



source feasible domain
 coupled admissible domain
 source-load slice, $\lambda = 0.75$
 DHN-only envelope
 - - - fixed heat reference


(a) C2: fixed DHN condition, $T_{\text{amb}} = -10\text{ }^{\circ}\text{C}$

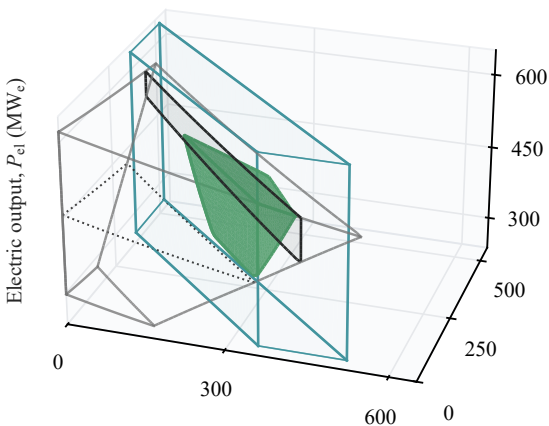


(b) $Q_{\text{h}} \text{--} Q_{\text{l}}$: DHN-only vs coupled

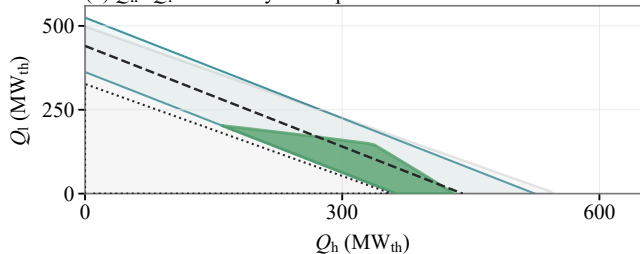

(c) $Q_{\text{h}} \text{--} P_{\text{el}}$

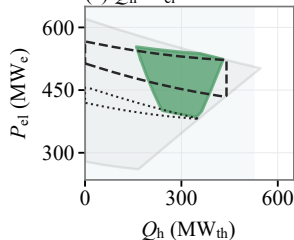

(d) $Q_{\text{l}} \text{--} P_{\text{el}}$



3D heat-allocation axes: high-grade heat, Q_{h} , and low-grade heat, Q_{l} (MW_{th})