

Rejected-point composition

Supply-temp./heat-output

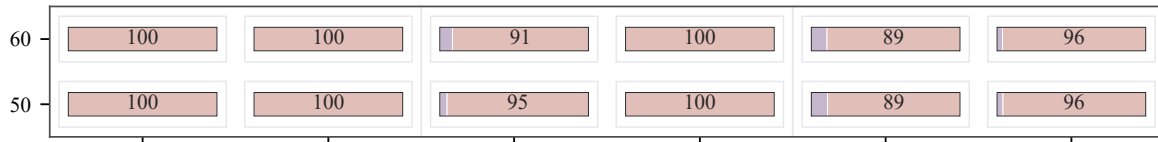
Low-grade heat

High-grade heat

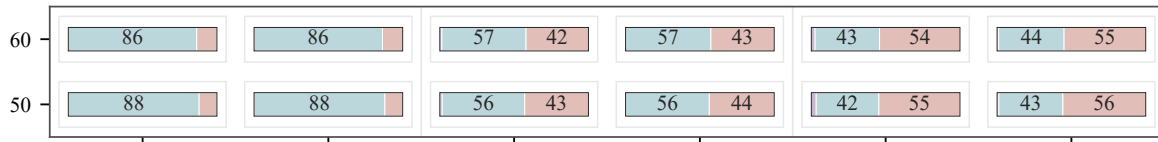
Source pre-screen

Return temperature, T_r (°C)

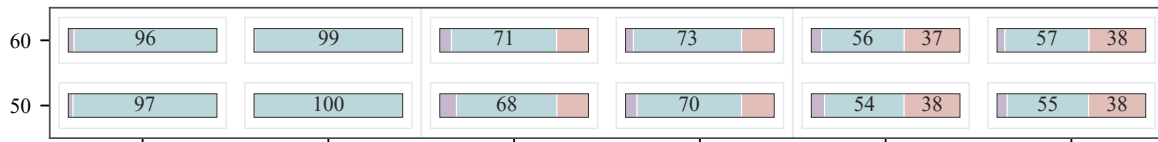
(a) C1

 $\lambda = 0.50$ $\lambda = 0.75$ $\lambda = 1.00$ 

(b) C2

 $\lambda = 0.50$ $\lambda = 0.75$ $\lambda = 1.00$ 

(c) C3

 $\lambda = 0.50$ $\lambda = 0.75$ $\lambda = 1.00$ Supply-temperature limit, $T_{s,max}$ (°C)