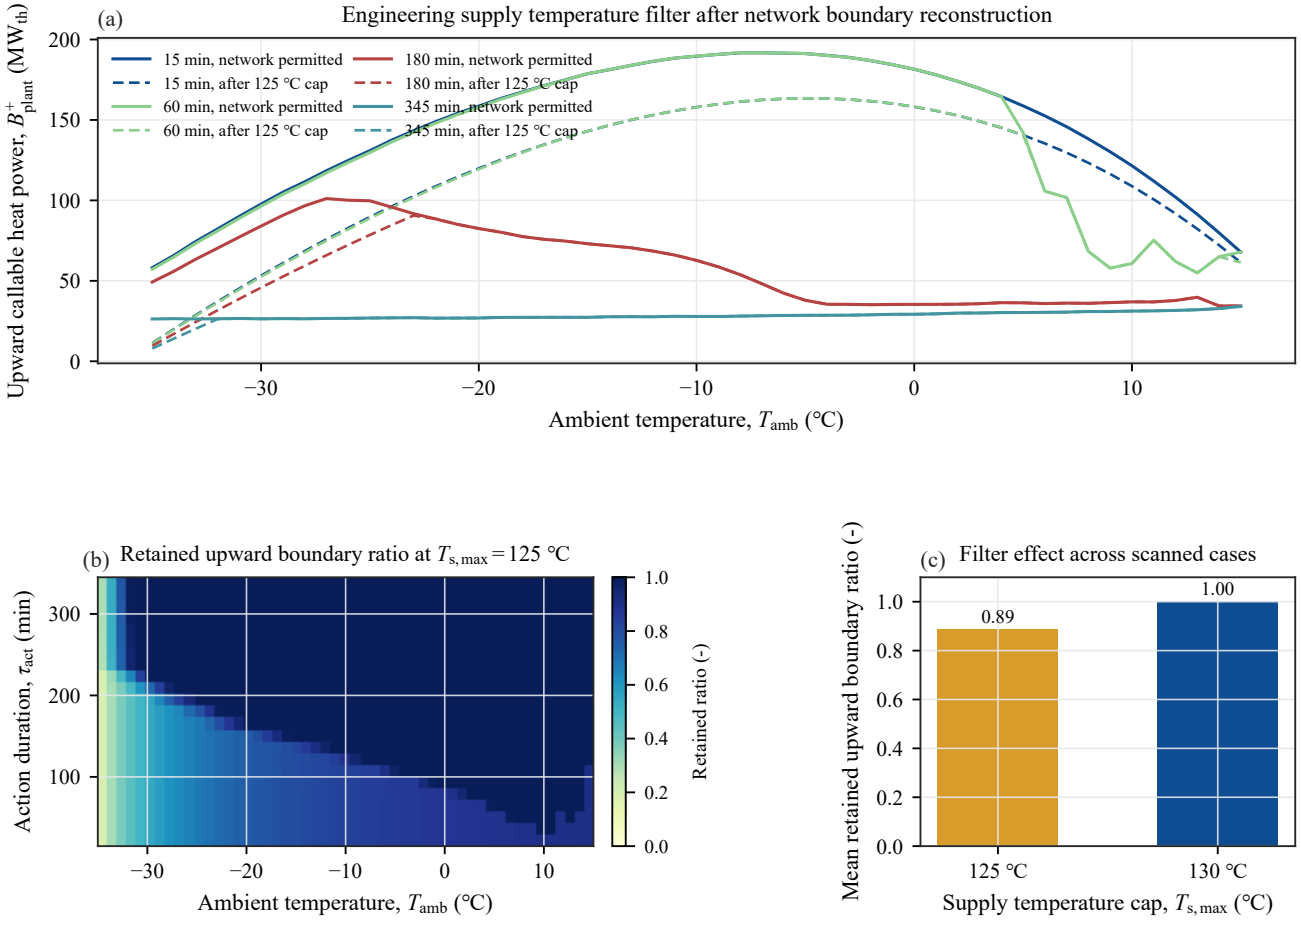
(a)
Engineering supply temperature filter after network boundary reconstruction
15 min, network permitted
15 min, after 125 °C cap
60 min, network permitted
60 min, after 125 °C cap
180 min, network permitted
180 min, after 125 °C cap
345 min, network permitted
345 min, after 125 °C cap
Upward callable heat power, B^{+}_{plant} (MW_{th})
Ambient temperature, T_{amb} (°C)
(b) Retained upward boundary ratio at $T_{s,max}$ = 125 °C
Action duration, τ_{act} (min)
Ambient temperature, T_{amb} (°C)
Retained ratio (-)
(c) Filter effect across scanned cases
Mean retained upward boundary ratio (-)
0.89
1.00
125 °C
130 °C
Supply temperature cap, $T_{s,max}$ (°C)