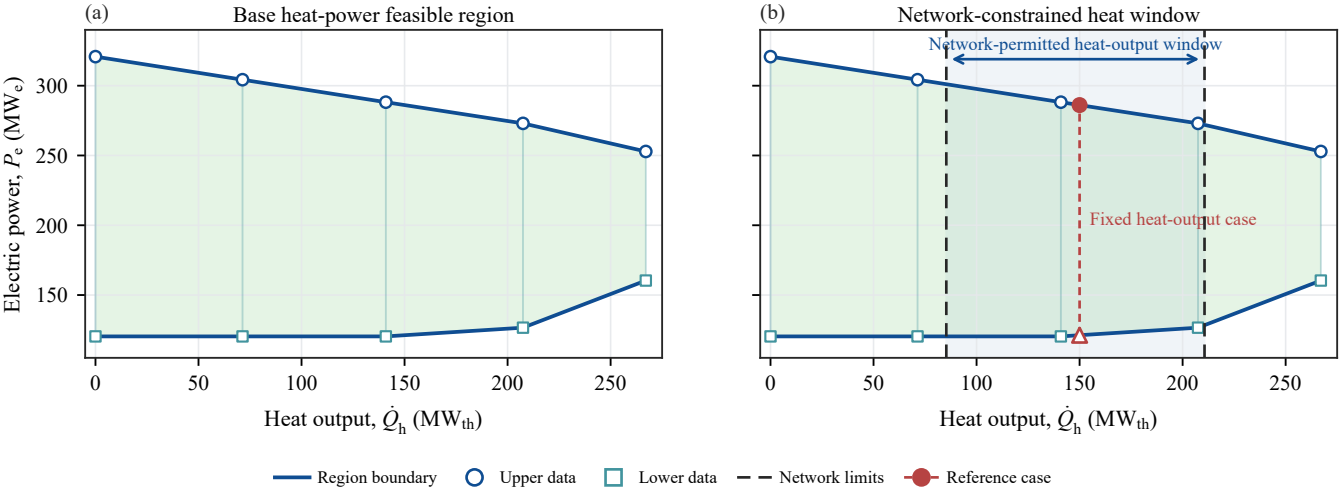
(a)
Base heat-power feasible region
Electric power, P_e (MW_e)
300
250
200
150
0
50
100
150
200
250
Heat output, $\dot{Q}_h$ (MW_{th})
(b)
Network-constrained heat window
Network-permitted heat-output window
Fixed heat-output case
0
50
100
150
200
250
Heat output, $\dot{Q}_h$ (MW_{th})
Region boundary
Upper data
Lower data
Network limits
Reference case