


Fault Code: 185

J1939 Network #1 - Data Erratic, Intermittent, or Incorrect

 Printable Version

Overview

Codes	Reason	Effect
Fault Code: 185 PID(P): S231 SPN: 639 FMI: 2/2 Lamp: Amber SRT:	Communication between the engine control module (ECM) and another device on the J1939 datalink has been lost.	Possible reduced engine performance.

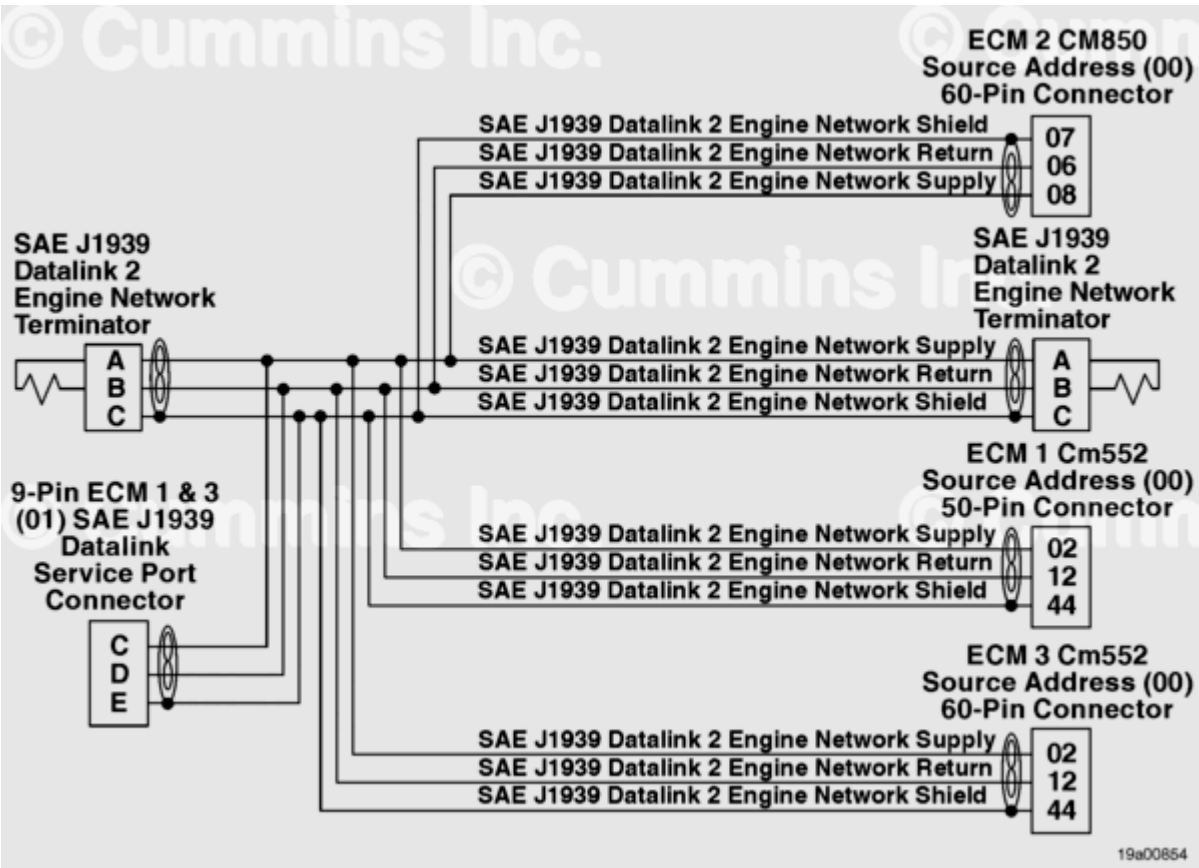

J1939 Datalink Circuit

Circuit Description

The ECM identified another device on the J1939 datalink network has stopped communicating on the network. The devices on the J1939 datalink network include: ECMs', and the Generator Interface Module. The harness for the J1939 datalink network has a shielded twisted pair of wires that connect each of the network devices and termination resistor.

Component Location

The Engine Control Modules (ECM) are located on a plate that is above the flywheel housing.

Conditions For Running The Diagnostics

This diagnostic runs continuously when the generator set controller is active.

Conditions For Setting The Fault Codes

The Engine Control Module (ECM) detected an open or short circuit condition in the J1939 datalink wiring harness.

Action Taken When The Fault Code Is Active

- The generator set controller displays a warning fault immediately when the diagnostics runs and fails.

Conditions For Clearing The Fault Code

- To validate the repair, perform a key cycle, start the engine and let it idle for 1 minute.
- The generator set controller will turn off the warning indicator immediately after the user presses reset.
- The "Reset All Faults" command in the recommended Cummins® electronic service tool or equivalent can be used to clear active faults.

Shoptalk

Each smart device on the J1939 datalink network need power and ground to turn on, after the smart device turns on, it can then communicate on the J1939 datalink network.

Possible causes of this fault code include:

- Malfunctioning or damaged J1939 datalink wiring harness.

Refer to Troubleshooting Fault Code 185 . (</qs3/pubsys2/xml/en/procedures/60/60-t05-185.html>)

