


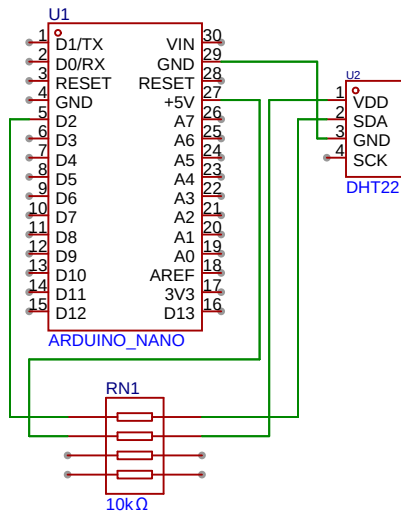

DEVICE DESIGNATION	DESCRIPTION
Arduino Nano	The Arduino Nano is a compact, breadboard-friendly development board based on the ATmega328P microcontroller, which serves as the CPU of the project by receiving, processing, and executing instruction code. It operates at 5V, featuring 14 digital input/output pins and 8 analog inputs, and is responsible for reading the digital data transmitted from the sensor and processing it for further action or display.
DHT22	The DHT22 is a low-cost, digital sensor used to measure ambient temperature and relative humidity with high accuracy. It operates on a power supply of 3.3V to 5V, covers a temperature measurement range of -40°C to 80°C, and utilizes a single-bus digital signal to output calibrated data directly to a single microcontroller I/O pin.
10kΩ Resistor	A 10kΩ resistor is a passive electrical component used to establish a stable default logic state on the data transmission line between the DHT22 sensor and the Arduino Nano. By connecting it between the VCC power line and the digital data line, it pulls the signal high when the bus is idle, preventing floating inputs and ensuring clean, error-free communication.

Schematic	arduino_nano_schematic		Create at	2026-05-07
			Update at	2026-05-08
Board	arduino_NANO		Page	P1
Drawn		exercise_2_part_B		
Reviewed				
		Version	Size	Page 1 Total 1
EasyEDA		V1.0	A4	EasyEDA.com