


Exp No: 1

FLASHING OF LED USING AT89C51 MICROCONTROLLER USING PROTEUS

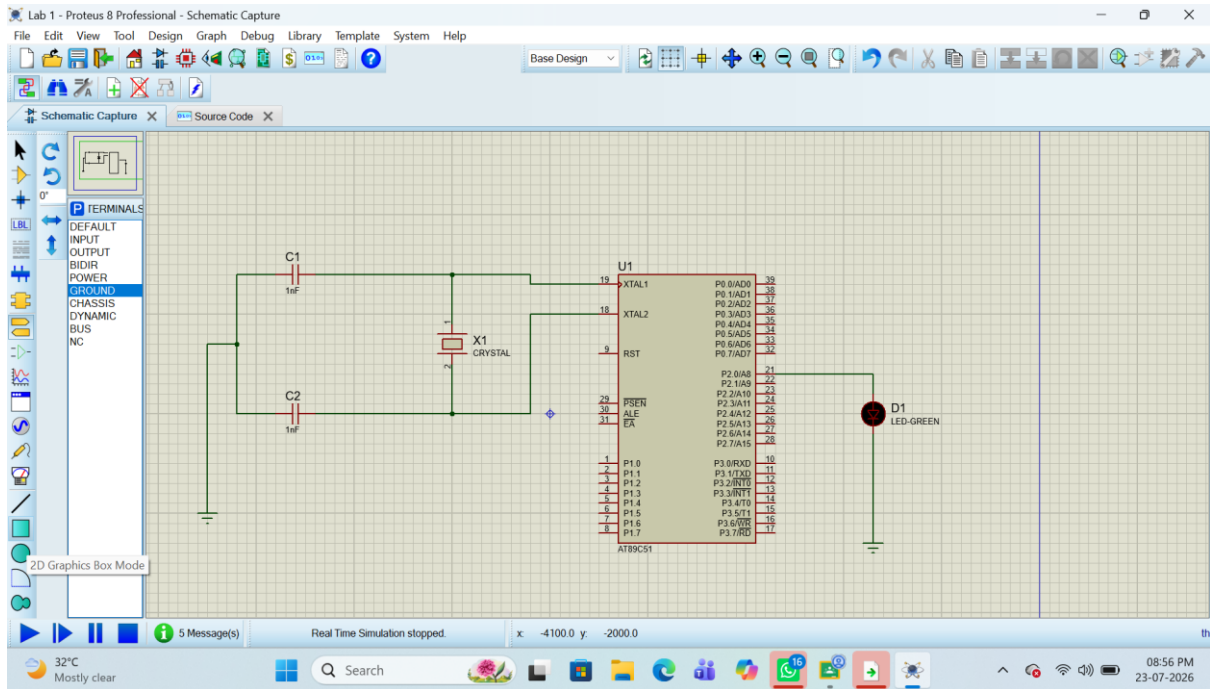

```
Lab 1 - Proteus 8 Professional - Source Code

File Project Build Edit Debug System Help
Schematic Capture Source Code
Projects
  AT89C51(U1)
    Source Files
      main.asm
main.asm
1 ORG 0000H
2 UP: SETB P2.0
3 ACALL DELAY
4 CLR P2.0
5 ACALL DELAY
6 SJMP UP
7 DELAY: MOV R4, #35
8 H1: MOV R3, #255
9 H2: DJNZ R3, H2
10 DJNZ R4, H1
11 RET
12 END

VSM Studio Output
no errors
ASEMDDX.EXE: Debug list
Processed 54 lines.
Compiled successfully.
```

