


Web UI Alarm Page Manual

TABLE OF CONTENTS

1WHAT CAN I SEE ON THE ALERTS PAGE?	02
1.1What can I do in the Alerts Page?	03
1.2Alerts	03
1.3Alarms	03
1.4How can I Configure view for Alerts and Alarms specific to Date or Device or Both?.....	03
1.4.1Configure Alerts-Alarms View w.r.t. Date.....	04
1.4.2Configure Alerts-Alarms View w.r.t. Device.....	04
1.4.3Configure Alerts-Alarms View w.r.t. both Date and Device.....	05
1.5 How can I see Alerts reported by MY Master Controller?	05
1.6 How can I see Alarms raised by My Master Controller?	06
1.7 How can I download Alerts reported by My Master Controller?	06
1.8How can I download Alarms reported by My Master Controller?	06
1.9How can I retrieve Recent or Older Alerts reported and Alarms raised by My Master Controller?	06
1.10How can I delete unwanted Alerts or Alarms?	07
1.11List of Alerts My Master Controller can report.....	08

1 What can I see on the Alerts Page?

The Alerts page provides you with an Interface to view or download alerts and alarms as reported by your Master Controller. This page has the following components as depicted in the image.

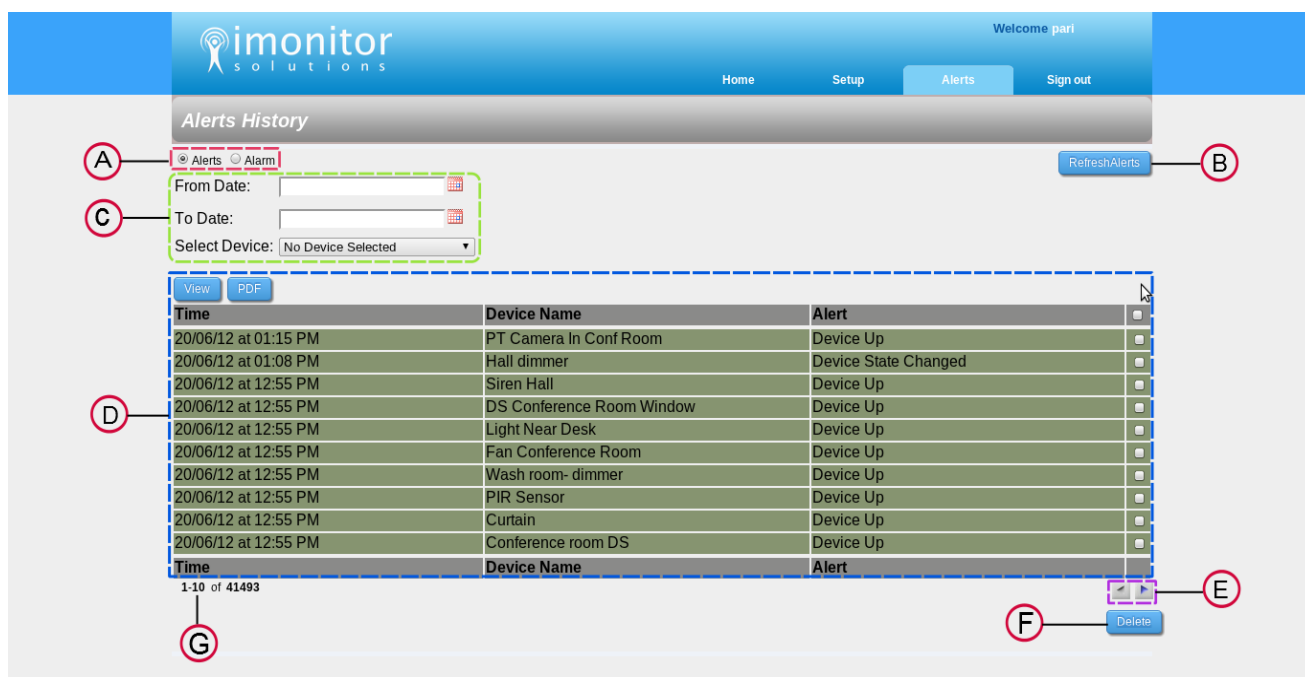

The screenshot shows the iMonitor Alerts History page. The interface includes a header with the iMonitor logo, navigation tabs (Home, Setup, Alerts, Sign out), and a 'Welcome pari' message. Below the header is the 'Alerts History' section. Callout A points to the 'Alerts' and 'Alarm' radio buttons. Callout B points to the 'RefreshAlerts' button. Callout C points to the 'From Date' and 'To Date' date pickers. Callout D points to the 'View' and 'PDF' buttons. Callout E points to the table controls (page number, first, previous, next, last buttons). Callout F points to the 'Delete' button. Callout G points to the '1-10 of 41493' text indicating the range of alerts displayed.

Time	Device Name	Alert
20/06/12 at 01:15 PM	PT Camera In Conf Room	Device Up
20/06/12 at 01:08 PM	Hall dimmer	Device State Changed
20/06/12 at 12:55 PM	Siren Hall	Device Up
20/06/12 at 12:55 PM	DS Conference Room Window	Device Up
20/06/12 at 12:55 PM	Light Near Desk	Device Up
20/06/12 at 12:55 PM	Fan Conference Room	Device Up
20/06/12 at 12:55 PM	Wash room- dimmer	Device Up
20/06/12 at 12:55 PM	PIR Sensor	Device Up
20/06/12 at 12:55 PM	Curtain	Device Up
20/06/12 at 12:55 PM	Conference room DS	Device Up

- A. Section to Select Alert Type.
- B. Section to Refresh Alerts.
- C. Interface to Configure View for Alerts and Alarms.
- D. Alert or Alarm - View Section.
- E. Controls to browse Alerts and Alarms.
- F. Interface to Delete Selected Alerts and Alarms.
- G. Range of Alerts being currently displayed.

1.1 What can I do in the Alerts Page?

On this page you will be able to do the following operations:

- A. View Recent Alerts, Alerts With Respect to Specified Dates, Alerts specific to Device.
- B. View Recent Alarms, Alarms With Respect to Specified Dates, Alarms Specific to Device.
- C. Download Selected Alerts or Alarms.
- D. Delete Selected Alerts or Alarms.

1.2 Alerts:

Alerts are the events that corresponds to the activity performed by any particular device. The Alerts are also listed in a tabular form on the Home Page. As for instance, a **Door Sensor** Device will generate a **Door Open/ Door Close** event.

1.3 Alarms:

Alarms are the Special Alerts as they are configured by the user. You can see alarms in the Alerts Page only if you have configured a device (**in setup page**) to raise alarms.


(Note: Alarms are just a subset of Alerts that My Master Controller can generate.)

1.4 How can I configure view for Alerts and Alarms specific to Date or Device or both?

The Alerts page gives you the privilege to browse through the Alerts as reported by the Master Controller.

There are three ways to configure the view for Alerts and Alarms.

1.4.1 Configure Alerts-Alarms View w.r.t. Date.

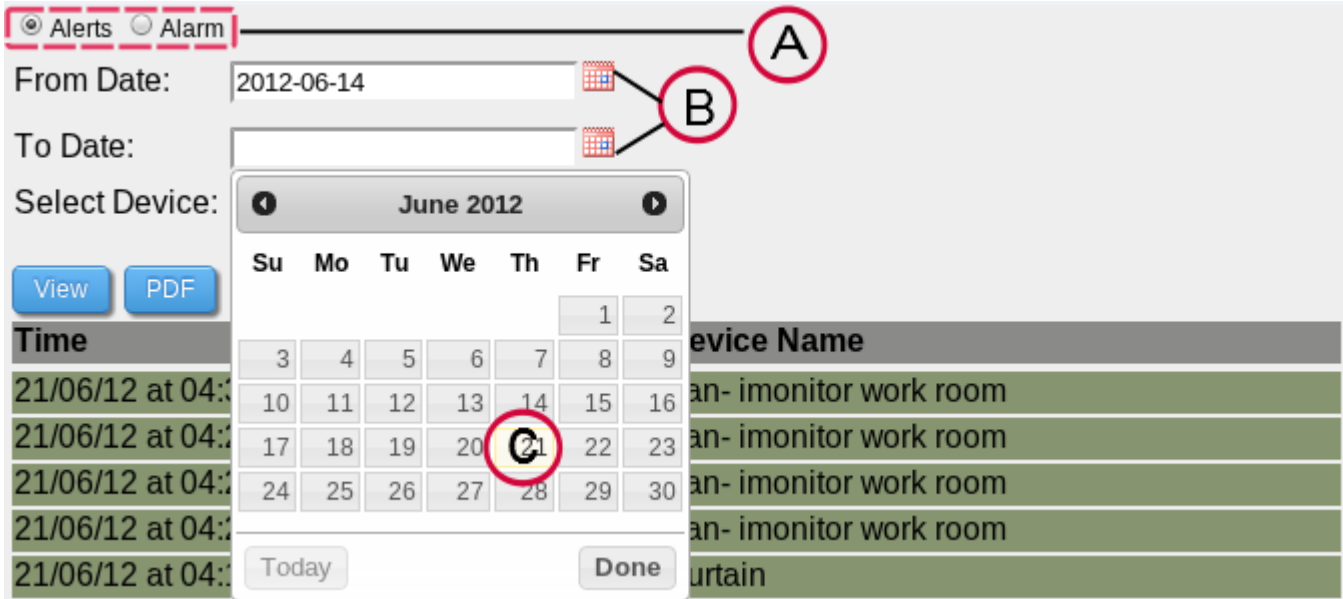

☒ Alerts ☐ Alarm

From Date: 2012-06-14

To Date:

Select Device:


View PDF

Time	Device Name
21/06/12 at 04:...	an- imonitor work room
21/06/12 at 04:...	an- imonitor work room
21/06/12 at 04:...	an- imonitor work room
21/06/12 at 04:...	an- imonitor work room
21/06/12 at 04:...	urtain

- A. Choose between Alerts and Alarm.
- B. Single click on the Calender Tool Icon.
- C. Select the Start date and End Date for respective Date elements.

To View or Download the corresponding alerts, press View or PDF Button respectively.

1.4.2 Configure Alerts-Alarms View w.r.t. Device.

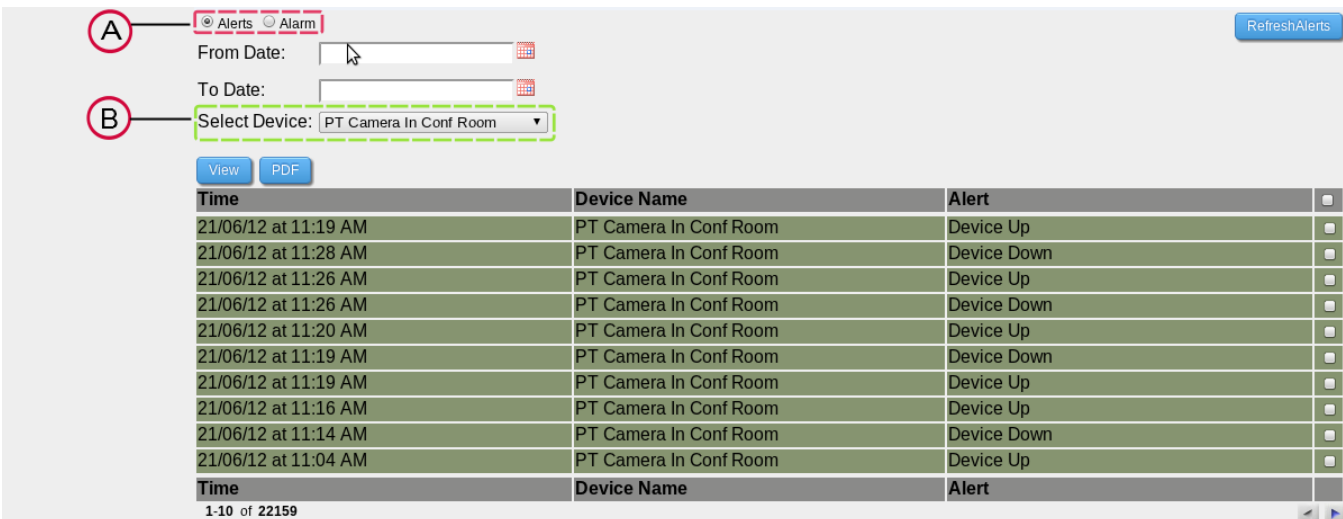

☒ Alerts ☐ Alarm

From Date:

To Date:

Select Device: PT Camera In Conf Room

View PDF

Time	Device Name	Alert
21/06/12 at 11:19 AM	PT Camera In Conf Room	Device Up
21/06/12 at 11:28 AM	PT Camera In Conf Room	Device Down
21/06/12 at 11:26 AM	PT Camera In Conf Room	Device Up
21/06/12 at 11:26 AM	PT Camera In Conf Room	Device Down
21/06/12 at 11:20 AM	PT Camera In Conf Room	Device Up
21/06/12 at 11:19 AM	PT Camera In Conf Room	Device Down
21/06/12 at 11:19 AM	PT Camera In Conf Room	Device Up
21/06/12 at 11:16 AM	PT Camera In Conf Room	Device Up
21/06/12 at 11:14 AM	PT Camera In Conf Room	Device Down
21/06/12 at 11:04 AM	PT Camera In Conf Room	Device Up

Time Device Name Alert


1-10 of 22159

A. Choose between Alerts and Alarm.

B. Select a device from the drop down option.

To View or Download the corresponding alerts, press View or PDF Button.

1.4.3 Configure Alerts-Alarms View w.r.t. both Date and Device.

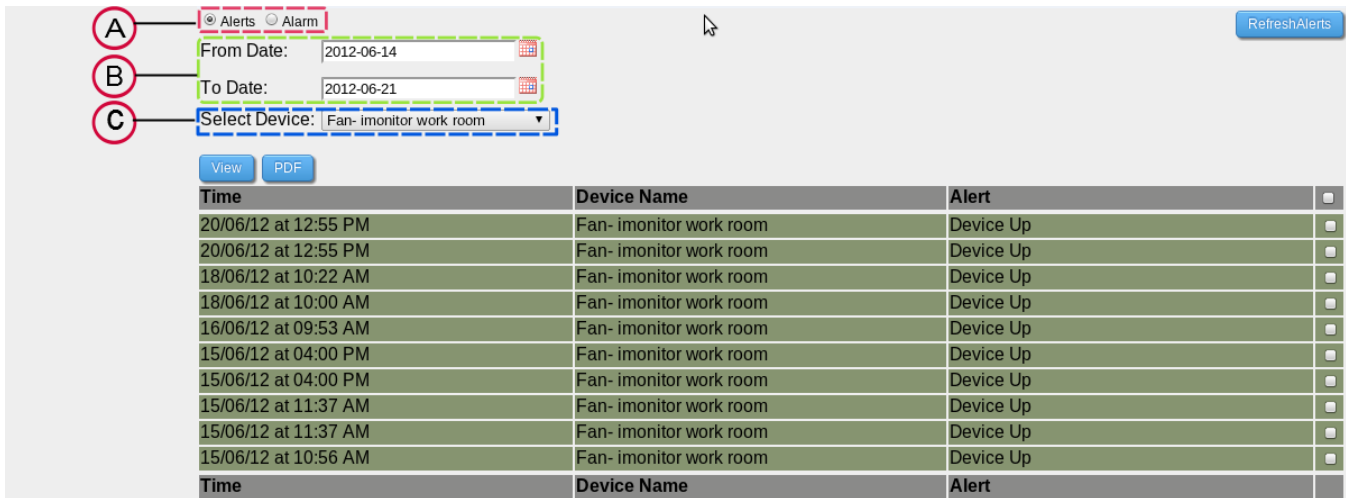

Time	Device Name	Alert
20/06/12 at 12:55 PM	Fan- imonitor work room	Device Up
20/06/12 at 12:55 PM	Fan- imonitor work room	Device Up
18/06/12 at 10:22 AM	Fan- imonitor work room	Device Up
18/06/12 at 10:00 AM	Fan- imonitor work room	Device Up
16/06/12 at 09:53 AM	Fan- imonitor work room	Device Up
15/06/12 at 04:00 PM	Fan- imonitor work room	Device Up
15/06/12 at 04:00 PM	Fan- imonitor work room	Device Up
15/06/12 at 11:37 AM	Fan- imonitor work room	Device Up
15/06/12 at 11:37 AM	Fan- imonitor work room	Device Up
15/06/12 at 10:56 AM	Fan- imonitor work room	Device Up

A. Choose between Alerts and Alarm.

B. Configure Start Date and End Date for the Alerts.

C. Select a Device from the drop down list.

To View or Download the corresponding alerts, press View or PDF Button.

1.5 How can I see Alerts reported by MY Master Controller?

Follow the steps below to list out alerts in the Alerts-View Section.

1. Select the Alerts radio button.
2. Configure the desired view for your alerts.
3. Single click on the View Button.

The List for the configured alerts will get listed in the Alerts-Alarms View Section in a tabular form.

1.6 How can I see Alarms raised by My Master Controller?

Follow the steps below to list out alarms in the Alarms-View Section

1. Select the Alarm radio button.
2. Configure the desired view for your alarms.
3. Single click on the View Button.

The List for the configured alarms will get listed in the Alerts-Alarms View Section in a tabular form.

1.7 How can I download Alerts reported by My Master Controller?

Follow the steps below to download a file in a Portable Document Format (PDF) listing the selected alerts.

1. Select the Alerts radio button.
2. Configure the Date or Device or both for which you want a PDF.
3. Single click on the PDF Button.
4. Provide the necessary permissions to download (if asked).

A Portable Document Format (PDF) file will get downloaded to your respective download directory.

1.8 How can I download Alarms reported by My Master Controller?

Follow the steps below to download a file in a Portable Document Format (PDF) listing the selected alarms.

1. Select the Alarms radio button.
2. Configure the Date or Device or both for which you want a PDF.
3. Single click on the PDF Button.
4. Provide the necessary permissions to download (if asked).

A Portable Document Format (PDF) file will get downloaded to your respective download directory.

1.9 How can I retrieve Recent or Older Alerts reported and Alarms raised by My Master Controller?

The Alerts Page not only lists the alerts that have been reported most recently, but also it can generate a list of alerts that were reported earlier.

A. While browsing through the list one can obtain the recent alerts by a single click of mouse on the **RefreshAlerts** Button.



B. Alternatively, one can easily browse the older alerts just by a single click on the browsing buttons provided just above the delete button at the left bottom of the screen.



1.10 How can I delete unwanted Alerts or Alarms?

Deleting Older Alerts-Alarms couldn't have been easier than this. There are two ways in which the User can delete the alerts show in the list, Select All Alerts at on go and press Delete Button or Select Desired Alerts and press Delete Button.

A. Delete All Alerts:

Time	Device Name	Alert	<input checked="" type="checkbox"/>
21/06/12 at 04:33 PM	Fan- imonitor work room	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:26 PM	Fan- imonitor work room	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:26 PM	Fan- imonitor work room	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:25 PM	Fan- imonitor work room	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:11 PM	Curtain	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:11 PM	Hall dimmer	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:06 PM	Curtain	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:06 PM	Fan Conference Room	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:00 PM	Hall dimmer	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 03:59 PM	Curtain	Device State Changed	<input checked="" type="checkbox"/>
Time	Device Name	Alert	
1-10 of 41898			

On select of box (A) at the top right of the Alerts-Alarms View Section, all the alerts or alarms will get selected at one go. The next step involves just a click on the Delete Button (B) located at the right bottom of the screen.

B. Delete Selected Alerts:

Time	Device Name	Alert	<input type="checkbox"/>
21/06/12 at 04:33 PM	Fan- imonitor work room	Device State Changed	<input type="checkbox"/>
21/06/12 at 04:26 PM	Fan- imonitor work room	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:26 PM	Fan- imonitor work room	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:25 PM	Fan- imonitor work room	Device State Changed	<input type="checkbox"/>
21/06/12 at 04:11 PM	Curtain	Device State Changed	<input type="checkbox"/>
21/06/12 at 04:11 PM	Hall dimmer	Device State Changed	<input checked="" type="checkbox"/>
21/06/12 at 04:06 PM	Curtain	Device State Changed	<input type="checkbox"/>
21/06/12 at 04:06 PM	Fan Conference Room	Device State Changed	<input type="checkbox"/>
21/06/12 at 04:00 PM	Hall dimmer	Device State Changed	<input type="checkbox"/>
21/06/12 at 03:59 PM	Curtain	Device State Changed	<input type="checkbox"/>
Time	Device Name	Alert	
1-10 of 41898			

Alternatively, the User can delete only the selected Alerts or Alarms from the List. This involves selecting the desired alerts (A) and pressing the Delete Button (B).

1.11 List of Alerts My Master Controller can report.

Alerts	Alarms
Motion Detected	Device Up
No Motion Detected	Device Down
Device Up	Motion Detected
Device Down	No Motion Detected
Door Open	Battery Status
Door Close	Panic Situation
Door Lock Open	Door Open
Door Lock Close	Door Close
Image Upload Success	Door Lock Open
Device State Changed	Door Lock Close
Battery Status	
Panic Situation	
Home Success	
Stay Success	
Away Success	