# Octal Bus Buffer/Line Driver with 3-State Outputs

The MC74VHCT244A is an advanced high speed CMOS octal bus buffer fabricated with silicon gate CMOS technology. It achieves high speed operation similar to equivalent Bipolar Schottky TTL while maintaining CMOS low power dissipation.

The MC74VHCT244A is a noninverting 3–state buffer, and has two active–low output enables. This device is designed to be used with 3–state memory address drivers, etc.

The VHCT inputs are compatible with TTL levels. This device can be used as a level converter for interfacing 3.3V to 5.0V, because it has full 5V CMOS level output swings.

The VHCT244A input and output (when disabled) structures provide protection when voltages between 0V and 5.5V are applied, regardless of the supply voltage. These input and output structures help prevent device destruction caused by supply voltage — input/output voltage mismatch, battery backup, hot insertion, etc.

- High Speed: tpD = 5.6ns (Typ) at VCC = 5V
- Low Power Dissipation: I<sub>CC</sub> = 4μA (Max) at T<sub>A</sub> = 25°C
- TTL-Compatible Inputs: VII = 0.8V; VIH = 2.0V
- · Power Down Protection Provided on Inputs and Outputs
- Balanced Propagation Delays
- Designed for 4.5V to 5.5V Operating Range
- Low Noise: Volp = 1.1V (Max)
- · Pin and Function Compatible with Other Standard Logic Families
- Latchup Performance Exceeds 300mA
- ESD Performance: HBM > 2000V; Machine Model > 200V
- Chip Complexity: 112 FETs or 28 Equivalent Gates

# **LOGIC DIAGRAM** 18 YA1 16 A2 YA2 14 12 DATA **NONINVERTING** INPUTS OUTPUTS 9 YB1 YB2 5 B3 YB3 B4 -17 3 OUTPUT OEA **ENABLES**

# MC74VHCT244A



**DW SUFFIX** 20-LEAD SOIC PACKAGE CASE 751D-04



**DT SUFFIX** 20-LEAD TSSOP PACKAGE CASE 948E-02



#### **M SUFFIX**

20-LEAD SOIC EIAJ PACKAGE CASE 967-01

#### **ORDERING INFORMATION**

MC74VHCTXXXADW SOIC
MC74VHCTXXXADT TSSOP
MC74VHCTXXXAM SOIC EIAJ

#### **PIN ASSIGNMENT** □ vcc ОЕА П П ОЕВ A1 [ 2 19 ҮВ4 П 18 YA1 3 A2 [ 17 T B4 16 TYA2 YB3 [] 5 15 B3 A3 [ 6 14 TYA3 YB2 [ 7 П В2 A4 8 YA4 YB1 9 12

#### **FUNCTION TABLE**

GND [

INP	JTS	OUTPUTS
OEA, OEB	A, B	YA, YB
L	L	L
L   H		H
Н	X	Ž



11 | B1

#### **MAXIMUM RATINGS\***

Symbol	Parameter		Value	Unit
VCC	DC Supply Voltage	- 0.5 to + 7.0	V	
V <sub>in</sub>	DC Input Voltage	- 0.5 to + 7.0	V	
V <sub>out</sub>	DC Output Voltage	Output in 3–State High or Low State	- 0.5 to + 7.0 - 0.5 to V <sub>CC</sub> + 0.5	V
ΙK	Input Diode Current		<b>- 20</b>	mA
lok	Output Diode Current (VOUT < GN	ND; V <sub>OUT</sub> > V <sub>CC</sub> )	± 20	mA
l <sub>out</sub>	DC Output Current, per Pin		± 25	mA
ICC	DC Supply Current, V <sub>CC</sub> and GND	) Pins	± 75	mA
PD	Power Dissipation in Still Air,	SOIC Packages† TSSOP Package†	500 450	mW
T <sub>stg</sub>	Storage Temperature		- 65 to + 150	°C

Absolute maximum continuous ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute—maximum—rated conditions is not implied.

†Derating — SOIC Packages: – 7 mW/°C from 65° to 125°C TSSOP Package: – 6.1 mW/°C from 65° to 125°C

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Unit
VCC	DC Supply Voltage	4.5	5.5	٧
V <sub>in</sub>	DC Input Voltage	0	5.5	٧
V <sub>out</sub>		in 3–State 0 Low State 0	5.5 VCC	V
TA	Operating Temperature	- 40	+ 85	°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time V <sub>CC</sub> =5	5.0V ±0.5V 0	20	ns/V

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high–impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range GND  $\leq$  ( $V_{in}$  or  $V_{out}$ )  $\leq$   $V_{CC}$ . Unused inputs must always be tied to an appropriate logic voltage

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V<sub>CC</sub>). Unused outputs must be left open.

#### DC ELECTRICAL CHARACTERISTICS

			vcc		T <sub>A</sub> = 25°C	;	T <sub>A</sub> = -4	0 to 85°C	
Symbol	Parameter	Test Conditions	V	Min	Тур	Max	Min	Max	Unit
VIH	Minimum High–Level Input Voltage		4.5 to 5.5	2.0			2.0		V
VIL	Maximum Low–Level Input Voltage		4.5 to 5.5			0.8		0.8	V
VOH	Minimum High-Level Output Voltage	I <sub>OH</sub> = - 50μA	4.5	4.4	4.5		4.4		V
	V <sub>in</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> = - 8mA	4.5	3.94			3.80		]
V <sub>OL</sub>	Maximum Low-Level Output Voltage	I <sub>OL</sub> = 50μA	4.5		0.0	0.1		0.1	V
	V <sub>in</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OL</sub> = 8mA	4.5			0.36		0.44	]
lin	Maximum Input Leakage Current	V <sub>in</sub> = 5.5 V or GND	0 to 5.5			± 0.1		± 1.0	μА
loz	Maximum 3–State Leakage Current	$V_{in} = V_{IL} \text{ or } V_{IH}$ $V_{out} = V_{CC} \text{ or GND}$	5.5			± 0.25		± 2.5	μА
Icc	Maximum Quiescent Supply Current	V <sub>in</sub> = V <sub>CC</sub> or GND	5.5			4.0		40.0	μА

MOTOROLA 2

### DC ELECTRICAL CHARACTERISTICS

			$V_{CC}$ $T_{A} = 25^{\circ}C$ $T_{A} = -40 \text{ to } 85^{\circ}C$		T <sub>A</sub> = 25°C		0 to 85°C		
Symbol	Parameter	Test Conditions	v	Min	Тур	Max	Min	Max	Unit
ICCT	Quiescent Supply Current	Per Input: V <sub>IN</sub> = 3.4V Other Input: V <sub>CC</sub> or GND	5.5			1.35		1.50	mA
lOPD	Output Leakage Current	V <sub>OUT</sub> = 5.5V	0			0.5		5.0	μА

# AC ELECTRICAL CHARACTERISTICS (Input $t_f = t_f = 3.0 \text{ns}$ )

					T <sub>A</sub> = 25°C		$T_A = -40$	) to 85°C	
Symbol	Parameter	Test Condi	tions	Min	Тур	Max	Min	Max	Unit
t <sub>PLH</sub> , t <sub>PHL</sub>	Maximum Propagation Delay A to YA or B to YB	$V_{CC} = 5.0 \pm 0.5 V$	C <sub>L</sub> = 15pF C <sub>L</sub> = 50pF		5.4 5.9	7.4 8.4	1.0 1.0	8.5 9.5	ns
t <sub>PZL</sub> , t <sub>PZH</sub>	Output Enable Time OEA to YA or OEB to YB	$V_{CC} = 5.0 \pm 0.5V$ $R_L = 1k\Omega$	$C_L = 15pF$ $C_L = 50pF$		7.7 8.2	10.4 11.4	1.0 1.0	12.0 13.0	ns
t <sub>PLZ</sub> , t <sub>PHZ</sub>	Output Disable Time OEA to YA or OEB to YB	$V_{CC} = 5.0 \pm 0.5V$ $R_L = 1k\Omega$	C <sub>L</sub> = 50pF		8.8	11.4	1.0	13.0	ns
tOSLH, tOSHL	Output to Output Skew	V <sub>CC</sub> = 5.0 ± 0.5V (Note NO TAG)	C <sub>L</sub> = 50pF			1.0		1.0	pF
C <sub>in</sub>	Maximum Input Capacitance				4	10		10	pF
C <sub>out</sub>	Maximum Three—State Output Capacitance (Output in High–Impedance State)				9				pF

		Typical @ 25°C, V <sub>CC</sub> = 5.0V	
$C_{PD}$	Power Dissipation Capacitance (Note NO TAG)	18	pF

<sup>1.</sup> Parameter guaranteed by design. toslh = |tplhm - tplhn|, toshl = |tphlm - tphln|.

# **NOISE CHARACTERISTICS** (Input $t_r = t_f = 3.0$ ns, $C_L = 50$ pF, $V_{CC} = 5.0$ V)


			25°C	
Symbol	Parameter	Тур	Max	Unit
VOLP	Quiet Output Maximum Dynamic VOL		1.1	V
VOLV	Quiet Output Minimum Dynamic VOL		- 1.1	V
VIHD	Minimum High Level Dynamic Input Voltage		2.0	V
V <sub>ILD</sub>	Maximum Low Level Dynamic Input Voltage		0.8	V

3

MOTOROLA

<sup>2.</sup> C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}/8$  (per bit). C<sub>PD</sub> is used to determine the no–load dynamic power consumption;  $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$ .

# **SWITCHING WAVEFORMS**








Figure 1.

Figure 2.

# **TEST CIRCUITS**



<sup>\*</sup> Includes all probe and jig capacitance

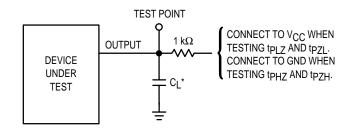


\* Includes all probe and jig capacitance


Figure 3. Test Circuit

Figure 4. Test Circuit

MOTOROLA 4

#### **OUTLINE DIMENSIONS**

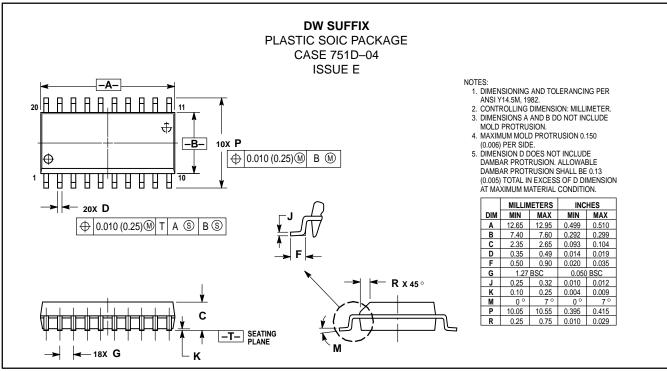


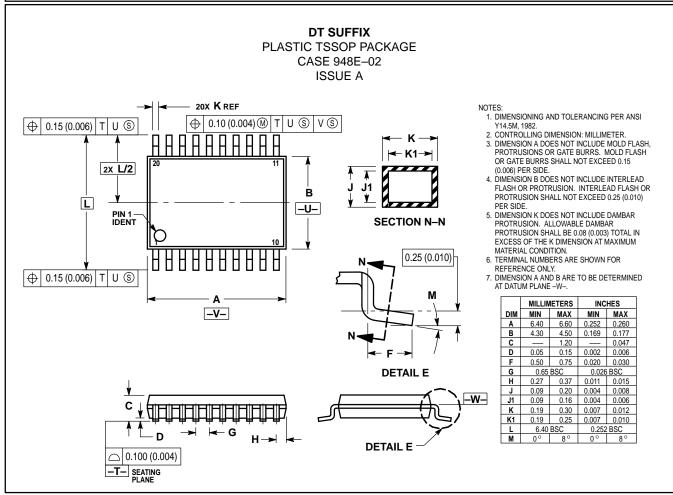



5


#### **OUTLINE DIMENSIONS**

# **M SUFFIX** PLASTIC SOIC EIAJ PACKAGE CASE 967-01 ISSUE O









#### NOTES

- DIMENSIONING AND TOLERANCING PER ANSI
- Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETER.
- 3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006)
- 4. TERMINAL NUMBERS ARE SHOWN FOR
- THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION.
  DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE
  BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 ( 0.018).

	MILLIN	IETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
Α		2.05		0.081
Α <sub>1</sub>	0.05	0.20	0.002	0.008
b	0.35	0.50	0.014	0.020
С	0.18	0.27	0.007	0.011
D	12.35	12.80	0.486	0.504
Е	5.10	5.45	0.201	0.215
е	1.27	BSC	0.050	BSC
ΗE	7.40	8.20	0.291	0.323
L	0.50	0.85	0.020	0.033
Ŀ	1.10	1.50	0.043	0.059
М	0 °	10°	0 °	10 °
$Q_1$	0.70	0.90	0.028 0.035	
Z		0.81		0.032

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

#### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447 JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

Mfax™: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 US & Canada ONLY 1-800-774-1848

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

INTERNET: http://motorola.com/sps



MC74VHCT244A/D