

COREDEL
CHLORIDE FRANCE

CHLORIDE
POWER ELECTRONICS

Dessin n.

page

COMMENTS :

AS BUILT

N.	Date				
N.	Date				
N.	Date				
N.	Date				
D	N.	MGA	BBA	JRA	AS BUILT
	Date	95/08/29	95/08/29	95/08/29	ASB
C	N.	MGA	BBA	JRA	UP DATED ACCORDING TO CEGELEC
	Date	93/03/08	93/03/08	93/03/09	LETTER TAJ/HAR 517 AND COREDEL STUDIES
B	N.	MGA	BBA	JRA	UP DATED ACCORDING TO CEGELEC
	Date	93/02/17	93/02/17	93/02/18	LETTER TAJ/HAR 470 AND COREDEL STUDIES
A	N.	JPR	BBA	JRA	ORIGINAL ISSUE
	Date	93/01/19	93/01/19	93/01/20	INF
REV.		ETABLI ESTABLISHED	VERIFIE CHECKED	APPROUVE APPROVED	MODIFICATIONS
					STAT.

VINH-SON HYDRO-POWER STATION

2 x 40 MVA

CONTRACT N° 12-05/CEG-PC3-PET/01-91

SOCIALIST REPUBLIC OF VIET-NAM

MINISTRY OF ENERGY



PETECHIM-POWER COMPANY Nr 3

ENGINEER EDF



LEADER

CEGELEC

FRANCE

ALSTHOM - JEUMONT

NEYRPC

CEGELEC

SDEN

ECHELLE
SCALE



COMMONS POWER HOUSE

125V DC BATTERY CHARGERS

20LAA001RD - 20LAA002RD

EQUIPMENT DRAWING - ELECTRICAL DIAGRAM
MATERIAL LIST AND CONNECTION DRAWING

	DATE	NOM NAME	VISA
ETABLI ESTABLISHED	93/01/19	JPR	
VERIFIE CHECKED	93/01/19	BBA	
APPROUVE APPROVED	93/01/20	JRA	

CEGELEC

Division ERE P : 35, rue d'Alsace F - 92531 Levallois Perret Cedex


CGE VIN20 SLAA-PF001

P2135A30165- .0


FOLIO
SHEET 1
F-FIN
SHEET 13

20 LAA 001 RD - 20 LAA 002 RD

240°

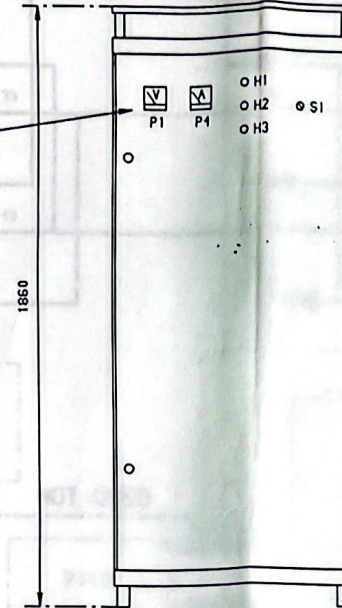


HEIGHT: 1860 mm
 WIDTH: 800 mm
 DEPTH: 600 mm
 PAINT: RAL 7032
 PROTECTION DEGREE: IP41
 KEYS: 3131E
 S1: ON/OFF CHARGER
 P1: CHARGER VOLTAGE
 P4: CHARGER CURRENT
 H1: CHARGER FAULT
 H2: LEDS HIGH VOLTAGE
 H3: LOW VOLTAGE

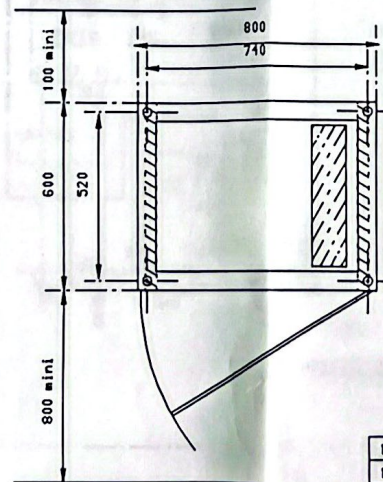

17/02/93	MGA			558	01
19/01/93	JPR			1 ^{re} Edition	00
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.	Indice
				CHARGER 125V / 160A	RB : 7491
				FRONT VIEW	
				Dessin n.	page
				P4623	1/1


COREDEL
 CHLORIDE FRANCE

CHLORIDE
 POWER ELECTRONICS

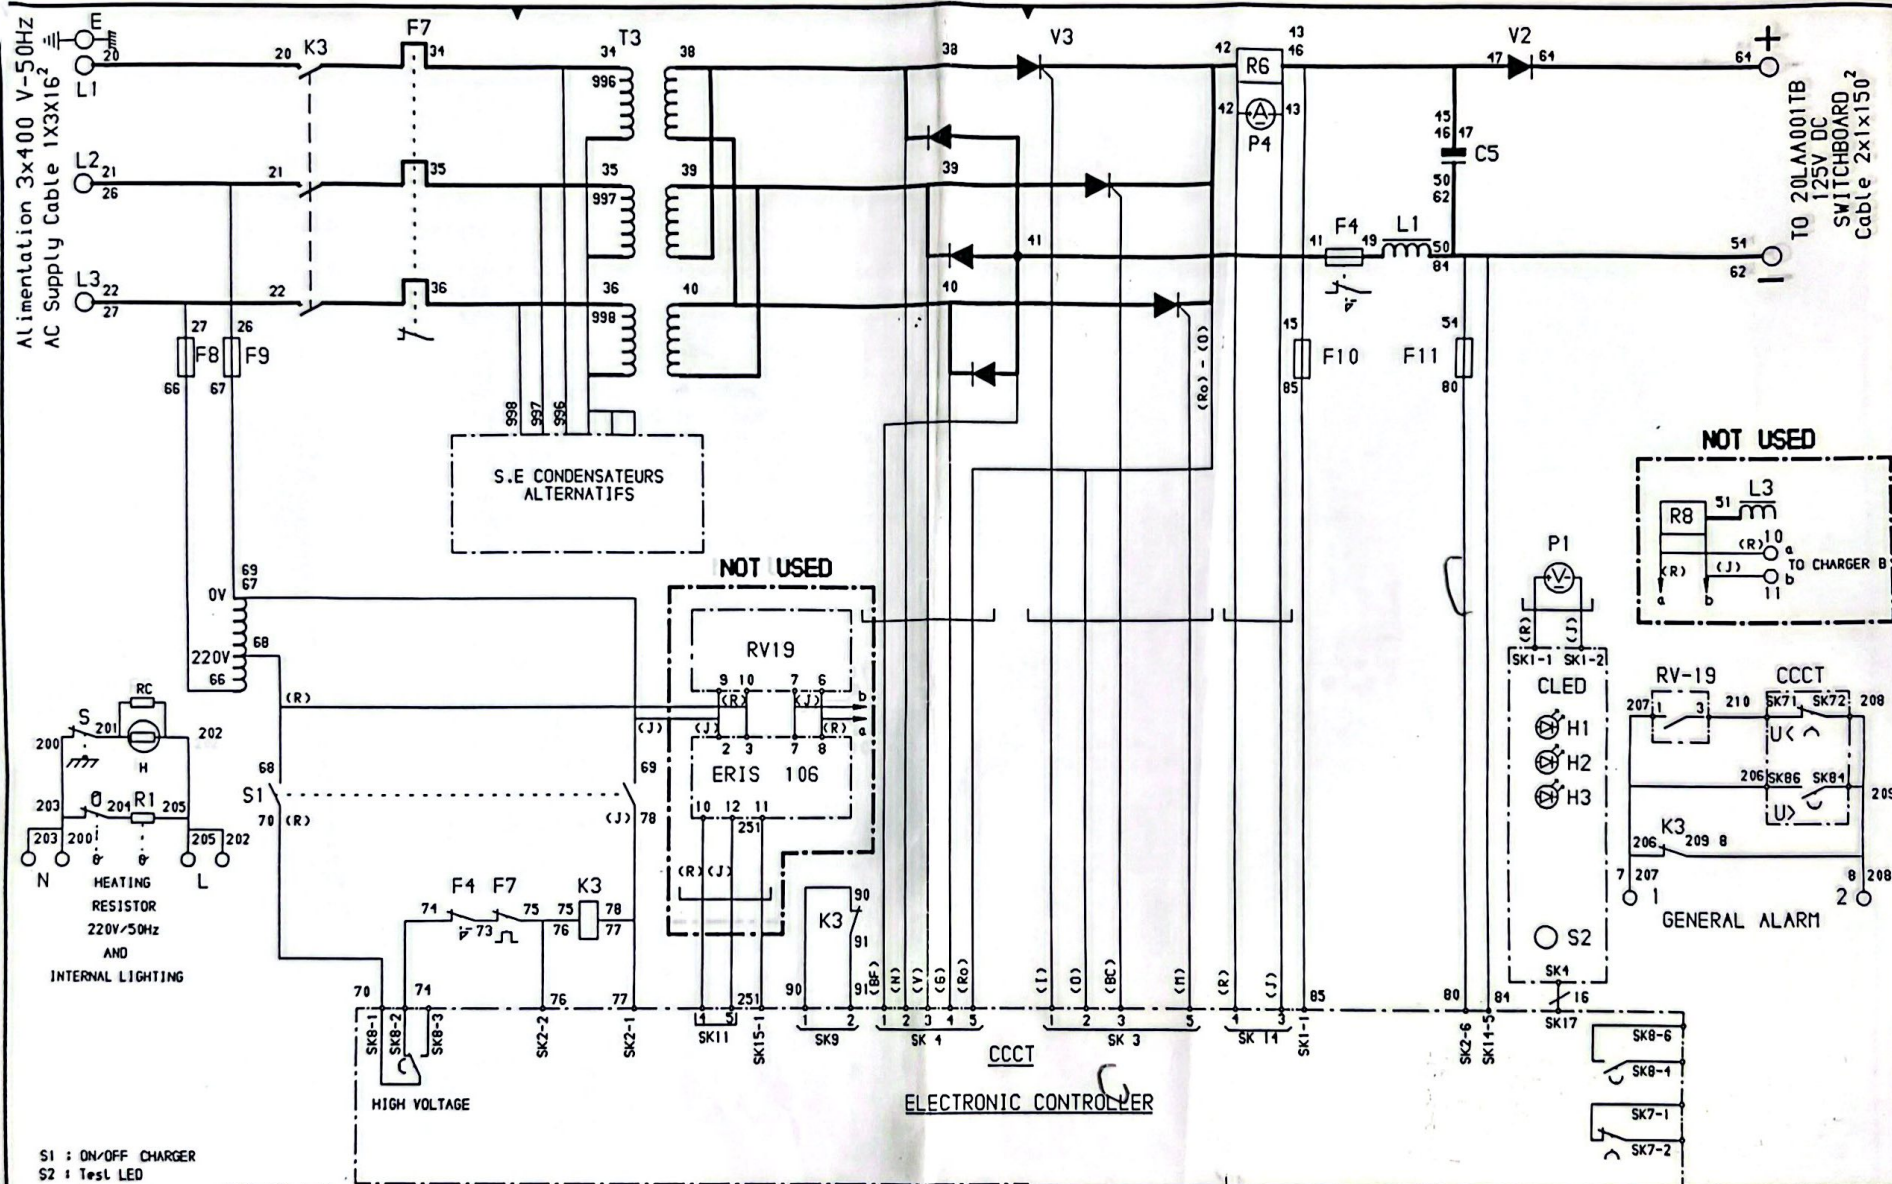

S1 : ON/OFF CHARGER
 S2 : Test LED
 P1 : Battery voltage (BF) : Dark blue
 P4 : Charger current (N) : Black
 (V) : Purple
 (G) : Grey
 (Ro) : Red
 (R) : Pink
 (J) : Yellow
 H1 : Charger fault
 H2 : High voltage
 H3 : Low voltage
 H : Internal lighting


04/03/93	LNA			1173		02
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.		Indice
20 LAA 001 RD	CHARGER A	CHARGER 125V/160A		ELECTRICAL DIAGRAM	RB : 7491	
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. SE11925	page 1	

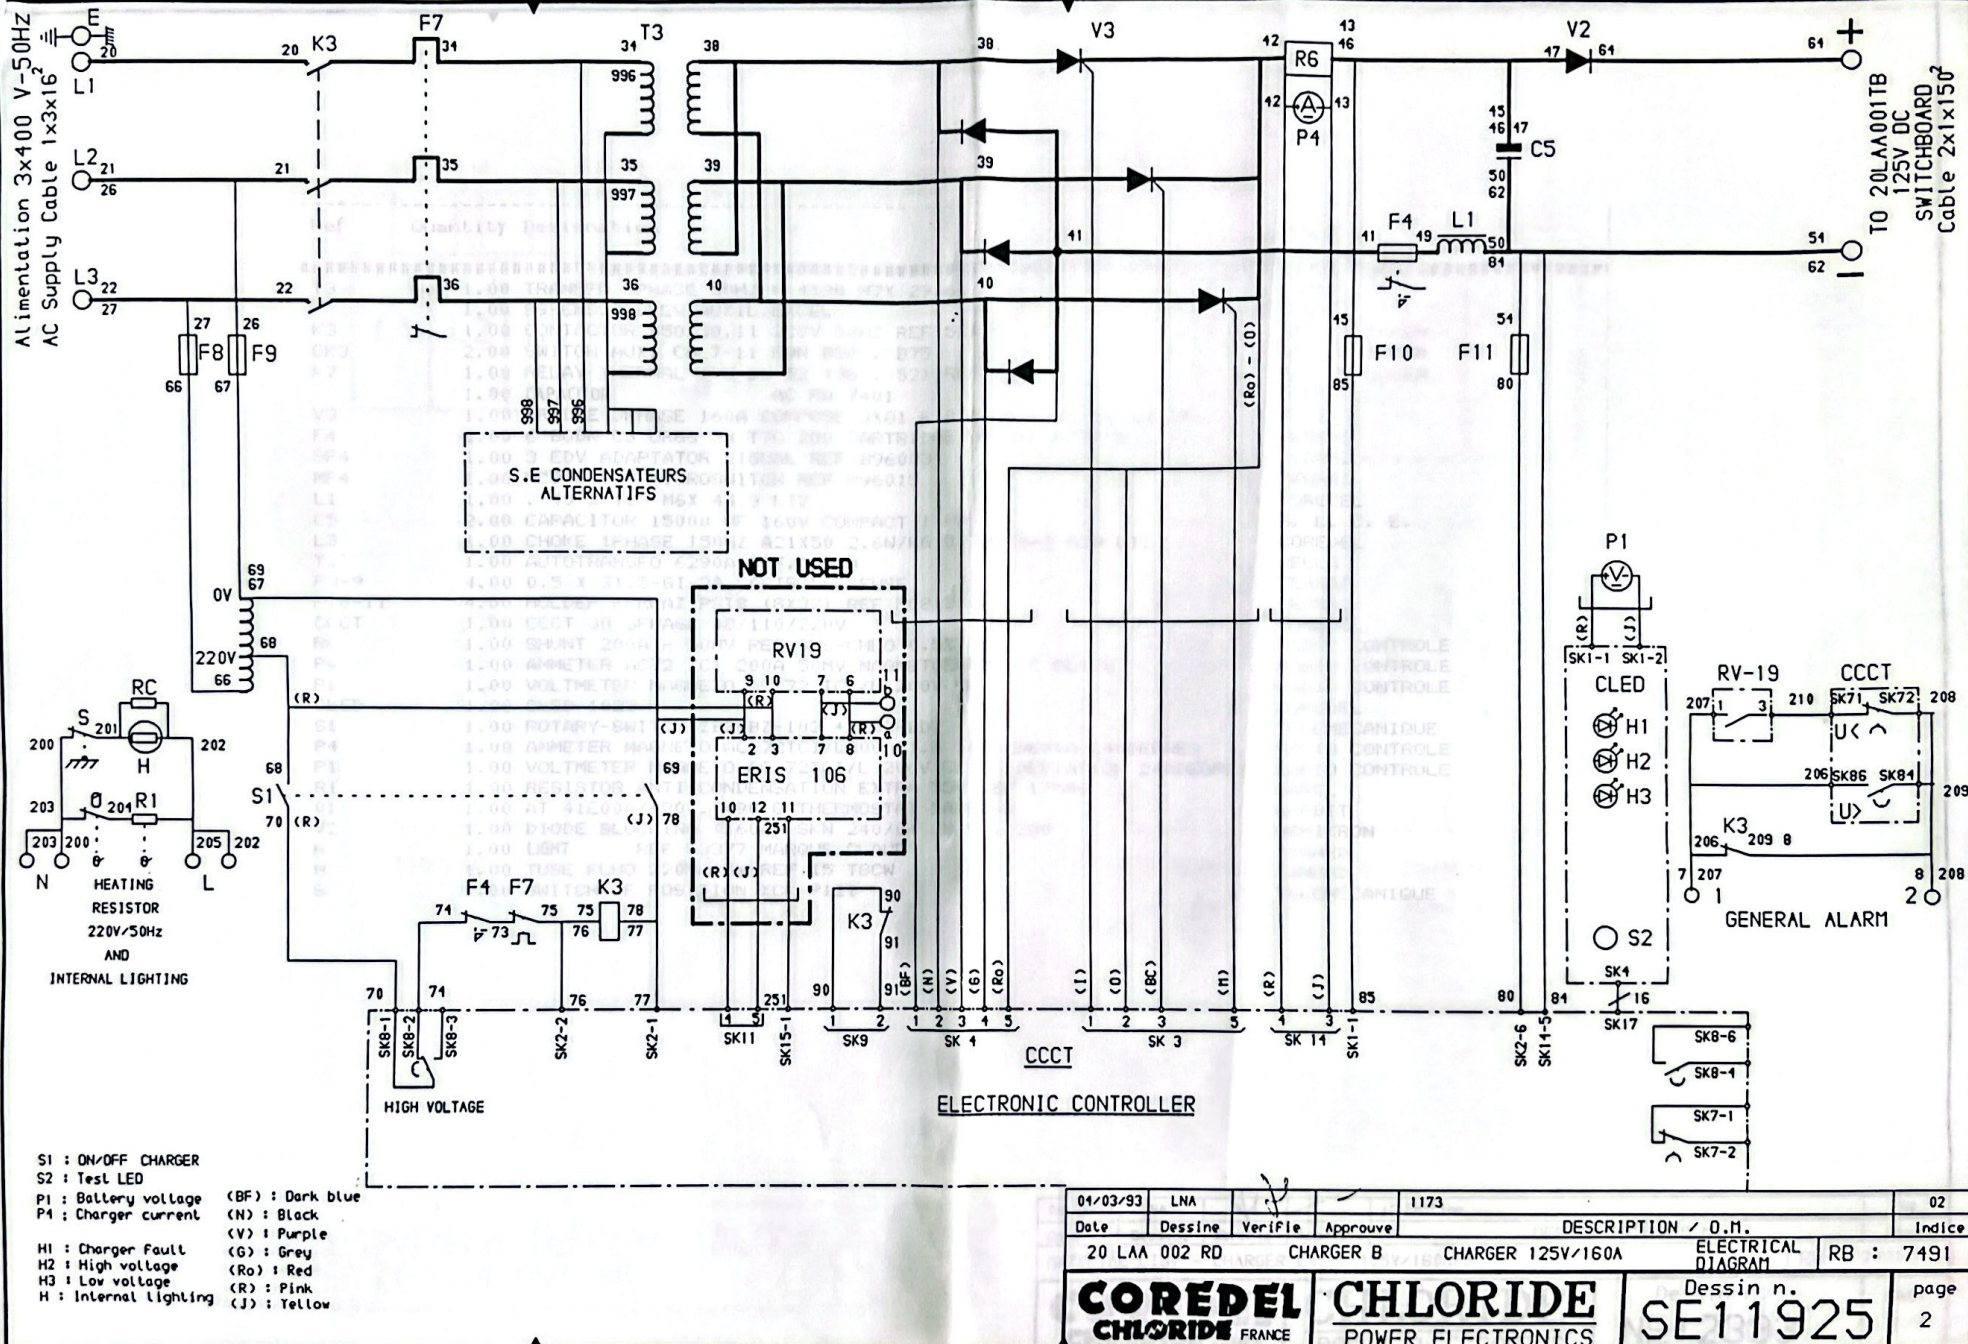

Ref	Quantity	Designation	Supplier
T3	1.00	TRANSFO 3PHASE 50HZ N 4X90 M7X 29.61 KVA	COREDEL
	1.00	SS-ENS.CABLES AUXIL.EXCEL	COREDEL
K3	1.00	CONTACTOR B50.30.11 220V 50HZ REF 52496	ABB PETERCEM
CK3	2.00	SWITCH AUX. CAL7-11 FOR B50 . B75	ABB PETERCEM
F7	1.00	RELAY THERMAL T75 DU 52 (36 . 52) REF 72421	ABB PETERCEM
	1.00	CAPACITOR AC RB 7401	COREDEL
V3	1.00	BRIDGE 3PHASE 160A COMPOSE 3X81 RIA + 3X70 HF/08 60 TS	ARCEL
F4	1.00	6 BODK C3 URGG 30 TTC 200 CARTRIDGE UR REF N78978	FERRAZ
SF4	1.00	3 EDV ADAPTATOR VISUAL REF B96003	FERRAZ
NF4	1.00	NC3 E 1-5 MICROSWITCH REF P96015	FERRAZ
L1	1.00	. 40 X 120 M6X 44.9 LI2	COREDEL
C5	2.00	CAPACITOR 15000 UF 160V COMPACT 1 BD	S. L. C. E.
L3	1.00	CHOKE 1PHASE 150HZ A21X50 2.6N/KG 0.79X10-3 A2H LI2	COREDEL
T2	1.00	AUTOTRANSFO 6290A REF.32710	CECLA
F8-9	4.00	0.5 X 31.5-GI-2A CARTRIDGE FUSE	FERRAZ
F10-11	4.00	HOLDER FERRAZ PST8 (8X32) REF F081218	FERRAZ
CCCT	1.00	CCCT 30 3PHASE 48/110/220V	COREDEL
R6	1.00	SHUNT 200A - 50MV REF.SHS-CHLO 0.5Z	RADIO CONTROLE
P4	1.00	ANMETER AC72 TCI 200A 50MV MAGNETOELECTRIC CL1.5	RADIO CONTROLE
P1	1.00	VOLTMETER MAGNETO AC 72 TCI/L 200V CL 1.5	RADIO CONTROLE
CLED	1.00	CLED 1023	COREDEL
S1	1.00	ROTARY-SWITCH ZB2-BZ-103 + ZB2-BD2	TELEMECANIQUE
P4	1.00	ANMETER MAGNETO AC 72TCI/L200AC1.5 50MV DEVIA 240DEGRES	RADIO CONTROLE
P1	1.00	VOLTMETER MAGNETO AC 72TCI/L 200V CL1.5 DEVIATION 240DEGRES	RADIO CONTROLE
R1	1.00	RESISTOR ANTI-CONDENSATION EXTRA 55W REF 17506	SAREL
01	1.00	AT 41E000/+30 . +90 C THERMOSTAT DANFOSS	GARBIT
V2	1.00	DIODE BLOCKING (160A) SKN 240/04 ON P 1/200	SEMIKRON
H	1.00	LIGHT REF 53377 MARQUE CLAUDE	ISNARD
H	1.00	TUBE FLUO 220V 15W REF 15 T8CW	ISNARD
S	1.00	SWITCH OF POSITION XCK P121	TELEMECANIQUE

CUBICLE CHARGER TERMINAL BLOCK
20 LAA 001 RD


09/03/93	LNA	☒	☒	1 ^{re} Edition	00
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.	Indice
MATERIAL LIST - CHARGER EXCEL 125V/160A/3					RB : 7491
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. NE12393	page 1/1

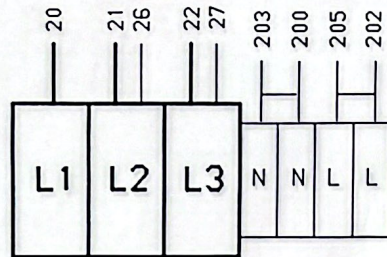

AC SUPPLY
3x400V/50Hz

HEATING
RESISTOR 220V/50Hz
AND
INTERNAL
LIGHTING 220V/50Hz

3 TERMINALS P16 4 TERMINALS P8
35mm² Max 6mm² Max

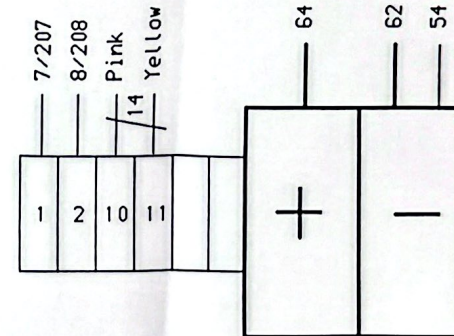

GENERAL ALARM

NOT USED

SPARE


TO 20LAA001TB
125V DC
SWITCHBOARD

6 TERMINALS P8 2 TERMINALS P42
6mm² Max 150mm² Max

PE

CUBICLE CHARGER TERMINAL BLOCK
20 LAA 001 RD


03/03/93	LNA			1 ^{re} Edition	00
Date	Dessine	Verifie	Approuve	DESCRIPTION / D.H.	Indice
CUBICLE CHARGER TERMINAL BLOCK				RB : 7491	
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. DD 6953	page 1

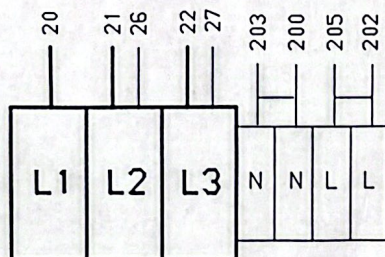

AC SUPPLY
3x400V/50Hz

HEATING
RESISTOR 220V/50Hz
AND
INTERNAL
LIGHTING 220V/50Hz

3 TERMINALS P16 4 TERMINALS P8
35mm² Max 6mm² Max

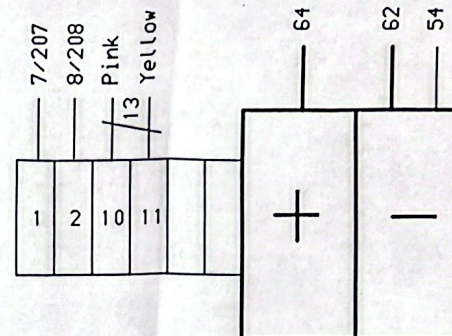

GENERAL ALARM

NOT USED

SPARE

TO 20LAA001TB
125V DC
SWITCHBOARD

6 TERMINALS P8 2 TERMINALS P42
6mm² Max 150mm² Max

PE

CUBICLE CHARGER TERMINAL BLOCK
20 LAA 002 RD

03/03/93	LNA			1 ^{re} Edition	00
Date	Dessine	Verifie	Approuve	DESCRIPTION / O.M.	Indice
CUBICLE CHARGER TERMINAL BLOCK					RB : 7491
COREDEL CHLORIDE FRANCE		CHLORIDE POWER ELECTRONICS		Dessin n. DD 6953	page 2