

# A Resilient Dynamic Gateway Selection Algorithm Based on Quality Aware Metric for Smart Grids

Victor Hugo Okabayashi, Diego Passos, Célio V. N. Albuquerque

Instituto de Computação

Universidade Federal Fluminense(UFF)

Niterói, RJ, Brasil

Email: {vhugo,dpassos,celio}@ic.uff.br

**Abstract**—Smart Grids are the evolution of the current electrical power system to meet the challenge of increasing demands for energy in this century by fully integrating the electrical power grid with data communication networks. The challenge faced by this kind of network is to fulfill reliability and resilience requirements in order to meet various types of services and applications. The use of wireless mesh networks can provide scalability and resilience to this communication network, but there are issues that need to be addressed so that it is in fact a solution for communications in Smart Grids. This paper proposes an algorithm for dynamic selection of gateways in a multihoming Smart Grid network, improving performance when a gateway's failure occurs. It uses a probabilistic approach for choosing gateways with good metrics. The results indicate that the proposed algorithm makes the routing protocol more robust and resilient against gateways failure compared to a existing algorithms for dynamic gateway selection.

**Keywords**—*wireless mesh networks, gateway selection, smart grid communication*).

## I. INTRODUCTION

The current electrical power system has an outdated hierarchical architecture that does not meet the future demands of energy consumption due to various limitations, such as limited generation capacity, one-way flow of energy (generation-transmission-distribution-consumption), low and deficient communication and reliability problems [1]. An evolution of the existing electrical power system aims at solving these problems, improving efficiency, reliability and security, integrating the use of renewable energy produced by consumers, departing from the current one-way flow and deploying a two-way flow for energy and communication [1], [2]. A two-way communication infrastructure is essential for Smart Grids [3], because it needs to send commands and to receive information from its components and sensors in real time, with reliability, allowing monitoring, maintenance and control of the entire grid.

Smart Grids have specific requirements of delay, bandwidth, frequency of updates, reliability, security and time response for each distinct application in their different fields [3]. Advanced Metering Infrastructure (AMI) is fundamental and is the first step to realize a Smart Grid [4], [5]. Its requirements should provide robustness and resilience to prevent or recover from problems, providing stability and reliability to the AMI network. This communication may use available wired or wireless technologies that support the exchange information between components of the AMI [6], [7]. Different types of

technologies can be used: cellular technology [8], WiMAX, ZigBee [8], RF Mesh [9], IEEE 802.11-based Wireless Mesh Networks (WMN) and Power Line Communication (PLC) [10].

PLC is a wired technology [6], but it has limitations. In case of failures, such as physical disruption of power lines, it would not be possible to maintain communication between AMI components [11]. Wireless networks offer more benefits than wired networks, such as lower cost, ease deployment and availability signal in large areas [8]. Among all wireless technologies, WMN has advantages compared to single-hop infrastructured network architectures, since it communicates in a multi-hop way that extends the coverage of the network and allows communication with alternative paths in case of failures [9], [12].

WMN, however, must be adapted to the communication requirements of AMI, where hundreds of meters communicate with Utility's headend through a Data Aggregation Point (DAP). DAPs are the gateways of this network. Typically, a AMI is constituted of networks connecting meters in the same neighborhood to one single DAP. Each DAP is connected to the headend through AMI wide area network. The large number of nodes is the main challenge for the WMN [13], since more than 100 meters may be associated to one single DAP. If all meters send data simultaneously this can cause congestion in the network. A way to mitigate this problem is the use of multiple DAPs. The routing protocol must be able to find reliable routes to improve performance and meet the requirements the AMI network.

Given the problems faced by routing protocols in WMN, to comply with AMI communication requirements, we propose an algorithm that dynamically selects DAPs for communication between meters and the headend. In this problem, we assumed that each meter can connect, through multiple hops, to a set of DAPs. The main goal of this algorithm, called Dynamic DAP Selection Algorithm (DDSA), is to increase the reliability, robustness and resiliency using multiple DAPs by meters thus improving performance in a presence of DAP's failure, since it exploits the option of choosing other DAP for communication with the headend.

The organization of the paper is as follows. Section II, describes the particularities of the AMI communication network, its challenges and problems. Section III presents the related work. Section IV proposes and explains the working principle of DDSA. Section V presents the results obtained in

simulations. Section VI concludes the paper and presents ideas for future work.

## II. BACKGROUND

The evolution of the current electrical grid involves a large use of information technology to move the current system towards a Smart Grid, using communication that allows a bidirectional flow of information between the different subsystems and the headend. Nearly 8% of all generated energy is lost along the transmission lines and 20% of the total generation capacity is only to support peak demands, which represent only 5% of the total demand [1]. About 90% of power outages and disturbances are assigned to the distribution subsystem, thus the success of a Smart Grid depends on the deployment of a reliable interconnected distribution subsystem.

The AMI improves the reliability and changing the paradigm to one where customer demand adjusts to the power generation. AMI is basically composed of smart meters, gateways (or DAPs) and Utility's headend, all interconnected by communication networks. The headend is connected to multiple DAPs, which in turn have connections to multiple smart meters. The meters send the measurement data to the headend through a DAP and this traffic is characterized by the exchange of short messages.

These messages have a payload that varies from tens to hundreds of bytes and are sent periodically, typically in a 15 minutes interval, and remain inactive the rest of the time [14], [7]. The headend can send commands and requests to meters also through DAPs.

According to [15], each meter requires a band from 10 to 100 Kbps and the latency should be less than 2000 ms. Since investments in the power sector are long-lasting, it is desirable that the AMI should also support long-term operations [5]. New demands for information may arise, making the requirements more stringent such as latency that should be less than hundreds of milliseconds in applications that need information in real time [16], [5].

The AMI traffic can be classified into regular and on-demand. It is regular when data is automatically sent by the meters at predetermined intervals time [17], [7] and constitute the majority of data traffic flowing through AMI [5]. The on-demand traffic is composed of alert messages from meters, command and control sent by the headend to meters and the responses to these commands [17]. In the latter type of traffic an increase in network congestion can occur due to the request for sending information by headend to a large number of meters, that would send their replies simultaneously. The DAP is a single point of failure, because all traffic between meters and headend or vice versa flows through it. Hence a DAP failure would prevent the entire network from working.

The residential density determines the amount of meters per area, which according to [17] can be classified into rural, suburban or urban scenario, with density varying from 10, 800 or 2000 meters per  $\text{km}^2$ , respectively. The external environment conditions in combination with the number of meters will determine the level of interference and attenuation in communication between meters and DAPs.

Due to the peculiarities of the AMI network and due to a large amount of meters acting as routers/clients mesh, there is a possibility of problems with loops and broken routes [18], causing a degradation in performance that may lead to failure communication requirements. Thus the routing protocol should handle this variation, providing an acceptable level of service regardless of WMN density. Another problem is the increased amount of collisions near the DAP because all packets are forwarded to it [6].

## III. RELATED WORK

The work in [11] proposes the use of WMN in AMI where multiple domains of mesh networks are connected by a WiMAX backbone. This architecture provides redundant paths between meters mitigating problems like broken routes due to nodes failures increasing their resilience and making the network fault tolerant. However, since this work considers only one single DAP acting as gateway in each WMN domain, if it becomes unavailable there will be no communication between the meters and the headend. This is the same problem studied by [9], where the WMN consists of meters, routers and collectors. The meters communicate with routers or directly to collectors, and the latter controls up to 25,000 meters and routers on a single network.

The work in [19] makes use of multiple gateways to increase the WMN resilience, because in addition to providing redundant paths, it also provides gateway redundancy.

The works in [20] and [21] are designed to meet the requirements of AMI networks and make use of multiple DAPs for communication between meters and headend modifying the HWMP protocol (Wireless Hybrid mesh Protocol). Although the work in [21] solves some deficiencies of the HWMP protocol, it still suffers from other problems such as route stability and loops. According to the authors, this is a characteristic of the distributed backpressure system adopted by them. However, neither of them has evaluated the protocol behavior in an environment with a DAP failure, nor using adaptation of transmission rate, which increases the problem of instability of routes. They use a base protocol that has scalability problems and congestion caused by control messages [22] making it difficult to use in AMI.

Our proposal, DDSA, makes use of multiple DAPs for communication between meters and headend, and differs from [20] and [21] because it is designed to improve performance in environments with DAP failure and it is also independent of the routing protocol and metric. Moreover, it can be implemented in a protocol that best suits the implementation of the AMI. In DDSA for each new data packet, meters probabilistically choose a DAP, from a set of available DAPs with good quality paths.

## IV. DYNAMIC DAP SELECTION ALGORITHM (DDSA)

The principle of the proposed algorithm is to randomly select a DAP using their respective path cost to define a probability to select each DAP. The better the cost for a given DAP, the higher the probability of selecting it. The use of multiple DAPs increases the reliability and performance of the routing, because it is possible to choose routes to the headend using any DAP.

For each DAP  $d_j$  the probability  $P_{(m_i, d_j)}$  is computed by the meter  $m_i$  by the expression:

$$P_{(m_i, d_j)} = \frac{M_{(m_i, d_j)}}{\sum_{k=1}^N M_{(m_i, d_k)}} ,$$

where  $M_{(m_i, d_j)}$  is the value of the quality metric of the path  $(m_i, d_j)$ , which is divided by the sum of all metric values of the meter  $m_i$  for all DAPs. Notice that this expression assumes that the routing metrics assigns higher values for better paths. If the used metric employs a reverse logic, the following expression is used:

$$P_{(m_i, d_j)} = \frac{1/M_{(m_i, d_j)}}{\sum_{k=1}^N 1/M_{(m_i, d_k)}} ,$$

To prevent selection of DAPs with very low metrics, a threshold  $\alpha$  is employed by the algorithm. In algorithm 1 shows how the DAP choice is made for meter  $m_i$ , first the best metric is found, then its probability to be selected is computed. This probability is multiplied by  $\alpha$ , that have values between 0 and 1, resulting in a value  $\gamma$  that is compared with others DAP's probability. If a DAP's probability is smaller than  $\gamma$  then it is discarded. The threshold  $\alpha$  is a parameter of the DDSA algorithm that affects the performance and the behavior of the network. A lower value of  $\alpha$  implies in selecting more DAPs which improving resilience in case of DAP faults, as opposed of higher value that selects only the best set of DAPs which reduces the resilience.

**input :** meter  $m_i$ , DAP vector  $d$ , number of DAP  $N$ , threshold value  $\alpha$

**output:** *Selected\_DAP*

$Sum \leftarrow 0$ ,  $Prob\_temp \leftarrow 0$ ,  $best\_M \leftarrow 0$

*//sum of all metric values and select the best DAP*

**for**  $k \leftarrow 1$  **to**  $N$  **do**

$M_{m_i d_k} \leftarrow findMetric(m_i, d_k)$

$Sum \leftarrow Sum + M_{m_i d_k}$

**if**  $best\_M < M_{m_i d_k}$  **then**

$best\_M \leftarrow M_{m_i d_k}$

$Selected\_DAP \leftarrow d_k$

**end**

**end**

$Prob\_var \leftarrow randomUniform(0, 1)$

$\gamma \leftarrow \alpha * \frac{best\_M}{Sum}$

*//choosing DAP*

**for**  $k \leftarrow 1$  **to**  $N$  **do**

**if**  $Prob\_temp \geq Prob\_var$  **then**  
        | **break**

**end**

$M_{m_i d_k} \leftarrow findMetric(m_i, d_k)$

$cost \leftarrow \frac{M_{(m_i, d_k)}}{Sum}$

**if**  $cost \geq \gamma$  **then**

$Prob\_temp \leftarrow Prob\_temp + cost$

$Selected\_DAP \leftarrow d_k$

**end**

**end**

**return** *Selected\_DAP*

**Algorithm 1:** DAP selection algorithm

## V. PERFORMANCE EVALUATION

### A. Simulation Environment

The performance of the DDSA is evaluated via the ns-2 simulator [23]. To simulate the behavior of a AMI network, composed of smart meters and DAPs, the ns-2 is set to simulate a suburban external scenario using the shadowing propagation model with the parameters set as path loss exponent = 2.7, standard deviation = 7.4 and reference distance = 1.0, defined in [17].



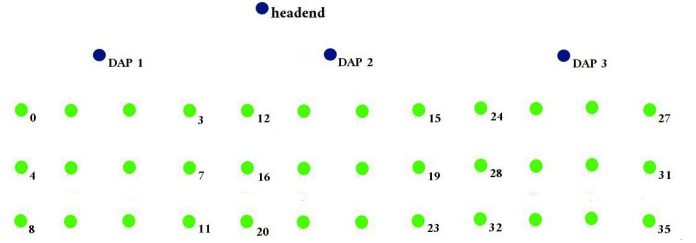



Fig. 1. Scenario used in the simulation

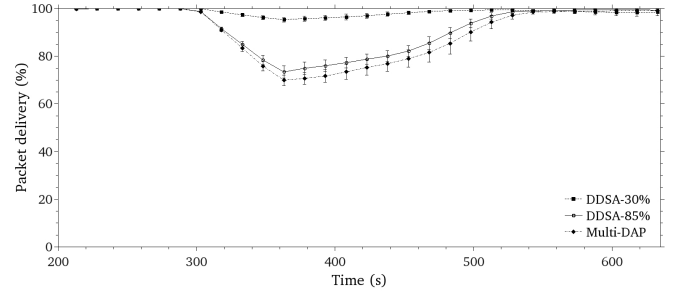

(a) Packet delivery for all nodes

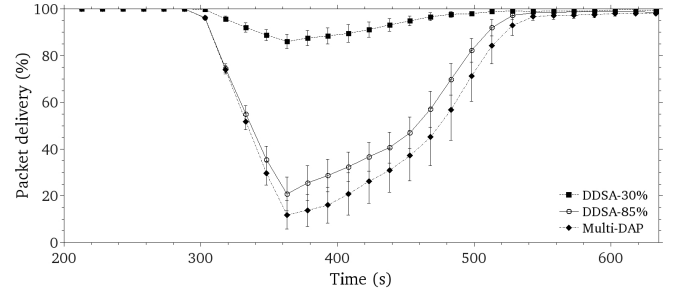

(b) Packet delivery for nodes 12-23

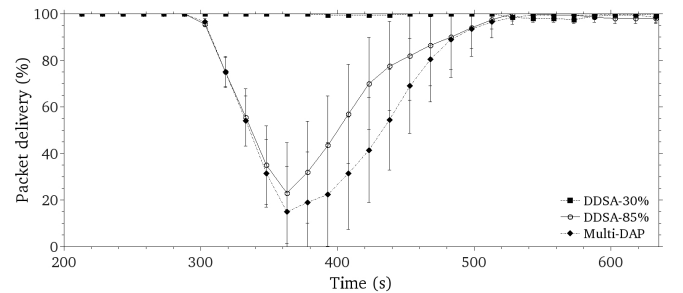

(c) Packet delivery for node 16

Fig. 2. Packet delivery

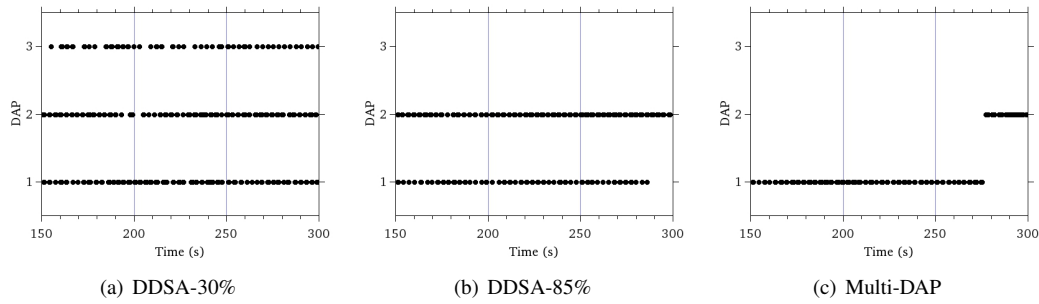


Fig. 3. DAP's choice by node 16 before failure

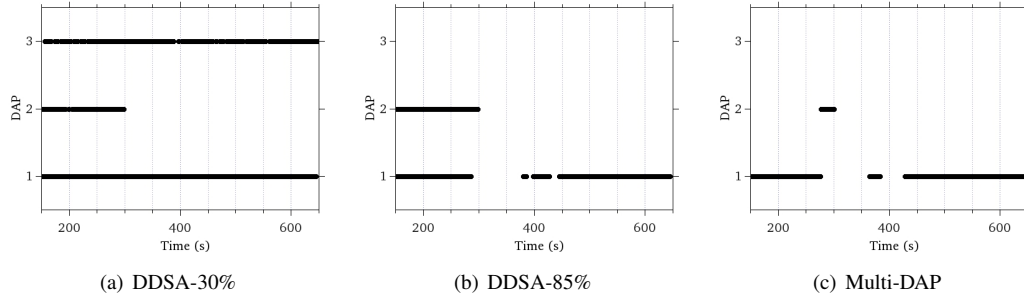


Fig. 4. DAP's choice by node 16

## B. Simulation Results

The used simulation topology used is composed of 36 nodes arranged in a grid and 3 DAPs (Fig. 1). To simulate the exchange of information between meters and DAPs in a typical application of AMI, a Constant Bit Rate (CBR) UDP traffic is used with fixed packet size of 400B [17] at the rate of 20 packets per minute. Each node sends 25 flows of data in a synchronized way for every round of transmission. The UDP is an unreliable transport protocol, but has some advantages such low latency. To make it more reliable its necessary to design a application layer protocol over UDP that implements its own transport service suitable for AMI traffic [24]. The exchange of information starts at time of 150 seconds and the DAP 2 failure occurs at the time 300 seconds. A total of 10 simulations were performed with a duration of 1150 seconds and in charts the confidence interval is 95%.

The DDSA was implemented in ns-2 simulator using OLSR [25] as the routing protocol. MARA [26] was employed as the routing metric and rate adaptation. In assessing the results were evaluated:


- (1) DDSA with  $\alpha = 0,3$  referred as DDSA-30%;
- (2) DDSA with  $\alpha = 0,85$  referred as DDSA-85%; and
- (3) the mechanism for dynamic gateway selection that chooses the best DAP according to routing metric at the time of sending the data packet. We refer to this as Multi-DAP.

The packet delivery rate in Figure 2 was calculated for the application layer. We compute as failure in delivery packet if none of the flows packet in a round are not received by any of the DAPs. In Figure 2(a) shows packet delivery rate for all nodes as a function of time, considering the latest 60 seconds. It is noticeable that the DDSA-30% performance is better than


others proposals after the occurrence of DAP 2 failure. At time 363 seconds DDSA-30% has about 95% of packet delivery rate, DDSA-85% has 73% and Multi-DAP has 69%. This was achieved because DDSA-30%, mainly in central region of the network (nodes 12 to 23), is the less affected by the failure of the DAP. It is noticed this behavior of the DDSA-30% in Figure 2(b) that, at time of 363 seconds, has about 86% of packet delivery rate and DDSA-85% and Multi-DAP has only 20,7% and 11,8% respectively. This shows that the tendency to distribute more packets among DAPs makes it more robust and resilient than others when a failure occurs. Figure 2(c) analyzes the behavior of the packet delivery rate for one node. Node 16 was chosen because it is located geographically with the same distance for 2 DAPs. Note that with DDSA-30%, when DAP 2 fails, the reduction in the rate was not as sharp as for the other proposals, becoming 77% and 85% better than DDSA-85% and Multi-DAP, respectively, at time 363 seconds.

To understand how the behavior of DDSA differs from the behavior of Multi-DAP in terms of DAP selection, in Figure 8 we shown the choices of nodes 16 using the three proposals during the simulations with a single seed for the period prior to the DAP failure. As seen, the choice of  $\alpha$  affects the behavior in choosing DAP. Notice how the lower  $\alpha$  (Fig. 3(a)) causes the farthest DAP (DAP 3) to be chosen. The higher  $\alpha$  (Fig. 3(b)) makes choices alternating between DAP 1 and DAP 2 that are closest and have better metrics, excluding DAP 3 for having a quality that is too low. The Multi-DAP (Fig. 3(c)) rarely makes exchanges between DAP, having only used a different DAP in the last 25 seconds shown in the graph.


Figure 4 shows the same information of Figure 8, but extends the view to whole simulation. After the occurrence of DAP 2 failure at time 300 seconds it is verified that the packets from nodes 16 are not received by any DAP for a long time in the simulations with DDSA-85% and Multi-DAP.

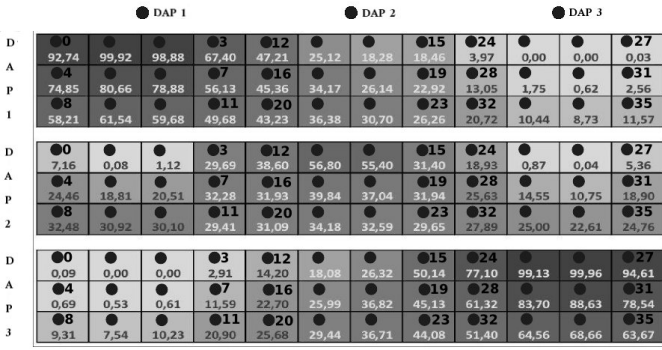

(a) DDSA-30%

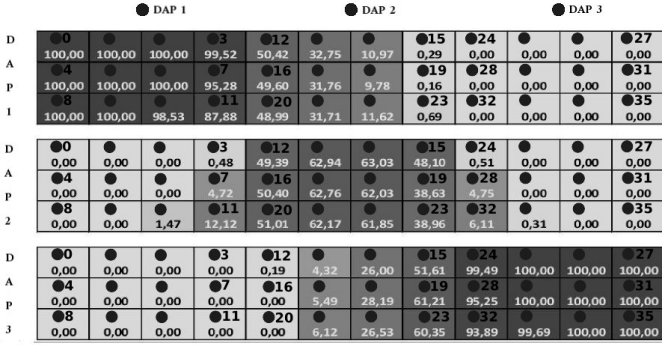

(b) DDSA-85%

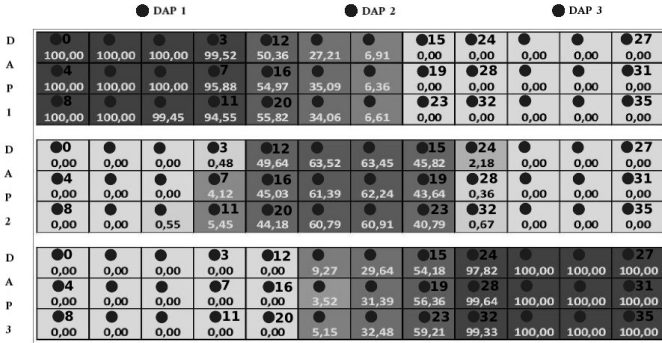

(c) Multi-DAP

Fig. 5. DAP's choice in %

For the DDSA-85%(Fig. 4(b)) the gap to deliver new packets lasted 64 seconds. For Multi-DAP (Fig. 4(c)), the gap lasted 81 seconds. This happens because before failure they start to send packets only to DAP 2. Note that for DDSA-30% (Fig. 4(a)), there is no noticeable gap because node 16 already balances the load among all DAP.

To check if this behavior is shared by other nodes, we gathered the information shown in Figure 5. We shown the DAPs choices of all nodes using intensities of grayscale to represent the percentages of DAPs choices by nodes. Higher values are represented by darker gray and lower values by lighter gray. Each matrix represents the percentages of choices for one DAP and each element is a representation of the nodes position. It is observed that the behavior of DDSA-30% (Fig. 5(a)) in balance the load among all DAP is more sharper than the other proposals, which can be seen by the elements with intermediate gray. For nodes in the central region of the

network with DDSA-30% the minor value is 14,2% and in the DDSA-85% (Fig. 5(b)) and Multi-DAP (Fig. 5(c)) six nodes (nodes 12, 15, 16, 19, 20, 23) do not choose DAP 1 or DAP 2. Except by nodes 13 and 14, in DDSA-30% all values in central region are below 40% in choosing DAP 2, in the DDSA-85% all values are above 38% and in the Multi-DAP they are above 40%. This demonstrate that DDSA-30% distributes more packets among DAPs in central region of network improving the resilience against DAP failure.

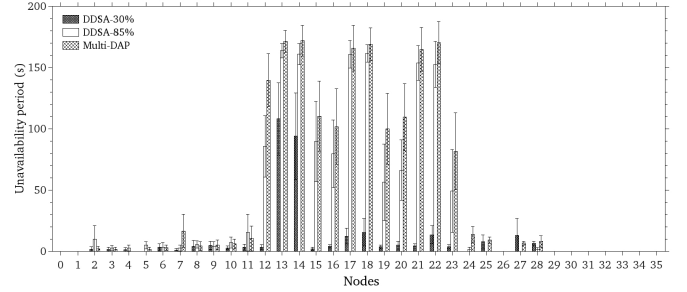


Fig. 6. Unavailability Period

Figure 6 shows how long a headend does not receive any information from one node. This means that information was unavailable at the headend. For each node we computed all periods in which no packet was received by any of the DAPs and we summed all periods over the duration of the simulation. It is noticed that the gap to deliver new packets, as seen for the node 16, is repeated for nodes in the central region of the network. In DDSA-85% and the Multi-DAP these nodes suffered long delays to deliver packets to any DAP, while DDSA-30% sustained lower delays. The average time for the DDSA-30% was 11,5 seconds, for DDSA-85% was 40,9 seconds and for Multi-DAP was 49,8 seconds. Notice that even for node 13, for which the DDSA-30% totaled 108 seconds, its performance was better than with the two other proposals (163 seconds with the DDSA-85% and 171 seconds with the Multi-DAP). This node and node 14 are the closest ones to the failed DAP 2, thus suffering more influence of this failure, because its path cost is much better compared to the other DAP.

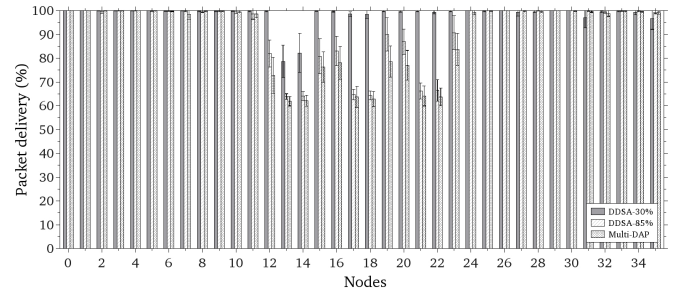


Fig. 7. Packet delivery

Finally, Figure 7 shows the packet delivery rate for all nodes as a function of time considering all simulation time. It is observed that the central region of the network is the most affected by the failure of the DAP. For these nodes, the DDSA-30% is the less affected by the fault with a performance above DDSA-85 % and Multi-DAP, where most of nodes in



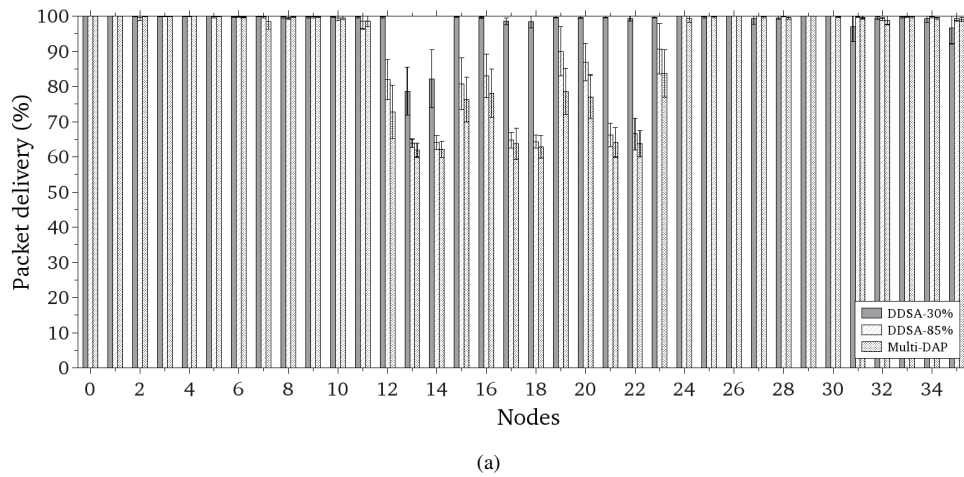


Fig. 8. Packet delivery

the central region showed a low packet delivery rates.

## VI. CONCLUSION

This work presented DDSA, dynamic DAP selection algorithm to increase the reliability and resilience of AMI applications through the use of multiple DAPs in WMN networks. In this kind of network, the DAP has an important role in exchanging information between the meter and the headend because all traffic flows through it. A failure in a DAP difficult the exchange of information on the AMI network, so alternative routes through other DAPs should be used after failure to continue occurring communication between meters and headend.

The results obtained showed that the DDSA increased the resilience of routing protocol even suffering with DAP failure evidenced by lower loss in performance. The results also showed the importance of the choice of the  $\alpha$  parameter that influences the routing behavior. Lower values favoring resilience than higher values, because it distributes more packets among DAPs even to the farthest DAP.

For future work we intend to do a deeper analysis in variation of  $\alpha$  parameter to observe the behavior of DDSA and find a value that brings more resilience in routing. Also is intention to study the use of dynamic variation of the  $\alpha$  parameter analyzing other metrics to improve the performance and resilience in a region with failure.

## ACKNOWLEDGMENT

This work is supported in part by CNPq, CAPES, FAPERJ, TBE/ANEEL and CELESC/ANEEL.

## REFERENCES

- [1] H. Farhangi, "The path of the smart grid," *IEEE Power and Energy Magazine*, vol. 8, no. 1, pp. 18–28, 2010.
- [2] K. Moslehi and R. Kumar, "A reliability perspective of the smart grid," *IEEE Transactions on Smart Grid*, vol. 1, no. 1, 2010.
- [3] V. C. Gungor, D. Sahin, T. Kocak, S. Ergut, C. Buccella, C. Cecati, and G. P. Hancke, "Smart grid technologies: Communication technologies and standards," *IEEE Transactions on Industrial Informatics*, vol. 7, no. 4, pp. 529–539, Nov 2011.
- [4] C. Bennett and D. Highfill, "Networking AMI smart meters," in *IEEE Energy 2030 Conference, 2008. ENERGY 2008.*, 2008.
- [5] W. Luan, D. Sharp, and S. Lancashire, "Smart grid communication network capacity planning for power utilities," in *IEEE PES Transmission and Distribution Conference and Exposition, 2010*, April 2010.
- [6] N. Saputro, K. Akkaya, and S. Uludag, "A survey of routing protocols for smart grid communications," *Computer Networks*, vol. 56, no. 11, pp. 2742 – 2771, 2012.
- [7] G. Deconinck, "An evaluation of two-way communication means for advanced metering in flanders (belgium)," in *IEEE Instrumentation and Measurement Technology Conference Proceedings, 2008. IMTC 2008.*, 2008.
- [8] P. Parikh, M. Kanabar, and T. Sidhu, "Opportunities and challenges of wireless communication technologies for smart grid applications," in *IEEE Power and Energy Society General Meeting, 2010*, 2010.
- [9] B. Lichtensteiger, B. Bjelajac, C. Muller, and C. Wietfeld, "RF mesh systems for smart metering: System architecture and performance," in *First IEEE International Conference on Smart Grid Communications (SmartGridComm), 2010*, 2010.
- [10] J. Liu, B. Zhao, J. Wang, Y. Zhu, and J. Hu, "Application of power line communication in smart power consumption," in *IEEE International Symposium on Power Line Communications and Its Applications (ISPLC), 2010*, 2010.
- [11] V. Gungor and F. Lambert, "A survey on communication networks for electric system automation," *Computer Networks*, vol. 50, no. 7, pp. 877–897, 2006.
- [12] X. Fang, S. Misra, G. Xue, and D. Yang, "Smart grid - the new and improved power grid: A survey," *IEEE Communications Surveys & Tutorials*, vol. 14, no. 4, pp. 944–980, Fourth 2012.
- [13] I. Akyildiz and X. Wang, "A survey on wireless mesh networks," *IEEE Communications Magazine*, vol. 43, no. 9, pp. S23–S30, Sept 2005.
- [14] O. S. G. OpenSG, "Smart grid network system requirements specification," OpenSG, 2013. [Online]. Available: <http://osgug.ucaug.org/UtiliComm/>
- [15] V. C. Gungor, D. Sahin, T. Kocak, S. Ergut, C. Buccella, C. Cecati, and G. P. Hancke, "A survey on smart grid potential applications and communication requirements," *IEEE Transactions on Industrial Informatics*, vol. 9, no. 1, pp. 28–42, Feb 2013.
- [16] Y. Yan, Y. Qian, H. Sharif, and D. Tipper, "A survey on smart grid communication infrastructures: Motivations, requirements and challenges," *Communications Surveys Tutorials, IEEE*, vol. 15, no. 1, 2013.
- [17] NIST, "NISTIR 7761 - Guidelines for assessing wireless standards for smart grid applications," 2011.
- [18] K. Ramachandran, I. Sheriff, E. Belding, and K. Almeroth, "Routing stability in static wireless mesh networks," in *Passive and Active Network Measurement*, ser. Lecture Notes in Computer Science. Springer Berlin Heidelberg, 2007, vol. 4427, pp. 73–82.

- [19] C. da Silva, D. Passos, J. Duarte, I. Moraes, and C. V. N. de Albuquerque, "Dyntun: A tool for providing multihoming support in wireless mesh networks," in *International Information and Telecommunication Technologies Symposium (I2TS), 2010*, 2010.
- [20] J. Kim, D. Kim, K. Lim, Y. Ko, and S. Lee, "Improving the reliability of IEEE 802.11s based wireless mesh networks for smart grid systems," *Journal of Communications and Networks*, vol. 14, no. 6, pp. 629–639, Dec 2012.
- [21] H. Gharavi and B. Hu, "Multigate communication network for smart grid," *Proceedings of the IEEE*, vol. 99, no. 6, pp. 1028–1045, 2011.
- [22] R. Carrano, L. Magalhães, D. C. M. Saade, and C. V. N. Albuquerque, "IEEE 802.11s multihop mac: A tutorial," *IEEE Communications Surveys Tutorials*, vol. 13, no. 1, pp. 52–67, First 2011.
- [23] NS-2, "The network simulator - ns-2," 2013. [Online]. Available: <http://www.isi.edu/nsnam/ns/>
- [24] D. M. F. Baker, "Internet protocols for the smart grid," Cisco Systems, RFC 6272, 2011.
- [25] T. Clausen, P. Jacquet, C. Adjih, A. Laouiti, P. Minet, P. Muhlethaler, A. Qayyum, L. Viennot *et al.*, "Optimized link state routing protocol (olsr)," *RFC 3626, Oct. 2003*, 2003.
- [26] D. Passos and C. V. N. Albuquerque, "A joint approach to routing metrics and rate adaptation in wireless mesh networks," *IEEE/ACM Transactions on Networking*, vol. 20, no. 4, pp. 999–1009, Aug 2012.