


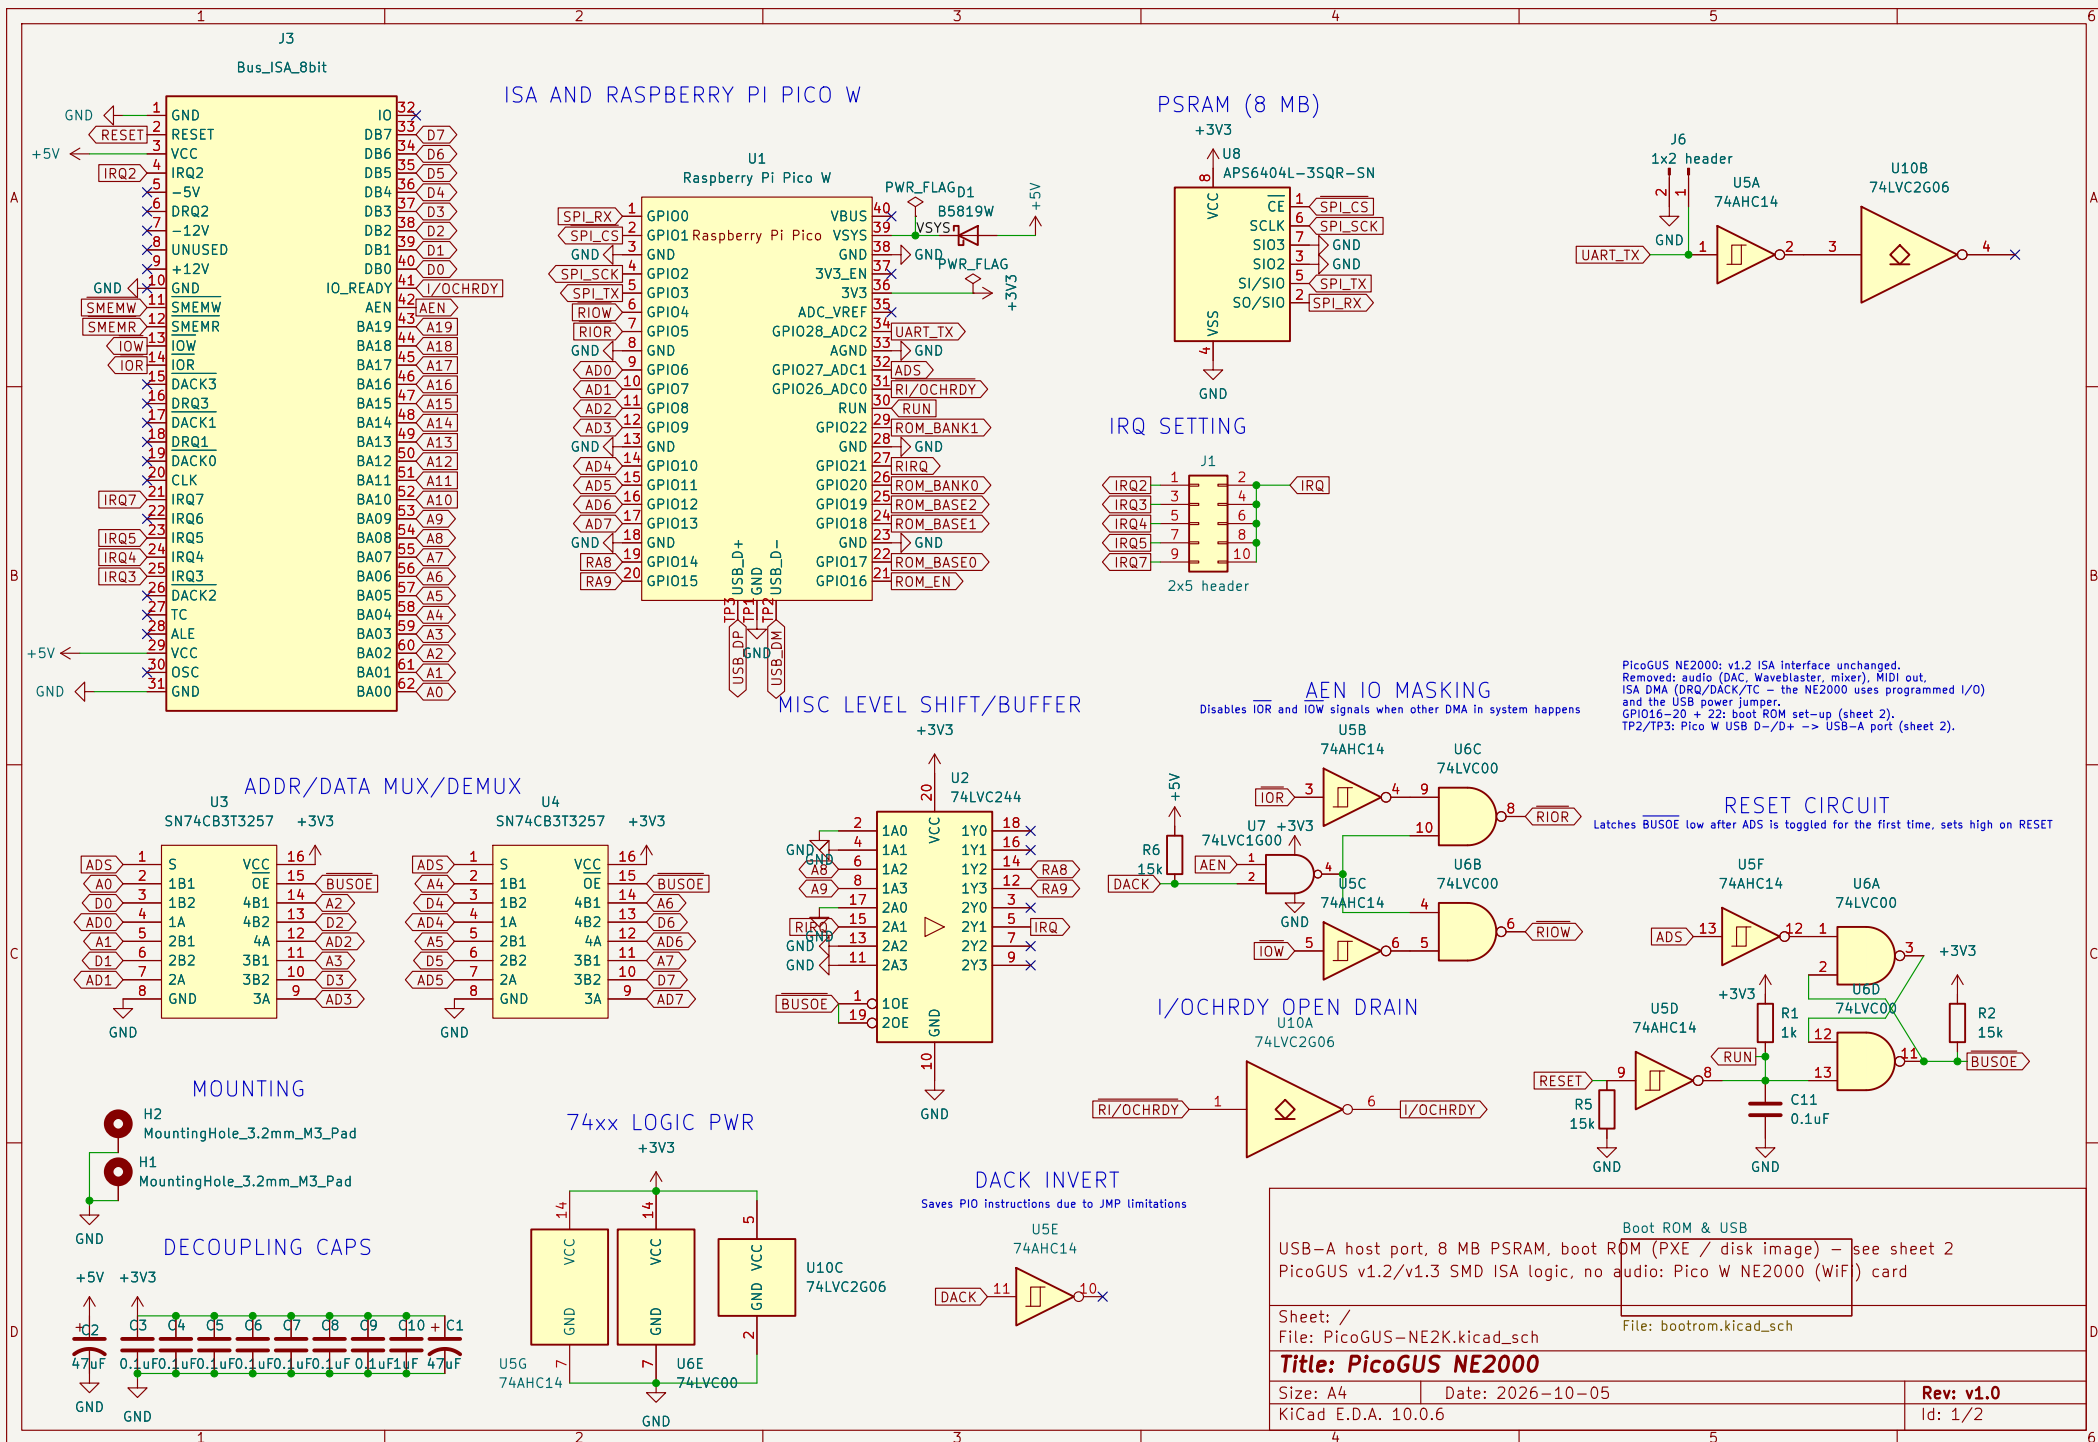

ISA AND RASPBERRY PI PICO W

PSRAM (8 MB)

IRQ SETTING

AEN IO MASKING

RESET CIRCUIT

ADDR/DATA MUX/DEMUX

MISC LEVEL SHIFT/BUFFER

MOUNTING

74xx LOGIC PWR

DACK INVERT

DECOUPLING CAPS

Title: PicoGUS NE2000

Sheet: /
File: PicoGUS-NE2K.kicad_sch
KiCad E.D.A. 10.0.6

Boot ROM & USB
USB-A host port, 8 MB PSRAM, boot ROM (PXE / disk image) – see sheet 2
PicoGUS v1.2/v1.3 SMD ISA logic, no audio: Pico W NE2000 (WiF) card


File: bootrom.kicad_sch

Rev: v1.0
Id: 1/2

SST39SF010A, 128 KB = 4 banks of 32 KB (bank = ROM_BANK1:0 from the Pico). 32 KB window at base = 1 1 BAE2E BAE1E BAE0E (SA19..SA15): 001 C8000, 010 D0000, 011 D8000, 100 E0000, 101 E8000. ROM_EN (pulled low = ROM invisible) and the base/bank bits are Pico GPIOs, set from the stored settings right after reset, long before the BIOS scans for option ROMs. Reads: -SMEMR in the window -> flash OE, U15 drives the ISA data bus. Writes (flashing from DOS): only with jumper J2 fitted (SST command sequence at 5555h/2AAAh).



➤ Data straight from the Pico W test points TP3 (D+) / TP2 (D-), behind the Pico's own 27R series resistors. VBUS from ISA +5V via F1 (0.5 A). Pico VBUS pin unused.

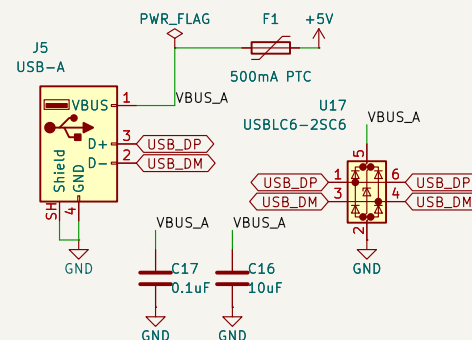

Id: 2/2