

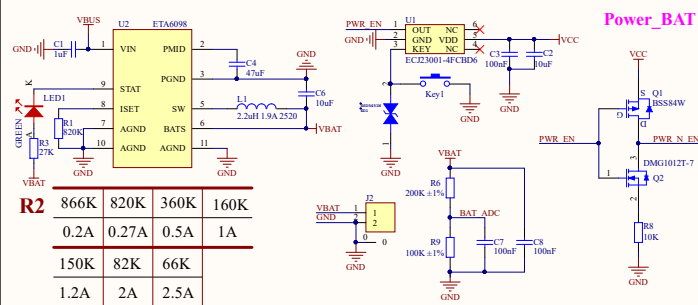



USB Type-C Interface

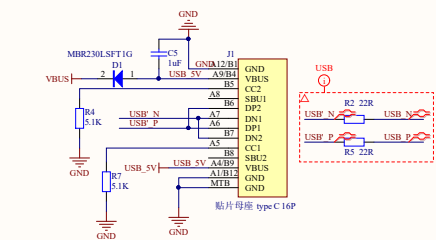


GPIO	LCD	SD Card	RTC	UART	IIC	IIC expend	Speak	IMU	SHTC3	Other	Pin Out
GPIO0	LCD_SCK	SPI_SCLK									
GPIO1	LCD_MOSI	SPI_MOSI									
GPIO2								12S_ASDOUT			
GPIO3								12S_LRCK			
GPIO4											GPIO4
GPIO5											GPIO5
GPIO6	TP_SDA		RTC_SDA		IIC_SDA	EXIO_SDA	Speak_SDA	IMU_SDA	SHTC3_SDA		IIC_SDA
GPIO7	TP_SCL		RTC_SCL		IIC_SCL	EXIO_SCL	Speak_SCL	IMU_SCL	SHTC3_SCL		IIC_SCL
GPIO8	LCD_MISO	SPI_MISO									
GPIO9										BOOT0	BOOT0
GPIO10	LCD_DC										
GPIO11	LCD_CS										
GPIO12										USB_N	USB_N
GPIO13										USB_P	USB_P
GPIO15							12S_SCLK				
GPIO16				UART_TXD							UART_TXD
GPIO17				UART_RXD							UART_RXD
GPIO18	TP_INT										
GPIO19								IMU_INT1			
GPIO20								12S_DSIN			
GPIO21											GPIO21
GPIO22											GPIO22
GPIO23		SPI_CS									
CHIP_PU										CHIP_PU	CHIP_PU
EXIO0	TP_RST										
EXIO1	LCD_RST										
EXIO2			RTC_INT								
EXIO3							PA_CTRL				
EXIO4										EXIO4	EXIO4
EXIO5										EXIO5	EXIO5
EXIO6										EXIO6	EXIO6
EXIO7										EXIO7	EXIO7
EXIO_ADC										BAT_ADC	
EXIO_PWM	LCD_BL										

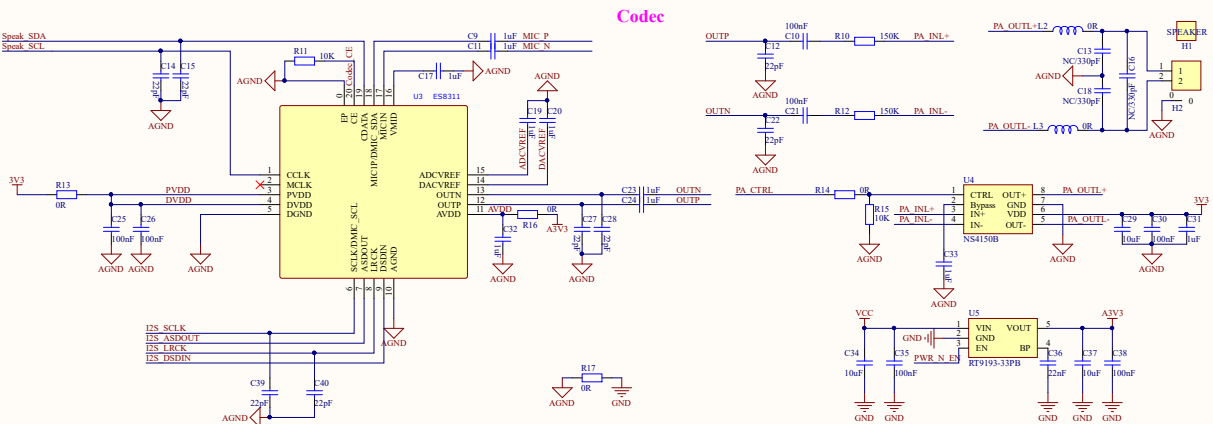

SD_CARD




Power_5v_to_3.3v

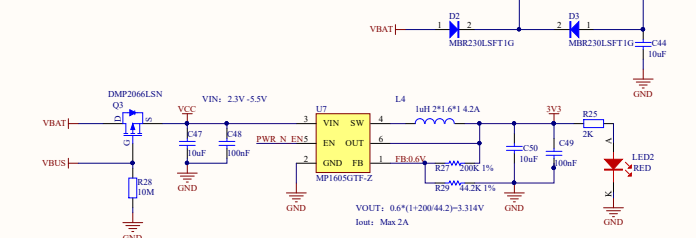


ESP32-C6-Touch-LCD-2.8




KEY




RTC

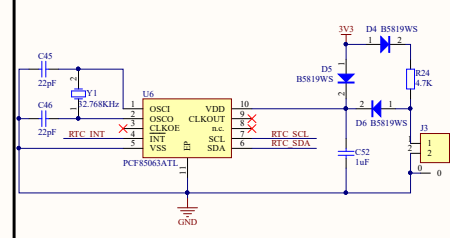


MIC1




SHTC3




ESP32-C6-WROOM-1

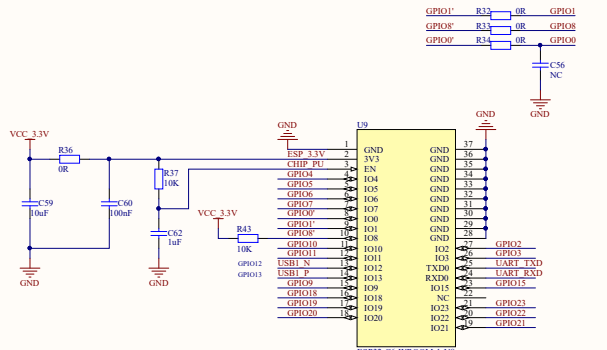


IMU

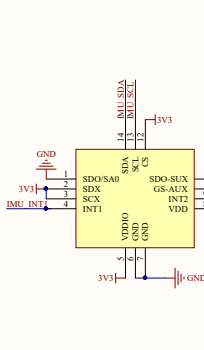

LCD

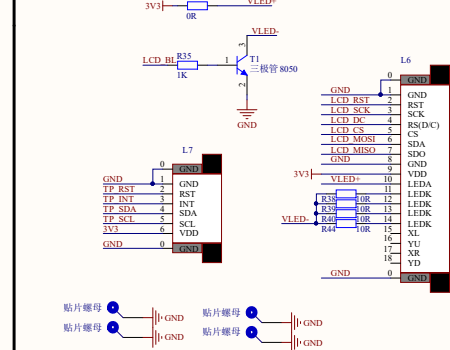

IO Expand



Pin Header

