



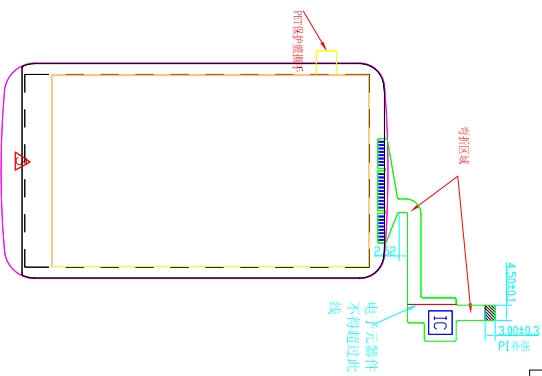


Front View

Back View

REVISION RECORD				
REV.	DESCRIPTION	DATE	BY	APPROVE
0	1st Edition	11.07.02	ZXW	hyj
	更改外形	11.07.05	JSY	hyj
	更改AFC金手指端总厚度	11.07.06	JSY	hyj
	按客户用图更改为AL000, 改为AL000A	11.07.22	ZXW	hyj
	按客户用图更改为AL000	11.08.20	ZXW	hyj
	按客户要求增加加工后圆角半径	11.08.22	ZXW	hyj

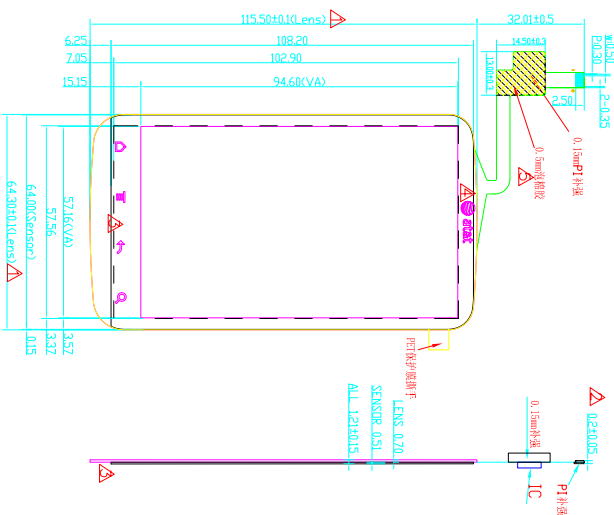

Overlay

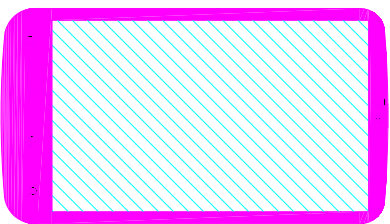

Three rectangular color swatches are shown horizontally. From left to right: a white rectangle, a transparent rectangle with diagonal hatching, and a black rectangle. Below each rectangle is its corresponding label in Chinese: '白色' (White), '透明' (Transparent), and '黑色' (Black).

PIN 1	TP-28V
PIN 2	GND
PIN 3	INT
PIN 4	SDA
PIN 5	SCL
PIN 6	RST
PIN 7	TP-18V
PIN 8	GND

UNLESS OTHERWISE SPECIFIED TOLERANCE ON DIMENSIONS ARE: ±0.2				广东迪之特电子科技有限公司 GUANGDONG DIGITAL ELECTRONIC TECHNOLOGY CO., LTD	
UNIT	MM	SCALE	1:1	Viewed from the front 	
DR.	DATE	CH.	DATE		
ZMW	11.08.23	HYJ	11.08.23	DWG. NO:	Rev
				D0110.11S.0157	I. 剖面纸 0

NOTES:

1.Unspecified Tolerance : ± 0.20

2.All materials in the drawing Comply with the RDHS

3. The transparency of panel is over 86%.

4. Plastic packing is anti static material, the period of validity is one year.