



# Chunghwa Picture Tubes, Ltd.

## Technical Specification

To :

Date : 2010 /03/15

**TFT LCD**

**CLAA080UA01**

ACCEPTED BY :

APPROVED BY	CHECKED BY	PREPARED BY
Ronald Huang	Roger Liu	Carol Shen

Prepared by : TFT-LCD Product Planning Management Division

**CHUNGHWA PICTUER TUBES, LTD.**

1127 Hopin Rd., Padeh, Taoyuan, Taiwan 334, R.O.C.

TEL: +886-3-3675151 FAX: +886-3-377-3003

Doc.No:	<b>CLAA080UA01-SCL-V1-20100315</b>	Issue Date:	2010/03/15
---------	------------------------------------	-------------	------------

**Modification Record List**

NO.	Issue Date	Modification Index
1	V1	Final spec.
2		
3		
4		
5		
6		
7		
8		
9		
10		

**Table of Content**

NO.	Table of Content	Page
1	OVERVIEW	3
2	ABSOLUTE MAXIMUM RATINGS	4
3	ELECTRICAL CHARACTERISTICS	5
4	CONNECTOR INTERFACE PIN & FUNCTION	9
5	INTERFACE TIMING CHART	10
6	BLOCK DIAGRAM	13
7	MECHANICAL SPECIFICATION	14
8	OPTICAL CHARACTERISTICS	16
9	RELIABILITY TEST CONDITIONS	20
10	HANDLING PRECAUTIONS FOR TFT-LCD MODULE	21

## 1. OVERVIEW

**CLAA080UA01** is 8" color (16 : 9) TFT-LCD (Thin Film Transistor Liquid Crystal Display) module composed of LCD panel, LVDS driver ICs, control circuit and backlight. By applying 6 bit digital data, 1600×RGB (3) ×768, 262K-color images are displayed on the 8" diagonal screen. General specifications are summarized in the following table :

ITEM	SPECIFICATION
Display Area	182.4(H)×87.552(V)(mm) (8-inch diagonal)
Number of Pixels	1600×3(H)×768(V)
Pixel Pitch	0.114(H)×0.114(V) (mm)
Color Pixel Arrangement	RGB vertical stripe
Display Mode	Normally white
Number of Colors	262,144(6bits) (LVDS)
Gamut	45%(Min)
Optimum Viewing Angle	6 o'clock
Response Time	16ms (Typ)
Surface Treatment	ARC150T 3H
Viewing Angle	35°、35°/10°、30° (Typ)
Brightness	340 cd/m <sup>2</sup> (5point) (Typ) 300 cd/m <sup>2</sup> (5point) (Min)
Uniformity	5point : 80% 13point : 65%
Consumption of Power	(2.23)W (Typ)
Module Size	195.3(W)×111.5(H)×3.375(D) (mm) (Max)
Module Weight	(80g) (Typ)

The LCD Products listed on this document are not suitable for use of aerospace equipment, submarine cable, and nuclear reactor control system and life support systems. If customers intend to use these LCD products for applications listed above or those not included in the "Standard" list as follows, please contact our sales in advance.

Standard : Computer, Office equipment, Communication equipment, Test and Measurement equipment, Machine tool, Industrial robot, Audio and Visual equipment, Other consumer products.


## 2. ABSOLUTE MAXIMUM RATINGS

The following are maximum value, which if exceeded, may cause faulty operation or damage to the unit.

ITEM	SYMBOL	MIN	MAX	UNIT	NOTE
LCD Power Voltage	VCC	0	4.0	V	
Operation Temperature	Top	0	50	°C	*1).*2).*3).*4)
Storage Temperature	Tstg	-25	65	°C	*1).*2).*3)

### 【Note】

- \*1) The relative temperature and humidity range are as below sketch, 90%RH Max. ( $T_a \leq 40^\circ\text{C}$ )
- \*2) The maximum wet bulb temperature  $\leq 39^\circ\text{C}$  ( $T_a > 40^\circ\text{C}$ ) and without dewing.
- \*3) If product in environment which over the definition of the relative temperature and humidity out of range too long, it will affect visual of LCD.
- \*4) If you operate LCD in normal temperature range, the center surface of panel should be under  $50^\circ\text{C}$ .

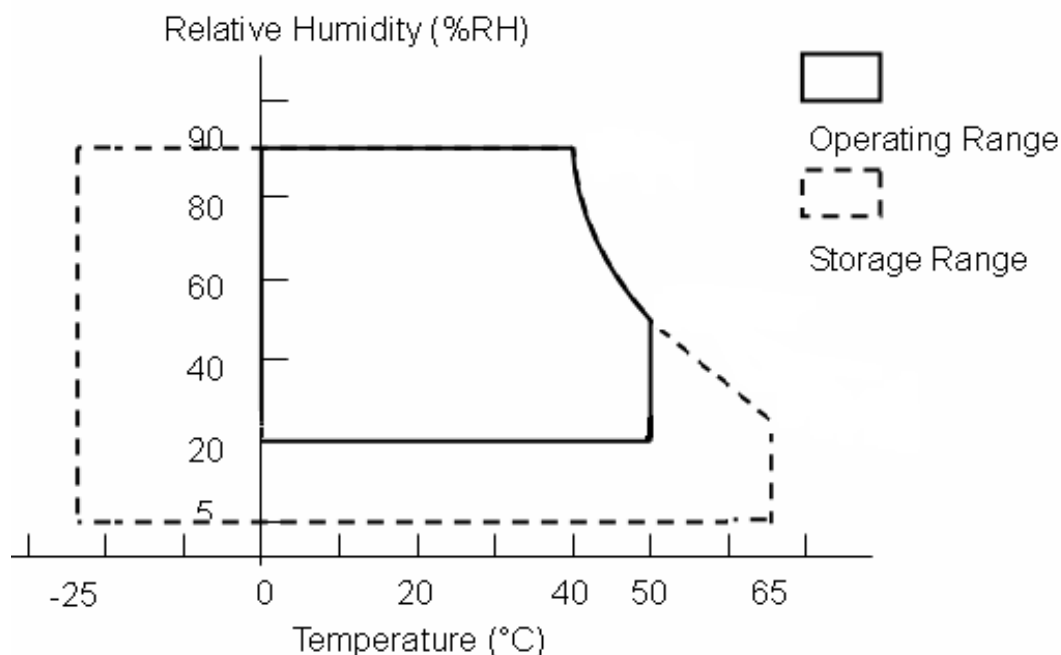

3. ELECTRICAL CHARACTERISTICS


(A) TFT LCD

ITEM		SYMBOL	MIN	TYP	MAX	UNIT	NOTE
LCD Power Voltage		VCC	2.35	2.5	2.7	V	*1)
LCD Power Current		ICC	-	TBD	TBD	mA	*2)
Rush Current		Irush	-	-	2	A	*4)
Logic Input Voltage (LVDS: IN+,IN-)	Common Voltage	VCM	0.7	-	1.6	V	*3)
	Differential Input Voltage	VID	100	-	600	mV	*3)
	Threshold Voltage (HIGH)	VTH	-	-	100	mV	*3) When VCM = +1.2V
	Threshold Voltage (LOW)	VTL	-100	-	-	mV	

【Note】


\*1) Power Sequence :

$0.50\text{ ms} \leq t1 \leq 10\text{ ms}$  $500\text{ ms} \leq t4$  $0.01\text{ ms} < t2 \leq 50\text{ ms}$  $200\text{ ms} \leq t5$  $0.01\text{ ms} < t3 \leq 50\text{ ms}$  $200\text{ ms} \leq t6$

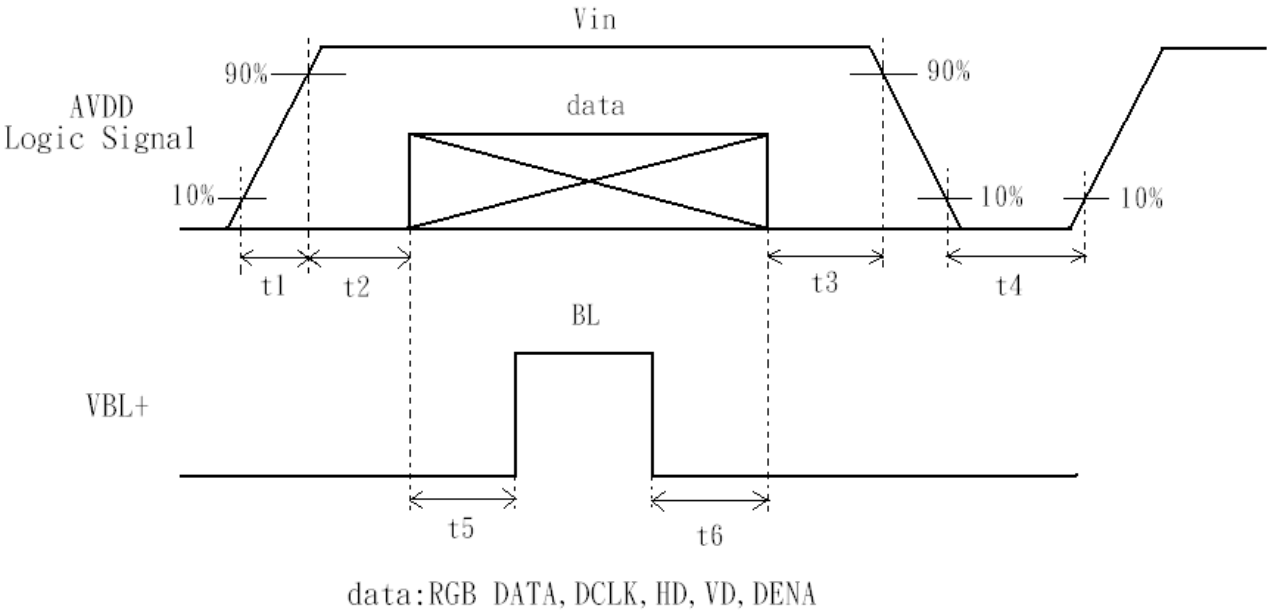


VCC-dip state


- (1)when  $2.35V > VCC \geq 2.2V$  ,  $t_d \leq 10\text{ ms}$ .
- (2)when  $VCC < 2.2V$  , VCC-dip condition should as the VCC-turn-off condition.

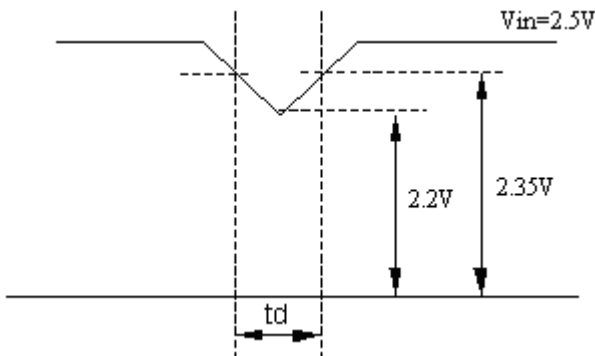



- \*2) Typical value is Mosaic (32\*36 Checker board) Pattern : 768 line mode.  
Circuit condition (Typ) :  $VCC=2.5\text{ V}$  ,  $f_v=60\text{ Hz}$  ,  $f_H=46.68\text{ kHz}$  ,  $f_{CLK}=83.5\text{ MHz}$ .

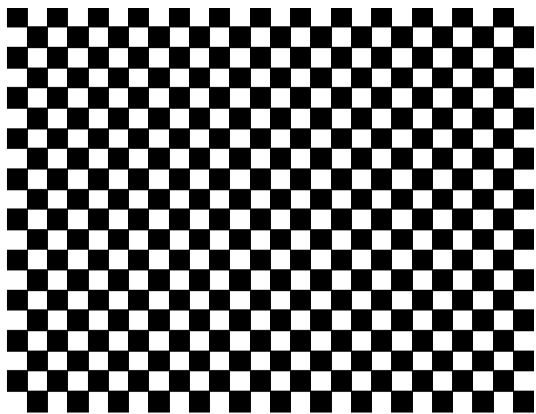

- Max value is Black Pattern : 768 line mode.  
Circuit condition (Max) :  $VCC=2.5\text{ V}$  ,  $f_v=60\text{ Hz}$  ,  $f_H=46.68\text{ kHz}$  ,  $f_{CLK}=83.5\text{ MHz}$ .




## \*3) LVDS Signal Definite :

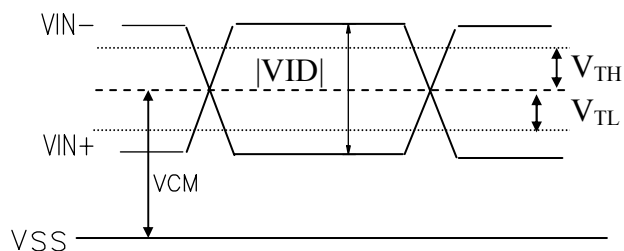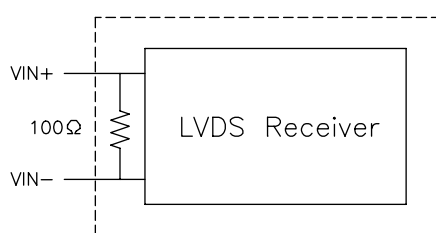

VIN+ : Positive differential DATA &amp; CLK Input

VIN- : Negative differential DATA &amp; CLK Input

## \*4) Irush measure condition

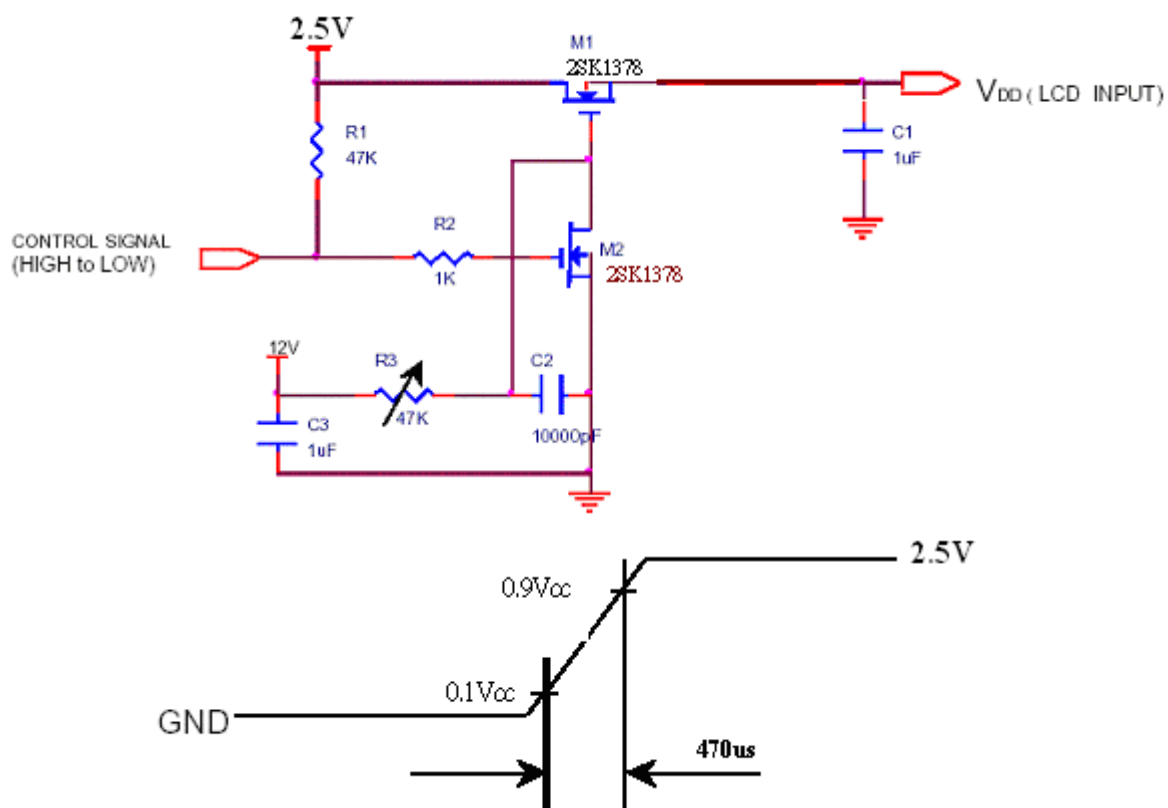



(B) BACK LIGHT

(a.) ELECTRICAL CHARACTERISTICS


Ta=25°C

ITEM	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Forward Voltage	V <sub>F</sub>	2.8	3.1	3.4	V	*1) I <sub>F</sub> =12mA
Forward Current	I <sub>F</sub>	11.5	12	12.5	mA	*1) I <sub>F</sub> =12mA
Power Consumption	PLED	(1.075)	(1.19)	(1.306)	W	*1)*2) I <sub>F</sub> =12mA

(b.) LED LIFE – TIME

ITEM	CONDITION	MIN	TYP	MAX	UNIT	NOTE
Life Time	I <sub>F</sub> =12mA、Ta=25°C	10000			hrs	*3)

\*1) Measure method : a. LED current is measured by utilizing a current meter as show below.  
b. System power PLED is measured at input voltage 12V.

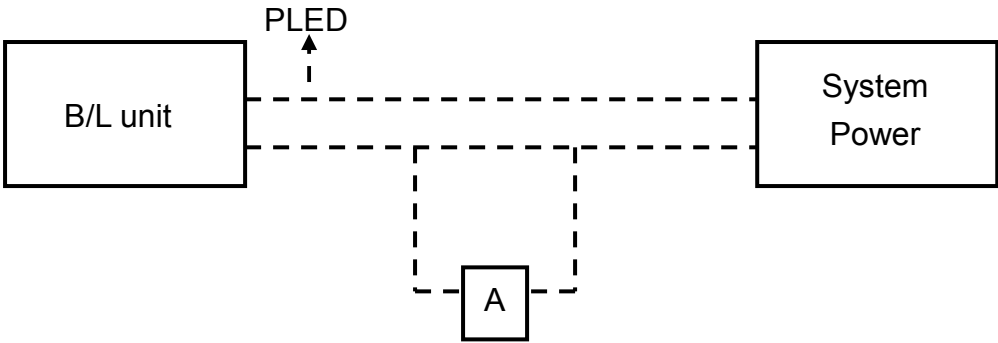

\*2) Calculator value for reference  $I_F \times V_F \times N = \text{PLED}$   
\*3) Life time means that estimated time to 50% degradation of initial luminous intensity.

## 4. Connector Interface PIN & Function


### CN (Interface signal)

Outlet connector: 20461-030E-12 (I-PEX)


Pin No.	SYMBOL	FUNCTION
1	IN0-	LVDS Differential Data 0- Input
2	IN0+	LVDS Differential Data 0+ Input
3	IN1-	LVDS Differential Data 1- Input
4	IN1+	LVDS Differential Data 1+ Input
5	IN2-	LVDS Differential Data 2- Input
6	IN2+	LVDS Differential Data 2+ Input
7	CLK-	LVDS Differential Clock- Input
8	CLK+	LVDS Differential Clock+ Input
9	NC	No Connection
10	NC	No Connection
11	NC	No Connection
12	NC	No Connection
13	B/L LED cathode 1	LED Ground
14	B/L LED cathode 2	LED Ground
15	B/L LED cathode 3	LED Ground
16	B/L LED cathode 4	LED Ground
17	NC	No Connection
18	NC	No Connection
19	NC	No Connection
20	NC	No Connection
21	GND	Ground
22	GND	Ground
23	GND	Ground
24	GND	Ground
25	LCD_VCC	+2.5V
26	LCD_VCC	+2.5V
27	LCD_VCC	+2.5V
28	NC	No Connection
29	B/L LED Anode	LED Power Input
30	B/L LED Anode	LED Power Input

5. INTERFACE TIMING CHART

(1)(a) LVDS input time sequence

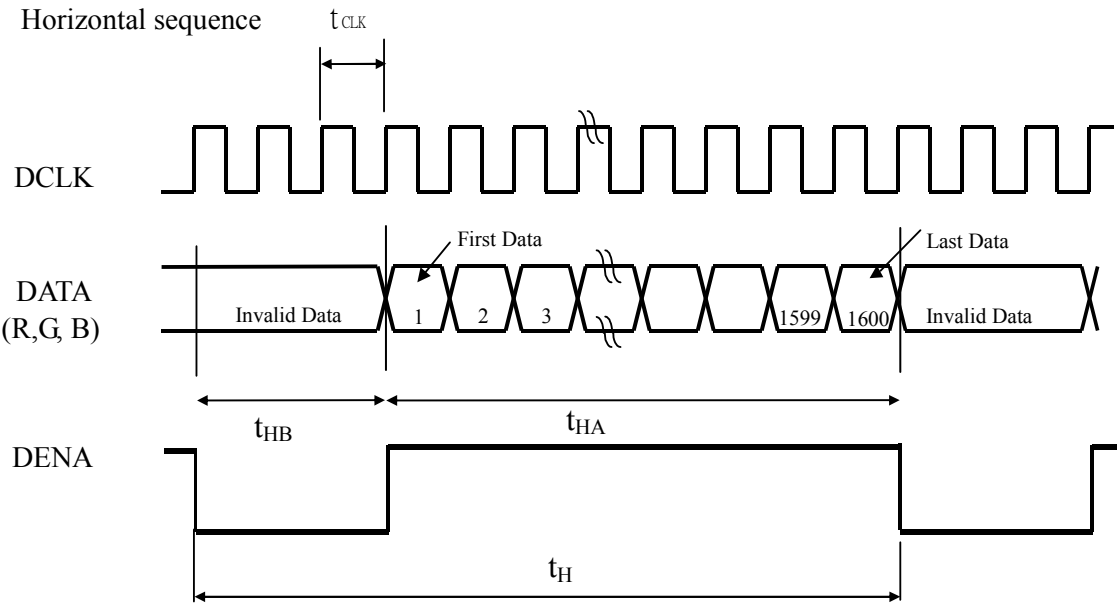

(b) LCD input time sequence

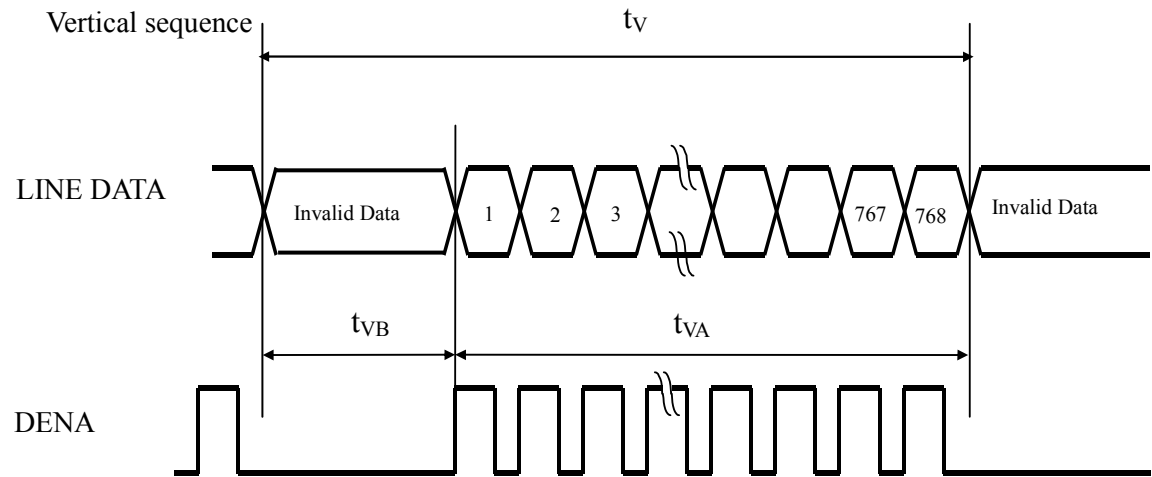

## (2) Timing Chart

ITEM				SYMBOL	MIN	TYP	MAX	UNIT
LCD Timing	Frame Rate			-	40	60	(60)	Hz
	DCLK		Frequency	f <sub>CLK</sub>	54.2	83.5	95	MHz
			Period	t <sub>CLK</sub>	18.45	11.97	10.52	ns
	DENA	Horizontal	Horizontal Total time	t <sub>H</sub>	1756	1790	3072	t <sub>CLK</sub>
			Horizontal Active time	t <sub>HA</sub>	1600	1600	1600	t <sub>CLK</sub>
			Horizontal Blank time	t <sub>HB</sub>	156	190	1472	t <sub>CLK</sub>
		Vertical	Vertical Total time	t <sub>V</sub>	772	778	1024	t <sub>H</sub>
			Vertical Active time	t <sub>VA</sub>	768	768	768	t <sub>H</sub>
			Vertical Blank time	t <sub>VB</sub>	4	10	256	t <sub>H</sub>
LVDS Spread Spectrum Range *3)				-2		+2	%	

## 【Note】

- \*1) DENA (DATA ENABLE) usually is positive.
- \*2) During the whole blank period, DCLK should keep input.
- \*3) At 100kHz modulation rate (LVDS=90MHz).

## (3) DATA mapping

Color	Input Data	R DATA						G DATA						B DATA					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
		MS B					LS B	MS B					LS B	MS B					LS B
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(1)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	RED(2)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Green	Green(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Blue	Blue(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

## 【Note】


1) Gray level:

Color(n) : n is level order; higher n means brighter level.

2) DATA:

1: high , 0: low


6. BLOCK DIAGRAM

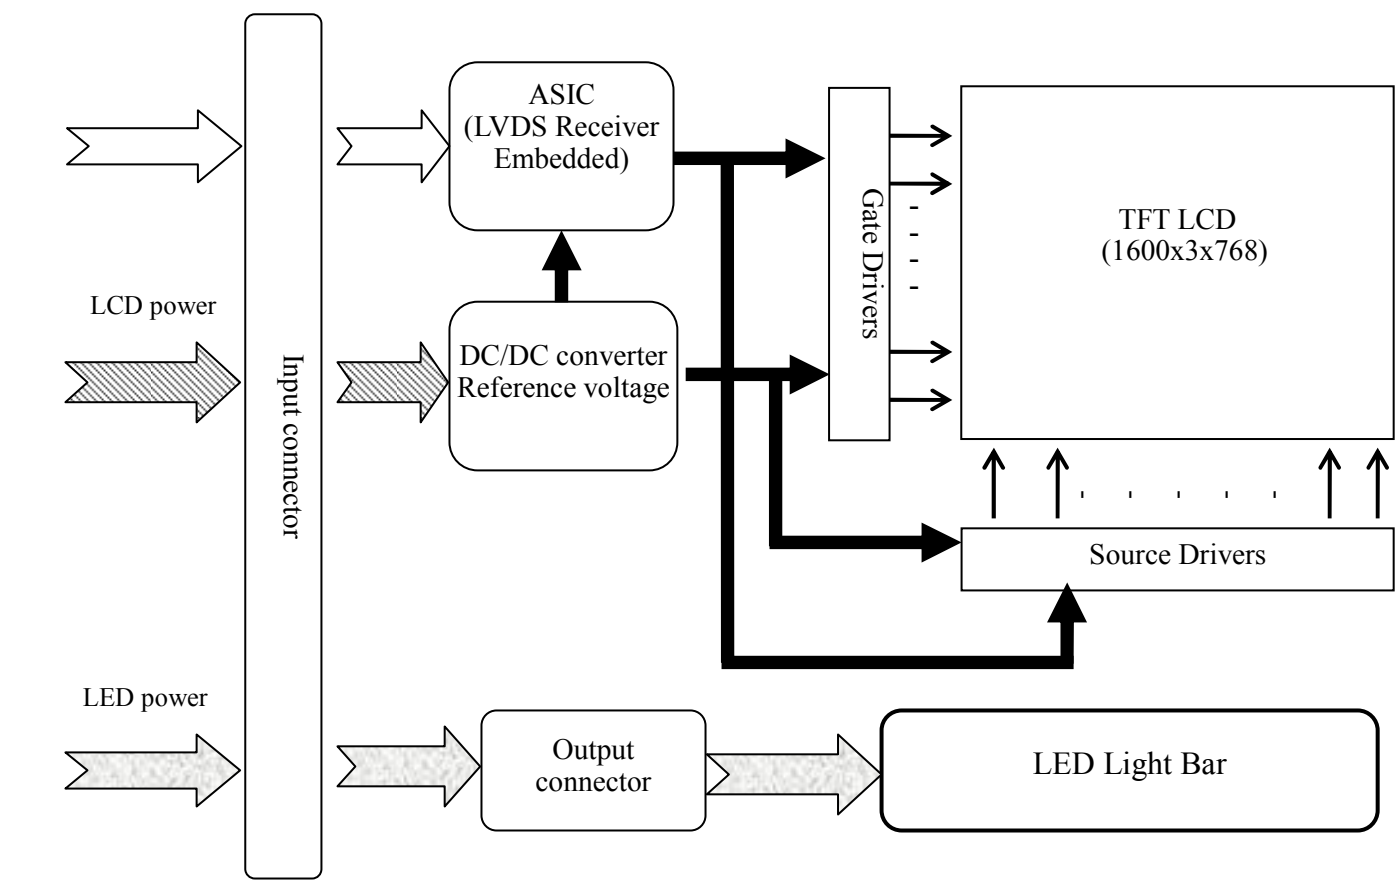

**(1) Front side**

**The tolerance, not show in the figure, is  $\pm 0.5$  mm.**


**[Unit : mm]**

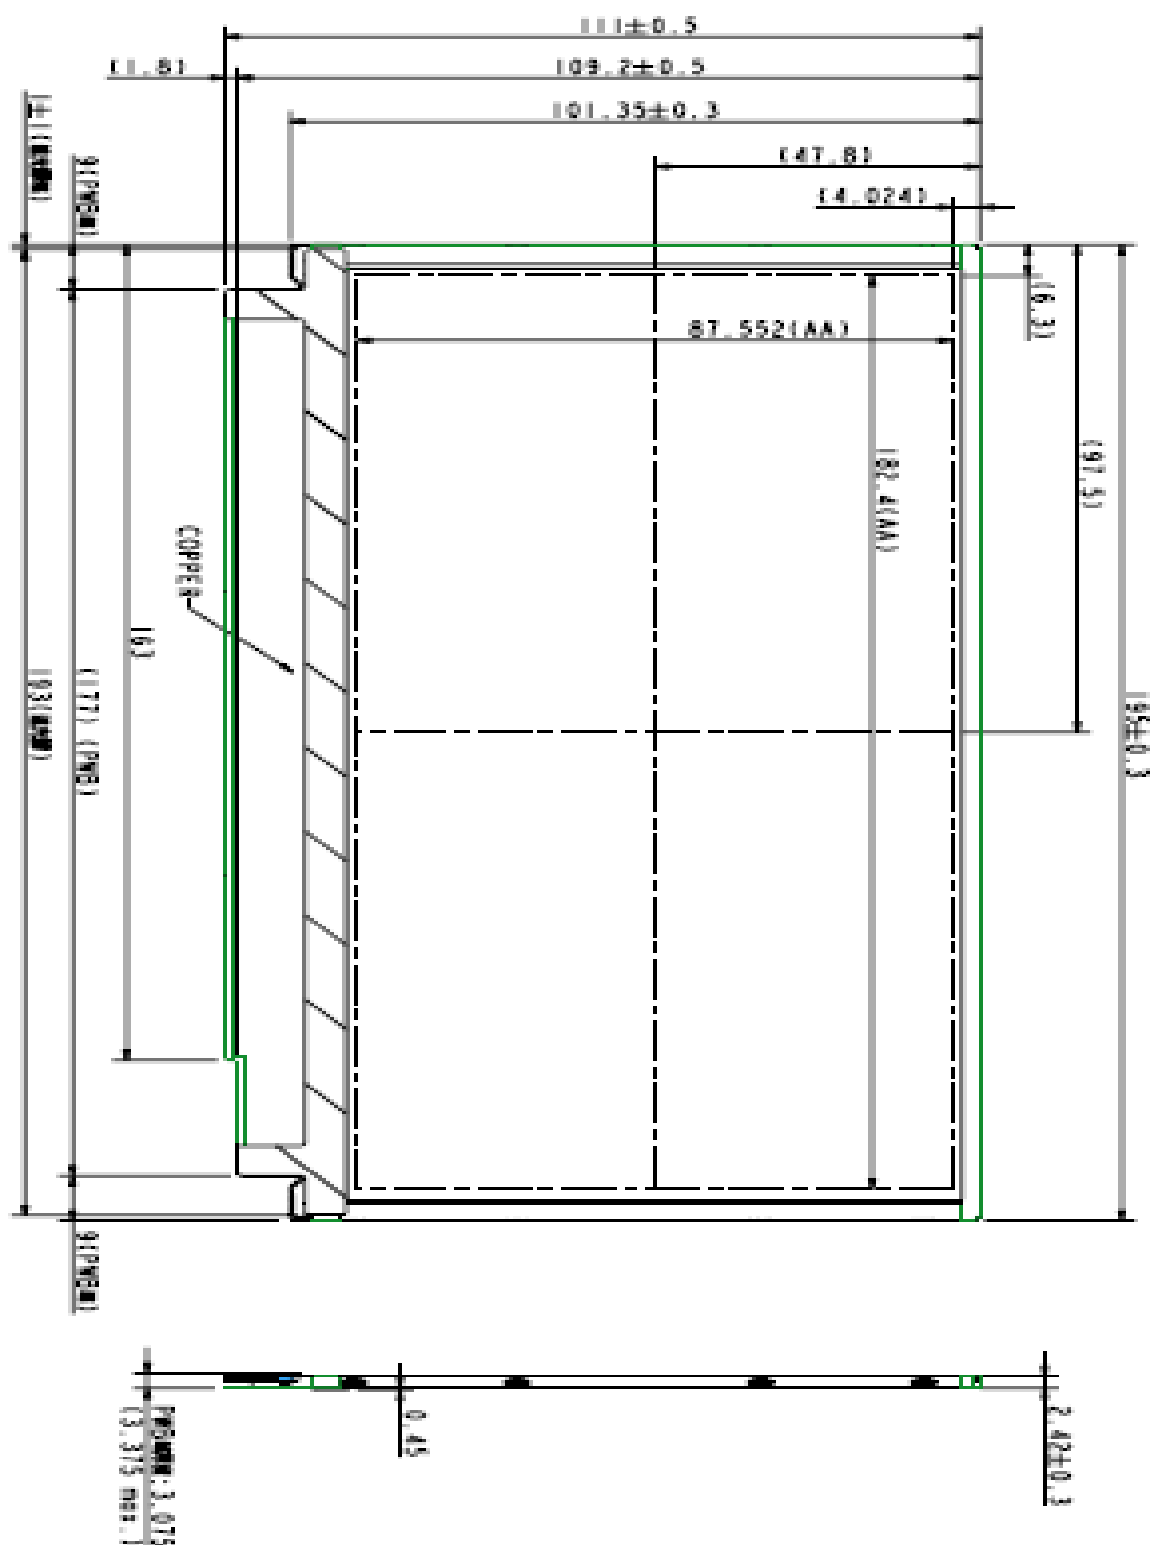

(2) Rear side

The tolerance, not show in the figure, is  $\pm 0.5$  mm.

[Unit : mm]

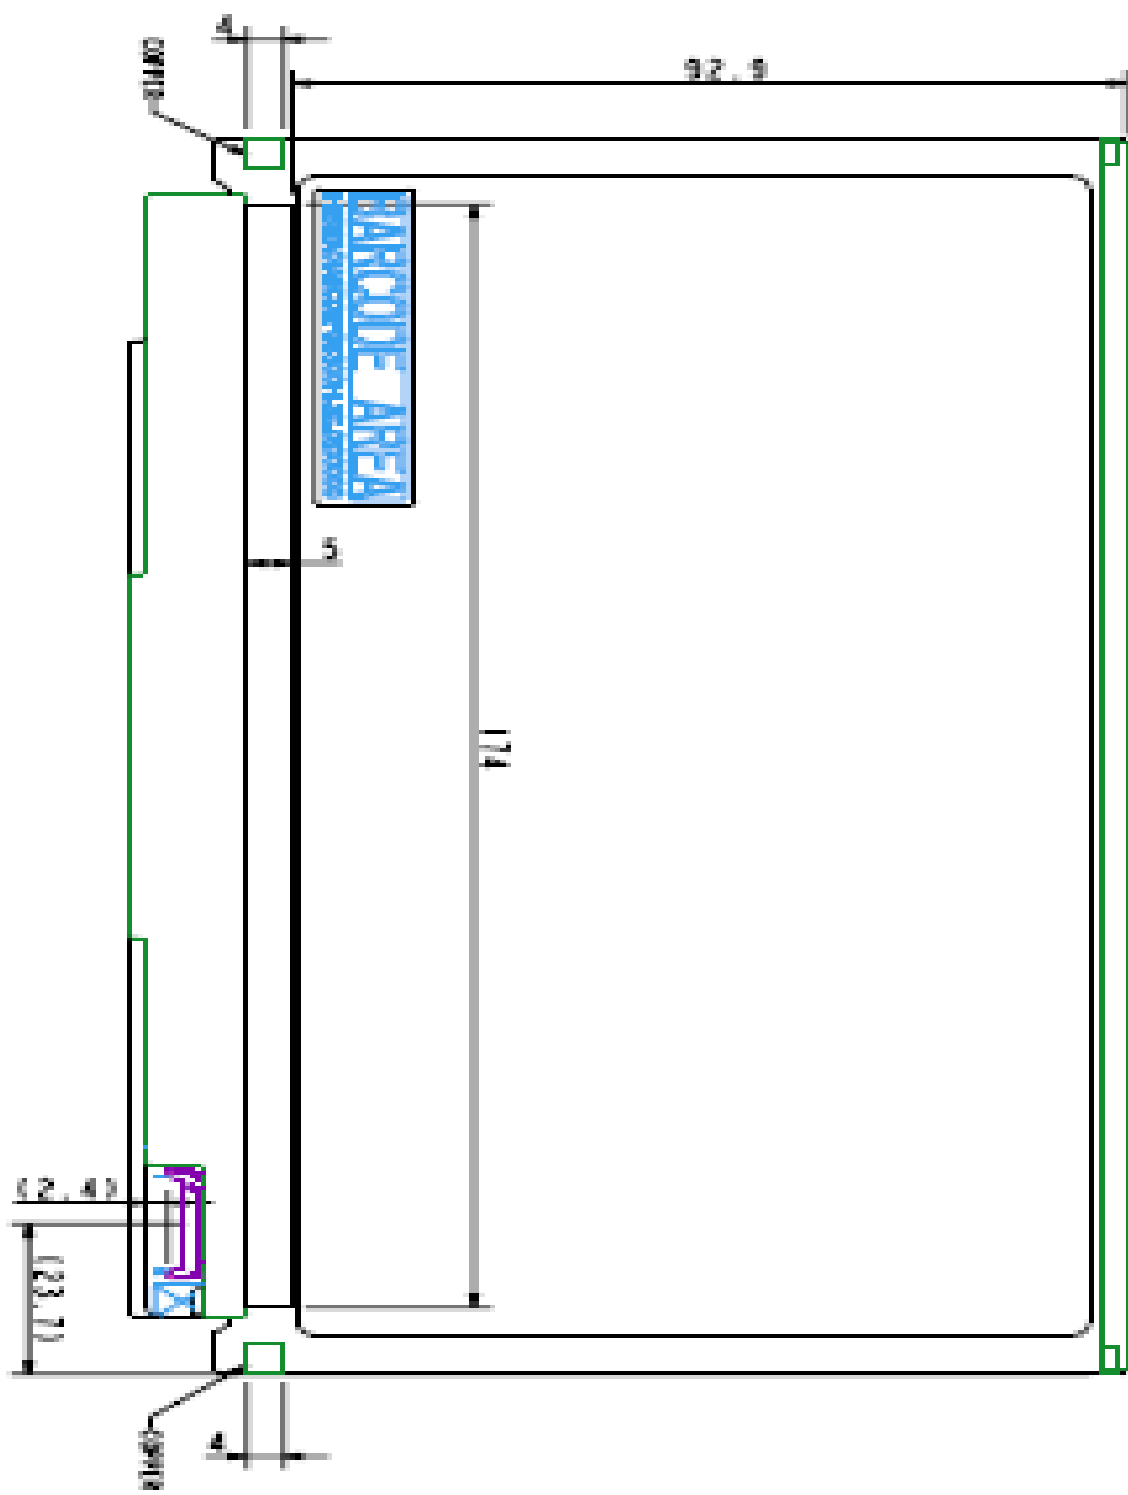



## 8. OPTICAL CHARACTERISTICS

$T_a=25^{\circ}\text{C}$  ,  $V_{DD}=3.3\text{V}$

ITEM		SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	NOTE
Contrast Ratio		CR	$\theta = \psi = 0^{\circ}$	(300)	400	--	--	*1) 2)
Luminance (5P)		L	$\theta = \psi = 0^{\circ}$	300	340	--	cd/m <sup>2</sup>	*1) 3)
Uniformity(5P)		$\Delta L$	$\theta = \psi = 0^{\circ}$	80	--	--	%	*1) 3)
Response Time		Tr	$\theta = \psi = 0^{\circ}$	--	16	25	ms	*5)
		Tf						
Cross Talk		CT	$\theta = \psi = 0^{\circ}$	--	--	1	%	*6)
View Angle	Horizontal	$\psi$	$CR \geq 10$	35/-35	--	--	°	*4)
	Vertical	$\theta$		10/-30	--	--	°	*4)
Color Coordinate	W	x	$\theta = \psi = 0^{\circ}$	0.2827	0.3127	0.3427		*3)
		y		0.299	0.329	0.359		
	R	x		0.543	0.573	0.603		
		y		0.308	0.338	0.368		
	G	x		0.315	0.345	0.375		
		y		0.558	0.588	0.618		
	B	x		0.128	0.158	0.188		
		y		0.070	0.100	0.130		
Gamut			$\theta = \psi = 0^{\circ}$	45	--	--	%	
Gamma		$\gamma$	GL	2.0	2.2	2.4		*7)

Color coordinate and color gamut are measured by SRUL1R, response time is measured by TRD-100, and all the other items are measured by BM-5A (TOPCON). All these items are measured under the dark room condition (no ambient light).

Measurement Condition: IL= 12mA (each LED)


**Definition of these measurement items is as follows:**

### \*1) Setup of Measurement Equipment

The LCD module should be turn-on to a stable luminance level to be reached. The measurement should be executed after lighting Backlight for 20 minutes and in a dark room.

**\*2) Definition of Contrast Ratio**

CR=ON (White) Luminance/OFF (Black) Luminance

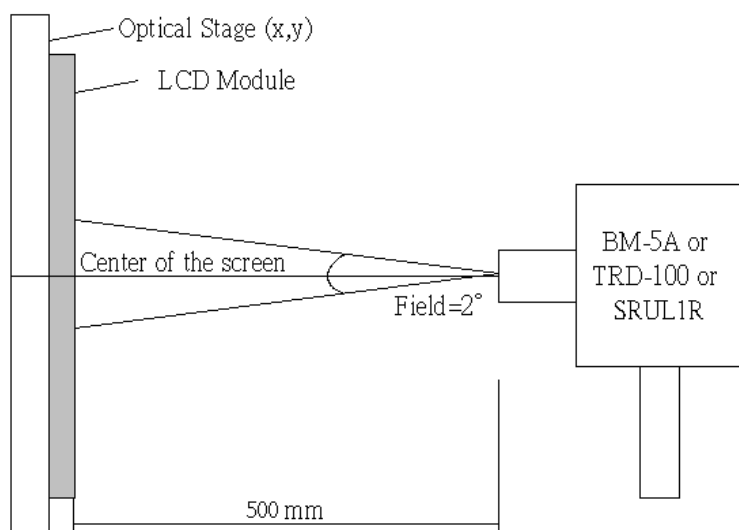**\*3) Definition of Luminance and Luminance uniformity**

Central luminance: The white luminance is measured at the center position "5" on the screen, see Fig.1 below.

5P Luminance (AVG): The white luminance is measured at measuring points 5、10、11、12、13, see Fig.1 below.

5P Uniformity:  $\Delta L = (L_{\min} / L_{\max}) \times 100\%$

13P Uniformity:  $\Delta L = (L_{\min} / L_{\max}) \times 100\%$



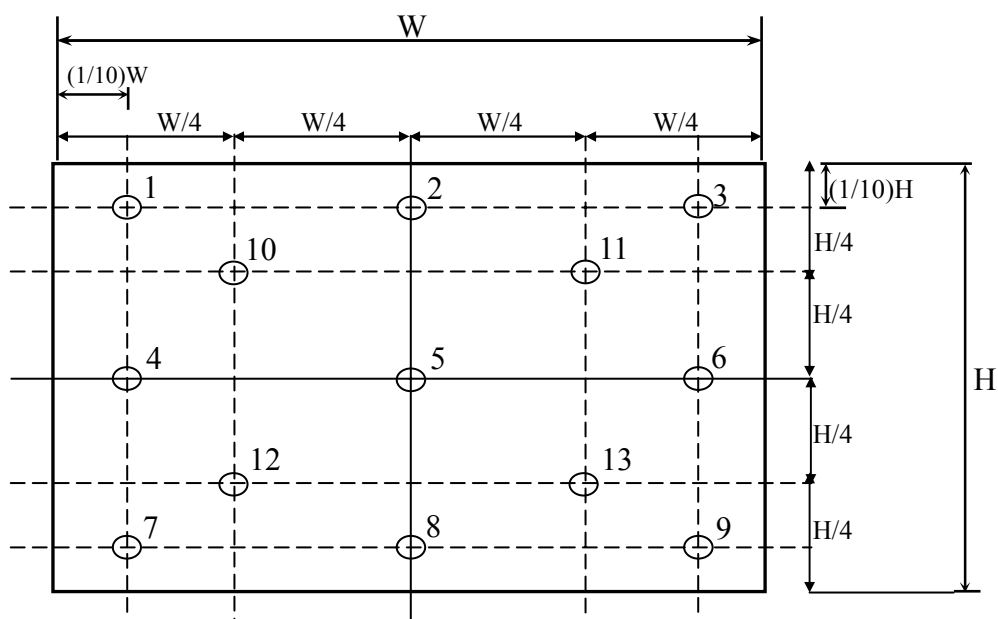


Fig.1 Measure point (Active area)

**\*4) Definition of view angle( $\theta$  ,  $\psi$ )**

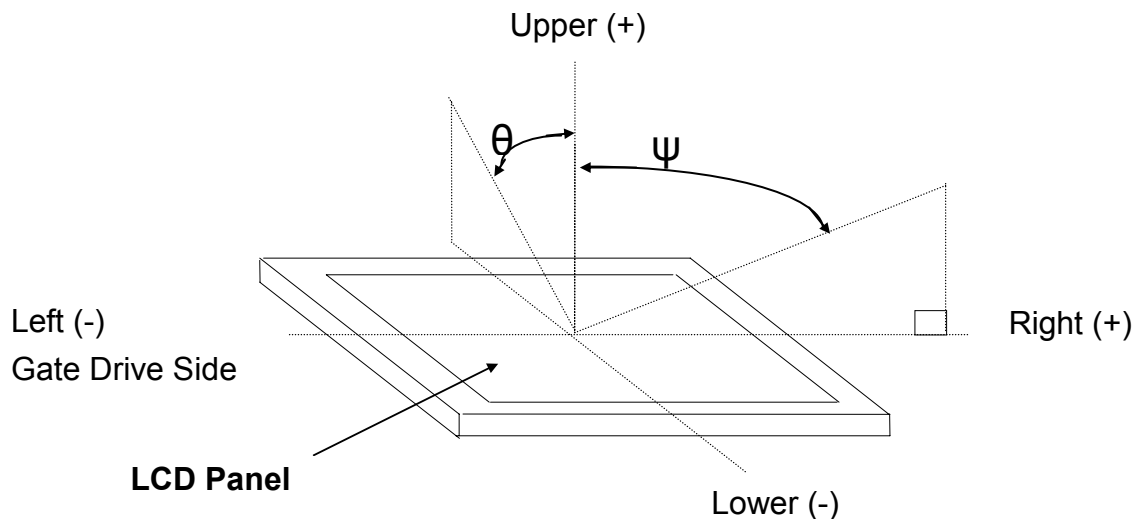

**\*5) Definition of response time**

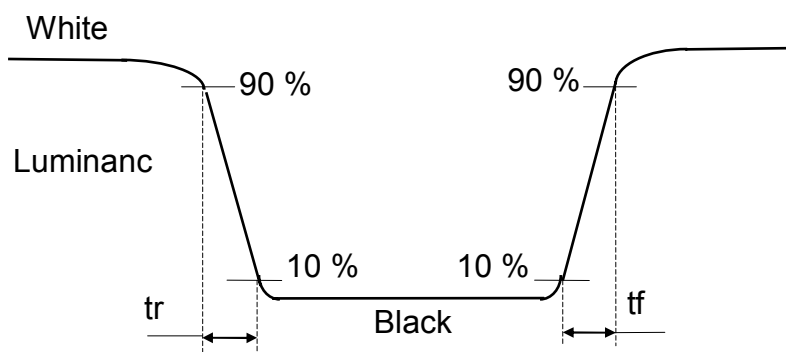


**\*6) Crosstalk Modulation Ratio**

$$CT = |Y_B - Y_A| / Y_A \times 100\%$$

$Y_A$  、  $Y_B$  measure position and definition


$Y_A$  means luminance at gray level 31(exclude gray level 0 pattern)

$Y_B$  means luminance at gray level 31(include gray level 0 pattern)

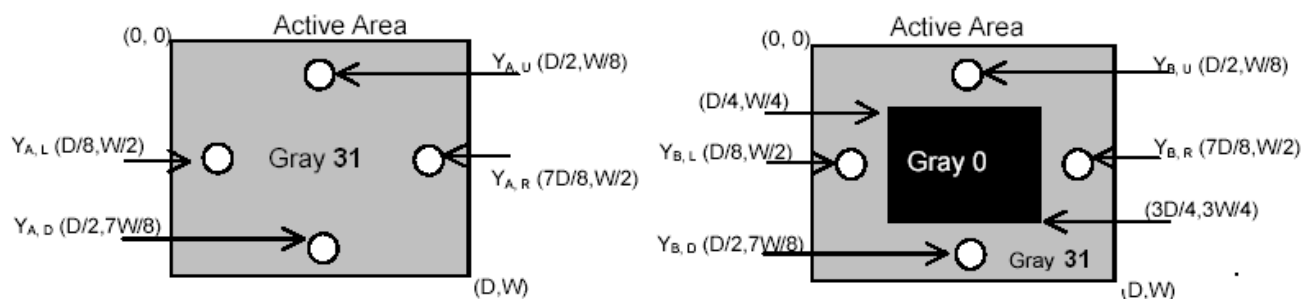

**\*7) Definition of Gamma (VESA)**

Based on Customer Sample, take the average value as a standard center value and the variation range of gamma value caused by loop voltage error should be between +/- 0.2. the bellow figure shows how to obtain the gamma curve and  $\gamma$  (from gray level: 0、4、8-----60、63).

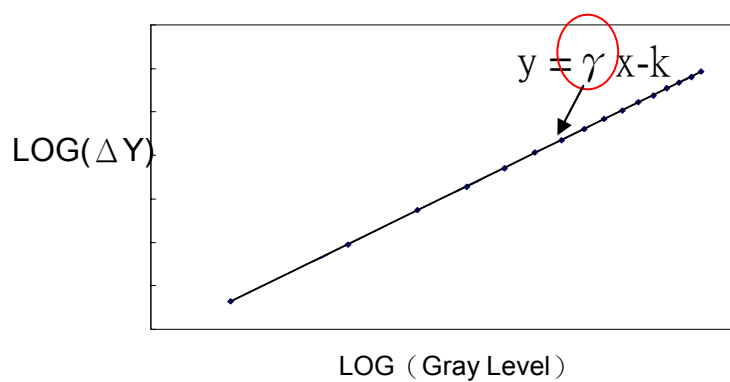

## 9. RELIABILITY TEST CONDITIONS

### (1) Temperature and Humidity

TEST ITEMS	CONDITIONS
High Temperature Operation	50° C ; 250Hrs
High Temperature Storage	65° C ; 250Hrs
High Temperature High Humidity Operation	40° C ; 95% RH ; 250Hrs
High Temperature High Humidity Storage	60° C ; 90% RH ; 48 Hrs
Low Temperature Operation	0° C ; 250 Hrs
Low Temperature Storage	-30° C ; 250 Hrs
Thermal Shock	-40° C (0.5 Hr) ~ 65° C (0.5 Hr), Ramp < 20° C , 100 CYCLES
Temperature & Pressure Storage	-30° C ; 260hPa , 24 Hrs

### (2) Shock & Vibration

TEST ITEMS	CONDITIONS
Shock (Non-Operation)	210G, 3ms, half sin ewave, $\pm X, \pm Y, \pm Z$ 1time each
Vibration (Non-Operation)	Random 2.3Grms, 5~500Hz, 0.11G <sup>2</sup> /Hz, 50~100Hz, -36dB/oct, X 、 Y 、 Z 20min total 60min

### (3) ESD

	Surface discharge(Panel display area、Frame、PWB、Panel back side)		Electrics capacity of Connector
	Contact	Air	Contact
Capacity	150 pF	150 pF	200 pF
Resistance	330 $\Omega$	330 $\Omega$	0 $\Omega$
Voltage	$\pm 8\text{kV}$	$\pm 8\text{kV}/\pm 15\text{kV}$	$\pm 250\text{ V}$
Interval	1 sec	1 sec	1 sec
Times(single point)	25	25	1

### (4) MTBF without B/L: 200,000 Hrs (min) lifetimes.

### (5) Judgment standard

The judgment of the above test should be made as follow:

Pass : Normal display image with no obvious non-uniformity and no line defect.

Partial transformation of the module parts should be ignored.

Fail : No display image, obvious non-uniformity, or line defects.

## 10. HANDLING PRECAUTIONS FOR TFT-LCD MODULE

Please pay attention to the followings in handling- TFT-LCD products.

### 10.1 ASSEMBLY PRECAUTION

- (1) Please use the mounting hole on the module side in installing and do not beading or wrenching LCD in assembling. And please do not drop, bend or twist LCD module in handling.
- (2) Please design display housing in accordance with the following guidelines.
  - Housing case must be destined carefully so as not to put stresses on LCD all sides and not to wrench module. The stresses may cause non-uniformity even if there is no non-uniformity statically.
  - Keep sufficient clearance between LCD module back surface and housing when the LCD module is mounted. Approximately 1.0 mm of the clearance in the design is recommended taking into account the tolerance of LCD module thickness and mounting structure height on the housing.
  - When some parts, such as, FPC cable and ferrite plate, are installed underneath the LCD module, still sufficient clearance is required, such as 0.5mm. This clearance is, especially, to be reconsidered when the additional parts are implemented for EMI countermeasure.
  - Keep sufficient clearance between LCD module and the others parts, such as speaker so as not to interface the LCD module. Approximately 1.0mm of the clearance in the design is recommended.
- (3) Please do not push or scratch LCD panel surface with any-thing hard. And do not soil LCD panel surface by touching with bare hands. (Polarizer film, surface of LCD panel is easy to be flawed.)
- (4) Please do not press any parts on the rear side such as source TCP, gate TCP, control circuit board and FPCs during handling LCD module. If pressing rear part is unavoidable, handle the LCD module with care not to damage them.
- (5) Please wipe out LCD panel surface with absorbent cotton or soft clothe in case of it being soiled.
- (6) Please wipe out drops of adhesives like saliva and water on LCD panel surface immediately. They might damage to cause panel surface variation and color change.
- (7) Please do not take a LCD module to pieces and reconstruct it. Resolving and reconstructing modules may cause them not to work well.
- (8) Please do not touch metal frames with bare hands and soiled gloves. A color change of the metal frames can happen during a long preservation of soiled LCD modules.

### 10.2 OPERATING PRECAUTIONS

- (1) Please be sure to turn off the power supply before connecting and disconnecting signal input cable.
- (2) Please do not change variable resistance settings in LCD module. They are adjusted to the most suitable value. If they are changed, it might happen LCD does not satisfy the characteristics specification.
- (3) Please consider that LCD backlight takes longer time to become stable of radiation characteristics in low temperature than in room temperature.
- (4) A condensation might happen on the surface and inside of LCD module in case of sudden change of ambient temperature.

- (5) Please pay attention to displaying the same pattern for very long time. Image might stick on LCD. If then, time going on can make LCD work well.
- (6) Please obey the same caution descriptions as ones that need to pay attention to ordinary electronic parts.

### 10.3 PRECAUTIONS WITH ELECTROSTATICS

- (1) This LCD module use CMOS-IC on circuit board and TFT-LCD panel, and so it is easy to be affected by electrostatics. Please be careful with electrostatics by the way of your body connecting to the ground and so on.
- (2) Please remove protection film very slowly on the surface of LCD module to prevent from electrostatics occurrence.

### 10.4 STORAGE PRECAUTIONS

- (1) When you store LCDs for a long time, it is recommended to keep the temperature between 0°C ~40°C without the exposure of sunlight and to keep the humidity less than 90%RH.
- (2) Please do not leave the LCDs in the environment of high humidity and high temperature such as 60°C 90%RH.
- (3) Please do not leave the LCDs in the environment of low temperature; below -20°C.

### 10.5 SAFETY PRECAUTIONS

- (1) When you waste LCDs, it is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.
- (2) If any liquid leaks out of a damaged-glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

### 10.6 OTHERS

- (1) A strong incident light into LCD panel might cause display characteristics' changing inferior because of polarizer film, color filter, and other materials becoming inferior. Please do not expose LCD module direct sunlight and strong UV rays.
- (2) Please pay attention to a panel side of LCD module not to contact with other materials in preserving it alone.
- (3) For the packaging box, please pay attention to the followings:
  - Packaging box and inner case for LCD are designed to protect the LCDs from the damage or scratching during transportation. Please do not open except picking LCDs up from the box.
  - Please do not pile them up more than 3 boxes. (They are not designed so.) And please do not turn over.
  - Please handle packaging box with care not to give them sudden shock and vibrations. And also please do not throw them up.
  - Packing box and inner case for LCDs are made of cardboard. So please pay attention not to get them wet. (Such like keeping them in high humidity or wet place can occur getting them wet.)