

Multisport 452

TV INTERFACE PROTOCOLES 452M



Non-binding pictures

● GENERALITIES

The main control console sends the data through an asynchronous serial line RS485.

The data rate is: 19200Bds, 8bits, no parity, 1stop bit

The data frames are always made of 54 characters; there always start with a START code "F8" and end with "0D" code (see note 1).

The match data are sent over several frames which alternate every 100ms. For each sport, all frames with the SPORT CODE indicated must be processed. Data marked "xx" should not be processed.

The 2nd character of each frame indicates the type of sport in progress (see next arrays). The composition of the frame is different from one sport to each other.


Note: for the exchange of data between control consoles, others data are transmitted through the line. Don't take into account these data.

● SET-UP – TV INTERFACE

Connect the TV Interface cable which has a plastic DIN plug at the back of one of the control consoles.

Open the junction box and connect the link cable of the TV system:

- ✓ Black wire: Ground
- ✓ White wire: Tx+
- ✓ Yellow wire: Tx-
- ✓ Red wire / Blue wire / Shield: not connected

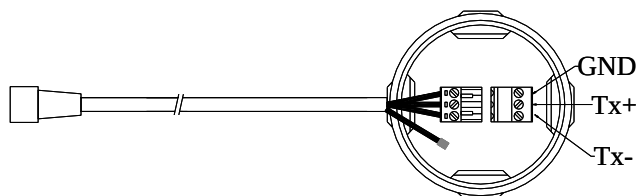

● MEANING OF THE NOTES

Note	Item	Value	Meaning	Value	Meaning	Value	Meaning
Note 1	Data format	"F8"	Hexadecimal				
Note 2	No specified format		ASCII				
Note 3	Team	H	HOME	G	GUEST		
Note 5	Horn	"31"	on	Other value	off		
Note 6	Timer start/stop	"30"	start	Other value	stop		
Note 6b	24 seconds timer start/stop	"30"	start	Other value	stop		
Note 7	24 seconds display	"30"	24" off	Other value	24" on		
Note 17	Team fouls	"30" to "39"	Numbers 0 to 9	"52"	Red square (FIBA 2020 only)		
Note 80	24" Timer (digit 2) and dot of tenths of seconds (Euroleague 2014 mode)	"30" to "39"	Numbers 0 to 9 (Dot OFF – 24" timer displayed in seconds)	"40" to "49"	Numbers 0 to 9 + Dot ON (24" timer displayed in tenths of seconds)		

● COMPOSITION OF THE FRAMES AMERICAN FOOTBALL

Code in the frame	BASKETBALL Type 1 frame
0	START CODE = "F8"
1	SPORT CODE ="35"
2	"20"
3	"20"
4	"20"
5	"20"
6	"20"
7	"20"
8	40 seconds timer (digit 1)
9	"20"
10	"20"
11	40 seconds timer (digit 2)
12	"20"
13	"20"
14	"20"
15	"20"
16	"20"
17	"20"
18	"20"
19	Horn (note 5)
20	Timer start/stop (note 6)
21	Time-out timer (digit 1)
22	"20"
23	"OD"

● COMPOSITION OF THE FRAMES

HANDBALL

Code in the frame	HANDBALL Type 1 frame	HANDBALL Type 2, 3 or 4 frame
0	START CODE = "F8"	START CODE = "F8"
1	SPORT CODE ="35"	SPORT CODE ="37" or "38" or "3C"
2	"xx"	"xx"
3	"xx"	"xx"
4	Timer (digit 1)	Timer (digit 1)
5	Timer (digit 2)	Timer (digit 2)
6	Timer (digit 3)	Timer (digit 3)
7	Timer (digit 4)	Timer (digit 4)
8	"xx"	"xx"
9	H: Points (digit 1)	"xx"
10	H: Points (digit 2)	"xx"
11	"xx"	"xx"
12	G: Points (digit 1)	"xx"
13	G: Points (digit 2)	"xx"
14	Period	"xx"
15	"xx"	"xx"
16	"xx"	"xx"
17	"xx"	"xx"
18	"xx"	"xx"
19	Horn (note 5)	Horn (note 5)
20	Timer start/stop (note 6)	Timer start/stop (note 6)
21	"xx"	"xx"
22	"xx"	"xx"
23	"xx"	"xx"
24	"xx"	"xx"
25	"xx"	"xx"
26	"xx"	"xx"
27	"xx"	"xx"
28	"xx"	"xx"
29	"xx"	"xx"
30	"xx"	"xx"
31	"xx"	"xx"
32	"xx"	"xx"
33	"xx"	"xx"
34	"xx"	"xx"
35	"xx"	"xx"
36	"xx"	"xx"
37	"xx"	"xx"
38	"xx"	"xx"
39	"xx"	"xx"
40	"xx"	"xx"
41	"xx"	"xx"
42	"xx"	"xx"
43	"xx"	"xx"
44	"xx"	"xx"
45	"xx"	"xx"
46	"xx"	"xx"
47	"xx"	"xx"
48	"xx"	"xx"
49	"xx"	"xx"
50	"xx"	"xx"
51	"xx"	"xx"
52	"xx"	"xx"
53	"0D"	"0D"

[illegible]

[illegible]



ZI de Bel Air

44850 LE CELLIER

FRANCE

☎ : +33 (0)2 40 25 46 90

Fax: +33 (0)2 40 25 30 63

✉ stramatel@stramatel.com

www.stramatel.com

*FIBA APPROVED EQUIPMENT: STRAMATEL offers a range of FIBA (International Basketball Federation) approved products.