

1. Description


1.1. Project

Project Name	STM32F103RB
Board Name	NUCLEO-F103RB
Generated with:	STM32CubeMX 4.27.0
Date	10/05/2018

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RBTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

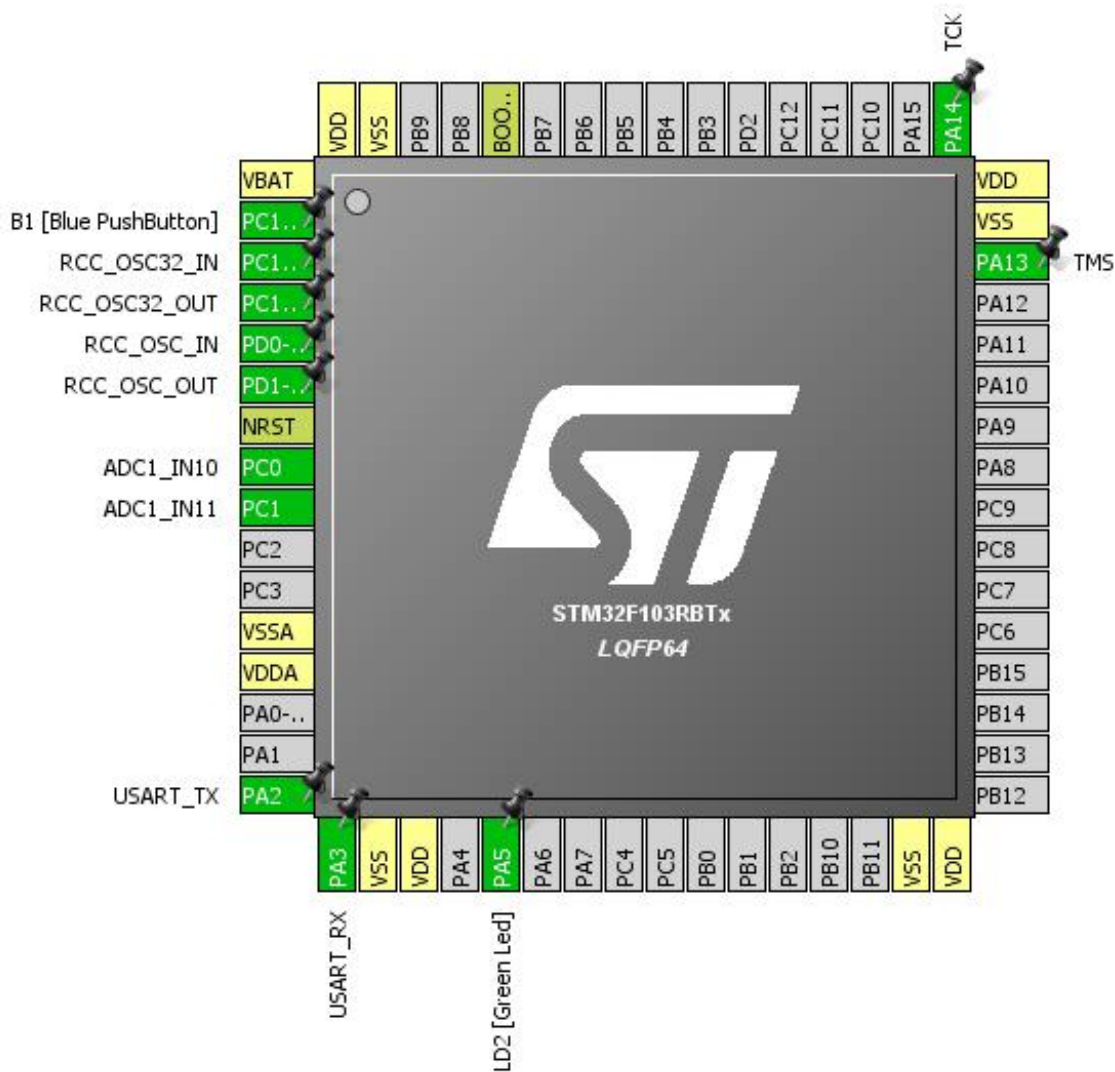


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0	I/O	ADC1_IN10	
9	PC1	I/O	ADC1_IN11	
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 *	I/O	GPIO_Output	LD2 [Green Led]
31	VSS	Power		
32	VDD	Power		
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

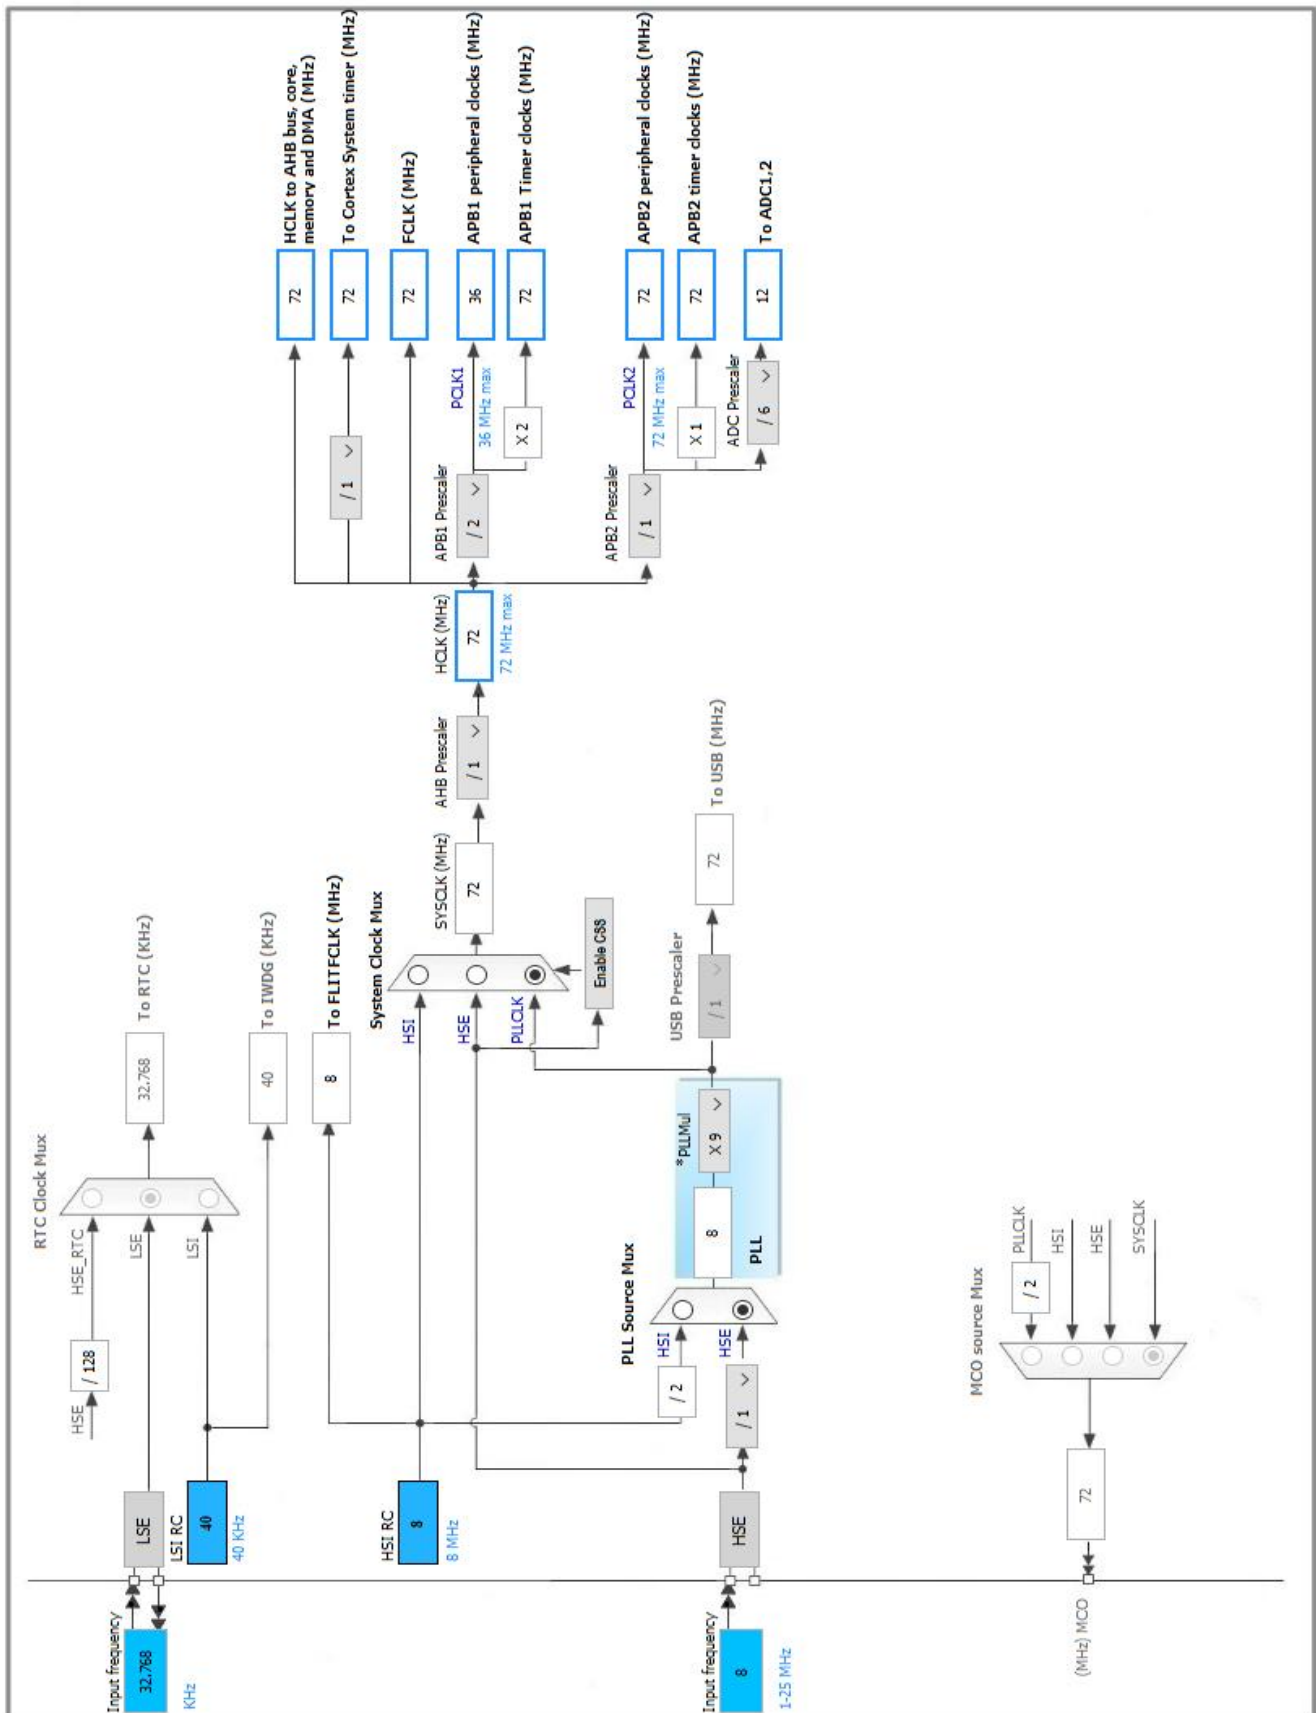

5. IPs and Middleware Configuration

5.1. ADC1

mode: IN10

mode: IN11

mode: Temperature Sensor Channel

5.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Data Alignment Right alignment

Scan Conversion Mode Enabled

Continuous Conversion Mode **Enabled ***

Discontinuous Conversion Mode Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable

Number Of Conversion **3 ***

External Trigger Conversion Source Regular Conversion launched by software

Rank 1

Channel Channel 10

Sampling Time **55.5 Cycles ***

Rank **2 ***

Channel **Channel 11 ***

Sampling Time **55.5 Cycles ***

Rank **3 ***

Channel **Channel Temperature Sensor ***

Sampling Time **55.5 Cycles ***

ADC_Injected_ConversionMode:

Number Of Conversions 0

WatchDog:

Enable Analog WatchDog Mode false

5.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.4. USART2

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PC0	ADC1_IN10	Analog mode	n/a	n/a	
	PC1	ADC1_IN11	Analog mode	n/a	n/a	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	Low	USART_TX
	PA3	USART2_RX	*	No pull-up and no pull-down	n/a	USART_RX
GPIO	PC13-TAMPER-RTC	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	n/a	Low	LD2 [Green Led]

6.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC1	DMA1_Channel1	Peripheral To Memory	Low

ADC1: DMA1_Channel1 DMA request Settings:

Mode: **Circular ***
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: **Word ***
Memory Data Width: **Word ***

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel1 global interrupt	true	0	0
EXTI line[15:10] interrupts	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 global interrupts	unused		
USART2 global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RBTx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	STM32F103RB
Project Folder	C:\Users\william\Desktop\STM32_Training\13. ADC_DMA
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report