Week 8 · Environmental Loads and Wave Filtering

USV Guidance, Navigation and Control (Graduate) · Department of Autonomous Vehicle System Engineering, Chungnam National University | revised 2026-09-25

ℹ Recordings of this semester's own classes

Every session of this course is recorded as it is given and posted to the playlist below. The written material here is the reference; the recording is the lecture, at the pace it was actually delivered. Use it to review a derivation, or to catch up on a missed week before the laboratory.

	Where
[충남대] 2026 센서신호처리 — this course, recorded live, 2026	playlist

★ Reference material — read this first

The five courses below are **taught by the instructor of this course** and are the assumed background for it. They run from the fundamentals down to the graduate material, so start wherever the gap is. Every frame, symbol and derivation used here is developed in them at length; anyone whose prerequisites are thin should work through them first, then return.

#	Course	Level	Lang.	Video	Slides and code
1	**Control Engineering** (제어공학) — the foundation: transfer functions, feedback, stability, root locus, PID	undergraduate	KO	playlist	drive
2	**Control System Design** (제어시스템설계) — design rather than analysis: specifications, loop shaping, discrete implementation	undergraduate	KO	playlist	drive
3	**Advanced Control Engineering** (제어공학특론) — reference frames, the 6-DOF equation of motion, rotation matrices and Euler angles, linearisation and trim, vehicle control design	graduate	EN	playlist	drive
4	**Sensor Signal Processing and Fusion** (센서신호처리 및 융합) — sensor models, noise, estimation and multi-sensor fusion	graduate	EN	playlist	drive
5	**Capstone Design** (캡스톤디자인) — a vehicle project carried end to end	undergraduate	KO	playlist	drive

Not fluent in MATLAB or Simulink yet? Do these before Part 2. Every laboratory in this course is Simulink, and the Onramp courses are free and take a few hours each.

Tool	Where to start
MATLAB	MATLAB Onramp · Core MATLAB Skills
Simulink	Simulink Onramp · instructor's Simulink lectures part 1 · part 2

✎ Getting the course files, and keeping them current (Windows)

The notes, models and scripts are kept in one Git repository that is updated through the semester. Clone it once; before every class, pull. A pull downloads only what has changed since the last one.

When	Where to run it	Command
once	PowerShell — installs Git for Windows	`winget install --id Git.Git -e`
once	the folder that will hold the course, e.g. `Documents`	`git clone https://github.com/wkyouncnu/Sensor-Signal-Processing-and-Fusion.git`
before every class	inside the cloned folder `Sensor-Signal-Processing-and-Fusion`	`git pull`

- `git pull` prints `Already up to date.` when nothing has changed, and otherwise lists the files it updated.
- The repository is private. When Git asks, sign in with the GitHub account the instructor has given access.
- Experiment on copies, not on the cloned files: copy a week's `WXX_simulink` folder elsewhere first, and a pull can never collide with local edits. If it already has, `git stash`, then `git pull`, then `git stash pop` sets the edits aside, updates, and puts them back.
- The MSS toolbox is not part of the repository. The weeks that simulate the Otter need it at `Tools\MSS` inside the cloned folder, and `_tools\mss_path.m` finds it there in either release layout — `Tools\MSS\VESSELS\otter.m` in the older releases, or `Tools\MSS\CRAFT\USV\models\otter.m` in the current master.
- **The two releases are not the same vessel.** The figures printed in these notes were measured with the older layout. Terminal surge speed agrees at 1.0286 m/s, but the current master turns 25.5 % faster under differential thrust, 0.1276 rad/s against 0.1017 rad/s. `mss_path` therefore prefers the older layout when both are present, and warns when only the newer one is available, so a reading that cannot reproduce is announced rather than silent.
- **A 118 MB folder disappears on the first pull after 2026-10-27.** `lectures\MSS-master` held a copy of MSS until then. It sat outside `Tools\MSS`, so no course script could reach it, and it only made cloning slower. Its removal is expected and is not a fault. Any file kept inside that folder must be moved elsewhere before pulling.

- **Course**: USV Guidance, Navigation and Control (Graduate)
- **Department**: Autonomous Vehicle System Engineering, Chungnam National University
- **This week**: ① the sea written as one signal, from a spectrum ② what happens when the autopilot of Week 4 is given that signal ③ the notch filter that removes one frequency from the measurement ④ what the filter costs on a manoeuvre, and the slow part of the sea that it must leave alone

★ Prerequisites from the previous week

- From Week 4: the heading autopilot, its gains, and the wrap. This week does not retune it — it changes only what the autopilot is allowed to see.
- From Week 7: the allocation that turns a demanded moment into two shaft speeds, and the limits it works inside.
- From Week 2 §2-10: a low-pass filter, and the phase lag every filter charges for its attenuation. The notch of this week is that idea, aimed at one frequency.

Learning Outcomes

Upon completion of this week, the learner is able to:

1. Write one realisation of a wave spectrum as a sum of components, and state which of its properties the controller cares about: the mean, the standard deviation, the rate and the peak frequency.
2. Explain why a vessel cannot follow the first-order wave motion, and measure what an autopilot spends trying.
3. Design a notch filter from the peak frequency, and state its attenuation and its phase lag from its two parameters.
4. Measure that filtering improves both the control effort **and** the true heading in a seaway.
5. Measure what the filter costs on a manoeuvre, and choose the notch width from that trade rather than from the attenuation alone.
6. Distinguish the oscillatory part of the sea, which must be filtered out, from the slow part, which must reach the integral.

Prerequisites and Setup

Item	Requirement
MATLAB	R2024b, with Simulink, the Control System Toolbox (`bode`) and the Signal Processing Toolbox (`pwelch`)
MSS	`Tools/MSS` , found by `W08_0_setup` through `mss_path` ; `wavespec` supplies the JONSWAP spectrum
Course folder	`lectures/W08_simulink`
Models	**one per experiment** — `W08_C_wave` , `W08_D_no_filter` , `W08_E_notch` , `W08_G_slow` , `W08_H_tuning` — all generated by `W08_1_build_waves` , never edited by hand
Time	lecture 40 min, laboratory 1 h 20 min

Part 1 · Principle and experiment, section by section

Every section states what is observed, says what follows from it, and then runs **the experiment that measures it**, on its own model.

Part of a section	What it holds
What is observed	the effect itself, with the numbers it produces
What follows from it	numbered lines, one step each, from the spectrum to the filter
Experiment N-x	the model, the commands, the output actually obtained, the figure, and a table that reads every feature of the figure back to **the numbered line that predicts it**

8-0. Setting up (10 min)

```
cd lectures/W08_simulink
W08_0_setup
W08_1_build_waves
```

Expected output:

```
  W08_0_setup
    sea       Hs = 0.30 m, T0 = 2.0 s  ->  w0 = 3.142 rad/s;  20 components
    response  the wave-induced heading has a standard deviation of 3.0 deg
    notch     zeta_n = 0.05, zeta_d = 0.30  ->  |H(j w0)| = 0.167 (-15.6 dB)
    autopilot Kp = 300, Kd = 100, Ki = 20;  |N| <= 70.85 N m

  built  W08_C_wave.slx     (overlapping lines: 0)
  built  W08_D_no_filter.slx (overlapping lines: 0)
  built  W08_E_notch.slx    (overlapping lines: 0)
  built  W08_G_slow.slx     (overlapping lines: 0)
  built  W08_H_tuning.slx   (overlapping lines: 0)
```

- `W08_0_setup.m` is the only file edited by hand. The sea is set by four numbers — H_s, T_0, the JONSWAP peak factor and the number of components — and the filter by two, ζ_n and ζ_d.
- `wave_on = 0` switches the sea off without removing anything from a model: every experiment of this week is run both ways.

> ⚠ **The first line of `W08_0_setup` is `clear`**
>
> It resets the workspace to the lecture's values. Run it again whenever a Scope does not match these notes.

8-1. Three disturbances, and where each one enters

This section answers: what does the environment do to a control loop, and at which point?

- Weeks 1 to 7 met one disturbance: a **current**, which Week 1 modelled as a velocity of the water and Week 5 measured as a standing cross-track error. This week adds the other two.

Disturbance	What it is	Where it enters	Where it is met in this course
current	a velocity of the water	the force balance, through $\boldsymbol{\nu_r = \nu - \nu_c}$	Week 1 §1-13, Week 5 §5-5
wind and second-order wave drift	a slowly varying **force** on the hull	added to the force the propellers produce	§8-6
first-order waves	a fast **oscillation**, of the vessel and of what the sensor reports	the measurement the controller acts on	§8-2 to §8-5

- The three differ in frequency by orders of magnitude, and that is what makes them separable: a current is constant, wind and drift vary over minutes, and the waves of this week oscillate at $\mathbf{3.14}$ rad/s — a period of two seconds.
- **The controller can and should reject the first two, and can neither reject nor usefully follow the third.** Everything in this week follows from that sentence.

> **What this week does not derive**
>
> How much a given sea turns a given hull — the response amplitude operator — belongs to hydrodynamics, not to control. This week takes the wave-induced heading as **given**, stated by its standard deviation (`sigma_psi`), and asks what a controller should do about it. Fossen's *Handbook* Chapter 8 derives the response; MSS computes it with `waveresponse345` .


Experiment 8-1 · The chain, and where the sea is added (5 min)

What it measures. Nothing yet: the canvas is matched to the table above, and the one arrow that is new this week is found.

The canvas. `W08_E_notch` — the fullest model of the week, read here and measured in Experiment 8-4. The vessel, the autopilot and the allocation are those of Weeks 4 and 7, unchanged.

Opening and running.

```
W08_0_setup
open_system('W08_E_notch')      % Run — 위: 선수각 셋, 가운데: 모멘트, 아래: 회전수 둘
```

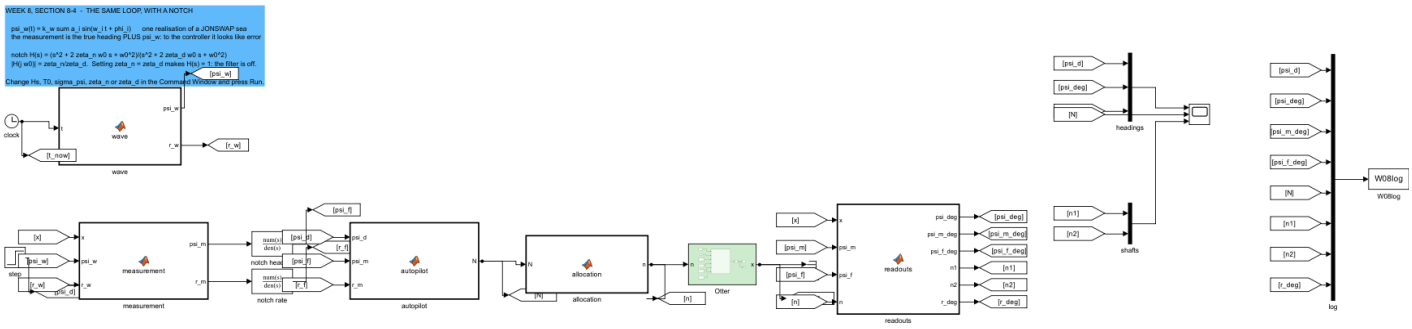

In the figure	Meaning
`clock` → `wave`	the sea, as a sum of components with fixed phases: the same sea on every run
`measurement`	where the sea enters: the true heading and rate **plus** the wave
`notch heading` , `notch rate`	the filter of §8-4, one for each measured signal
`autopilot` → `allocation` → green `Otter`	Weeks 4 and 7, not retuned and not rewritten
Scope	the command, the true heading and the measured heading; then the moment; then the two shaft speeds

- Double-click `measurement` and read the two lines. The vessel is **not** being pushed by the wave in this model: the sensor reports an oscillation, and the controller treats it as error. That is the situation wave filtering exists for.

8-2. The sea as one signal

This section answers: what does a seaway look like from inside a controller?

What is observed. Experiment 8-2 runs the sea with no vessel and no controller:

- the wave-induced heading has a standard deviation of 3.008° and reaches 12.79°,
- its **rate** has a standard deviation of 11.64 deg/s and reaches 59.45 deg/s,
- the mean of both is zero to three decimals,
- and the spectrum of the heading peaks at 3.07 rad/s, against $\omega_0 = 2\pi/T_0 = 3.142$ rad/s.

What follows from it, one line at a time.

1. A sea state is a **spectrum**, not a waveform: $S(\omega)$ says how much energy sits at each frequency. This week uses JONSWAP, from MSS `wavespec` , with $H_s = 0.3$ m and $T_0 = 2$ s — a short wind chop, the sea a 2 m vessel actually meets.
2. One **realisation** of that spectrum is a sum of components,

$$\psi_w(t) = k_w \sum_{i=1}^{N} a_i \sin(\omega_i t + \phi_i), \qquad a_i = \sqrt{2\, S(\omega_i)\, \Delta\omega}$$

   with the amplitudes taken from the spectrum and the phases chosen. Fixing the phases makes the sea **repeatable**, so that a table in these notes can be reproduced; MSS's `waveresponse345` builds a realisation the same way.
3. **The mean is zero.** A first-order wave shakes the vessel; it does not push it. Whatever pushing the sea does is the slow part of §8-6, and it is a different signal.
4. **The rate is the problem, not the amplitude.** 3° of heading is nothing, but 11.64 deg/s of heading **rate** is about what this vessel can turn at with its full 70.85 N·m (Week 4 §4-2: 8.14 deg/s at 20 N·m). A controller with a derivative term sees that rate directly.
5. The energy is narrow-banded around ω_0. That is what makes a **notch** the right instrument: one frequency to remove, not a whole band above some corner.
6. $\omega_0 = 3.14$ rad/s sits **above** the loop's bandwidth. Week 4's step response rises in about 1.1 s, so $\omega_B \approx 1.8/t_r \approx 1.6$ rad/s (Week 2 §2-3): the vessel could not follow the sea even if it should.

Experiment 8-2 · The sea as one signal (8 min)

What it measures. Lines 3 to 6: the mean, the standard deviation of the heading and of its rate, and where the spectrum peaks.


The model. `W08_C_wave` — the wave block, a Scope and a log. No vessel and no controller: the sea on its own.


Opening and running.

```
W08_0_setup
open_system('W08_C_wave')       % Run — 위: 선수각, 아래: 그 변화율 / heading above, its rate below
Hs = 0.6;                       % Run — 거친 바다 / a rougher sea: everything doubles
Hs = 0.3; T0 = 4;               % Run — 긴 너울 / a longer swell: slower, and far gentler in rate
W08_C_sea_as_signal             % 통계와 스펙트럼 / the statistics and the spectrum
```

Expected output:

```
W08 Experiment 8-2  the sea as one signal  (Hs 0.30 m, T0 2.0 s)
  signal                          std      max     mean
  wave-induced heading          3.008   12.792   0.0089   [deg]
  its rate                     11.637   59.454  -0.0108   [deg/s]
  the heading spectrum peaks at 3.068 rad/s;  w0 = 2 pi / T0 = 3.142 rad/s
```

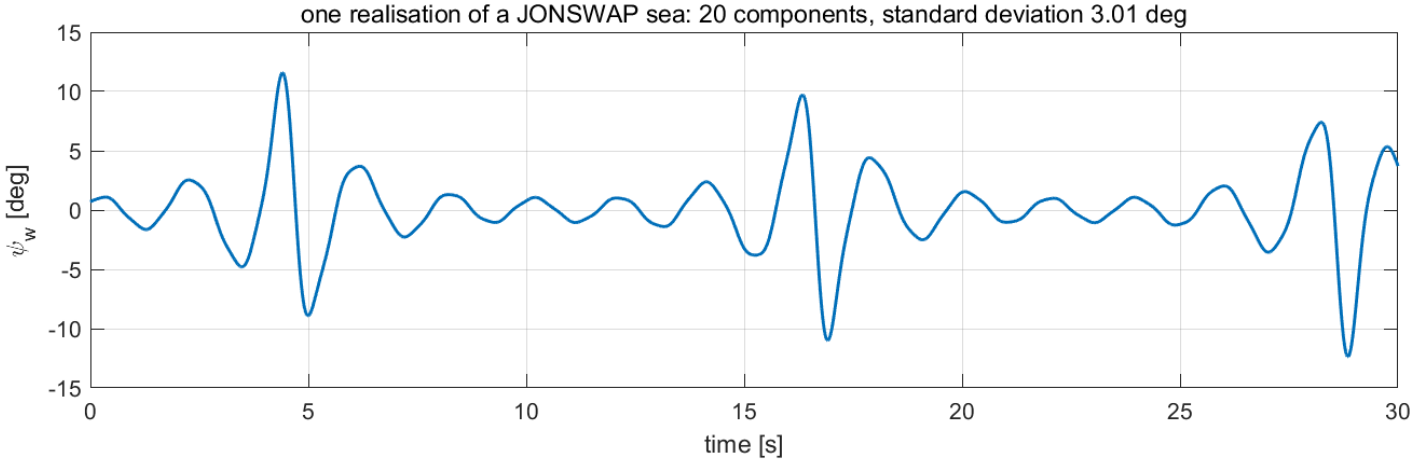

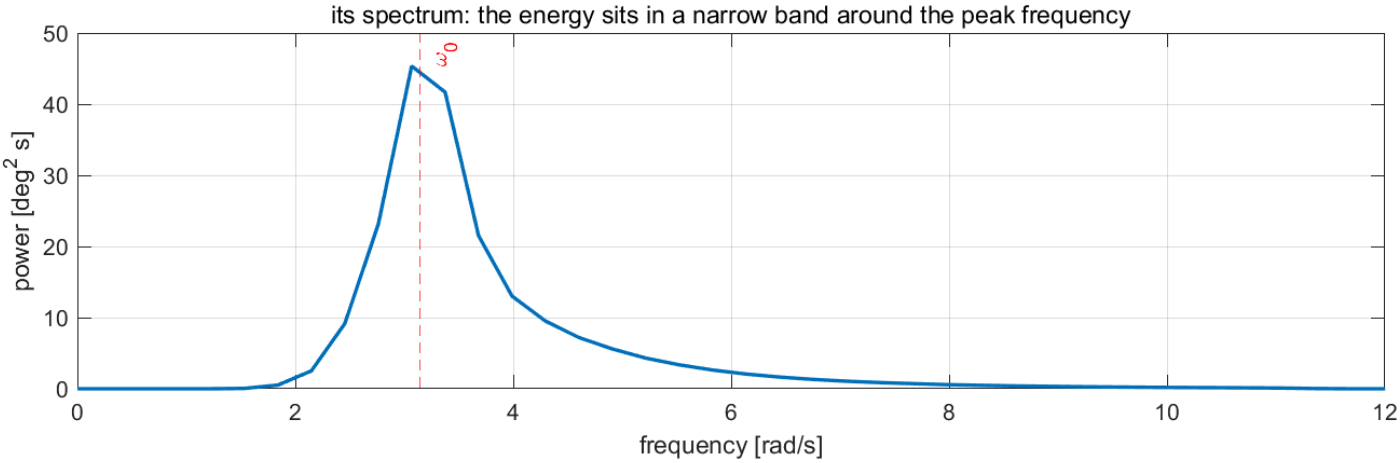

Reading the figure against the derivation.

Where to look	What is there	Which line predicts it
top panel, the trace	an irregular oscillation, never repeating within the run	line 2: many components at different frequencies
top panel, **where it sits**	centred on zero	line 3: a first-order wave has no mean
top panel, the slope of the trace	steep everywhere	line 4: the rate, not the amplitude, is what a derivative sees
bottom panel, the peak	at $\omega_0 = 3.14$ rad/s, marked	line 1: JONSWAP with $T_0 = 2$ s
bottom panel, the **width** of the peak	narrow, with little energy below 2 rad/s	line 5: a notch is enough; a low-pass is not needed

What the figure says

- The sea the controller sees is one narrow-band signal with zero mean and a rate the vessel can barely match.

What to try	What to watch
`Hs = 0.6;` Run	every amplitude doubles: the spectrum is linear in the energy, and the realisation with it
`T0 = 4;` Run	the peak moves to 1.57 rad/s, **below** the loop bandwidth. The vessel would then partly follow the sea, and a notch there would fight the steering itself — the case §8-7 warns about

> ✎ **In class**
>
> - **Purpose** — replace "there are waves" by four numbers a controller can be reasoned about with.
> - **Point to** — the rate panel, and Week 4's measured turn rate of 8.14 deg/s at 20 N·m.
> - **Ask** — "Why does the mean matter?" Because a zero-mean disturbance cannot be corrected on average; only its effect on effort can be.
> - **Take away** — a sea state is a spectrum, and what reaches the controller is one narrow-band signal.

8-3. The loop that chases the waves

This section answers: what happens if the autopilot of Week 4 is simply left switched on?

What is observed. Experiment 8-3 runs the Week 4 loop with the sea on and off:

- with the sea off, the heading holds to 0.001° and the moment is 0.00 N·m,
- with the sea on, the moment works at 18.85 N·m of standard deviation and **reaches its 70.85 N·m limit**, spending 1.18 s of the window saturated,
- the shaft speeds wander by 29.14 rad/s,
- and the **true** heading — the vessel's own, not the measurement — has a standard deviation of 1.551°.

What follows from it, one line at a time.

1. The controller cannot tell the wave apart from a real heading error: both arrive on the same wire. It therefore acts on all of it.
2. The P term alone would demand $K_p\,\psi_w \approx 300 \times 0.052\ \text{rad} = 16$ N·m of standard deviation, and the D term $K_d\,r_w \approx 100 \times 0.203\ \text{rad/s} = 20$ N·m. The measured 18.85 N·m is that order, with the limit clipping the peaks.
3. **The vessel cannot follow.** At 3.14 rad/s the loop is past its bandwidth (§8-2 line 6), so almost none of that moment turns into the motion it was asked for.
4. **It is not merely wasted, it is harmful.** The moment is large enough to shake the vessel at wave frequency, and the true heading is 1.551° worse than the 0.001° of the calm run. The controller has become a disturbance.

5. The propellers pay for all of it: continual reversals, 29 rad/s of variation, and a limit reached over a thousand times an hour. This is the wear and the power that wave filtering exists to prevent.
6. Nothing here is a tuning fault. The gains are the ones Week 4 chose and verified; what is wrong is **what the controller is allowed to see**.

Experiment 8-3 · The loop in waves, unfiltered (12 min)

What it measures. Lines 2, 4 and 5: the effort, the harm to the true heading, and what the propellers do.


The model. `W08_D_no_filter` — the loop of Weeks 4 and 7 with the measurement wired straight in. There is no filter anywhere in this model.

Opening and running.

```
W08_0_setup
open_system('W08_D_no_filter')  % Run — 아래 두 칸을 본다 / watch the lower two panels
wave_on = 0;                    % Run — 조용한 바다: 모멘트가 0 이다 / a calm sea: the moment is zero
wave_on = 1; Hs = 0.15;         % Run — 절반의 바다 / half the sea
W08_D_chasing_waves             % 두 경우를 한 번에 / both cases at once
```

Expected output:

```
W08 Experiment 8-3  the loop in waves, with no filter  (after t = 20 s)
  sea         heading std    moment std    moment max    shaft n1 std    time on the limit
  off            0.001 deg        0.00 Nm       0.01 Nm        0.00 rad/s       0.00 s
  on             1.551 deg       18.85 Nm      70.85 Nm       29.14 rad/s       1.18 s
```

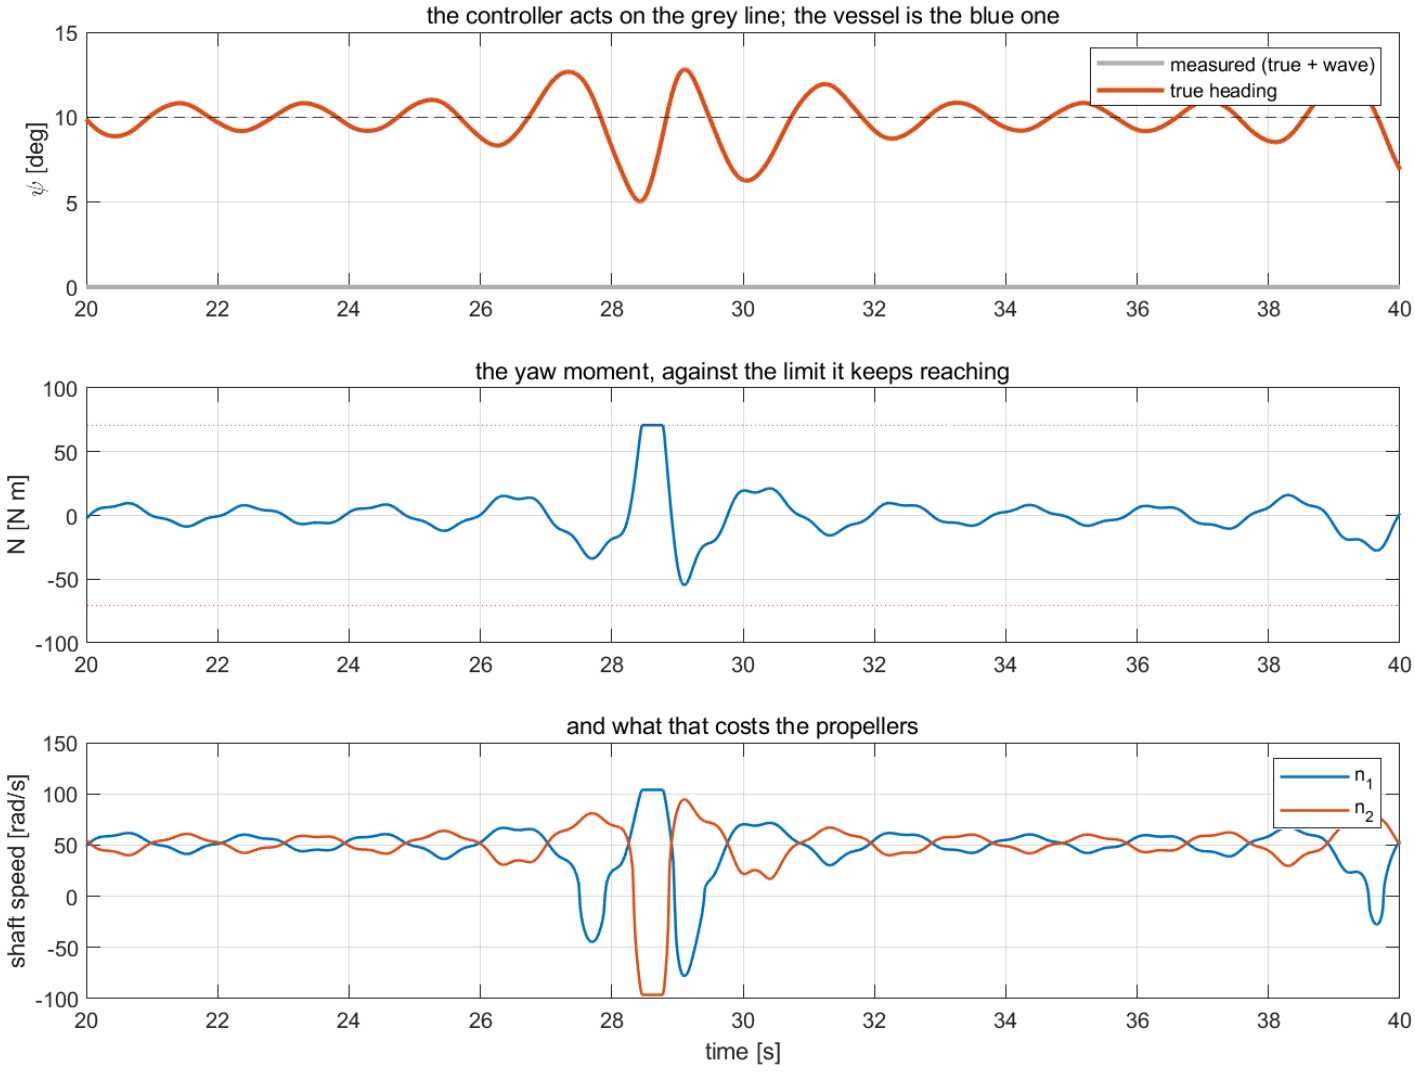

Reading the figure against the derivation.

Where to look	What is there	Which line predicts it
top panel, the grey line	the measurement, swinging by $\pm 10^{\circ}$	line 1: the wave and the heading arrive on one wire
top panel, the blue line	the true heading, wandering by 1.55°	line 4: the controller is shaking the vessel
top panel, blue against grey	the blue is far smaller	line 3: the vessel cannot follow at 3.14 rad/s
middle panel, the flat tops	the moment on its ± 70.85 N·m limit	line 2: the demand exceeds what the propellers have
bottom panel	the shafts reversing continually	line 5: the cost is paid in wear and power

What the figure says

- Everything in the lower two panels is spent on a motion the vessel cannot make, and the top panel shows it made the heading worse.

What to try	What to watch
`Hs = 0.15;` Run	half the sea halves the effort, and the heading still degrades: the fault scales with the sea, it is not a threshold effect
`Kd = 0;` Run	the effort falls sharply — the derivative was the larger contributor (line 2) — but Week 4's damping goes with it, which is why the answer is a filter and not a smaller gain

> ✎ **In class**
>
> - **Purpose** — show that a correct, verified controller can be made harmful by its measurement alone.
> - **Point to** — the calm row and the seaway row of the table: the same gains, and every column different.
> - **Ask** — "Which term is doing the damage?" Mostly D: the wave rate is 11.6 deg/s against a heading of 3°.
> - **Take away** — a loop that cannot follow a disturbance should not be shown it.

8-4. The notch filter

This section answers: how is one frequency removed from a measurement, and what does removing it change?

What is observed. Experiment 8-4 puts a notch on both measured signals and changes nothing else:

- the moment falls from 18.85 to 13.41 N·m of standard deviation,
- the shaft speeds from 29.14 to 20.58 rad/s,
- and the **true heading improves as well**, from 1.551° to 1.042°.

What follows from it, one line at a time.

1. The filter must remove one narrow band and leave everything else alone, because the heading the vessel is actually steering lives below it (§8-2 lines 5 and 6). The second-order **notch** does exactly that:

$$H(s) = \frac{s^2 + 2\zeta_n \omega_0 s + \omega_0^2}{s^2 + 2\zeta_d \omega_0 s + \omega_0^2}, \qquad \zeta_n < \zeta_d$$

2. At the notch frequency the two quadratic terms cancel except for their damping, so the attenuation is the **ratio of the two damping ratios**:

$$|H(j\omega_0)| = \frac{\zeta_n}{\zeta_d} = \frac{0.05}{0.3} = 0.167 = -15.6 \text{ dB}$$

3. Far from ω_0, in both directions, the numerator and denominator agree and $|H| \to 1$. A notch **passes** the slow disturbances of §8-6 and the steering itself.
4. Setting $\zeta_n = \zeta_d$ makes $H(s) = 1$ identically. That is how the filter is switched off in these models — no block is removed, and the comparison stays honest.
5. Both measured signals must be filtered. The rate carries the wave at 11.6 deg/s (§8-2 line 4), so filtering the heading alone would leave the larger of the two contributions in place.
6. The true heading improving is the result worth keeping. Filtering does not merely save effort: by not shaking the vessel at wave frequency, it steers better.

Experiment 8-4 · The notch, measured (12 min)

What it measures. Lines 2 and 6: the attenuation the formula predicts, and what the filter does to the effort and to the true heading in the same sea.


The model. `W08_E_notch` — the model of §8-3 with two Transfer Fcn blocks added, `notch heading` and `notch rate`, both carrying the coefficients of line 1.

Opening and running.

```
W08_0_setup
open_system('W08_E_notch')      % Run — 가운데 칸의 모멘트가 작아졌다 / a quieter moment
zeta_n = zeta_d;                % Run — 필터를 끈다 (H(s) = 1) / the filter switched off
zeta_n = 0.05;  zeta_d = 1.0;   % Run — 더 넓게 / a wider notch
W08_E_notch_filter              % 두 모델을 같은 바다에서 / both models, in the same sea
```

Expected output:

```
W08 Experiment 8-4  the notch  (zeta_n 0.05, zeta_d 0.30  ->  |H(j w0)| = 0.167)
  filter        heading std   moment std   moment max   shaft n1 std
  none             1.551 deg       18.85 Nm      70.85 Nm       29.14 rad/s
  notch            1.042 deg       13.41 Nm      70.85 Nm       20.58 rad/s
```

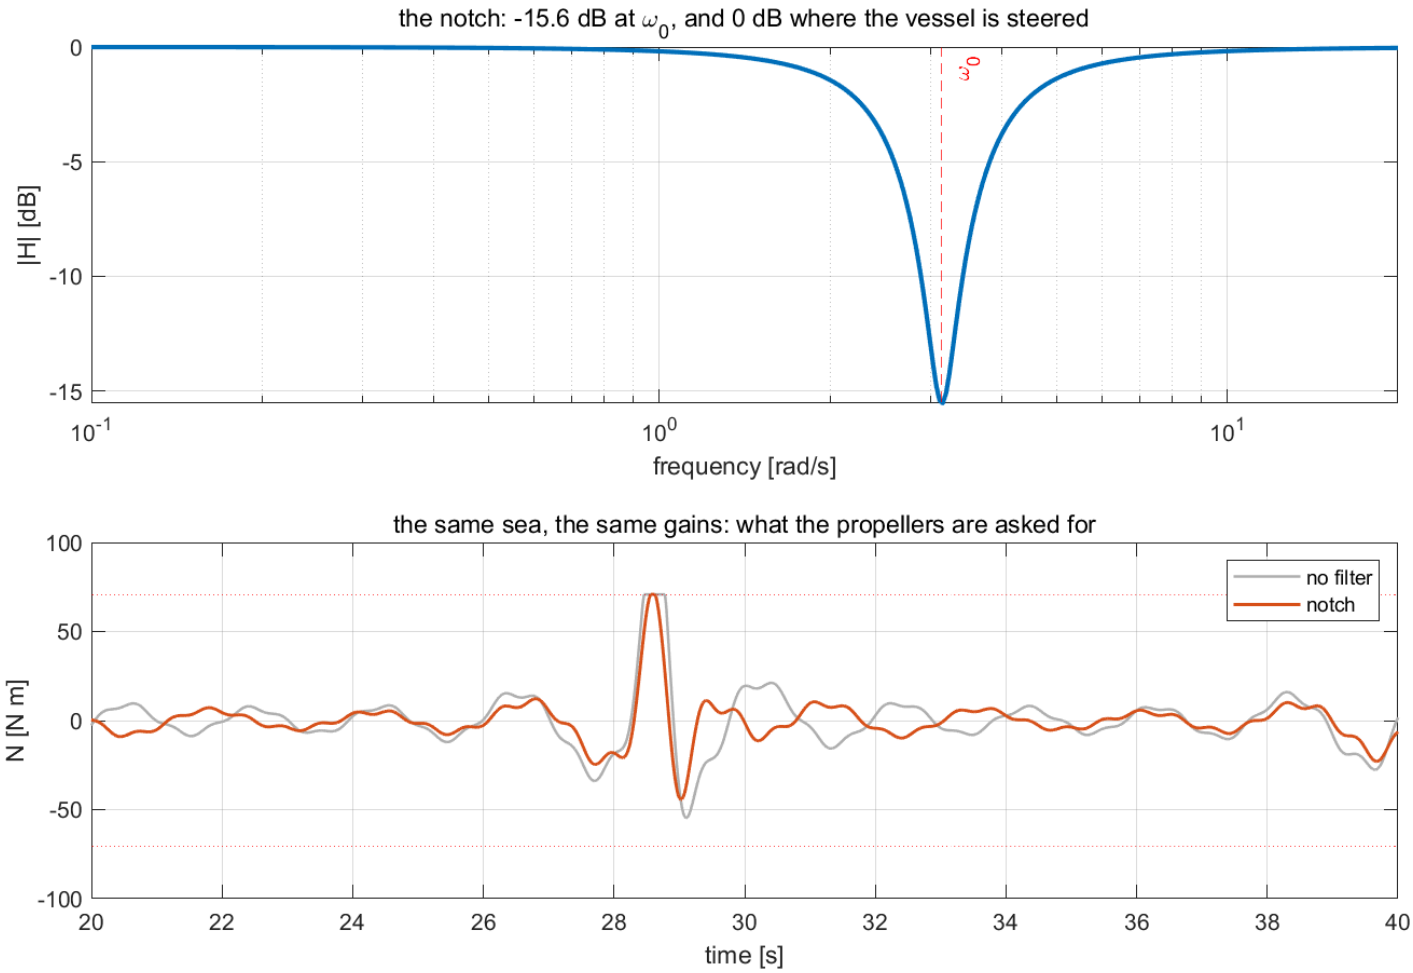

Reading the figure against the derivation.

Where to look	What is there	Which line predicts it
top panel, the dip	-15.6 dB at the marked ω_0	line 2: $\zeta_n/\zeta_d = 0.167$
top panel, away from the dip	back to 0 dB on both sides	line 3: everything else is passed
top panel, the width of the dip	about a decade	line 1: ζ_d sets it, and §8-7 chooses it
bottom panel, grey against blue	the same sea, a visibly quieter demand	line 6: the effort saved
bottom panel, the flat tops that remain	the limit is still reached occasionally	the notch attenuates by -15.6 dB, it does not delete
the heading column of the table	$1.551 \rightarrow 1.042$ deg	line 6: not shaking the vessel steers it better

What the figure says

- One filter, two numbers, and every column of the table improves at once. Nothing was retuned.

What to try	What to watch
`zeta_n = zeta_d;` Run	$H(s) = 1$: the model with the filter reproduces the model without it, which is the check that the comparison is fair (line 4)
`zeta_d = 1.0;` Run	the moment falls further, to 7.61 N·m — and §8-5 shows what that costs

> ✎ **In class**
>
> - **Purpose** — one filter, derived from one number of the sea, with its attenuation known before it is run.
> - **Point to** — the Bode dip and the moment trace under it, then the heading column.
> - **Ask** — "Why filter the rate as well?" It carries the wave at 11.6 deg/s; leaving it in would leave most of the problem in.
> - **Take away** — a notch removes one frequency and returns to unity everywhere else.

8-5. What the filter costs

This section answers: is the notch free, and may it be left in on a calm day?

What is observed. Experiment 8-5 switches the sea off and gives both models the same 10° step:

- unfiltered: overshoot $0.93\,\%$, settling 1.72 s — the Week 4 result,
- with the notch: overshoot $9.07\,\%$, settling 7.76 s,
- and the notch's phase at 1.6 rad/s, the loop's bandwidth, is -18.5°.

What follows from it, one line at a time.

1. Attenuation and phase cannot be separated: any filter that removes energy at one frequency delays signals at neighbouring ones. Week 2 §2-10 charged the same price for the derivative's low-pass.
2. The loop is steered at frequencies near $\omega_B \approx 1.6$ rad/s, and the notch adds -18.5° of phase there.
3. That phase falls on the **D term**, which is what supplies the damping (Week 4 §4-3 line 3). A brake that arrives late is a weaker brake, so the overshoot grows from 0.93 to $9.07\,\%$.
4. The wider the notch, the more phase it spends at the steering frequencies — which is §8-7's trade, measured.
5. So the filter is **not free, and not always right**. In a seaway it saves effort and steers better; in still water it makes a manoeuvre worse.
6. A vessel that must both manoeuvre hard and sit in a seaway switches the filter out for the manoeuvre, which in these models is one line: $\zeta_n = \zeta_d$.

Experiment 8-5 · The cost, on a step (8 min)

What it measures. Lines 2 and 3: the phase the notch adds at the bandwidth, and what it does to a manoeuvre with no sea at all.


The models. `W08_D_no_filter` and `W08_E_notch`, the two of §8-3 and §8-4, with `wave_on = 0`. Nothing else differs between them.

Opening and running.

```
W08_0_setup
wave_on = 0;                    % 바다를 끈다 / the sea off
open_system('W08_D_no_filter')  % Run — 4주차의 계단응답 그대로 / the Week 4 step
open_system('W08_E_notch')      % Run — 같은 계단, 더 크게 넘친다 / the same step, more overshoot
W08_F_what_it_costs             % 두 응답과 지표 / both responses and their metrics
```

Expected output:

```
W08 Experiment 8-5  what the filter costs  (the sea switched off)
  filter        overshoot   rise [s]   settle [s]   phase of H at 1.6 rad/s
  none              0.93 %      1.14        1.72               0.0 deg
  notch             9.07 %      0.86        7.76             -18.5 deg
```

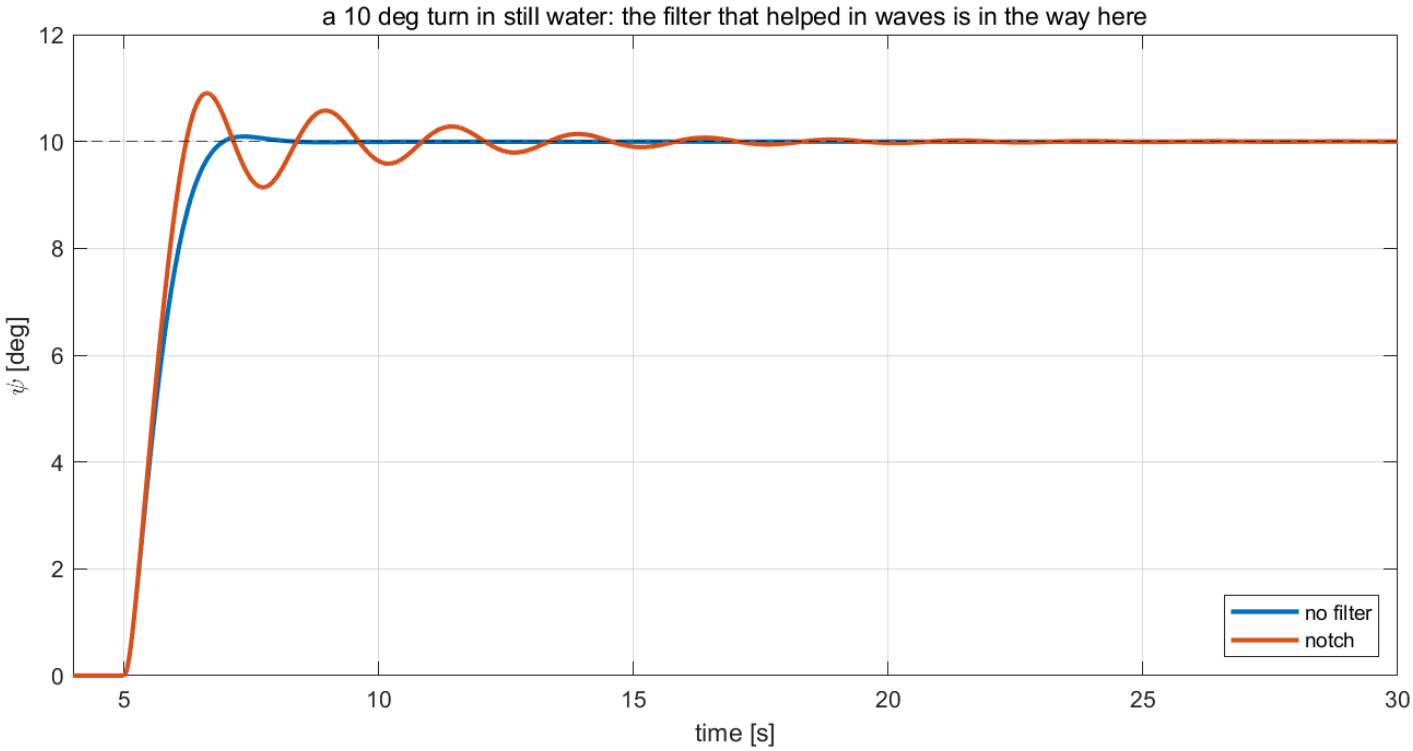

Reading the figure against the derivation.

Where to look	What is there	Which line predicts it
the two traces before the peak	almost the same, the notched one slightly faster	line 3: the damping is what weakens, not the push
the peak of the notched trace	$9.07\,\%$ against $0.93\,\%$	line 3: -18.5° of phase on the D term
the tail of the notched trace	a long slow approach, 7.76 s	line 3 again: less damping leaves a slower settling
the phase column	0.0° and -18.5° at 1.6 rad/s	lines 1 and 2: the price of the attenuation, charged where the vessel is steered

What the figure says

- The filter that improved every column of §8-4 makes this manoeuvre visibly worse. Both are true at once, and which matters depends on the day.

What to try	What to watch
`zeta_d = 1.0;` then rerun	overshoot $42.32\,\%$ and settling 20.82 s: a wider notch is a worse manoeuvre, monotonically
`zeta_n = zeta_d;` then rerun	the two models agree exactly again: the cost is the filter's, not the model's

> ✎ **In class**
>
> - **Purpose** — refuse the idea that a filter is a free improvement.
> - **Point to** — the phase column, and Week 2 §2-10 where the same trade was paid for the derivative.
> - **Ask** — "Why is the rise time slightly shorter with the filter?" Less damping is a faster rise and a worse peak; both come from the same lost phase.
> - **Take away** — attenuation is bought with phase, and phase is what damping is made of.

8-6. The slow part, which must not be filtered

This section answers: the sea also pushes. What happens to that part?

What is observed. Experiment 8-6 adds a slowly varying yaw moment of 15 N·m, varying over 60 s, to the hull — wind and second-order wave drift, as one signal — with the notch in place:

- with P–D alone the vessel settles 3.071° off the commanded heading,
- with the integral of Week 4 it settles 0.084° off,
- and both hold the same -15.13 N·m against the disturbance.

What follows from it, one line at a time.

1. Wind and second-order wave drift vary over minutes, not seconds: on the frequency axis they sit two decades below ω_0.
2. The notch is unity there (§8-4 line 3), so it **passes** them. A filter that removed them would hide a real push from the controller, and the vessel would be carried off heading with the measurement showing nothing.
3. A steady moment demands a steady counter-moment, and a P controller can only produce one from error: $300 \times 3.071^\circ \times \pi/180 = 16.1$ N·m, which is the -15.13 N·m measured plus what the D term contributes in the swings. This is Week 2 §2-6 line 7 once more.
4. The integral removes that error, exactly as in Weeks 2 to 5: 0.084° left.
5. **The wave does not wind the integral up**, because it has zero mean (§8-2 line 3). The integral accumulates the slow part and ignores the fast one — which is why a notch and an integral can be used together without one spoiling the other.
6. So the two halves of the sea are handled by two different mechanisms, and neither can do the other's work: the notch for what cannot be followed, the integral for what must be opposed.

Experiment 8-6 · The slow part, and the integral (10 min)

What it measures. Lines 3 to 5: the error a P–D loop keeps against a slow push, the integral removing it, and that the wave does not wind it up.


The model. `W08_G_slow` — the notched loop with the integral of Week 4 switched on and a slow disturbance moment added to the hull, after the controller, where the sea adds it.

Opening and running.

```
W08_0_setup
open_system('W08_G_slow')       % Run — 명령 위에 앉는다 / it settles on the command
Ki = 0;                         % Run — 3 도 옆에 앉는다 / it settles 3 deg beside it
Ki = 20; N_slow = 40;           % Run — 더 센 바람 / a stronger push, and the same conclusion
W08_G_slow_part                 % 두 경우를 한 번에 / both cases at once
```

Expected output:

```
W08 Experiment 8-6  a slow disturbance of 15 N m, varying over 60 s
  controller              mean heading error   mean moment   heading std
  P-D  (Ki = 0)                    3.071 deg       -15.13 Nm      1.198 deg
  PI-D                             0.084 deg       -15.13 Nm      1.191 deg
```

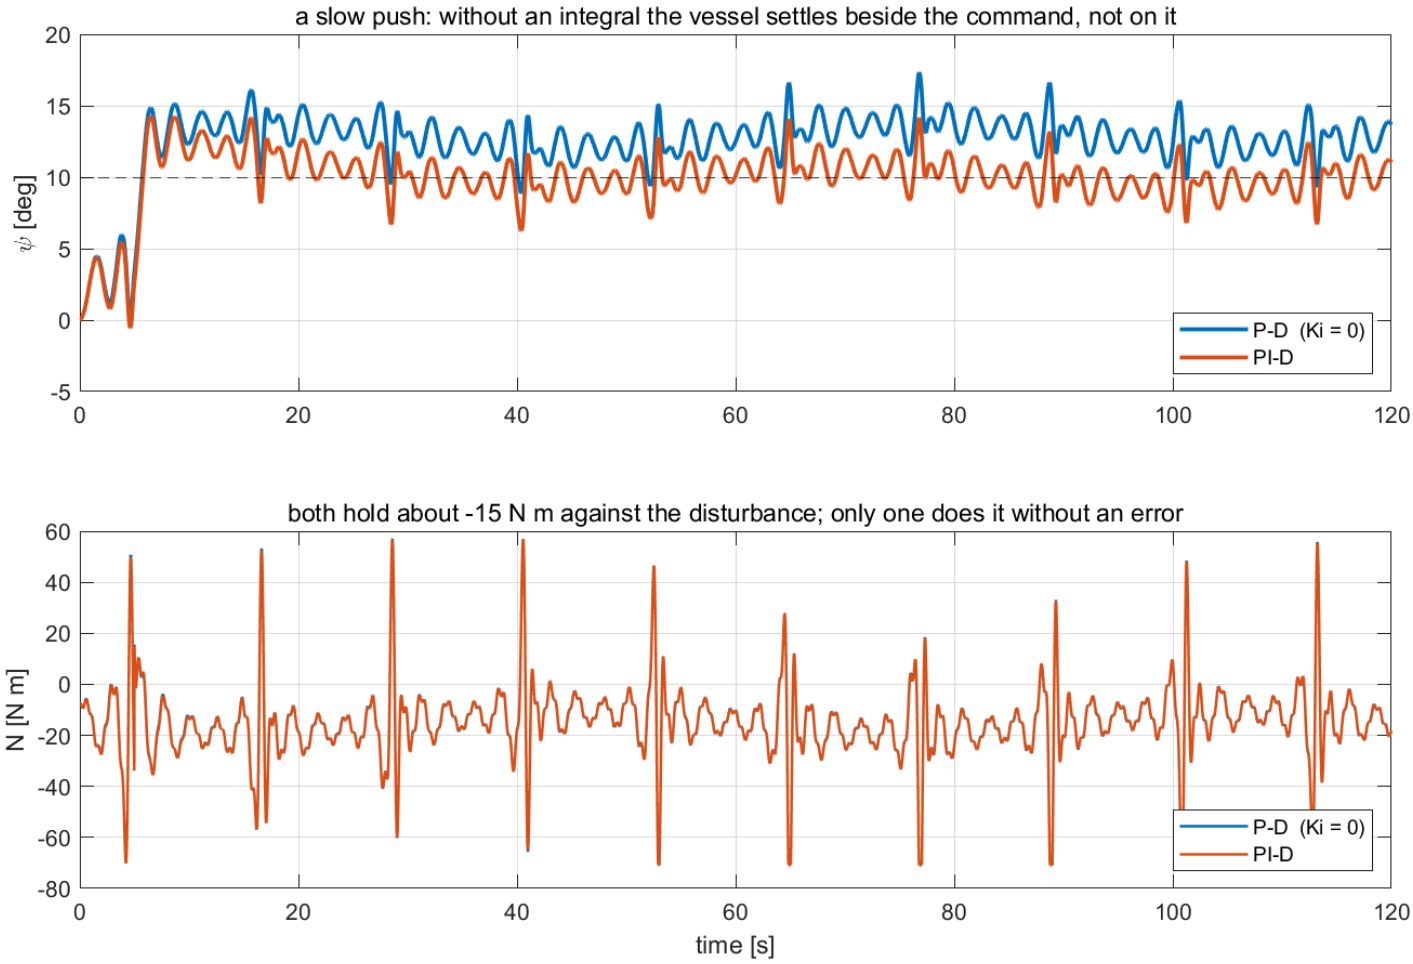

Reading the figure against the derivation.

Where to look	What is there	Which line predicts it
top panel, the P–D trace	riding 3° above the dashed command	line 3: the error is what makes the counter-moment
top panel, the PI–D trace	on the command, with the same wave ripple	line 4: the integral removes the offset and nothing else
top panel, the ripple on both	the same size, 1.19°	line 5: the integral does not touch the zero-mean part
bottom panel, both traces	around -15 N·m, following the slow variation	lines 1 and 2: the notch passed the slow part, so the loop can oppose it
the two `mean moment` entries	identical to two decimals	line 3: the physics decides the moment; the controller decides who pays for it

What the figure says

- The notch kept what the controller must act on and removed what it must not. The two parts of the sea leave by two different doors.

What to try	What to watch
`N_slow = 40;` with `Ki = 0`	the offset grows in proportion, to about 8°: line 3 is linear in the disturbance
`T_slow = 6;`	a disturbance ten times faster is now close to the loop bandwidth and partly attenuated by the notch's skirt — the boundary between "slow" and "wave" is not sharp, and §8-7 is where it is drawn

> ✎ **In class**
>
> - **Purpose** — close the loop of the week: the filter must be selective, not merely attenuating.
> - **Point to** — the identical ripple on both traces, and the offset on only one.
> - **Ask** — "What would happen if the notch also removed the slow part?" The vessel would be pushed off heading and the measurement would not show it — the worst failure in this week.
> - **Take away** — filter what cannot be followed, integrate what must be opposed.

8-7. Choosing the notch

This section answers: what decides the two numbers of the filter?

What is observed. Experiment 8-7 sweeps the width ζ_d with ζ_n fixed at 0.05:

ζ_d	$\lvert H(j\omega_0)\rvert$	moment std [N·m]	heading std [deg]	overshoot [%]	settling [s]
0.2	0.250	14.78	1.166	4.09	6.12
0.3	**0.167**	**13.41**	**1.042**	**9.07**	**7.76**
0.5	0.100	10.88	0.812	19.29	10.22
0.7	0.071	9.33	0.715	28.92	14.14
1.0	0.050	7.61	0.537	42.32	20.82

- every column improves monotonically with width in the sea, and every column worsens monotonically on the step.

What follows from it, one line at a time.

1. **ω_0 is not tuned; it is measured.** It comes from the sea, through T_0, and a wave filter that is centred on the wrong frequency attenuates nothing useful. On a vessel it is estimated on line, from the measured heading spectrum — which is what Experiment 8-2 did with `pwelch`.
2. ζ_n sets the depth, ζ_n/ζ_d, and there is little reason to make it large. This week keeps it at 0.05 throughout.
3. ζ_d sets the width, and it is the only real decision: wider removes more of the sea (§8-4) and spends more phase at the steering frequencies (§8-5).
4. The two columns to read together are therefore **moment std** and **overshoot**. The first is what the filter is for; the second is what it costs.
5. For this vessel and this sea, $\zeta_d = 0.3$: the moment falls from 18.85 to 13.41 N·m while the overshoot stays below $10\,\%$. A wider notch buys another 6 N·m at the price of a manoeuvre four times worse.
6. The tuning order is therefore: **measure ω_0 → fix ζ_n small → raise ζ_d until the manoeuvre is as bad as can be accepted → check in the sea.** It is the order of Week 2 §2-12 with the roles of "good" and "cheap" exchanged.
7. Beyond a notch there is an **observer**: a model of the vessel and of the wave, estimating the low-frequency heading rather than filtering the measured one. That is what MSS's `demoPassiveWavefilterAutopilot1` and `demoKalmanWavefilterAutop` do, and what Week 9 leads to.

Experiment 8-7 · Choosing the width (12 min)

What it measures. Lines 3 to 5: the two columns that decide, measured on five widths — the same sweep that produced the table above.


The model. `W08_H_tuning` — the notched loop of §8-4 again, this time as the model the filter is **chosen** on. It is run twice for each width: once in the sea for the effort, once with the sea off for the step.

Opening and running.

```
W08_0_setup
W08_H_tuning_order              % 다섯 너비, 두 수치씩 / five widths, two numbers each
```

Expected output:

```
W08 Experiment 8-7  choosing the notch  (zeta_n = 0.05 throughout)
  zeta_d   |H(j w0)|   moment std   heading std   overshoot   settle [s]
    0.20       0.250       14.78 Nm      1.166 deg      4.09 %      6.12
    0.30       0.167       13.41 Nm      1.042 deg      9.07 %      7.76
    0.50       0.100       10.88 Nm      0.812 deg     19.29 %     10.22
    0.70       0.071        9.33 Nm      0.715 deg     28.92 %     14.14
    1.00       0.050        7.61 Nm      0.537 deg     42.32 %     20.82
```

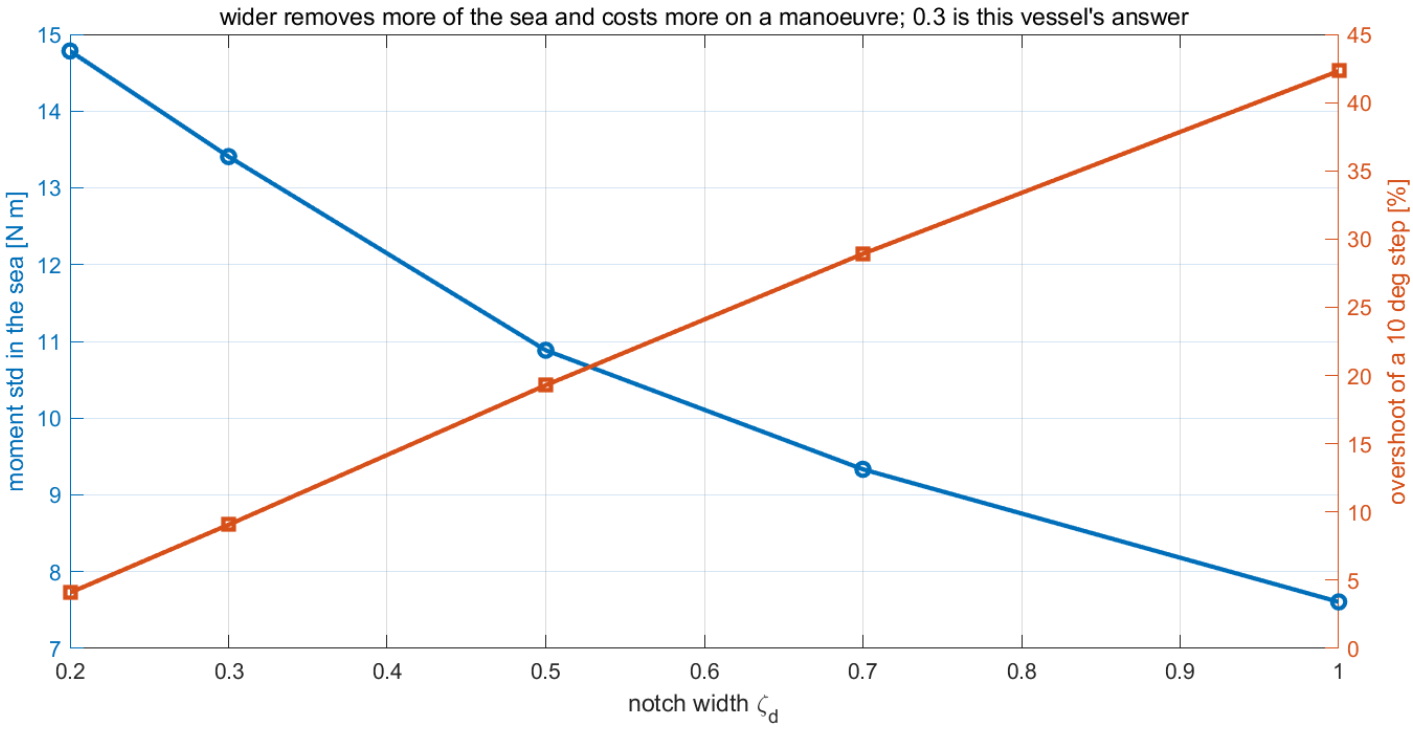

Reading the figure against the derivation.

Where to look	What is there	Which line predicts it
the left-hand curve	falling from 14.78 to 7.61 N·m	line 3: a wider notch removes more of the sea
the right-hand curve	rising from 4.09 to $42.32\,\%$	line 3 again, the other side of it
where the two curves cross in usefulness	around $\zeta_d = 0.3$	line 5: the chosen value of this week
the `|H(j w0)|` column	exactly ζ_n/ζ_d in every row	§8-4 line 2, once per row
the `heading std` column	improving with width, like the moment	§8-4 line 6: the two go together in the sea

What the figure says

- There is no best notch, only a chosen one, and the choice is written in two columns of one table.

What to try	What to watch
`T0 = 4;` then rerun the sweep	ω_0 halves, the notch lands at 1.57 rad/s — inside the loop's bandwidth — and every width costs far more. Line 1: the sea decides where the filter goes, and some seas cannot be filtered this way
`zeta_n = 0.2;` at $\zeta_d = 0.3$	a shallow notch: little attenuation and little phase. The depth is the cheap parameter, the width the expensive one

> **✎ In class**
>
> - **Purpose** — end the week with a decision made from measurements, as every week of this course ends.
> - **Point to** — the two curves crossing purposes, and the single row that was chosen.
> - **Ask** — "What would make a wide notch the right answer?" A vessel that never manoeuvres hard — a survey ship on a line, or a rig on station.
> - **Take away** — measure ω_0, keep the notch shallow and no wider than the manoeuvre can pay for.

Part 2 · Laboratory run order

The experiments of Part 1 are worked through in order; this table is the index of what was run, for repeating the week at home.

Experiment	Model	Script	What it shows
8-0	all of them	`W08_0_setup`, `W08_1_build_waves`	the parameters, and every model written from code
8-1	`W08_E_notch`	—	the chain, and where the sea is added
8-2	`W08_C_wave`	`W08_C_sea_as_signal`	one realisation of a JONSWAP sea, and its spectrum
8-3	`W08_D_no_filter`	`W08_D_chasing_waves`	the Week 4 loop, shown the sea
8-4	`W08_E_notch`	`W08_E_notch_filter`	the notch, and what it saves
8-5	`W08_D_no_filter`, `W08_E_notch`	`W08_F_what_it_costs`	the same step with the sea off
8-6	`W08_G_slow`	`W08_G_slow_part`	a slow push, and the integral
8-7	`W08_H_tuning`	`W08_H_tuning_order`	five widths, and the choice

- The scripts only repeat what Run already shows, for several settings at once, and print the numbers quoted in Part 1.
- Each experiment ends with an **In class** note: purpose, what to point at, a question with its answer, and the sentence to take away.

Summary

Week Summary

Step	What was done	How it was verified
1	wrote one sea as a sum of components from a JONSWAP spectrum	`check_overlaps` 0 in four models; `verify_w08_waves` check 2: H_s exact, peak at ω_0
2	measured what reaches the controller	Experiment 8-2: heading std 3.008°, rate std 11.64 deg/s, zero mean; check 3
3	showed the Week 4 loop chasing it	Experiment 8-3: moment std 18.85 N·m, on the limit for 1.18 s, true heading 1.551°
4	derived and measured the notch	Experiment 8-4: -15.6 dB at ω_0; moment $18.85 \to 13.41$ N·m and heading $1.551 \to 1.042^\circ$; checks 4 and 5
5	measured what it costs	Experiment 8-5: overshoot $0.93 \to 9.07\,\%$, settling $1.72 \to 7.76$ s, phase -18.5° at 1.6 rad/s
6	separated the slow part from the fast	Experiment 8-6: 3.071° of offset with P–D, 0.084° with the integral, the same -15.13 N·m held
7	chose the width from the trade	Experiment 8-7: five widths measured both ways; $\zeta_d = 0.3$

Progress Check

★ Minimum condition for following Week 9

Theory

- [ ] Able to write one realisation of a wave spectrum, and to say why the phases are fixed.
- [ ] Able to state the four numbers of a sea that a controller cares about, and which of them is the dangerous one.
- [ ] Able to explain why a vessel can neither follow nor usefully oppose the first-order wave motion.
- [ ] Able to write the notch and state its attenuation at ω_0 from its two parameters.
- [ ] Able to explain why a filter that attenuates must also delay, and where that delay is felt.
- [ ] Able to say which part of the sea the integral must see, and why the notch does not remove it.

Laboratory

- [ ] `W08_1_build_waves` ran and every model reported `overlapping lines: 0`.
- [ ] The sea was changed in the Command Window and the Scope showed the new sea.
- [ ] `verify_w08_waves` printed `ALL CHECKS PASSED`.

Recorded observations

- [ ] The standard deviation of the wave-induced heading and of its rate.
- [ ] The moment standard deviation with and without the notch, in the same sea.
- [ ] The overshoot of a 10° step with and without the notch, with the sea off.
- [ ] The heading error left by P–D against a slow disturbance, and by PI–D.

Assignment 7

① Requirements

1. Estimate ω_0 **from the measurement alone**: run `W08_D_no_filter`, take the measured heading, and find the peak of its spectrum with `pwelch`. Report the estimate and its error against $2\pi/T_0$.
2. Detune the notch on purpose: centre it at $0.8\,\omega_0$ and at $1.25\,\omega_0$, with $\zeta_d = 0.3$, and report the moment standard deviation for each against the correctly centred one.
3. Repeat the sweep of Experiment 8-7 for a longer sea, $T_0 = 4$ s, and state whether a notch is still the right instrument for this vessel.

② Verification — mandatory

- `verify_w08_waves` prints `ALL CHECKS PASSED`.
- Every number is reported with the window it was measured over, as Part 1 does ($t > 20$ s).
- The estimate of ω_0 is reported with the length of record it was made from.

③ Analysis (5–10 lines)

- From ② and ③: a wave filter must be centred on a frequency that the sea itself decides and that changes with the weather. State what that implies for a vessel that runs for a day, and what would have to be added to the models of this week.

Grading

Item	Points
ω_0 estimated from the measurement	25
the detuned notch, both directions	25
the sweep at $T_0 = 4$ s, with a conclusion	30
the analysis	20

Troubleshooting

Symptom	Cause	Fix
the two models give the same result in waves	`zeta_n` equals `zeta_d`, so the notch is unity	set `zeta_n = 0.05`
the sea looks different from the notes	`Hs`, `T0` or `N_comp` was changed; the components are rebuilt from them	run `W08_0_setup` again
the moment sits on its limit even with the notch	expected: the notch attenuates by -15.6 dB, it does not delete (§8-4)	a wider notch, at the cost of §8-5
the step response is much worse than Week 4's	the notch is in and the sea is off — that is §8-5, not a fault	`zeta_n = zeta_d` to switch it out
`pwelch` is undefined	the Signal Processing Toolbox is not installed	Experiment 8-2's spectrum only; the rest of the week does not need it

References

Primary

- Fossen, T. I. *Handbook of Marine Craft Hydrodynamics and Motion Control*, 2nd ed. Chapter 8, environmental forces and moments: wind, waves and current, and the linear wave response used here. The wave-filtering chapter develops the notch and the observers that replace it.
- MSS toolbox — `GNC/wavespec.m` (the JONSWAP spectrum this week samples), `GNC/waveresponse345.m` (a realisation built the same way), and the demonstration models `demoPassiveWavefilterAutopilot1.slx` and `demoKalmanWavefilterAutop.slx`, which are where §8-7 line 7 leads.
- Fossen, T. I. and Perez, T. (2009). Kalman filtering for positioning and heading control of ships and offshore rigs. *IEEE Control Systems Magazine* **29**(6), 32–46. DOI 10.1109/MCS.2009.934408. Why the estimator replaced the fixed notch in practice.

In this course

- Week 2 §2-10 — a filter's attenuation is bought with phase, first met on the derivative.
- Week 4 §4-2 and §4-3 — the autopilot this week does not retune, and the turn rate its moment can produce.
- Week 7 — the allocation between the moment and the two shaft speeds whose chatter §8-3 measures.
- Week 1 §1-13 — the current, the third disturbance of §8-1, modelled as a velocity.

Next Week

Week 9 asks the vessel to stay in one place rather than to go somewhere: dynamic positioning, and the one direction two propellers cannot push. The observer that replaces the notch of §8-7 — a model of the vessel and of the wave, estimating the low-frequency heading — is the reading that §8-7 line 7 points to.