
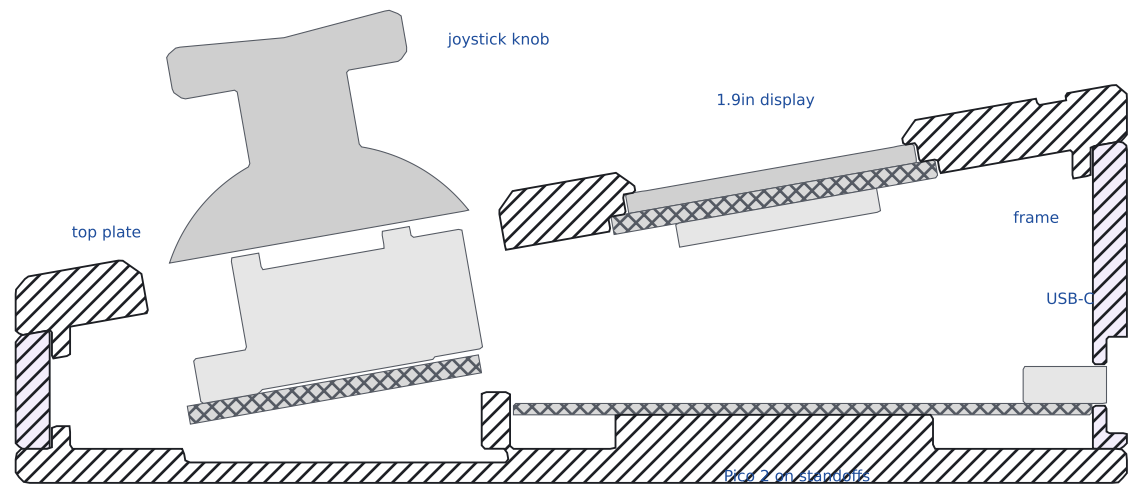
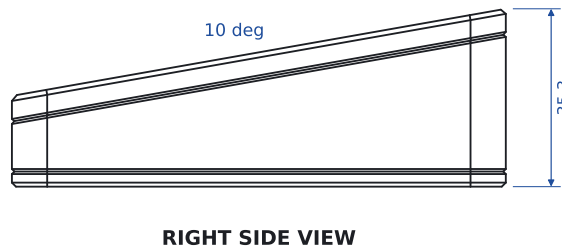
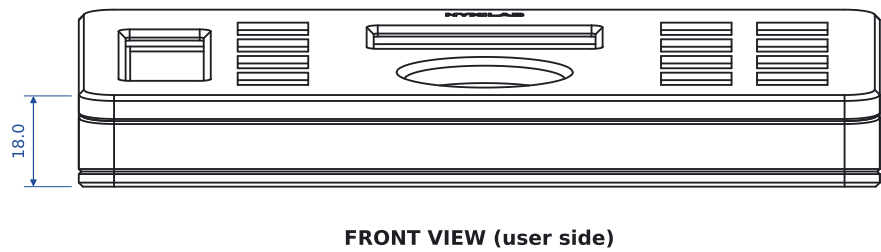


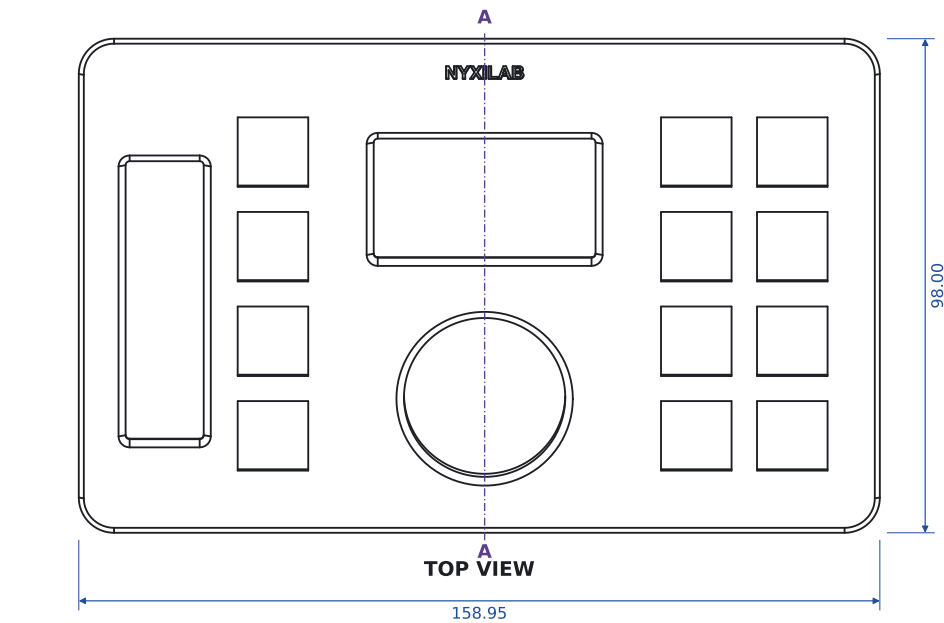

#	Part	Qty	Spec / use
1	top_plate (colour A)	1	PLA/PETG, top face down
2	frame (colour B)	1	PLA/PETG, accent colour
3	base (colour A)	1	PLA/PETG
4	bar_spine	1	PLA/PETG, 100 %
5	M3x8 countersunk ISO 10642	8	case screws
6	M3 heat-set insert 5.7x4.6	8	plate bosses
7	M3x6 self-tapping	4	joystick posts
8	M2x4 self-tapping	4	1.9in display
9	M2x8 self-tapping	2	bar display + spine
10	M2x5 self-tapping	2	Pico 2 standoffs
11	Rubber feet 10x3	4	base recesses
12	MX switch + 1u keycap	12	plate mount
13	1N4148 diode	12	COL2ROW

NYXILAB MACROPAD

GENERAL ARRANGEMENT

158.9 x 98.0 mm, 10 deg wedge, 3-layer stack


SHEET 01 SCALE 1:1.5 / A-A 1:1

mm | 2026-09-27


Features

MX cut-outs 12x 14.0 x 14.0 through, clip relief 15.0 x 15.6 from below, skin 1.5
Key pitch 19.05 | columns u = 38.53 / 122.53 / 141.58
Rows v = 19.52 / 38.58 / 57.62 / 76.67
1.9in window 44.02 x 24.00 centred (u 80.53, v 67.15), 1.4 x 45 bevel
2.25in window 15.50 x 55.99 centred (u 17.04, v 46.60), 1.4 x 45 bevel
Joystick opening D32.0 + 1.5 x 45 bevel at (u 80.53, v 27.00)
Plate 5.0 thick, display skin 2.0, top edge chamfer 1.0
Slope length V = 99.51 (world depth 98.0 at 10 deg)

Ordinates from the front-left corner of the top surface (u right, v up-slope).

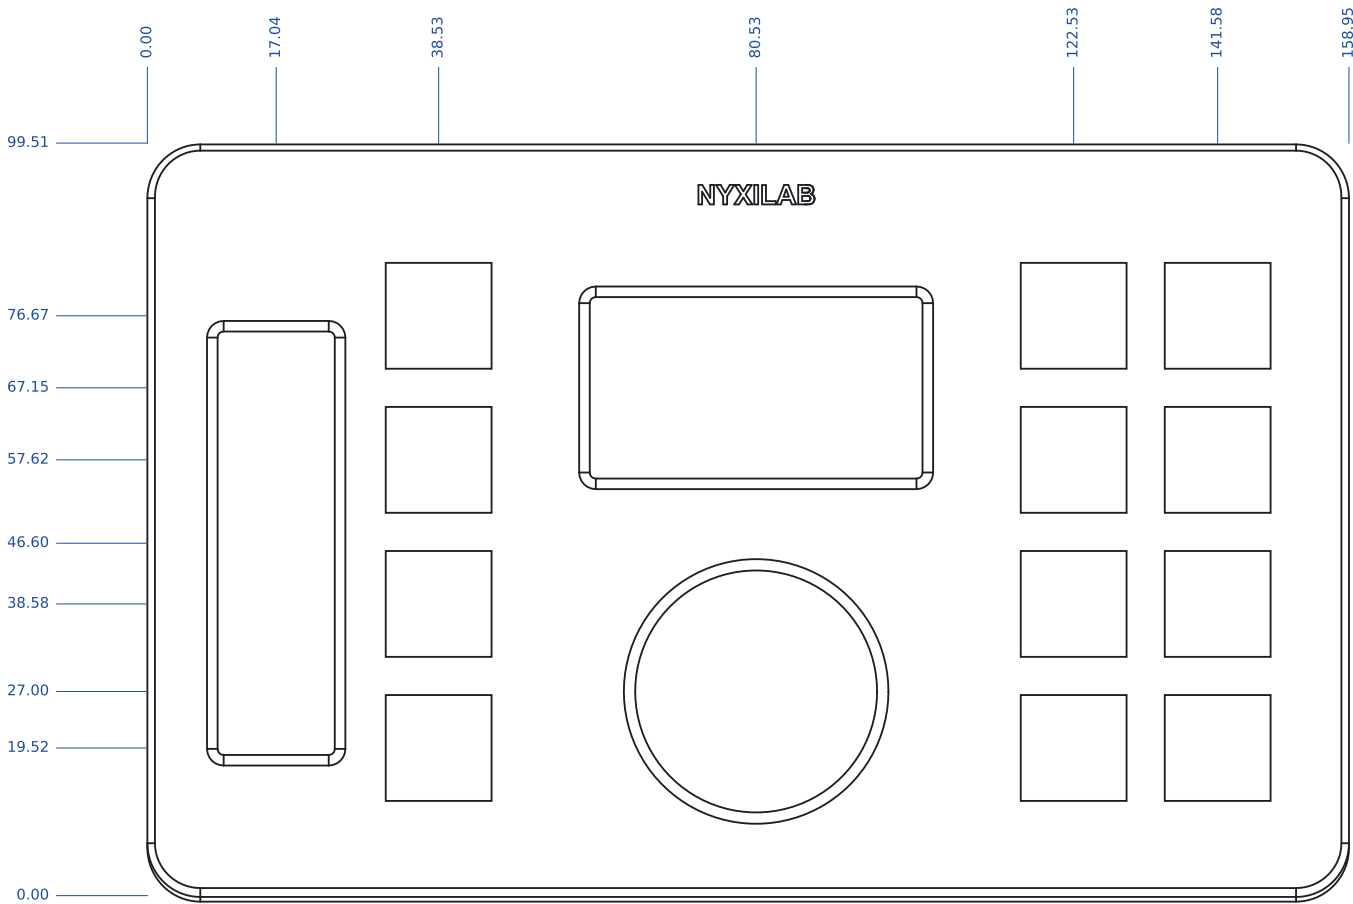

TOP (visible face)

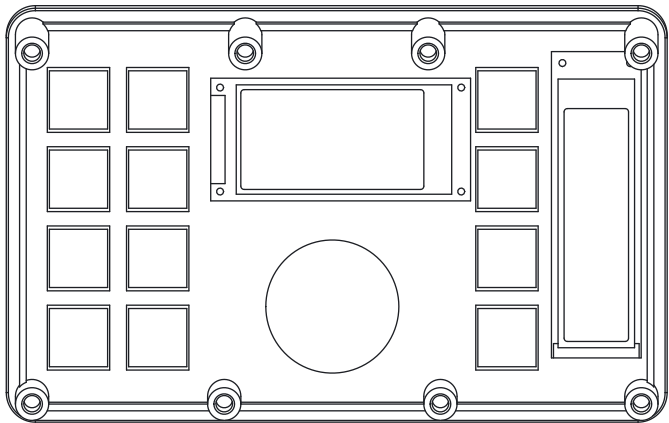

UNDERSIDE (from below, 1:1.8)

Bosses: world-vertical, M3 heat-set insert D4.0 x 6.2 at the lower end
Display pockets: glass + PCB steps, M2 pilot D1.7 blind (0.7 skin left)
Header relief grooves over the display pin rows (front-side joints)
Locating lip 1.6 x 2.5 drops inside the frame



NYXILAB MACROPAD

TOP PLATE - TRUE VIEW

SHEET 02 SCALE 1:1

Viewed normal to the tilted top surface (plate frame u, v)

mm | 2026-09-27

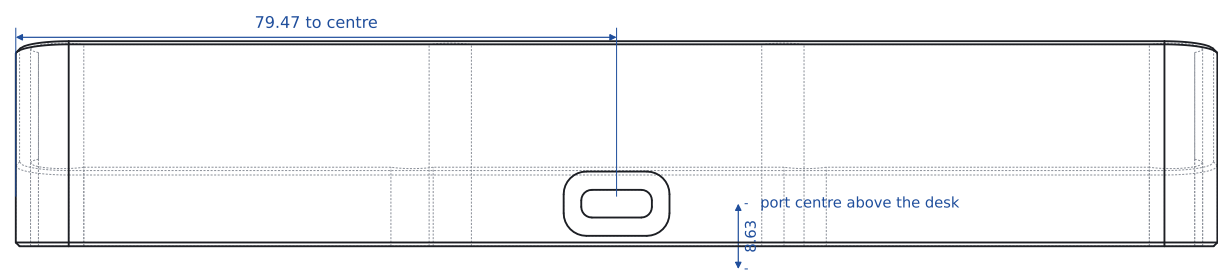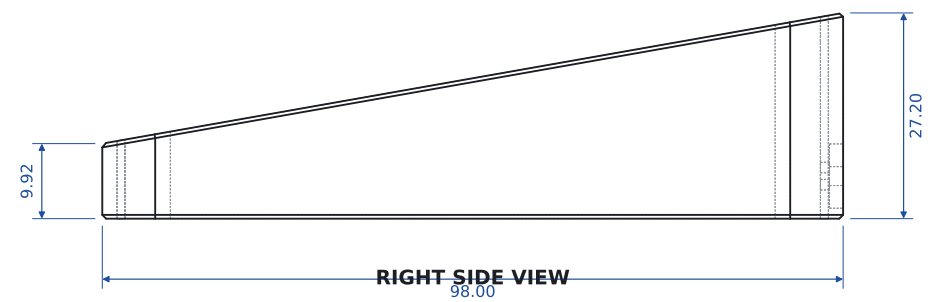

BACK VIEW (looking at the USB port)

USB-C port & details

Port centre x = 79.47 from the left edge, 8.63 above the desk
Thin wall 1.2 with receptacle opening 9.34 x 3.66 (R1.4)
Outer recess 14.0 x 8.5 R3.0, 1.8 deep, for the plug overmold
Receptacle face ends flush with the recess floor: any USB-C cable fits, and the port captures the Pico's USB end (the clone has no holes there).
Boss saddles: 8x R4.25 vertical grooves locate the frame
0.5 mm chamfers at both seams form V-grooves between colours


NYXILAB MACROPAD

FRAME (CENTRE LAYER)

SHEET 03 SCALE 1:1

Wedge wall ring, accent colour. USB-C port in the back wall.

mm | 2026-09-27

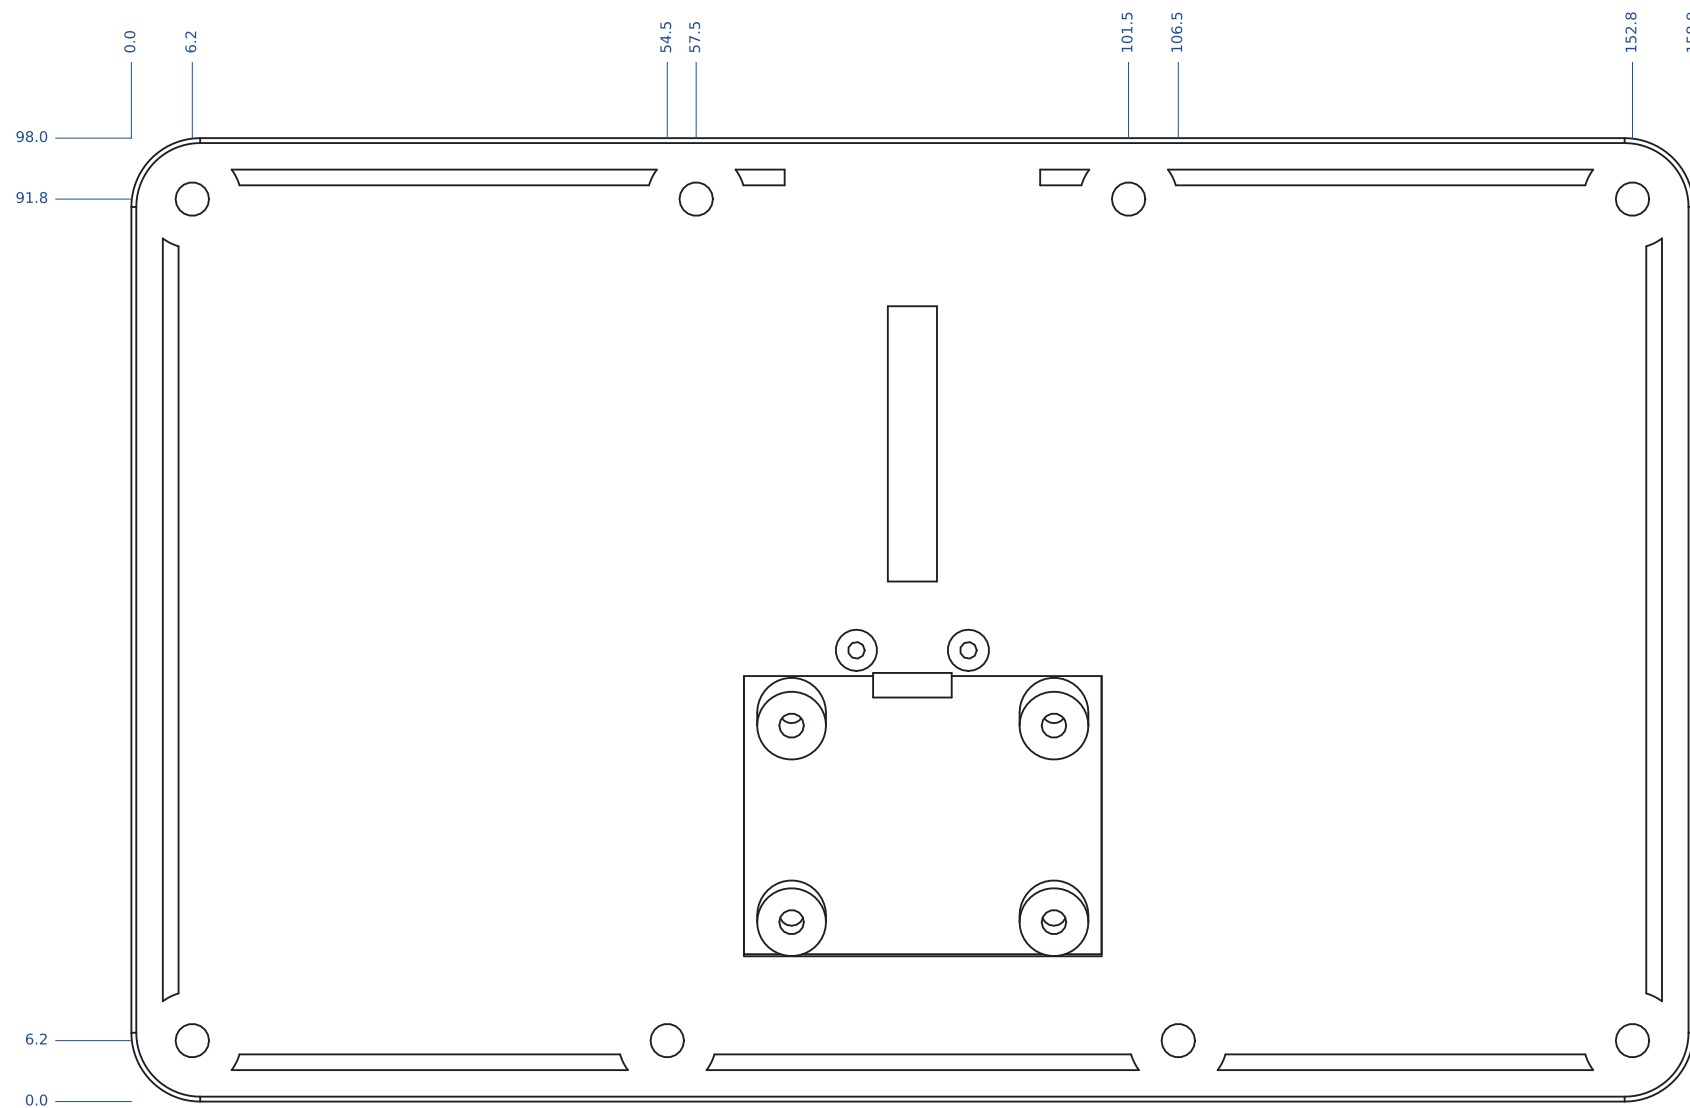

TOP VIEW 1.3:1 (inside face)

Features

- 8x countersunk D3.4 / D6.8 x 90 deg (M3x8 ISO 10642)
- Boss centres 6.2 from the edges; see ordinates
- Pico standoffs D4.2 x 3.0, M2 pilot D1.7: (73.78, 45.90), (85.18, 45.90)
- Pico centre rail + forward stop (USB end is held by the frame port)
- Joystick posts D7.0, perpendicular to the plate (10 deg), M3 pilot D2.5
top centres: (67.2, 18.3, z5.7), (93.9, 18.3, z5.7)
(67.2, 38.2, z9.2), (93.9, 38.2, z9.2)
- Joystick solder-joint relief 1.2 deep under the module
- Feet: 4x D10.5 x 1.0 recesses, 16.0 from the edges
- Locating lip 1.6 x 2.0 inside the frame (gaps at bosses & USB)

NYXILAB MACROPAD

BASE (BOTTOM LAYER)

SHEET 04 SCALE 1.3:1

Pico 2 cradle, joystick posts, M3 countersinks, feet

mm | 2026-09-27



SPINE - TOP 2:1



SPINE - SIDE 2:1 (bed face down)

Bar display spine

Held by the bar module's own two M2 holes (M2x8 through spine + PCB into the plate).
Arches 3.0 mm over the FPC / ZIF / parts on the module back,
pad presses the PCB 3-16 mm from the header end (0.2 mm preload).
Print flat side down, 100 % infill.

Fit-test coupons (print these first, ~1 h total)

- fit_switch 3 MX holes 13.9 / 14.0 / 14.1 - pick the one your switches click into
- fit_plate_d19 1.9in window, pockets and M2 pilots
- fit_plate_bar 2.25in window, pockets and pilots
- fit_plate_joy joystick opening and bevel
- fit_usb back wall + Pico cradle: plug a cable in, check alignment
- fit_joystick base patch with the 4 posts: check the KY-023 hole grid

If a fit is off, change the value in cad/macropad_cad/params.py
and rebuild (make cad). Values marked MEASURE are the likely suspects.

NYXILAB MACROPAD	
BAR DISPLAY SPINE & FIT TESTS	SHEET 05 SCALE 2:1
Clamp for the 2.25in module; coupons to print first	mm 2026-09-27