

DESK CONNECTOR AND LEDS

RJ45 to the control box; the two LEDs are inside the jack

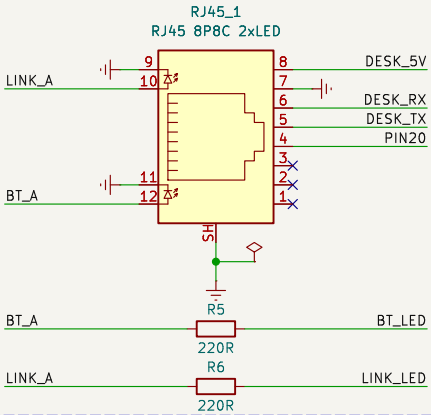


5 V INPUT

PTC, reverse block, bulk

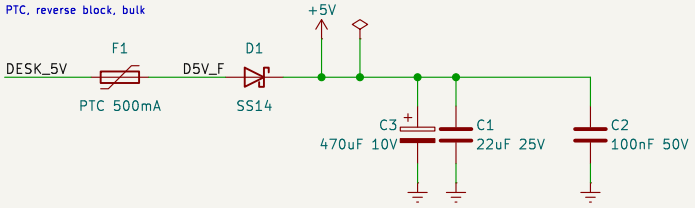


RX LEVEL SHIFT

5 V box TX –> 3.3 V ESP, clamped

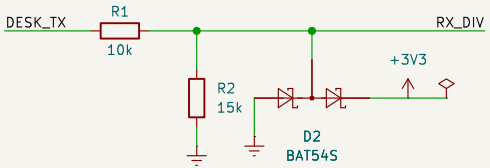


TX AND WAKE

3.3 V, series limited



ESP32 DevKit V1 30–pin sockets

pin names as on the silkscreen, both sides

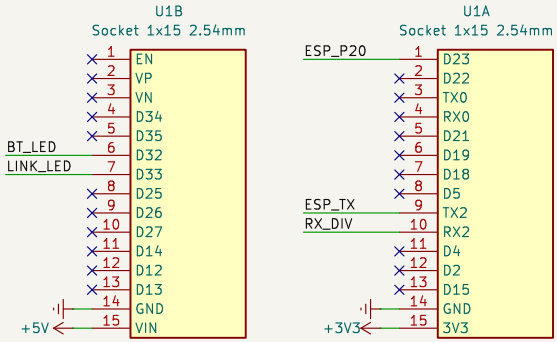

NOTES

Box pinout: 8 +5V, 7 GND, 6 box RX, 5 box TX (5 V), 4 wake, 1–3 unused
Idle: pin 5 ~5.0 V, RX2 ~3.0 V, VIN ~4.5 V; wake high = awake
GPIO16 RX2, GPIO17 TX2, GPIO23 wake, GPIO32 BT, GPIO33 LINK
BT solid: panel connected. LINK solid: box answers, fast: no frames
C3: long leg to +5V, at most 11.5 mm tall. Rev1 had pins 5 and 6 swapped

4x M3, 71.8 x 28.8



ESP32 DevKit V1 30–pin carrier, RJ45 to the control box

Wouter ten Brinke

Sheet: /

File: tab5–desk–ctrl.kicad_sch

Title: FlexiSpot / LoctekMotion BLE desk companion

Size: A5	Date:	**Rev: rev2**
KiCad E.D.A. 9.0.6		Id: 1/1