Protectoseal PRO-FLOW Vent Sizing Program

Annex A of API 2000 (7th Edition) / ISO 28300 : 45000E - In-Line Deflagration Arrester for Group D (IIA) Vapors

Date: Sep-13-2017

PROTECTOSEAL MODEL: 45002E 2 Inch


Recommended vent based on the following user supplied data:

Additional Product Specific Pressure Venting

MANUALLY SELECTED VENT

Manually Entered Flow15.000 MSCFHCalculated Tank Pressure4.880 in WC

Powered by ZingChart

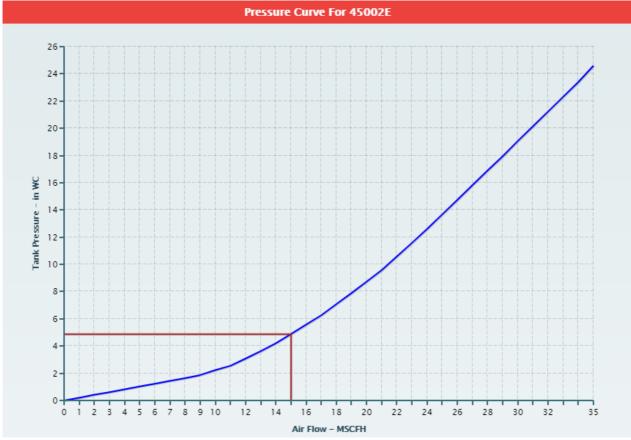

Notes

Protectoseal PRO-FLOW Vent Sizing Program Date:

Annex A of API 2000 (7th Edition) / ISO 28300 : 45000E - In-Line Deflagration Arrester for Group D (IIA) Vapors

PROTECTOSEAL MODEL:

45002E 2 Inch


Date: Sep-13-2017

Recommended vent based on the following user supplied data:

MANUALLY SELECTED VENT

Manually Entered Flow15.000 MSCFHCalculated Tank Vacuum4.880 in WC

Powered by ZingChart

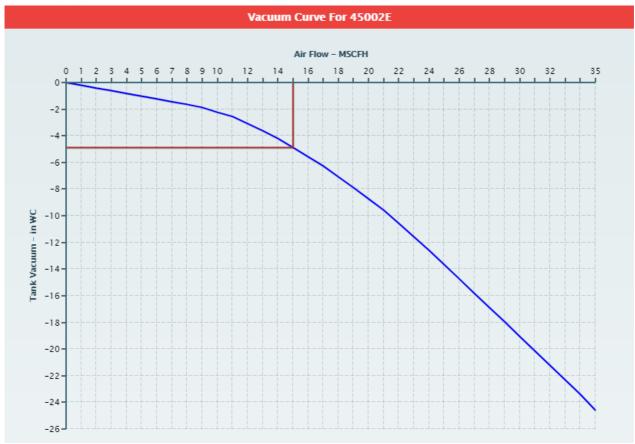

Notes