


STM32

Power Supply

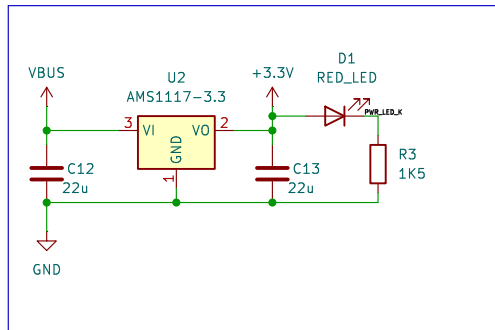


VBUS from USB connection (nom. +5V) Min.22uF input/output. caps

Mounting Holes

- H1
MountingHole
- H2
MountingHole
- H3
MountingHole
- H4
MountingHole

M2

Microcontroller and USB

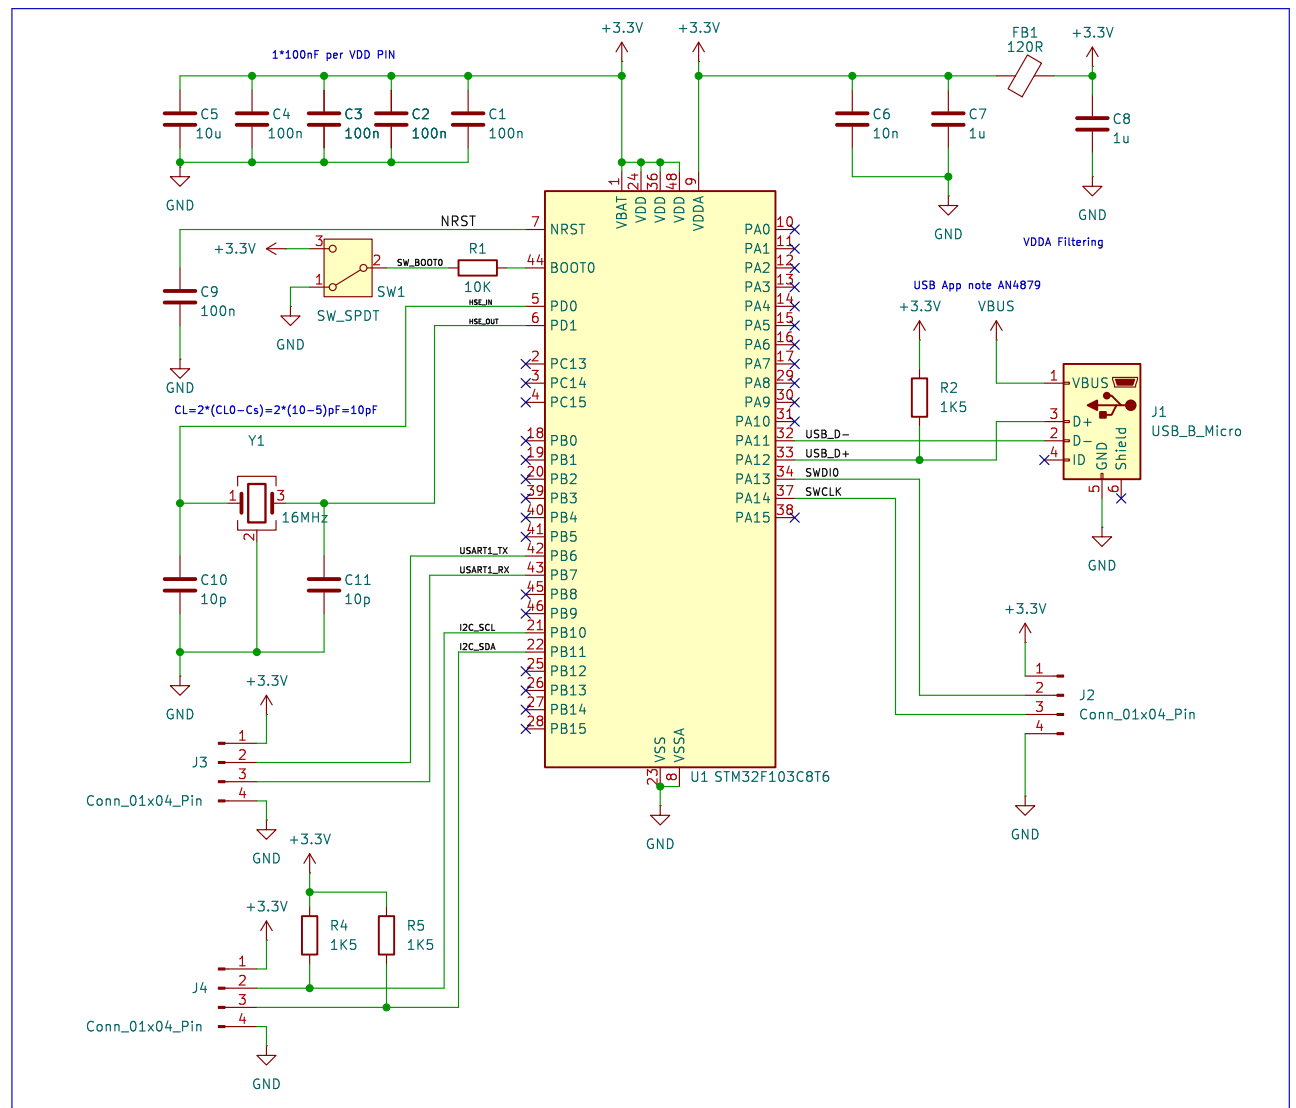

Pin-out using STM32 CubeIDE

Design By – Arun K Ranadeep

Sheet: /
File: STM32.kicad_sch

Title: STM32

Size: A4	Date: 2026-06-25
KiCad E.D.A. 9.0.8-rc1-220-gf368ede532	

Rev: 0.1
Id: 1/1