

Relay module experiment

Overview



This is a simple button control relay experiment. Delay() function is not used to eliminate jitter and improve the running efficiency of the program.

Specification

Null

Pin definition

Arduino Relay module

5VC VCC GND GND D8 IN


Hardware required

Material diagram	Material name	Number
A TOTAL CONTROL OF THE PARTY OF	Relay module	1
	Button	1
4113-	10KΩ resistor	1
	USB Cable	1
	UNO R3	1
	Breadboard	1
	Jumper wires	Several

1



Connection diagram

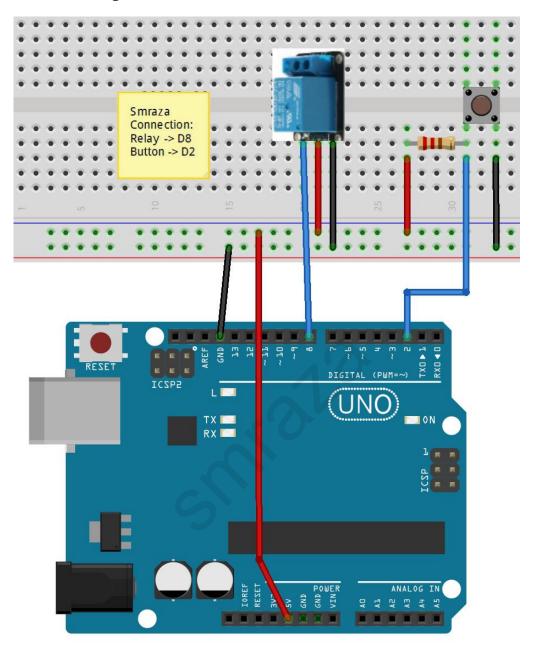




Sample code

```
Note: sample code under the Sample code folder
const int buttonPin = 2;
const int relay = 8;
int relayState = HIGH;
int buttonState;
int lastButtonState = LOW;
long lastDebounceTime = 0; // Last output pin trigger time
long debounceDelay = 50; //Elimination of jitter, if the output is not stable increase in
time
void setup() {
    pinMode(buttonPin, INPUT);
    pinMode(relay, OUTPUT);
    digitalWrite(relay, relayState);
}
void loop() {
    int reading = digitalRead(buttonPin); //Read button data
    if (reading != lastButtonState) {
         lastDebounceTime = millis();
    if ((millis() - lastDebounceTime) > debounceDelay){
         if (reading != buttonState) {
             buttonState = reading;
             if (buttonState == HIGH) {
                  relayState = !relayState;
             }
        }
    }
    digitalWrite(relay, relayState);
    lastButtonState = reading;
}
```



Example picture

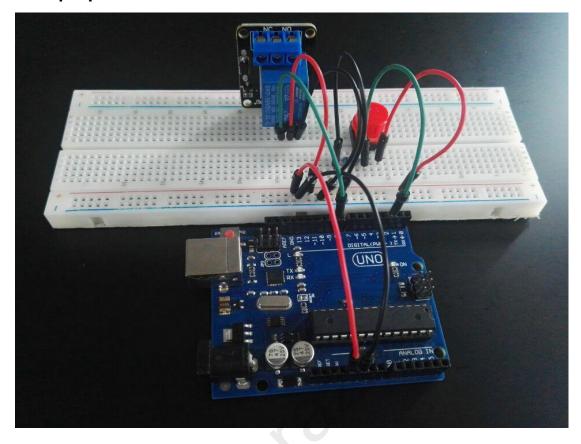



Language reference

Tips: click on the following name to jump to the web page. If you fail to open, use the Adobe reader to open this document. const millis()

Application effect

When the button is pressed, the state of the relay will be changed.

Amazon US store: http://www.amazon.com/shops/smraza

Amazon CA store: https://www.amazon.ca/shops/AMIHZKLK542FQ
Amazon UK store: http://www.amazon.co.uk/shops/AVEAJYX3AHG8Q
Amazon FR store: http://www.amazon.fr/shops/AVEAJYX3AHG8Q
Amazon ES store: http://www.amazon.es/shops/AVEAJYX3AHG8Q

^{*} About Smraza:

^{*} We are a leading manufacturer of electronic components for Arduino and Raspberry Pi.

^{*} Official website: http://www.smraza.com/

^{*} We have a professional engineering team dedicated to providing tutorials and support to help you get started.

^{*} If you have any technical questions, please feel free to contact our support staff via email at support@smraza.com

^{*} We truly hope you enjoy the product, for more great products please visit our