


SPI configuration

It can be understood from the data manual that SSD20X has 2 SPI interfaces, one has been used for SPI Flash, so there is only one SPI interface for developers.

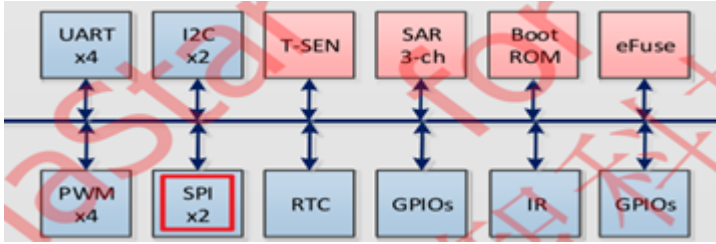

If you need to open the SPI interface, you need to change the status in DTS to ok:

```
#vi infinity2m.dtsi
```

```
296 spi_nandflash {
297     compatible = "mx-spinand";
298     clocks = <CLK_hdma>;
299     status = "ok";
300 };
301
302 spi: spi {
303     compatible = "star_spi";
304     io_phy_addr = <0x1000000>;
305     banks = <0x1110>, <0x1111>, <0x1030>, <0x1010>, <0x1000>;
306     clocks = <CLK_msmpi0>;
307     interrupts = <GIC_SPI INT_IRQ_MSPI_0 IRQ_TYPE_LEVEL_HIGH>;
308     /*
309     * padmux:
310     * mode=1: PAD_PM_SD_CMD, PAD_SD_D1, PAD_SD_D0, PAD_SD_CLR, PAD_SD_CMD
311     * mode=2: PAD_TTL16, PAD_TTL17, PAD_TTL18, PAD_TTL19
312     * mode=3: PAD_GPIO4, PAD_GPIO5, PAD_GPIO6, PAD_GPIO7
313     * mode=4: PAD_FUART_RX, PAD_FUART_TX, PAD_FUART_CTS, PAD_FUART_RTS
314     * mode=5: PAD_GPIO8, PAD_GPIO9, PAD_GPIO10, PAD_GPIO11
315     * mode=6: PAD_GPIO0, PAD_GPIO1, PAD_GPIO2, PAD_GPIO3
316     */
317     dma = <1>;
318     spi0 mode = <0>;
319     status = "ok";
320 };
321
322 spi0: spi0 {
323     compatible = "stardev";
324     status = "ok";
325 };
```

Then configure the corresponding pin as SPI_MODE:

```
#vi infinity2m-ssc011a-s01a-padmux-display.dtsi
```

```
90 //PAD_PM_SPI_CS >, // default not-GPIO
91 //PAD_PM_SPI_CE >, // default not-GPIO
92 //PAD_PM_SPI_D1 >, // default not-GPIO
93 //PAD_PM_SPI_D0 >, // default not-GPIO
94 //PAD_PM_SPI_WFS >, // default not-GPIO
95 //PAD_PM_SPI_RLD >, // default not-GPIO
```

Here, since SPI_MODE has been set by default, it is only necessary to ensure that it is not configured for other functions.

Finally load the MSPI driver:

```
#cd kernel && ARCH=arm make menuconfig
```

```
< > SSTAR_PWM
<*> SPI NAND
    READ (nand-qual-read) --->
    WRITE (nand-qual-write) --->
<*> MS SPI driver
< > MMC driver
<*> SStar SD/MMC Card Interface Support
<*> EMAC
```

文档更新时间: 2020-10-24 20:02 作者: admin

