

Programmer ITS401

Programmer ITS401, programming, java, c language, python, php, android (/)

[Home/ \(/\)](#) [Contact Us/](#) [Copyright Statement/ \(/copyright\)](#) [Privacy Policy \(/privacy-policy\)](#)

SSD202 uboot, kenel programming and preliminary learning of the system, please forgive me for the inadequacy_North *BoF*'s blog - Programmer ITS401

tags: [linux \(/searchArticle?qc=linux&page=1\)](#) [kernel \(/searchArticle?qc=内核&page=1\)](#) [windows \(/searchArticle?qc=windows&page=1\)](#) [ssd201/202 \(/searchArticle?qc=ssd201/202&page=1\)](#)

SSD202 uboot, kenel programming and system flashing

ISP burning When the flash has not burned the system or the system is damaged, you can first burn the boot through the ISP, and then burn the complete system through eth, usb or sd. Download and extract tools/ssd201_ISP_5.0.15.rar and serial debugging assistant to windows and unzip it;

serial port debugging assistant download address:

<https://the.earth.li/~sgtatham/putty/0.74/w64/putty-64bit-0.74-installer.msi>

(<https://the.earth.li/~sgtatham/putty/0.74/w64/putty-64bit-0.74-installer.msi>)

development board and **USB_debug** tool purchase link: [https:// item.taobao.com/item.htm?id=631665290641](https://item.taobao.com/item.htm?id=631665290641) (<https://item.taobao.com/item.htm?id=631665290641>)

The tools you need can go to my resources to download for free!!! Free!!! Free!!!

Enter the decompression directory


and open the serial port assistant, if the board has not been burned before The system can be powered on directly, otherwise enter uboot and execute debug

you need to double-click the USB_debug tool to




The following bin file is the boot folder under the images compiled in the previous article.


Copy the entire images to Windows

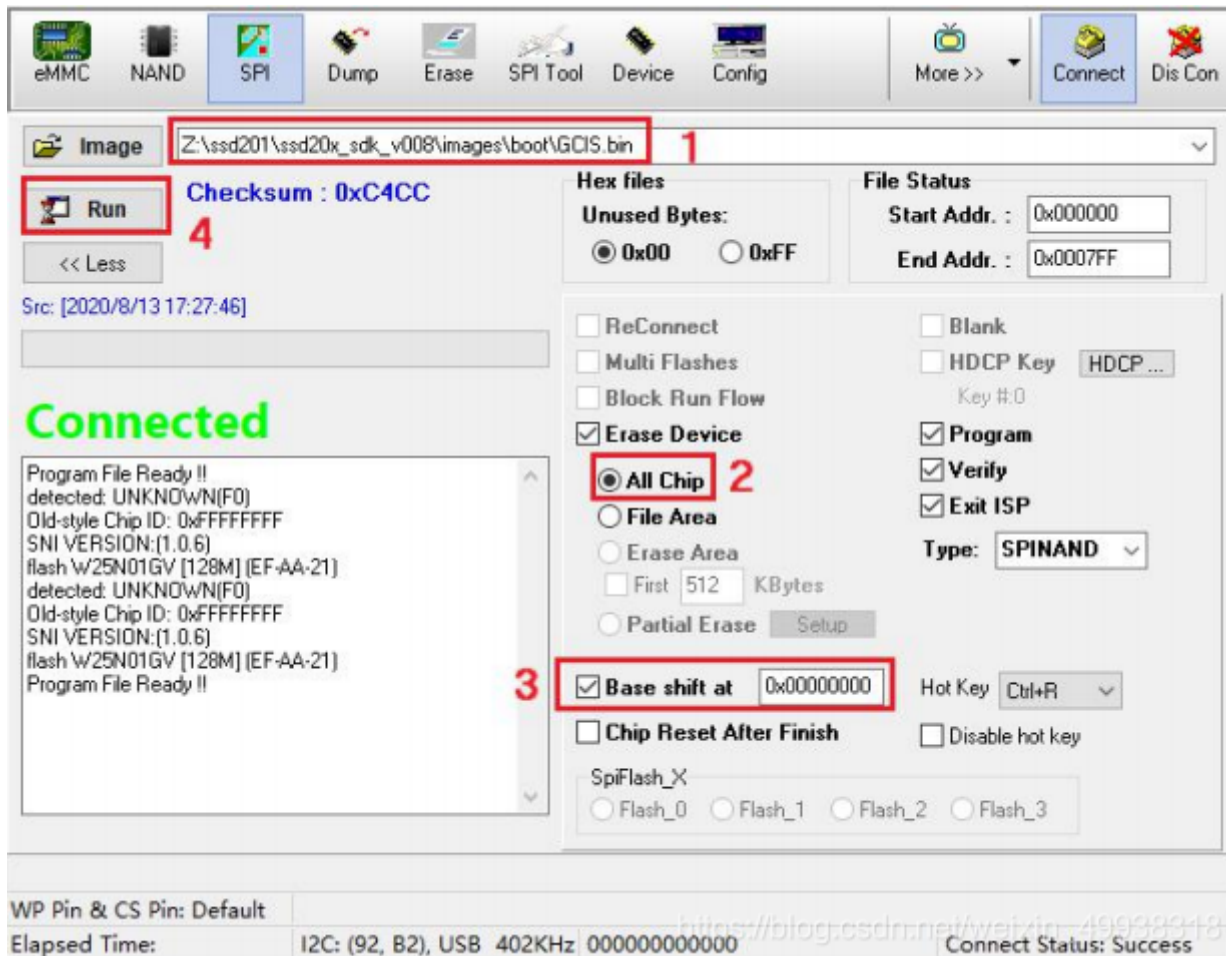


Burn GCIS.bin

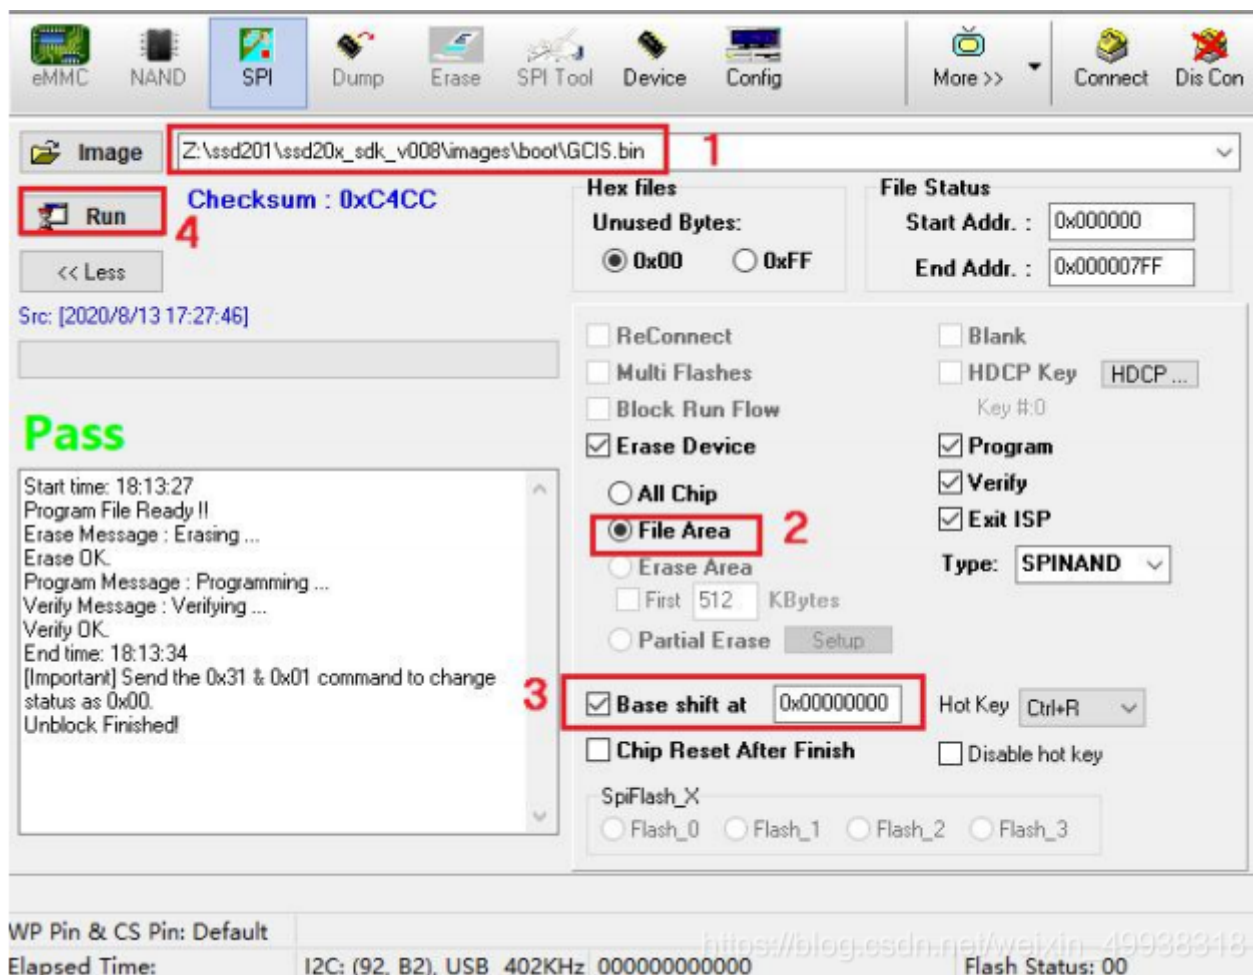


Burn IPL.bin

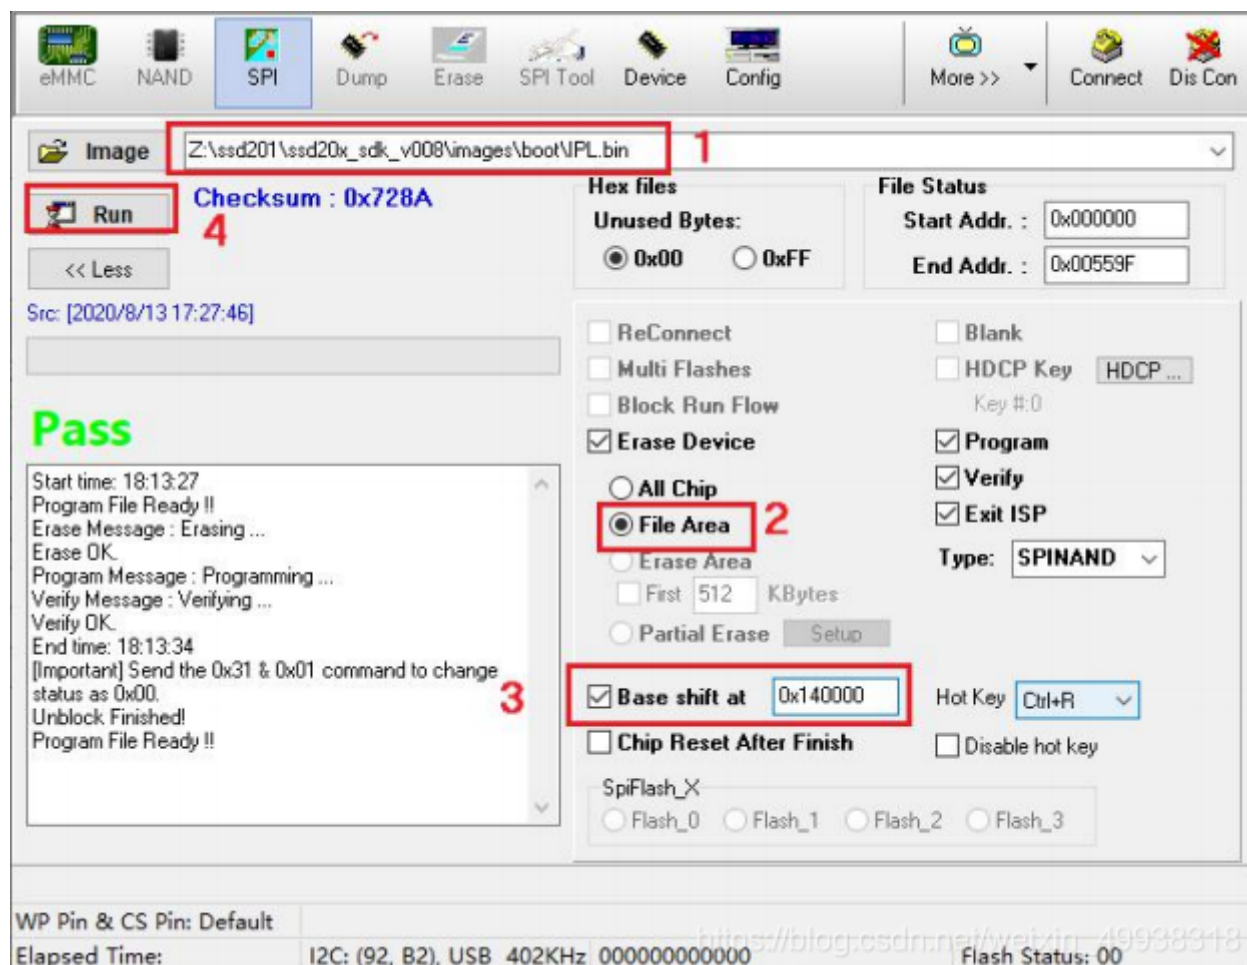

Burn IPL_CUST.bin

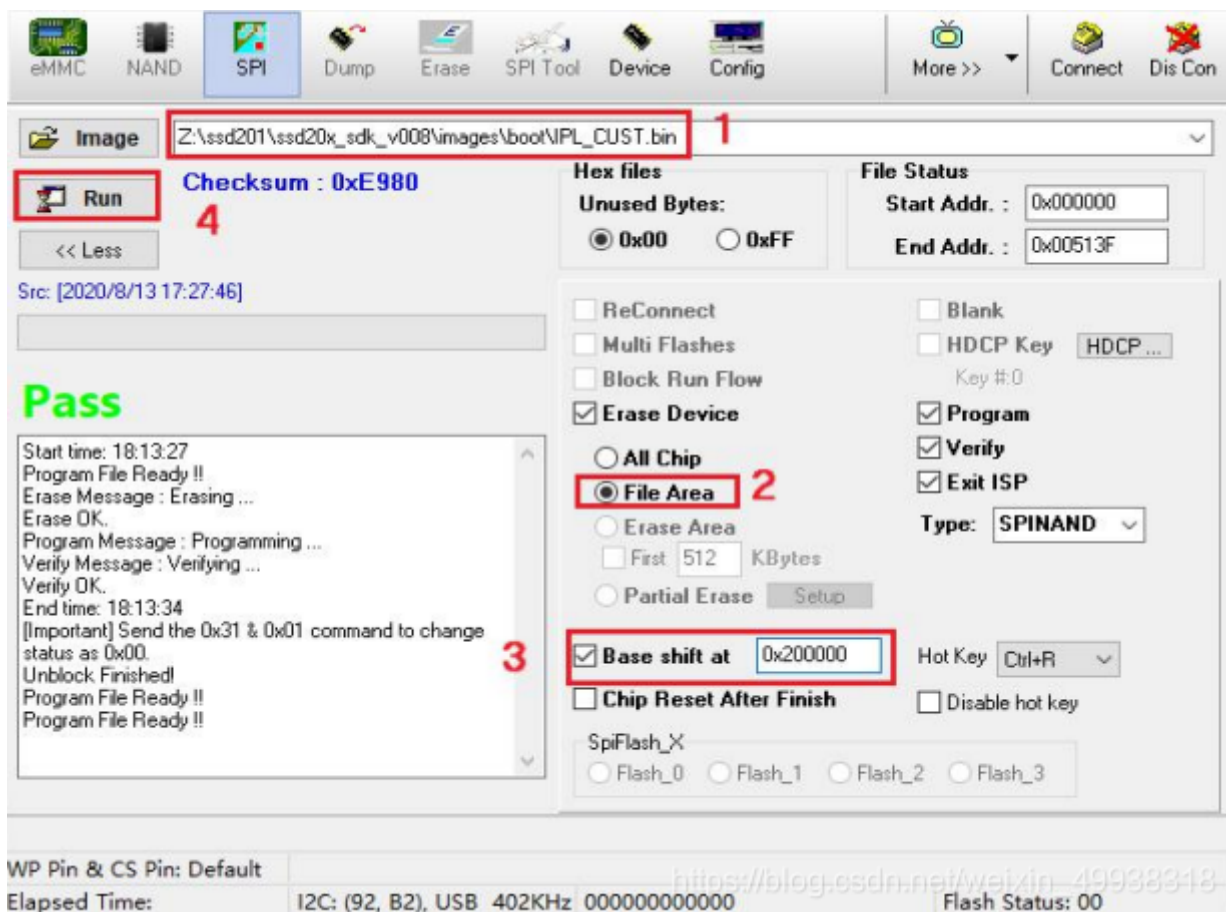

Burn u-boot_spinand.xz.img.bin

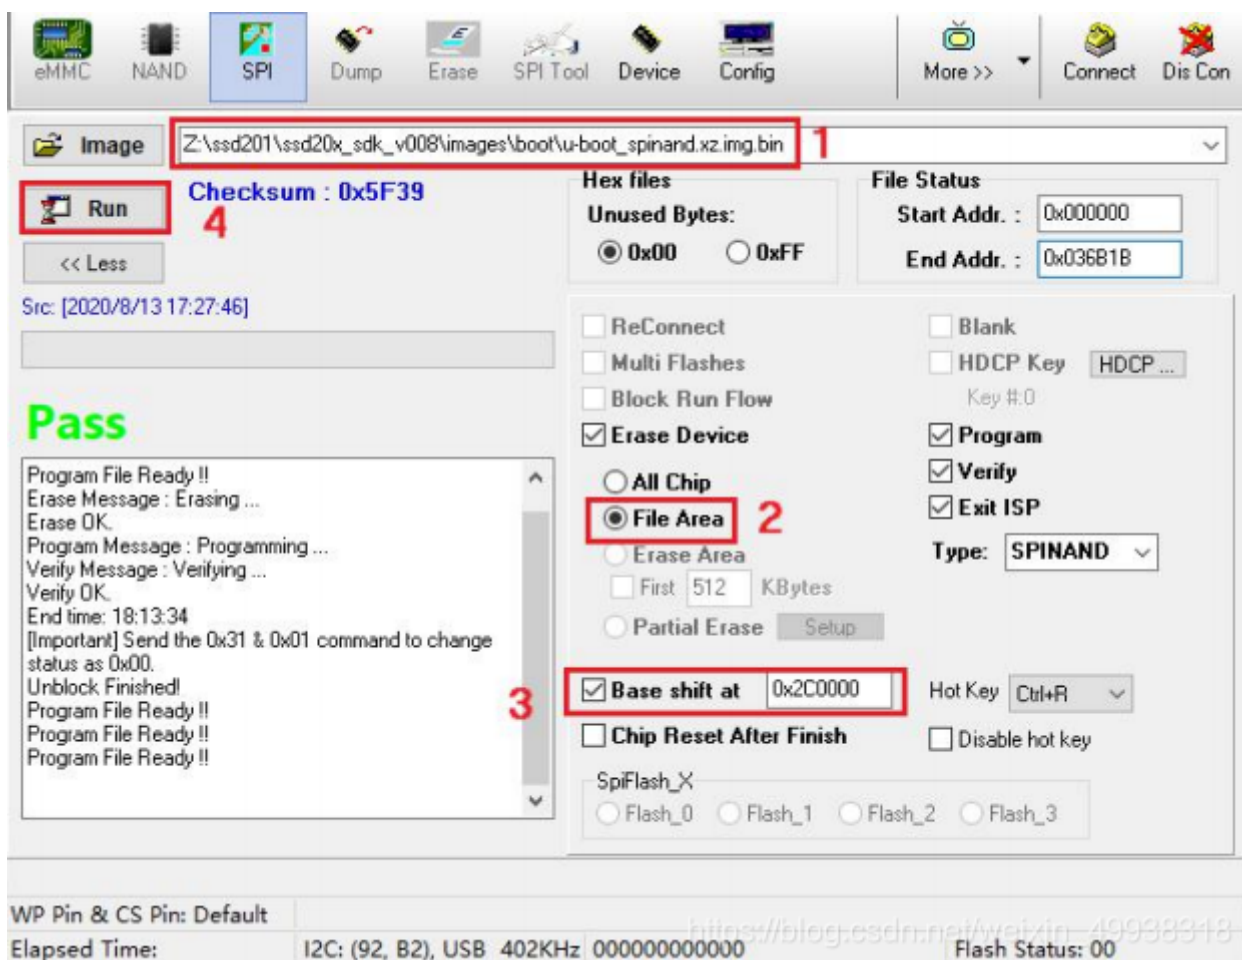

After verifying that the burning is completed, close the ISP burning software, open the serial debugging software, and power on the board again, and observe whether there is any printing information:

```
I2C:   ready
DRAM:
WARNING: Caches not enabled
SPINAND: _MDrv_SPINAND_GET_INFO: Found SPINAND INFO
(0xEF) (0xAA) (0x21)
SPINAND: board_nand_init: CIS doesn't contain part info
128 MiB
MMC:   MStar SD/MMC: 0
SPINAND: MDrv_SPINAND_GetPartOffset: UBOOT_PBA==0 and no PNI: 0 0 0
SPINAND: MDrv_SPINAND_GetPartOffset: use offset 1E0000
*** Warning - bad CRC, using default environment

In:    serial
Out:   serial
Err:   serial
Net:   MAC Address 00:30:1B:BA:02:DB
Auto-Negotiation...
AN failLink Status Speed:10 Full-duplex:0
Status Error!
sstar_emac
Warning: sstar_emac using MAC address from net device

SigmaStar # █ https://blog.csdn.net/weixin\_49938318
```

ETH burn


ETH burning is done under uboot, so you need to make sure that uboot has been burned.

Download and decompress tools/Tftpd32.rar and enter the decompression directory, double-click to run tftpd32.exe to open the tftp server:

Turn off Windows Firewall! ! !

Otherwise there will be a connection failure

1. The path to store the images folder by yourself
2. The IP address of the computer (it can also be set as a fixed IP at 192.168.1.xxx)

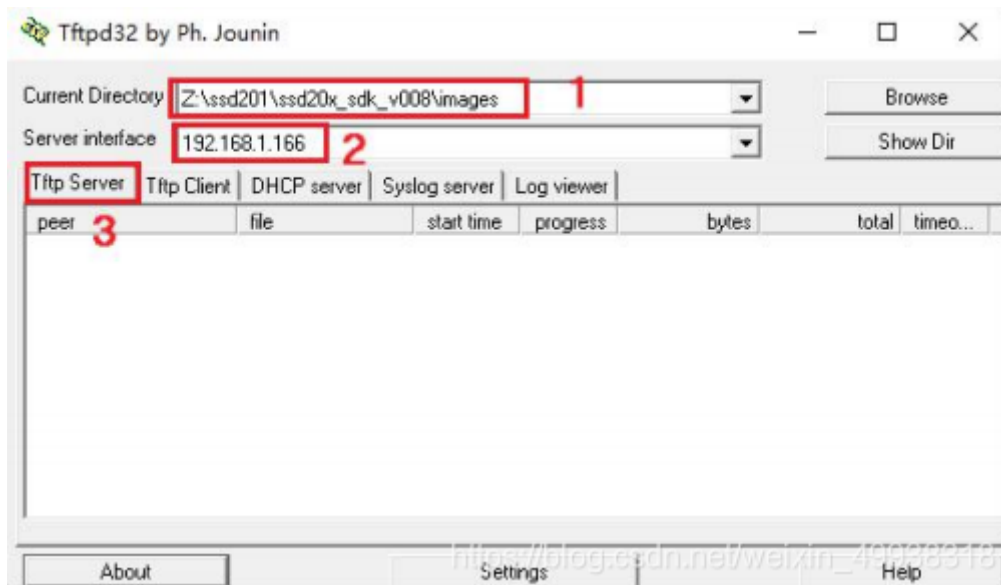

The board enters uboot, and sets the two environment variables of ipaddr and serverip, and ensures that the board and the computer Able to communicate:

set the board IP setenv ipaddr 192.168.1.112

set the server IP setenv serverip 192.168.1.166 (corresponding to 2 above)

to ensure that it is in a network segment

```
# setenv ipaddr 192.168.1.112
# setenv serverip 192.168.1.166
# saveenv
```

```
SigmaStar # setenv ipaddr 192.168.1.112
SigmaStar # setenv serverip 192.168.1.166
SigmaStar # saveenv
Saving Environment to NAND...
Erasing NAND...
Erasing at 0x440000 -- 100% complete.
Writing to NAND... OK
SigmaStar # ping 192.168.1.166
Using sstar_emac device
host 192.168.1.166 is alive
SigmaStar #
```

https://blog.csdn.net/weixin_49938318

Execute estar to start updating the system:

```
# estar
```

```

SigmaStar # estar
Using sstar_emac device
TFTP from server 192.168.1.166; our IP address is 192.168.1.112
Filename 'auto_update.txt'.
Load address: 0x23aae6e0
Loading: #
        3.9 KiB/s
done
Bytes transferred = 449 (1c1 hex)

>> estar scripts/[[cis.es
Using sstar_emac device
TFTP from server 192.168.1.166; our IP address is 192.168.1.112
Filename 'scripts/[[cis.es'.
Load address: 0x23aaf6e8
Loading: #
        2 KiB/s
done
Bytes transferred = 208 (d0 hex)

>> tftp 0x21000000 boot/SPINANDINFO.sni
Using sstar_emac device
TFTP from server 192.168.1.166; our IP address is 192.168.1.112

```

https://blog.csdn.net/weixin_49938318

In addition, there are two burning methods: USB burning and SD card burning.

Since I only use ETH burning, the other two methods will not be described here

. For those who need it, please refer to: <https://blog.csdn.net/ami82/article/details/110958233>

(<https://blog.csdn.net/ami82/article/details/110958233>)

Next Ubuntu installation dependencies

Brush system for boards

If you don't want trouble, you can go directly to GitHub to get the image file, you can directly brush the system without the intermediate process:

<https://github.com/wireless-tag-com/8ms-sstar/tree/main/images>

(<https://github.com/wireless-tag-com/8ms-sstar/tree/main/images>)

Then skip the environment construction, and Compilation starts from the following **brush** system !!!

Let's build an environment for yourself and compile

ubuntu 16.04.3 64-bit system


```
# sudo apt-get install subversion build-essential libncurses5-dev zlib1g-dev gawk git ccach  
e \gettext libssl-dev xsltproc libxml-parser-perl \gengetopt default-jre-headless ocaml-nox  
sharutils textinfo  
# sudo dpkg --add-architecture i386  
# sudo apt-get update  
# sudo apt-get install zlib1g:i386 libstdc++6:i386 libc6:i386 libc6-dev-i386
```

download code

```
# git clone https://github.com.cnpmjs.org/wireless-tag-com/openwrt-ssd20x.git
```

Install toolchain

Download toolchain link: <https://pan.baidu.com/s/1SUK1a-drbWo1tkHQzCgchg>

(<https://pan.baidu.com/s/1SUK1a-drbWo1tkHQzCgchg>) Extraction code: 1o3d

unzip toolchain

```
# sudo tar wt-gcc-arm-8.2-2018.08-x86_64-arm-linux-gnueabihf.tag.gz -xvf -C /opt/
```

Set the environment variables, modify the ~/.profile file (`vim ~/.profile`), and add the following line to the end of the file

```
# PATH="/opt/gcc-arm-8.2-2018.08-x86_64-arm-linux-gnueabihf/bin:$PATH"
```

Enabling environment variables manually

```
# source ~/.profile
```

Test cross toolchain

```
# arm-linux-gnueabihf-gcc --version
```

Compile

Generate model configuration file

```
# cd 18.06  
# ./scripts/feeds update -a  
# ./scripts/feeds install -a -f  
  
# make WT2022_wt
```

Model name description WT2022 SSD202+SPI NAND WT2011 SSD201+SPI
NAND

Compile

make V=s -j8 The

compiled product is located in bin/target/sstar/ssd20x/WT2022

File Name	Description
WT2022-sysupgrade.bin	Upgrade file
WT2022-ulmage.xz	Kernel file
WT2022-root-ubi.img	Root file system (SPI NAND)

Brush system

If the system is the original linux system, please use the following method to flash the system to an openwrt system

, press the Enter button, enter uboot, and execute the following command (SSD202_openwrt.bin is located in the images directory, please copy it to the tftp32 server directory, set The computer IP is 192.168.1.88)

need to use tools: serial debugging tool putty, ftpd32.exe, network cable, usb_debug tool

```
# setenv ipaddr 192.168.1.11
# setenv serverip 192.168.1.88
# tftp 0x21000000 SSD202_openwrt.bin
# nand erase.chip
# nand write.e 0x21000000 0x00 ${filesize}
# reset
```

Upgrade (choose whether to upgrade or not and how to upgrade)

1. Enter the system background through the serial port or telnet in the system, and execute the following command:

```
# cd /tmp
# tftp -g 192.168.1.88 -r WT2022-sysupgrade.bin
# sysupgrade WT2022-sysupgrade.bin
```

After the upgrade is complete, the system will automatically restart

2. Upgrade through the serial port and network port under uboot (press the enter button during the power-on phase), and execute the following command:

set the environment variable and start the network

```
# setenv serverip 192.168.1.88
# setenv ipaddr 192.168.1.11
# setenv ethinitauto 1
# saveenv
# reset
```

After rebooting, press Enter to re-enter uboot

3. SPI NAND

upgrade

```
# tftp 0x21000000 WT2022-root-ubi.img
# nand erase.part ubi
# nand write.e 0x21000000 ubi ${filesize}
```

Reference document: <https://blog.csdn.net/ami82/article/details/110958233>

(<https://blog.csdn.net/ami82/article/details/110958233>)

(<https://creativecommons.org/licenses/by-sa/4.0/>) Copyright statement: This article is an original article by the blogger and follows the CC 4.0 BY-SA (<https://creativecommons.org/licenses/by-sa/4.0/>) copyright agreement. Please attach the original source link and this statement for reprinting.

Link to this article: https://blog.csdn.net/weixin_49938318/article/details/113344223

(https://blog.csdn.net/weixin_49938318/article/details/113344223)

The original author deletes the posts (/copyright) for false content, deletes the posts (/copyright) , advertisements or spam articles, and complains (/copyright)

Intelligent Recommendation

[Linux] [Kernel] A simple example of a kernel module - vickytong1018's blog - Programmer ITS401 (/article/vickytong1018/4845972)

kernel kernel module cross compilation

2021 Tea Master (Intermediate) Looking for Analysis and Tea Master (Intermediate) Exam Summary_weixin_47565892's blog - Programmer ITS401 (/article/weixin_47565892/4845965)

Source of the question bank: Yidiantong official account of the safety production simulation test. The tea art teacher (intermediate) finds the reference answer for analysis and the tea art teacher (intermediate) examination question analysis. The summary of the students who have passed is relatively effective in

helping the tea master (intermediate) exam to summarize the students successfully pass the exam. 1. [True or False] During the tea evaluation process, different tea types should have different dry tea colors, different soup color standards and different leaf base colors. (√) 2. [True or False] The shrub-type tea plant is relatively short, with dense branches near the ground, or from the root neck. (√) 3. [True or False] When turning to pour water, the right hand must be turned counterclockwise, and the left hand must be turned clockwise...

Review and review of HTML basics (basic tags, a simple login verification)_Bruce_suu's blog - Programmer ITS401 (/article/A_student_sz/4845964)

HTML basic tag form read-only tag: readonly Disabled tag: disabled Hidden tag: hidden form primary verification*** Common method **placeholder[The external link image transfer failed, the origin site may have an anti-chain mechanism, it is recommended to save the image directly Upload(img-SYzFaeXB-1590596852886)(C:\Users\Xiaosu\AppData\Roaming\Typora\typora-user-images\image-20200528000703385.png)][External link image transfer failed, the source site may have anti-leech mechanism, build

Python extracts edges from images and uses canny operator (/article/qq_25439417/4845963)

```
import tensorflow as tfimport numpy as npimport skimage as siimport tensorflow.examples.tutorials.mnist.input_data as input_dataimport matplotlib.pyplot as pltfrom skimage import data,filters,fe...
```

Centos 6.5 compiles php mysql5.6_Lamp environment to build Linux CentOS6.5 to compile and install mysql5.6 specific details - Programmer Sought (/article/weixin_36197248/4845960)

This article mainly introduces the detailed explanation of Lamp environment to build Linux CentOS6.5, compile and install mysql5.6, which has certain reference value. Interested friends can refer to the preparation before installation to check whether mysql has been installed on centos through the rpm command, and then Uninstall the existing mysql version [root@localhost src]# rpm -qa | grep mysqlmysql-libs-5.1.66-2.el6_3.i686[root@loca...

[Practice and problem solving 34] VSCODE appears ssh "permissions are too open" error, the problem of error reporting that the link to the remote server is not easy to use is solved - Programmer Sought (/article/qq_41554005/4845957)

1、问题描述报错如下ssh "permissions are too open" error2、出现问题的原因It is recommended that your private key files are NOT accessible by others.This private key will be ignored.vscode或者其他的使用ssh的软件查看ssh配置文件的时候发现这个ssh配置文件的权限太过于开放，每个用户都是可读可写的，然后报错3、解决方法3.1 linux上

随便推点

ajax catch,jQuery：捕获ajax异常_知秋的一叶的博客-程序员ITS401 (/article/weixin_33021323/119436059)

许多失败的jquery-ajax请求正以错误的方式污染我的控制台。查看产生这些控制台错误的代码(jquery 1.7.2，第8240行)// Do send the request// This may raise an exception which is actually// handled in jQuery.ajax (so no try/catch here)xhr.send((s....

《Python机器学习算法》的写作历程_zhiyong_will的博客-程序员ITS401 (/article/google19890102/52690119)

最近有两个多月的时间没来更新博客，是一直在忙着一件事——将博客中的一些文章整理成书。一开始写博客，给自己的文章建了一个响亮的标题《简单易学的机器学习算法》，但是发现写着写着，每一个算法也变得没那么简单易学，因此想对这些零散的知识点做一次全面的整理。最初是一年前有了这个念头，一直没有去实践，自己给自己找了很多的借口，今年8月份，这个念头又一次那么强烈的袭上心头，没有太多思考，说干就干。。。决定了，但是

202Linux系统 解压失败，怎么解决_Big-Winda的博客-程序员ITS401_linux下解压失败 (/article/Winda_shi/111857653)

在Linux系统里面用tar -zxvf jdk-15.0.1_linux-x64_bin.tar.gz解压文件的时候，解压不成功出现下列这种：tar: jdk-15.0.1: Cannot mkdir: Permission deniedtar: jdk-15.0.1/legal/java.xml/bcel.md: Cannot open: No such file or directoryjdk-15.0.1/legal/java.xml/dom.md: tar: jdk-15.0.1: Cann

鸿蒙Hi3861开发板配置、编译与烧录 < 五 > _深自缄默。。的博客-程序员ITS401_hi3861开发板 (/article/w_hn934524/124649908)

前言文章内容个人实操记录，由于各版本不同，仅供参考。文章目录前言5.使用AT命令测试WiFi模组5.1安装xcom v2.2串口调试软件5.2连接Hi3861核心板5.3 AT命令测试WiFi模组文章总览5.使用AT命令测试WiFi模组5.1安装xcom v2.2串口调试软件参考地址：xcom v2.25.2连接Hi3861核心板串口选择：COM4<选择前面所确定的端口>波率：115200打开串口，并按下开发板上的重启按钮 如图即可5.3 AT命令测试W

解决Linux 负载过高问题过程记录_gu_study的博客-程序员ITS401_linux负载高 (/article/gu_study/81942939)

解决问题的思路1.top命令查看该机器的负载状况2.cd /proc/pid 查看对应高占用程序的位置3.进入对应程序中查看日志，根据CPU和内存这两个因素分析4.ps -ajxf 查看进程及其之下的线程，通过stat查看是否存在D僵尸进程1.什么是负载过高1.1load Average1：load Average 1.1：什么是Loa...

base64转为pcap的方法_rongyongfeikai2的博客-程序员ITS401 (/article/rongyongfeikai2/103936981)

```
#coding:utf-8import base64import osimport binasciidef hex2oct(data): if data == 'a': return 10 elif data == 'b': return 11 elif data == 'c': return 12 eli...
```

recommended article

If you don't know these 10 classic software test questions, you will lose your job! _its666's Blog - Programmer ITS401 (/article/its666/112465956)

Requirements for the approval of chess and card games - the reporting unit should be an approved online game business unit_Dayun Network's Blog-Programmer ITS401 (/article/weixin_45470503/100156791)

Qt Style Sheets (8): Using Style Sheets to Set the Appearance of Tab Components (/article/hyongilfmmm/83190358)

Docker data volume principle_whatday's blog-programmer ITS401_docker data volume principle (/article/whatday/105770143)

After installing some software, the IE homepage was hijacked by https://www.hao123.com/?tn=93453552_hao_pg_weixin_30532837's blog - Programmer ITS401 (/article/weixin_30532837/95067918)

OSPF_zyp139's Blog - Programmer ITS401 (/article/zyp139/86591228)

github RPC failed; curl 56 OpenSSL SSL_read: SSL_ERROR_SYSCALL, errno 10054_I-T Xiao's blog - Programmer ITS401 (/article/hahahhahahahha123456/85380593)

How to use Java to electronically sign PDF files (3) to generate Pdf templates - Programmer Sought (/article/qq_30336433/83818944)

popular articles

Oracle Systimestamp function_304's blog - Programmer ITS401_systimestamp (/article/BOBO12082119/6237165)

[Adjustment] Liaoning University of Engineering and Technology accepts transfer students majoring in mechanics, water conservancy, civil engineering, mining, machinery, electrical, computer, etc..._Computer and Software Postgraduate Blog - Programmer ITS401 (/article/csseky/114529128)

manjaro (arch linux) install EXBOSS and needle_ this person is lazy, has not set a nickname yet... Blog - Programmer ITS401 (/article/weixin_39417324/115371498)

System.arraycopy array copy (/article/hhj13978064496/105748357)

Windows system Mysql database backup (/article/yexiaomodemo/104015893)

Android clicks the picture to return, the example code of the light and dark click effect of the Android development return key - Teak i's blog - Programmer ITS401 (/article/weixin_35433448/117541647)

The first book "How can I read a book fast?" 》_Octopus brother TuNan&Z's blog - Programmer ITS401 (/article/qq_43528451/115556089)

Want to prepare for the 2022 'Golden Three Silver Four' must-have software test interview questions are all here - Programmer Sought (/article/qq_60168783/122849233)

Related tags

linux (/searchArticle?qc=linux&page=1)

kernel (/searchArticle?qc=内核&page=1)

windows (/searchArticle?qc=windows&page=1)

ssd201/202 (/searchArticle?qc=ssd201/202&page=1)
