

A


B

C

D

E

F

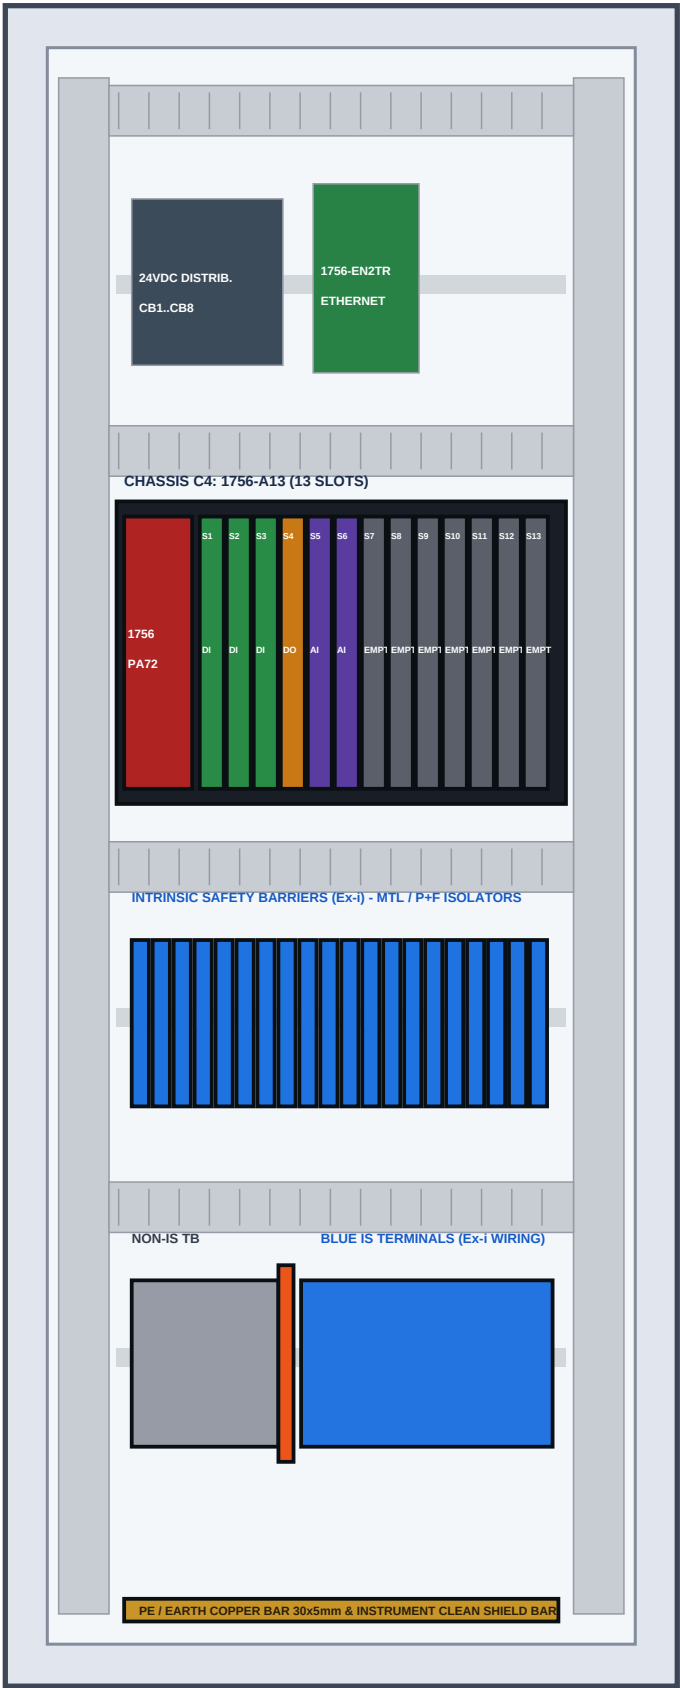

PANEL M4 - RACK C4 HARDWARE ALLOCATION & FIELD TERMINAL SCHEDULE							
Slot	Module Catalog	Description / Module Function	I/O Type	Channels	Terminal Strip	Connected Junction Boxes / Signals	Status
PS	1756-PA72	ControlLogix 85-265V AC Power Supply (72W @ 60C)	POWER	120/230VAC	Internal Rack	Chassis Backplane Power	ACTIVE (RED)
01	1756-IB32	32-Point 24VDC Sink/Source Digital Input	DI	32	C4S01-X1,X2	JB-606 & IS-JB-612 Ex-i DI	ACTIVE
02	1756-IB32	32-Point 24VDC Sink/Source Digital Input	DI	32	C4S02-X1,X2	IS-JB-612 & JB-612 Field DI	ACTIVE (IS)
03	1756-IB32	32-Point 24VDC Sink/Source Digital Input	DI	32	C4S03-X1,X2	IS-JB-608 & JB-608 Ex-i DI	ACTIVE (IS)
04	1756-OB32	32-Point 24VDC Source Digital Output	DO	32	C4S04-X1,X2	JB-606, JB-612, IS-JB-608 DO	ACTIVE
05	1756-IF16	16-Point High Resolution Analog Input	AI	16	C4S05-X1	JB-606 & IS-JB-612 Ex-i AI	ACTIVE (IS)
06	1756-IF16	16-Point High Resolution Analog Input	AI	16	C4S06-X1	JB-612, IS-JB-608, JB-608 AI	ACTIVE (IS)
07	1756-N2	Slot Filler Plate (Empty Slot)	EMPTY	-	-	Chassis Spare Expansion Slot	SPARE (AVAILABLE)
08	1756-N2	Slot Filler Plate (Empty Slot)	EMPTY	-	-	Chassis Spare Expansion Slot	SPARE (AVAILABLE)
09	1756-N2	Slot Filler Plate (Empty Slot)	EMPTY	-	-	Chassis Spare Expansion Slot	SPARE (AVAILABLE)
10	1756-N2	Slot Filler Plate (Empty Slot)	EMPTY	-	-	Chassis Spare Expansion Slot	SPARE (AVAILABLE)
11	1756-N2	Slot Filler Plate (Empty Slot)	EMPTY	-	-	Chassis Spare Expansion Slot	SPARE (AVAILABLE)
12	1756-N2	Slot Filler Plate (Empty Slot)	EMPTY	-	-	Chassis Spare Expansion Slot	SPARE (AVAILABLE)
13	1756-N2	Slot Filler Plate (Empty Slot)	EMPTY	-	-	Chassis Spare Expansion Slot	SPARE (AVAILABLE)

PANEL M4 INSTALLATION SPECIFICATIONS & FIELD CONNECTIONS	
- ENCLOSURE SIZE: 800 mm (W) x 2000 mm (H) x 800 mm (D) + 100 mm plinth base. Single door. - FIELD DESTINATIONS: Connects to field junction boxes: JB-606, IS-JB-612, JB-612, IS-JB-608, JB-608. - POWER INFEEED: Dual redundant 24VDC feeder lines from Panel M1 distribution bus. - NETWORK ARCHITECTURE: Dual-ring EtherNet/IP Device Level Ring (DLR) connection. - CABLING RULES: All analog inputs wired with individually shielded twisted pairs (LiY-CY TP). - SHIELD GROUNDING: Cable screens grounded at panel entry copper earth bar only (single-point earthing).	

INGREDION (THAILAND) CO., LTD. KALASIN STARCH PLANT - JET COOKER PROJECT				AEC INDUSTRIAL ENGINEERING SYSTEMS INTEGRATION & AUTOMATION	
PANEL M4 - SUBPANEL MOUNTING PLAN & COMPONENT SCHEDULE MAIN CONTROL CABINET CA1 / MOTOR CONTROL PANELS M1...M4				DOC NO: CA1-DWG-PL-006 REV: 3.6	DATE: 2026-09-07
SCALE: 1:8 PROJECT: JET COOKER	DRAWN: AEC-ENG CHECKED: LEAD-PE		STATUS: APPROVED		SHEET: 6 / 7

A

B

C

D

E

F