




Flash manual


! **Notes:** If VIA can't recognize your PCB, please load the json file to make VIA recognize. (check step 7 of #1 Flash) <https://usevia.app/#/design>

#1 Flash with VIA firmware:

- 1- Download the latest **VIA firmware and Json file** from [the link below](#), unzip it.
- 2- Put your PCB into bootloader mode (hold down ESC key while plugging in a USB data cable). Tip: You can directly press **LShift+RShift+LCtrl+B** at the same time to enter bootloader mode.
- 3- Caps light starts flashing, and the computer pops up a removable disk named Unicore-F1.
- 4- Drag/copy the **.uf2** you just downloaded to the new disk directly.
- 5- The flash drive will eject automatically.
- 6- Open **VIA** on <https://usevia.app/#/>. In **VIA Settings** tab, enable **Design** tab and select **Render Mode** as **3D**

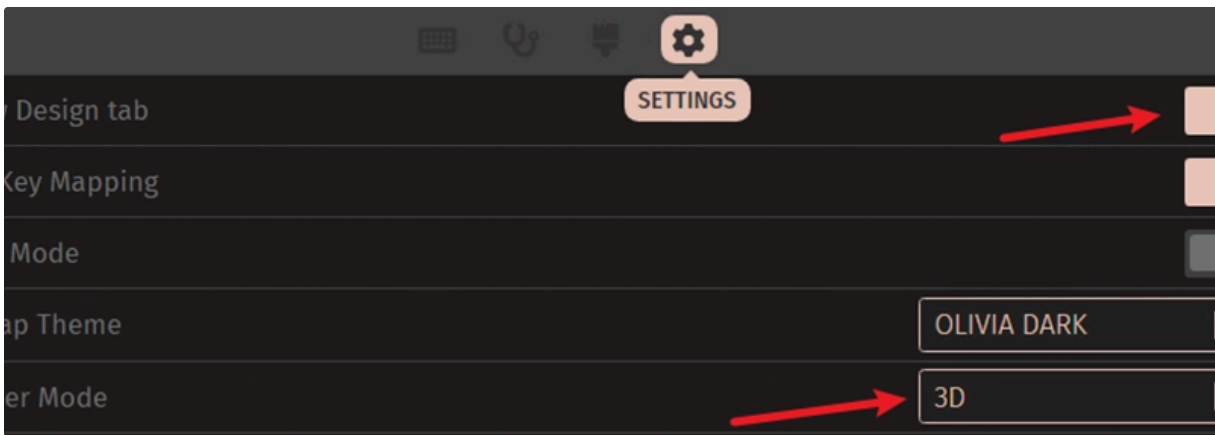

7- In the **Design** tab, enable **Use v2 definitions** first, then load the **json** file

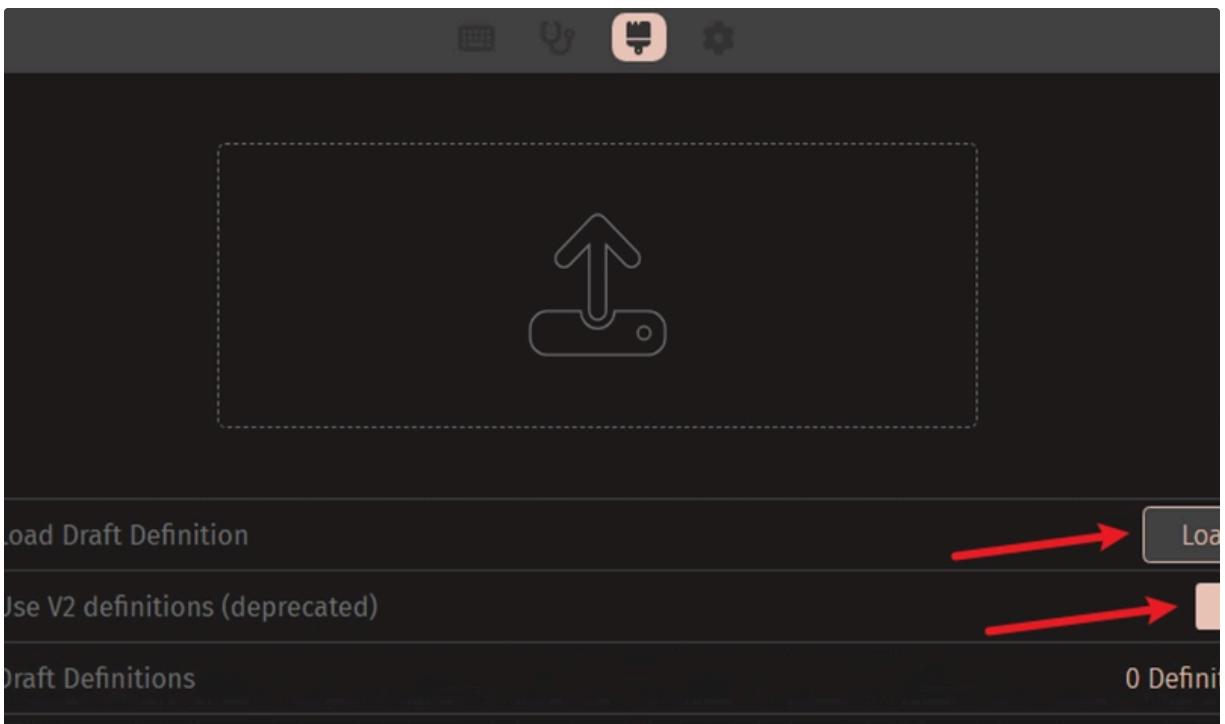

8- At last, authorize your device in **Configure** tab




Download the latest **VIA firmware/Json file**: <https://ydkb.io/help/?www#/other-firmware/vial> (select KBD8x Mk3)

Fans Keyboard	VIA / Vial Firmware	VIA JSON	Supplementary Note
8x Mk3	2023-09-19_DN9J	JSON	

*(Optional) Download **VIA Configurator**: <https://caniusevia.com/>
<https://github.com/the-via/releases/releases>

#2 Flash with TMK firmware: (Follow this method, VIA will not recognize your device)

1- Download the TMK firmware from <https://ydkb.io/>, in the upper right corner of the page, select **DL .uf2** file

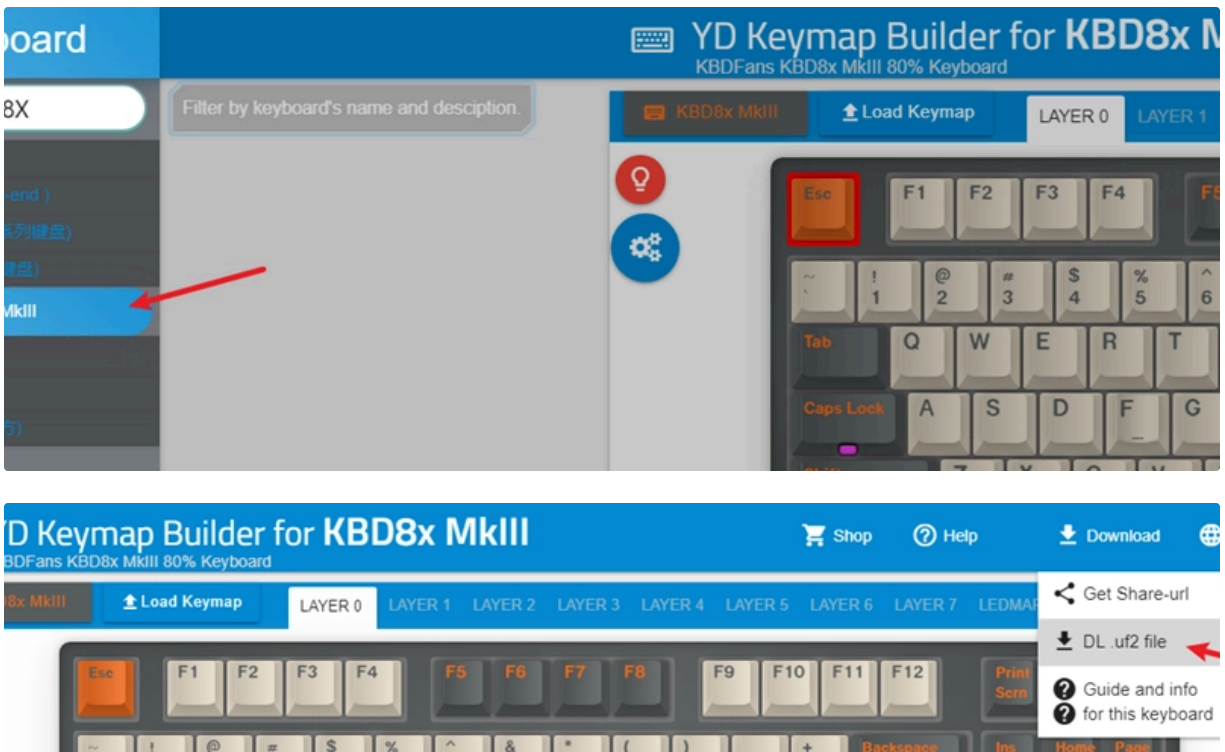

2- Put your board into bootloader mode (hold down ESC key while plugging in a USB data cable). Tip: You can directly press **LShift+RShift+LCtrl+B** at the same time to enter bootloader mode.

3- Caps light starts flashing, and the computer pops up a removable disk named Unicore-F1.

4- Drag/copy the **.uf2** you just downloaded to the new disk directly.