


MAIN PCB | FABRICATION DRAWING

HM_Nightfall-mini-2e_v1 / 2026-09-21

4 x D1.60 NON-PLATED MOUNTING HOLES


Units: mm | Nominal dimensions | Do not scale | All CAM files share the same origin

Full profile - viewed from top

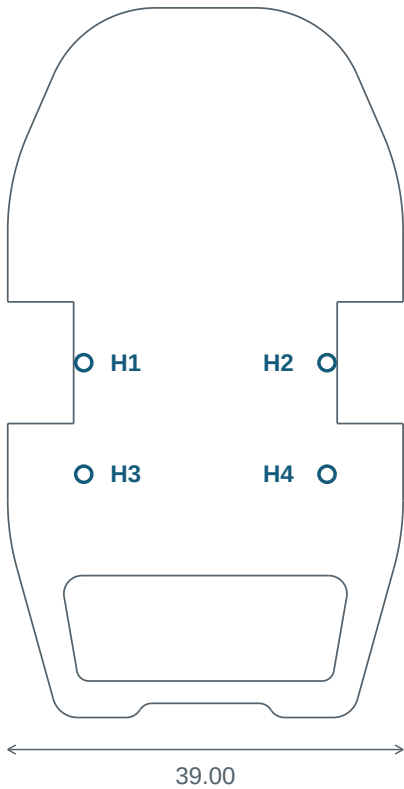

Overall nominal size: 39.00 x 70.00

Upper holes - edge detail

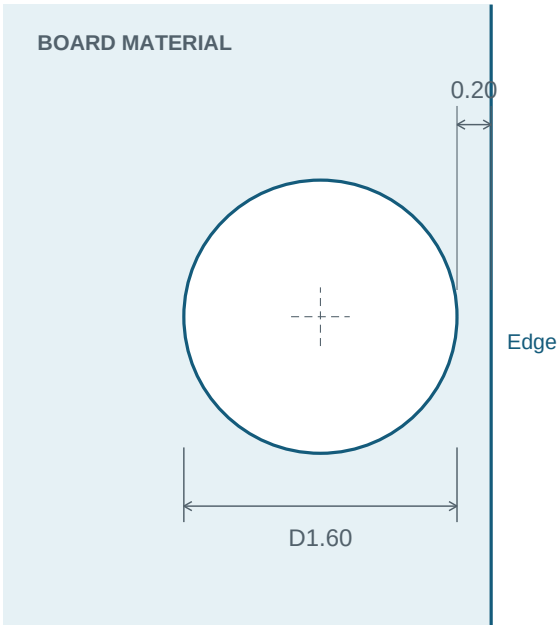

0.20 mm web applies to H1 and H2.
Preserve hole centers and final profile.

Mounting centers - CAM coordinates (Gerber Y is negative)

Hole	Position	X	Y	Diameter
H1	Upper left	136.501098	-105.003598	1.60 NP
H2	Upper right	160.501098	-105.003598	1.60 NP
H3	Lower left	136.503667	-116.003598	1.60 NP
H4	Lower right	160.501098	-116.003598	1.60 NP

Fabrication instructions

- Two copper layers, FR-4; nominal board thickness 1.60 mm from the source PCB.
- H1-H4 are NON-PLATED circular internal profiles in Edge.Cuts, not in the drill files.
Produce four finished D1.60 holes. Do not add plating or duplicate these features.
- Separate drills: 199 plated holes and two D0.90 non-plated switch mounting holes.
- Keep the 0.20 mm webs at H1/H2. Review routing support before manufacture.
- Use the included top legend; the bottom legend is empty. Do not mirror CAM layers.
- Bare PCB package only. Copper weight and finish are selected with the manufacturer.

Source DRC: 4 existing errors / 112 warnings / 0 unconnected. See FABRICATION_NOTES.txt.
Physical mounting strength and assembly fit have not been tested.