

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

产 品 承 认 书

客户（CUSTOMER）：纽曼

客户编号（MODEL NO.）:VP01/VP02

品种类（Mode）：GFF

产品编号（PART/NO）：FXT101041-NM-A1

版本号(Ver.): A1

供应商（VENDOR）：深圳市富鑫泰触控科技有限公司

地址（ADDRESS）：东莞市厚街镇厚沙路124号和兴家居装饰材料城
A1栋2楼

电话号码（MOBILE NUMBER）：严增杰：(0086)13682652425

制作	审核	核准
PREPARED BY	CHECKED BY	APPROVED BY
叶小艳	黄金英	

请客户仔细阅读规格书中的各项内容，当对规格书内各项内容表示认可时；
请在下面客户确认项中签字回传我司存档。

Please read the following specifications carefully. When all contents in this
specification are approved, please sign the following customer confirmation
and return it to our company for filing.

客户确认(Customer confirmed)

审 核 (Checked)	批 准 (Approved by)	确 认 人 (Confirmed by)

Table of content

目录

00. Specification Revision Record [规格变更记录].....	03
00. Dimension Drawing [尺寸图].....	04
01. Circumscription [范围].....	05
02. Features [特性].....	05
03. General Specification [规格总则].....	05
04. Environmental Characteristics [环境特性].....	05
05. Optical Characteristics [光学特性].....	05
06. Electrical Characteristics [电子特性].....	05
07. Durability [耐久性].....	05
08. Mechanical Characteristics [机械特性].....	06
09. Reliability [可靠性].....	07
10. Linearity [线性].....	08
11. Appearance Inspection [外观检查].....	09
12. Attention for Mounting Condition [装机注意事项].....	10
13. Caution [注意事项].....	11
14. Warranty [保固].....	12
15. Appendices [附注].....	12
-Appendix I [附注一] : Design Guide [设计指南].....	13/14
-Appendix II [附注二] : Appearance Specification [外观检查规格].....	15/19

深圳市富鑫泰触控科技有限公司
Shenzhen Fuxintai Touch Technology Co., Ltd.

Specification Revision Record

规格变更记录

Customer :

Date :

Customer No :

Model :

[illegible]

1
-KOTL CONFIDENTIAL-
UNDER NDA DISTRIBUTION ONLY

3
由Autodesk教育版产品制作

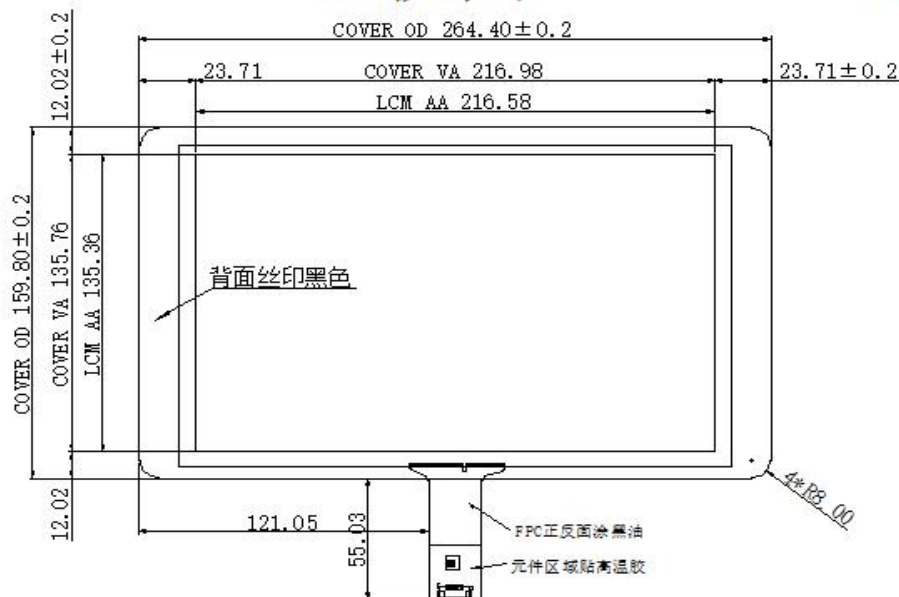
6		7	8	
版本	标示	变更内容/Change Content	签名/Autograph	日期/Date
A1		初版	YYX	2026.05.11

备注：FPC共用FXT101039

正视图

侧视图

背视图



TP厚度:2.325±2
不含辅料
LENS:1.85±0.1
FILM SENSOR:0.475



技术参数:	
1. IC及通道: COF_RX18*TX28	
Cover GLASS: 2mm	
Film SENSOR: 0.475mm	
引 线: FPC (PITCH=0.5mm)	
总厚度: 2.475.0±0.2mm	
2. 工作电压: 2.8~3.3V	
3. 透光率: ≥86%	
4. 表面硬度: 6H	
5. 工作环境: -20℃~+60℃, ≤8%RH	
6. 储存环境: -30℃~+70℃, ≤8%RH	

说明:

1. 结构类型: G+FF结构;
2. 未标注公差: ±0.20;
3. 符合ROHS标准;

TP FPC通道定义:

1	VDD
2	GND
3	SCL
4	SDA
5	INT
6	RST



深圳市富鑫泰科技有限公司

设计/Drawing	YZX	2026.08.11	图纸编号/Drawing No.	FXT101041-NM-A1工程图
审核/Check			物料编号/Material No.	
批准/Approve			比例/Scaling	1:1
			投影方式/Projection Type	

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

01. Circumscription The specification is for Projected Capacitive Touch Panel modules.
[范围] [此规格适用于投射式电容触控屏]

02. Feaures [特性]

Item[项目]		Specifications [规格]
(1)	Type [型式]	Projective Capacitive [投射电容式]
(2)	Input Mode [操作模式]	Finger [手指]
(3)	Connector [连接方式]	USB

03. General Specification [规格总则]

Item[项目]		Specifications [规格]
(1)	Frame Size[外框尺寸]	264.4*159.8
(2)	View Area[可视区]	216.98*135.76
(3)	SENSOR 功能片	231.5*146.38
(4)	LCM	无
(5)	Total Thickness[总厚度]	2.325 ± 0.20
(6)	I/O channel[出线 pin 脚数]	6 PIN

04. Environmental Characteristics [环境特性]

Item[项目]		Specifications[规格]	
(1)	Operation[操作]	Temperature[温度] -20℃ +60℃	Humidity[湿度](Non Condensing)[不可沾露]
(2)	Storage[储存]	-30℃ + 70℃	

Note: Testing environment is undernormal atmosphere pressure.[注：于正常的 1 个大气压下]
※When the ambient temperature is above 65℃,the humidity is allowed to be below 50%RH.[65℃以上高温环境时，湿度在 50%以下]

05. Optical Characteristics[光学特性]

※ Measured by BYK-Gardner

Item[项目]		Specifications[规格]
(1)	Transparency[透光性]	86% ± 5%
(2)	Haze[雾化度]	未定义

06. Electrical Characteristics[电子特性]

Item[项目]		Specifications[规格]
(1)	Response[响应时间]	According to Integration time of controller
(2)	Insulation[绝缘阻抗]	≥100M Ω
(3)	Linearity [线性]	X≤1.0%，Y≤1.0% (See Figure 10-1)

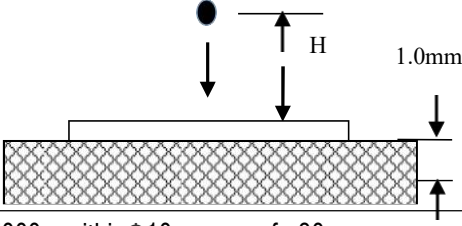


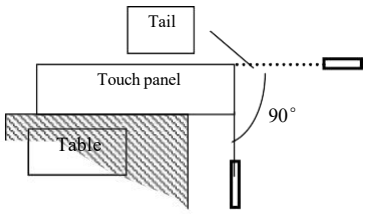
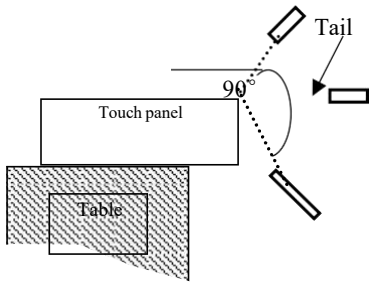
07. Durability
[耐久性]

Item[项目]		Specifications[规格]
(1)	Knock Test[触击测试]	100,000,000 times (1 亿次)

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

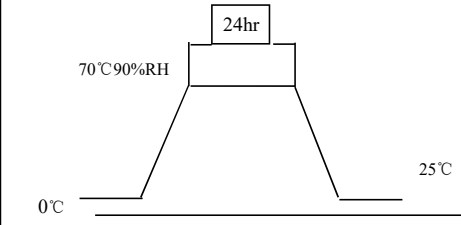
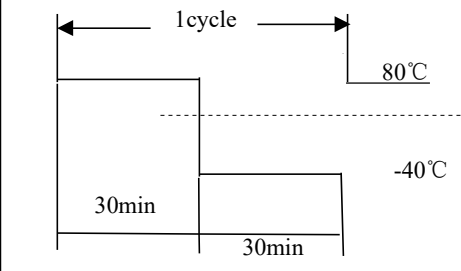
08. Mechanical Characteristics [机械特性]

Item[项目]	Condition[条件]	Specifications
(1) Operation Force [动作力]	Finger $\leq 10g$ [手触 $\leq 10g$]	Satisfy- 1. Optical Characteristics 2. Electrical Characteristics Appearance- 1. Ignore test area 2. No mechanical damage.
(2) Impact [冲击]	$\Phi 25.0$ Dia. SteelBall/67g Height=30cm/1time, Impact at center area [Φ25/67g 不锈钢球; 高度 30cm, 中央区域冲击 1 次]	
		
(3) Static Load [静态承重]	5000g within $\Phi 10cm$ area for 30 sec [5000g 砝码置于 Φ10cm 区域内, 静置 30 秒]	
		
(4) Hardness[硬度]	6H pencil, pressure 750g/45° [铅笔 6H, 压力 750g/45° (ASTM D3363)]	
		
(5) Tail Peeling [剥离]	800g/cm by vertical 90° for 30sec [800g/cm, 垂直 90°, 静置 30 秒]	
		
(5) Tail Blending [绕折]	90° 10 times left&right [90° 角, 左右来回 10 次]	
		

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

09. Reliability [信赖性]

Item[项目]		Condition[条件]	Specifications
(1)	Constant Temperature/ Humidity [恒温恒湿]	70℃/90%RH,24-72hrs and normalized for 4hrs [70℃/90%RH,24-72 小时, 回常温 4 小时后始可测试]	Satisfy- 1. Electrical Characteristics
			
(2)	Heat Cycle [高温循环]	70℃/24-72hrs and normalized for 4hrs [70℃/24-72 小时, 回常温 4 小时后始可测试]	
(3)	Cold Cycle [低温循环]	-40℃/24-72hrs and normalized for 4hrs [-40℃/24-72 小时, 回常温 4 小时后始可测试]	
(4)	Thermal Cycle [冷热循环]	-40℃~80℃[60 min./cycle] *10 cycles and normalized for 4 hrs [-40℃ ~80℃, 每循环 60 分钟, 共 10 次循环, 回常温 4 小时后始可测试]	
			

深圳市富鑫泰触控科技有限公司

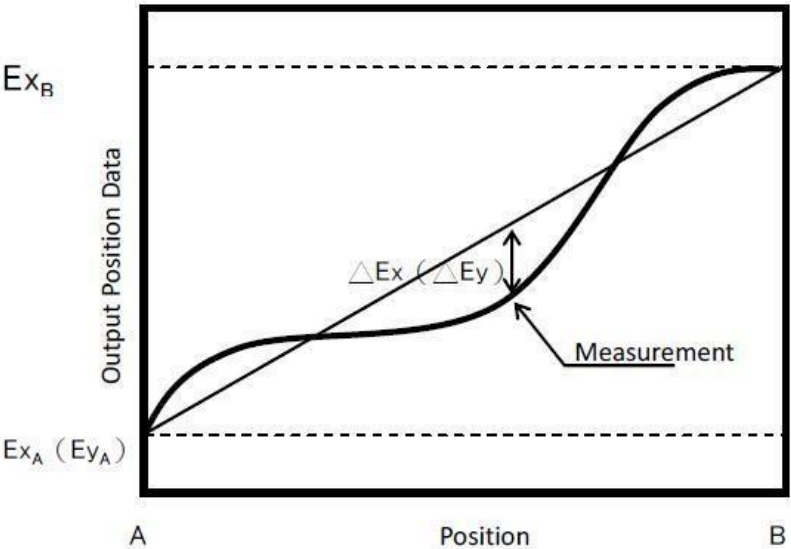
Shenzhen Fuxintai Touch Technology Co., Ltd.

10. Linearity [线性]

(1) Linearity Condition [线性测试条件]

Measure the product output data when a brass finger connected with GND is traced a straight line AB. ΔE is the maximum output difference when a brass finger traces A to B. AB is the end and the end in an active area. Linearity is expressed by the following equation. (Fig 10-1).

[产品测量数据时，一铜手指连接接地为一条直线导线。 ΔE 为最大输出差距，铜手指的轨迹从 A 到 B 为基础，线性表现由下面的公式。] (Fig10-1)



(Fig 10-1)

※ X directional linearity = $(\Delta Ex / \Delta Ex_{a-b}) \times 100[\%]$
directional linearity = $(\Delta Ey / \Delta Ey_{a-b}) \times 100[\%]$

※ Test Tool: Brass Finger

[测试工具]: 黄铜手指

Cylindrical brass bar simulating a fingertip used in measurement and testing.

[模拟指尖，由黄铜制成，测量测试用]

(2) Specification [规格]

Linearity must be meet the electrical specification outlined in Item 6

[线性必须符合 6 项目的电性规范]

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

11. Appearance Inspection [线性]

(1) The inspection was performed with two 20W(1800±500 LUX)fluorescent lamp lighting from back or side. The panel was placed 45cm away from eyes. (Figure 11-1)

[(1) 检测始用之灯光为二盏 20W(1800±500 LUX)炽灯光, 并于面板后侧或上侧照射, 检测时须放置在离眼睛 45cm 处(Figure11-1)]

1.检验治具

2.眼睛检验方向


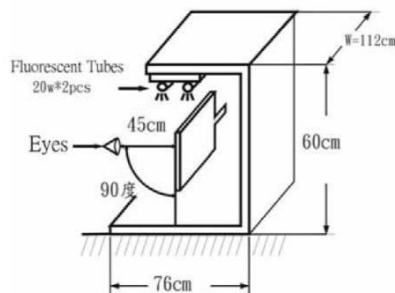


Figure 11-1

(2) Glass Flaw [玻璃瑕疵]

Item [项目]	Picture [图示]	Specification [规格]
Corner Flaw [脚瑕疵]		Not allowed [不允许]
Edge Flaw [边线瑕疵]		Not allowed [不允许]
Progressive Flaw [裂缝瑕疵]		Not allowed [不允许]

Note : T=Glass thickness

(3) Please refer to AppendixII: Appearance Specification.

[(3)外观规格请详见(附注 1)]

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

12. Attention for Mounting Condition [装机注意事项]

(1)	The gasket support of touch panel must be designed on the outside of viewable area, as well as to avoid pressing on touch panel accidentally, the enclosure must be designed with enough clearance to panel surface. To avoid pressing error on touch panel accidentally, please remain space between the surface of panel and the Bezel. (Figure 12-1) [请将固定触控屏用的支撑体(support)设计于可视区(Viewable area)之外。为避免不小心碰到触控屏而产生动作,请预留空间于面板与机壳之间](图示 12-1)
(2)	We recommend elastic material made support. [建议使用弹性物质制成的支撑体]
(3)	The edge of touch panel is conductive. Don't touch it with metal after mounting. [触控屏面板四周面板有可能会导电,安装时请勿与其他金属物质接触]
(4)	Please take notice of the grounding of power while mounting the touchscreen, otherwise it may have unstable situation. [电容式触控屏幕的组装必须注意电源的接地,可能因外界干扰会有动作不稳定的情况发生]
(5)	Please do not pull on flex tail during assembly. Do not bend at 90° and each bend angle should be no less than R:5mm. [组装时不可拉扯 TAIL 讯号线,且不可直接弯折 90° 度,每处弯曲处都需保持最小 R 角(R=5mm)]
(6)	During assembly, the touch panel must be securely affixed onto the LCD Panel to prevent displacement of the touch panel due to outside force pressing on touch screen or bezel/case. [电容式触控面板与 LCD Panel 组装时,必须确定确实黏贴固定,不可因外力按压触控面板或机壳,而造成触控面板晃动偏移。]

Projective Capacitive Touch Panel Assembly Guide + Touch Windows

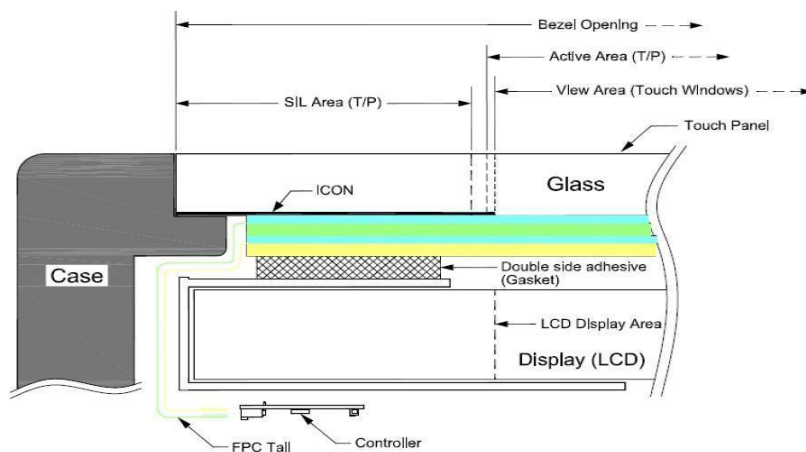


Figure 12-1

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

13. Caution [注意事项]

Storage [储存]	(1) Store panel under the temperature and humidity range pre-specified. Direct sunlight exposure or piling should be avoided. [储存要注意温/湿度条件, 且不可直接暴露于阳光下, 或堆叠造成直接加压面板] (2) Ship Method (1) must use legal couriers to transport products. (2) fragile products; beware of vibration and dropping during transit. [搬运方法 (1) 需雇佣合法搬运公司进行货物运输 (2) 产品为易碎品, 搬运时需注意震动、掉落] (3) Stacking method (a) based on standard air/ocean freight regulation (b) pallet use recommended for stacking (c) monitor stack weight and height to prevent damage to bottom stack. [堆叠方法 (a) 依空运或海运堆放标准 (b) 建议利用栈板进行堆叠作业 (c) 注意堆叠重量及高度, 不可造成最下层包装箱发生变形或破损]
Unpack [拆装]	1) Unpack the box with the printed red arrow pointing up. [注意检查包装箱已发现来货外箱已有严重变形或破损时, 应立即拍照取证, 以避免损失]
Handling [握持]	(1) Use clean sacks or glove to prevent fingerprints and/or stains left on the panel. Extra attention and carefulness should be taken while handling the glass edge. [佩戴清洁的指套、手套、口罩, 以避免造成指纹、体污或不小心被玻璃边割伤] (2) Avoid touching the viewing area before installation/integration. [安装组合时, 避免直接接触可视区] (3) Holding the panel instead of the tail at all time. [拿取面板时, 不可直接拿取 tail 部份]
Cleaning [清洁]	(1) Use neutral detergent or isopropyl alcohol on a clean soft cloth to clean the panel surface. [使用干净且柔软的布, 沾中性清洁剂或酒精进行清洁] (2) Prevent using any kind of chemical solvent, acidic or alkali solution. [不能使用化学溶剂或酸碱进行清洁] (3) Foreign objects and prints that can be wiped off are not regulated under the specification, can be ignored. [表面可擦拭及排除的异物及异纹并不列入判定规范内, 可被忽略]
Installing and Assembling [组合与装配]	(1) Excessive force or strain to the panel or tail is prohibited. [注意避免加压或拉扯面板及 tail] (2) Retain at least 3.0 mm clearance between panel and display module. [最少保留 3.0mm 的空间与面板及显示器之间] (3) Gasket or cushion pads around the edge of the panel may segregate water and/or dust contamination. [在设计机构时, 注意四周边缘需有缓冲垫, 以避免渗水或聚集灰尘] (4) Maintain a minimal 5R when bending tail to prevent dead fold or fold mark. [组装时应保持最小 5R 的折弯尺寸, 并避免死折或有折痕现象] (5) Flaws in customer module design may cause functionality issues after assembly. [客户端设计模组若有疏失时, 会造成触控屏组装后, 产生形变或破损现象会影响正常触控功能]
Operating [操作]	(1) Touch the panel with your finger or stylus only to assure normal operation. Any sharp edged or hard objects are prohibited. [应用手指或专用触控工具, 不能使用尖锐、坚硬的物体书写输入] (2) Operate the panel in a steady environment. Abrupt variation on temperature and humidity may cause malfunction of the panel. [急剧的温/湿度变化有结露现象, 易造成面板功能失效, 所以稳定的环境条件是必要的] (3) Avoid applying excessive activation force or sudden impact on the panel surface. [避免应用过大触动力或瞬间冲击面板表面] (4) Avoid high voltage and/or static charge. [避免高压与静电]
Test [测试]	(1) During the measurement, the brass finger must connect to ground. [使用黄铜手指测量时必须接地] (2) The whole brass finger footprint must be inside the active area. [使用黄铜手指测量需于 A. A. 区域内部有效的区域]
Others [其它]	(1) Keep the panel surface clean. Prevent any kind of adhesive applied on the surface. [请保持表面清洁, 不要贴胶带于面板上] (2) FXT has the right to change the materials and/or specifications. [富兴泰保有变更规格及材料的权利]

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

14. Warranty [品质保证]

- (1) In addition to the following 4 points, FXT offers a 1-year warranty on all FXT's products. FXT guaranty provide for repair and replacement without any charge during this period. FXT reserves the right in its sole discretion to determine the defects received, and will take the responsibility if there is any defect or damage.
[除了下列 4 点所述外, 富兴泰所生产制造产品保证期为 1 年, 若判定为富兴泰之责任, 则产品更换。富兴泰保留判定责任归属之权利。]
- (2) Limited warranty does not cover the following situations: [有限度保证, 不包括下列几点]
【Notice】
FXT is not responsible for following situation:
1. Damages caused by improper handling from clients, such as the shipping or manufacturing processes. [在客户的制程或运输中, 因客户自身疏忽所造成对产品的伤害及破损]
2. Damages caused by either natural disaster or human factors after receiving the products.
[在客户收到富兴泰之产品后, 因为天灾人祸所造成的伤害及破损]
3. Damage caused by self-repairs, and modifications or disassembling of HIGGSTEC products from clients without prior notice. [没有知会富兴泰共同讨论, 而自行变更、维修、拆卸产品所造成的伤害及破损]
4. Damage caused by user error; failing to follow normal operation procedures or using paper tools.
[客户端于触控屏使用操作上, 该使用正确的动作及工具操作触控屏, 因客户未依正确操作使用造成产品伤害及破损]
5. Product serial numbers and/or labels must remain intact or clearly visible for tracking purpose; otherwise, warranty is voided. [产品条码需保留完整清晰以利追索, 其不完整时无法保质]
- (3) 1. This document is a property of FXT. The information contained herein is deemed Confidential and Proprietary and may not be reproduced or disclosed to third parties without prior written consent of YX. [这份文件是富兴泰的财产, 所包含的信息均被视为机密或专有, 未经富兴泰事先书面同意不得复制或透露给第三方]
2. FXT disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights of other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
[富兴泰公司产品提供给客户端进行整体设计组装后, 除本产品外若有其他发生违反相关知识产权及任何所有权之争议部份, 则不做任何担保]
3. The information contained herein are subject to change without notice due to product improvement or other reasons. Therefore please request for the latest product information upon actual use.
[此文件的资料会因该产品改善或其它因素而有改变。请在有确切需要时向富兴泰索取最新产品资料版本]

15. Appendices [附注]

Item [项目]	Content [内容]
Appendix I [附註一]	Design Guide [設計指南]
Appendix II [附註二]	Appearance Specification [外觀檢查規格]

Appendix I [附注一] Design Guide[设计指南]

1.	Projected capacity [投射式电容]	Using a matrix type electrode pattern and matching software/hardware & IC to measure the change in capacitance for determining a touch actuation in single- and multiple-touch multi-functioning applications. [设计由矩阵式的电极图案及搭配软、硬件、IC 等，并主要利用电容量的变化，来判断动作的产生，以展现单点及多点触控功能的应用。]
2.	Product area definition [投射式电容]	The diagram illustrates the product area definition for a projected capacitive touch panel. It shows a rectangular frame with four yellow rectangular regions labeled ①, ②, ③, and ④. Region ① is the Tail (讯号线) on the left side. Region ② is the Active Area (动作区) at the top. Region ③ is the Active Area on the right side. Region ④ is the Active Area at the bottom. The Viewable Area (可视区) is the central region within the Frame Size (外型). A. Frame Size[产品外型尺寸] B. Viewable Area[可视区：与 LCD 搭配时约为铁框内缘’ 为设计银线路路最小范围，此区域无触控。] C. Active Area [该区域内可执行触控动作之范围] D. Tail [传输电压及电容传输电压及电容讯号用]
3.	Silver trace layout area [银线设计区]	As shown in the illustration, the tail side marked ① is where the traces converge, thus requiring more width. [依上图所示，将产品 4 边编上号码，其 Tail 端为编号①其他各边则为②③④，因①边需汇集所有讯号线，故其边宽尺寸需较大空间，其所需尺寸会依实际线数而定，若有任何设计上需求可与轩好航讨论后 提供最佳方案。]

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

4.	Material selection [材料选择]	1. ITO Glass Thickness: 0.40t/0.55t/0.7t / 1.1t / (mm), it is recommended to use thicker glass for larger size panels; chemical strengthening optional. ITO resistance setting and selection is based on Yi Xin product design. [厚度为 0.40t/0.55t/0.7t / 1.1t / (mm)，建议大尺寸面板其选用较厚 Glass 亦可依据特殊需求增加化学强化] [ITO 阻抗设定及选用，依益欣设计为主] 2. ITO Film Thickness: 0.05t/0.125t / 0.188t (mm), current industry standard uses 0.125t mainly; the optic treatment can be AG or AR; surface hardness 2-3H. ITO resistance setting and selection is based on Yi Xin product design. [厚度为 0.125t/0.35t / 0.475t(mm)，目前业界都以 0.475t 为主要选择，其外观特性亦可选择高/雾面处理，表面硬度为 2-3H] [ITO 阻抗设定及选用，依益欣设计为主] 3.Tail FFC and FPC types: copper inlay allow high conductivity; can add Housing or ZIF component. FFC can withstand up to 105 C and FPC up to 200 C; FPC material allows a smaller bending angle.FFC signal count is 2-50pins, less capable to change shape/form but cost less.FPC has unlimited signal count; can be versatile in shape to conform to structural design. [种类分为 FFC/FPC 两种，两者都为铜导线其导电系数都非常良好，皆可于前端部份增加 Housing 或 ZIF 原件，因材料关系 FFC 可耐温 105℃度而 FPC 可耐温约 200 度，FPC 材料较薄可提供较小的绕折角度] [FFC 讯号数为 2~50pin，外型较无法依据结构需求变化，但单价较经济] [FPC 讯号数为无限制，外型较可依结构需求变化，但单价较昂贵]
5.	Other sub-material [其它附属材料]	For special requirements such as gasket, Poron, polarizer and insulation, etc. Xuanyuhang can offer optimum solution upon request. [如有特殊需求，例如需增加 Gasket、Poron 或偏光材及绝缘材等等，可于轩好航讨论后提供最佳方案]
6.	Suitable-applications [产品适用范围]	Suitable for all applications. Not recommended for use in high EM interference environment. [全方位均可适用，单需注意不建议使用于环境为高电磁干扰区域]

深圳市富鑫泰触控科技有限公司

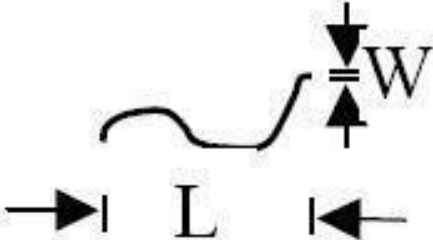
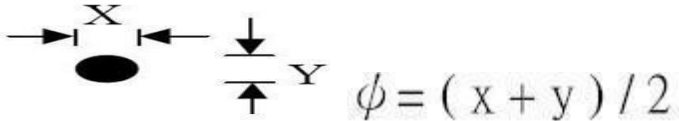
Shenzhen Fuxintai Touch Technology Co. , Ltd.

检查项目及判定 (Review items and judgment)

项目 (Item)		标准说明 (判定标准) Standard description (judgment standard)	缺点判定 defect judgment		
			CR	MA	MI
尺寸 (Size)		外型尺寸超规格造成客户无法装机使用 (The customer is unable to install,due to the size exceeding the specification)	√		
		其它尺寸超出规格书之公差范围 (Other dimensions are beyond the tolerance range of the specification)		√	
原 材 料 (Material)		原材料型号规格与规格书不一致。 (The model and specification of raw materials are inconsistent with the specifications)		√	
外观 (exterior)	脏污 (Dirty)	内污目视从正面看不清为允收。 (If the internal pollution can not be seen clearly from the front, it is acceptable.)		✗	
		产品边缘内污, 机壳可以遮住则允收, 反之拒收。 If the internal pollution is at the edge of the product, it can be covered by the shell, then it can be accepted, otherwise it will be rejected		√	
		内污目视从膜面看较明显, 拒收。 If, the internal pollution is obvious by visual inspection from the film surface, so it is rejected		√	
		产品表面无法清洁的脏污按点状不良判定。 The dirt on the surface of the product,that cannot be cleaned, shall be judged as poor dot.		√	
		产品B 面脏污不允许; A面(正面) 借助任何溶剂可擦拭干净者, 单批抽检不良比例≤5%, 判定允收, 否则拒收。 Surface B of the product is not allowed to be dirty; However, if surface A (front) can be wiped clean with any solvent, and the defective proportion of single batch spot check is≤5%, it will be judged as acceptable, otherwise it will be rejected			√

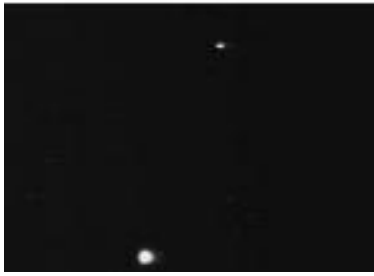
深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

项目 (Item)		标准说明Standard description (判定标准 judgement standard)	缺点判定		
			CR	MA	MI
外观 (Appearance)	线状 （两线状缺陷距离应大于15mm，有刮伤感不允许） Linear(The distance between two linear defects shall be more than 15mm, and the scratches are not allowed)				
		产品尺寸: 7-21.5寸之间 Product size: less than 7 -21inches			
		$W \leq 0.15\text{mm}$, $L \leq 5.0\text{mm}$, 可以忽略不计 $W \leq 0.15\text{mm}$, $L \leq 5.0\text{mm}$, Negligible			
		$0.2\text{mm} < W \leq 0.3\text{mm}$, $L \leq 6.0\text{mm}$ 允许五条 $0.2\text{mm} < W \leq 0.3\text{mm}$, $L \leq 6.0\text{mm}$ Less than 5(including 5)			√
		$0.3\text{mm} < W \leq 0.35\text{mm}$, $L \leq 7.0\text{mm}$ 允许三条 $0.3\text{mm} < W \leq 0.35\text{mm}$, $L \leq 7.0\text{mm}$ Less than 3(including 3)			√
		$W > 0.5\text{mm}$ 或 $L > 9.0\text{mm}$ 不允许 $W > 0.5\text{mm}$ or $L > 9.0\text{mm}$ Not allowed		√	
外观 (Appearance)	点状 (Dotted)				
		点状不良可用机壳或面板盖住时则不计缺陷 The poor dots are not counted when they can be covered by shell or panel			
		产品尺寸: 7-21.5寸之间 Product size: less than 7-21.5 inches			
		$D \leq 0.25\text{mm}$, 忽略不计 (密集不可) Negligible(Can't be dense)			√
		$0.1\text{mm} < D \leq 0.5\text{mm}$ 同一片产品上允许四个点，且与另一点间距 > 10mm 4 points are allowed on the same product, and the distance between the two points should be > 10 mm			√
		$D > 0.55\text{mm}$ 不允许 $D > 0.6\text{mm}$ Not allowed		√	

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

外观 (Appearance)	透光 (Penetrating)				
		产品尺寸: 7 寸-21.5寸之间,)Product size: less than 7-21.5 inch			
		透光不允许 (no Penetrating)			√
外观 (Appearance)	气泡 (Bubble)	$D \leq 0.2\text{mm}$ 时, 可忽略不计 When $D \leq 0.2\text{mm}$,Negligible			√
		$0.2\text{mm} < D \leq 0.25\text{mm}$ 时, 与另一点相距 $>15\text{mm}$ 以上, 允许 When $0.2\text{mm} < D \leq 0.25\text{mm}$,and the distance with other point over $>15\text{mm}$, three points are allowed.			√
		$0.25\text{mm} < D \leq 0.3\text{mm}$, 与另一点相距 $>20\text{mm}$ 以上, 允许两颗 When $0.25\text{mm} < D \leq 0.3\text{mm}$, and the distance between each bubbles is $>20\text{mm}$, two bubbles are allowed.			√
		$D > 0.35\text{mm}$ 不允许 $D > 0.35\text{mm}$ Not allowed		√	
		气泡在可控区外, 机壳可以盖住, 可予忽略。 It is negligible, when the bubbles are outside the control area, and can be covered by the shell.			
	背胶/ 泡棉 (Adhesive / foam)	贴附位置须与规格书一致, 不可露面板, 45° 角看不可入可视区 The position shall be consistent with the specification, the panel shall not be exposed, and it shall not be seen when viewed at 45° angle		√	
		贴附须平整, 接口不可重叠 It shall be flat and the interface shall not be overlapped			√
	水胶 (Water glue)	产品 (如面板、功能片及 FPC 等) 上不可有残胶 No residual glue is allowed on the product (such as panel, function sheet, FPC, etc.)		√	
		产品溢胶部分以可视区边线距功能片边沿距离的 $2/3$ 管控 The overflow must be controlled within $2/3$ of the distance between the edge of the visible area and the edge of the function sheet.		√	
	保护胶 (Protective glue)	不可残留在产品表面, 否则拒收 The protective glue shall not remain on the product surface, otherwise it shall be rejected			√
	摄像孔 (The camera hole)	锯齿/色差等依所签限度样判定 Sawtooth / color difference, etc. shall be determined according to the signed samples.			√
		点状缺陷 $D \leq 0.15\text{mm}$, 允许 1 处 Point defect $D \leq 0.15\text{mm}$, one place is allowed.			√

深圳市富鑫泰触控科技有限公司

Shenzhen Fuxintai Touch Technology Co., Ltd.

	IR 半透感应孔 (Semi-permeable sensor hole)	锯齿/色差等依所签限度样判定 Sawtooth / color difference, etc. shall be determined according to the signed samples.			√
		点状缺陷 $D \leq 0.10\text{mm}$, 允许 1 处 Point defect $D \leq 0.10\text{mm}$, one place is allowed.			√
	Logo	参照限度样品。Reference the sample.		√	
	角破损 (Angle damage)	$X \leq 1.0\text{mm}$ 且 $Y \leq 0.5\text{mm}$ 且 $Z \leq \text{GT}$, 可予忽略 $X \leq 1.0\text{mm}$ and $Y \leq 0.5\text{mm}$ and $Z \leq \text{GT}$, Negligible.			
		$X > 1.0\text{mm}$ 或 $Y > 0.5\text{mm}$ 或 $Z > \text{GT}$, 拒收 $X > 1.0\text{mm}$ or $Y > 0.5\text{mm}$ or $Z > \text{GT}$, Rejection			√
	边破损 (Edge damage)	$X \leq 3.0\text{mm}$ 且 $Y \leq 0.6\text{mm}$ 且 $Z \leq \text{GT}$, 可予忽略 $X \leq 3.0\text{mm}$ and $Y \leq 0.6\text{mm}$ and $Z \leq \text{GT}$, Negligible.			
		$X > 5.0\text{mm}$ 或 $Y > 1.0\text{mm}$ 或 $Z > \text{GT}$, 拒收 $X > 5.0\text{mm}$ or $Y > 1.0\text{mm}$ or $Z > \text{GT}$, Rejection			√
		Sensor 面崩边或崩角未伤及线路且正视不可见, 允收 Sensor When the edge collapse or angle collapse occurs, if the circuit is not damaged and the front view is invisible, it can be accepted.			
		Sensor 面崩边或崩角伤及线路或正视可见, 拒收 Sensor When the edge collapse or angle collapse occurs, if the circuit is damaged or the front view is visible, rejection.		√	
	破 屏 (Broken screen)	不允许 Not allow	√		
	披锋/ 大边 (Phi Fong / Big Edge)	不允许 Not allow		√	
	变 形 (Deformation)	不允许 Not allow		√	
	蚀 刻 痕 (The corrosion Nick)	比对样品或签样 Refer to the sample		√	
	色 差 (Aberration)	比对样品或签样 Refer to the sample		√	
	熏烟 (Smoke cigarette)	可视区内有熏烟但可擦拭, 拒收 The smoke cigarette in the visual area, but can be wiped, rejection.			√
		可视区有熏烟但不可擦拭, 拒收 The smoke cigarette in the visual area, but can not be wiped, rejection.		√	
		丝印印刷边缘不平整 Uneven edge of silk screen printing		√	
		字体: 印刷模糊, 重影不可辨识, 拒收		√	

深圳市富鑫泰触控科技有限公司
Shenzhen Fuxintai Touch Technology Co., Ltd.

外观 (appearance)	回油 (Oil return)	Font:fuzzy printing, unrecognizable ghosting, rejection.			
		图案字体清晰，无严重粗细现象，允许轻微图案字体渗透或干版字体线条变粗或变细较正常线宽≤1/3（且≤+/-0.1mm），无断字 Clear pattern and font,without serious thickness inconsistency.Slight pattern font penetration or dry typeface becomes thick or thin are allowed.Compared with normal line width, it should be≤1 / 3 (and ≤ +/- 0.1mm) , no hyphenation.			
外观 (appearance)	引线 (lead)	印刷的文字、符号清晰可辨认可以接受，字迹模糊、残缺、脱落、无法辨认不可以接受。 Clear and recognizable printed words and symbols are acceptable. Blurred, crippled, shed, Illegible words are unacceptable.			√
		引线压反或导电面做反，拒收 Lead reverse or conductive surface reverse, reject	√		
		引线边缘撕裂，拒收 Lead edge tear, reject.	√		
		短路、开路、补线，拒收 Short circuit, open circuit, patching, rejection	√		
		不平整性翘曲，折痕，不影响功能，允收 Uneven warpage, crease, no effect on function, acceptable			
		引线划伤：不允许露出铜/镍层。铜镍层被暴露为 NG。 Wire cut: exposed copper/nickel layer is not allow. The copper-nickel layer is exposed as unacceptable		√	
		器件焊反、焊歪、少焊、虚焊，拒收 Device soldering is reversed, soldering is crooked, less soldering, and virtual soldering, rejection.		√	
		黑色电磁膜：边缘部分剥离在宽 0.3mm 以下、长度不限；内部剥离直径在 0.5mm 以下，且不影响功能，数量不限，密集不可。 Back electromagnetic film:The edge part is stripped below 0.3mm in width and unlimited in length;The internal peeling diameter is less than 0.5mm, and does not affect the function. The quantity is unlimited but not dense.			√