

TECHNICAL SPECIFICATION

		2WD	4WD
ENGINE		50 HP (36.5 kW), 2100 RPM, 3 cylinder, Direct injection, Turbo charged, Inline FIP, coolant cooled with over flow reservoir	
AIR FILTER		Dry type, dual element	
TRANSMISSION	Clutch	Dual	
	Gear Box	12 Forward + 4 Reverse, Collarshift, TSS	
	Speeds	Forward 1.9 - 31.5 kmph, 1.4 - 31.5 kmph (Optional) Reverse 3.4 - 22.1 kmph, 2.3 - 19.6 kmph (Optional)	
BRAKES		Self Adjusting, Self Equalising, Hydraulically Actuated, Oil immersed disk brakes	
HYDRAULICS	Maximum Lifting capacity	2000 kgf / 2500 kgf (Optional)	
	3 Point linkage	Category II, Automatic depth & draft control (ADDC)	
STEERING		Power Steering	
POWER TAKE OFF	Type	Independent , 6 splines	
	RPM	Dual PTO / Reverse PTO Standard : 540 @ 2100 ERPM Economy : 540 @ 1600 ERPM	
FUEL TANK CAPACITY		68 L	
WHEELS AND TYRES	Front	6.5 x 20 (0.17 x 0.51 m), 8 PR 7.5 x 16 (0.19 x 0.41 m), 8 PR (Optional)	9.5 x 24 (0.24 x 0.61 m), 8 PR
	Rear	16.9 x 28 (0.43 x 0.71 m), 12 PR 14.9 x 28 (0.38 x 0.71 m), 12 PR (Optional)	16.9 x 28 (0.43 x 0.71 m), 12 PR 14.9 x 28 (0.38 X 0.71 m)
ELECTRICAL SYSTEM		88 Ah, 12 V battery, 40 Amp. Alternator, 2.5 kW starter motor	
DIMENSIONS AND WEIGHT	Total weight	2110 kg	2410 kg
	Wheel base	2050 mm	2050 mm
	Overall length	3535 mm	3585 mm
	Overall width	1850 mm	1875 mm
OPTIONAL ACCESSORIES		• Ballast Weight • Canopy • Canopy Holder • Draw Bar • Wagon Hitch	



FACTORY FITTED OPTIONS

- Adjustable front axle
- Heavy duty front axle
- Reverse PTO - (Std + Reverse)
- Dual PTO - (Std + Economy)
- EQRL system
- Synchromesh Transmission - (TSS)
- Selective Control Valve - (SCV)
- Roll over protection structure (ROPS) with deluxe seat and seat belt

ADDITIONAL FEATURES

- Single piece hood with gas strut mechanism
- Side bar, exhaust muffler guard & finger guard
- Water bottle holder
- Seat with arm rest (Optional)
- Suspended pedal

Note: All the options / features may not be available in a single variant.

John Deere
Genuine Parts

I Economical I Reliable I
I Easily available I



John Deere India Private Limited

3rd floor, Tower-15, Cybercity, Magarpatta City, Hadapsar,
Pune - 411013. Maharashtra. www.JohnDeere.co.in

For more information, please contact our authorised dealer or nearest area office.



- Tractors • Implements
- Harvesters • Finance



JOHN DEERE

Please note: Improvement in the product is a continuous process. Hence the information given in this brochure is subject to change without prior notice. Accessories shown are not the part of standard equipment.

Zindagi ka
Best Decision!



JOHN DEERE

Dum Hai!

Xtra Range, Xtra Dum



LiftPro™

INCREASED LIFT CAPACITY

2500 kgf



Strength in Ease Success.

Dozer



Leveler



Loader



Potato Planter



We have always known your ambition for something extra in life... extra success, extra prosperity, extra happiness! This desire for extra reflects in the choice for your own tractor as well! With John Deere Tractor, you choose a path of profit and progress for life! So presenting exclusively for you the new John Deere **5210 GearPro™** with extra range and extra power!

At John Deere, our focus is always to understand your needs and better our offerings with advanced technology to suit them. So we bring you the all powerful **5210 GearPro™** for your regular farming activities as well as specialised loading, dozing and leveling, with a high lifting capacity of 2500 kg. We are sure that it will prove to be your best choice!

The new **5210 GearPro™** has many amazing features, including –

- **4 Gear range** – more gear options for more activities
- **High 39% back up torque** – no need to change gears often
- **More lifting capacity** – strength to lift weight upto 2500 kgf
- **4 Wheel drive** – less tyre slippage, more productivity

So give your dreams the strength to fly with the new **5210 GearPro™** with Xtra range, Xtra power!



High Torque reserve ~ 39%
Suitable for activities that require more pulling power or load bearing




EQRL
EQRL switch eases lifting, joining and use of implement



Planetary Gear with Straight axle
Low noise, less vibration, highly durable




Sway Bar
Ease in adjusting or joining implements

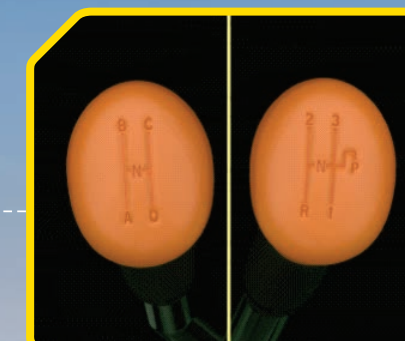


GearPro™
4 Gear Range
More gear options for more activities

5210
GearPro™ 12F + 4R

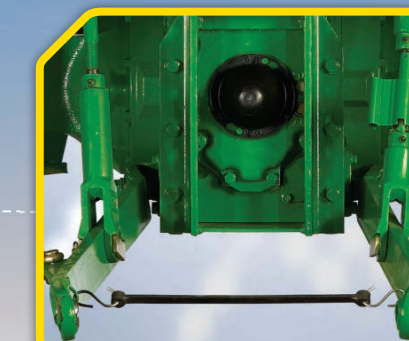

LiftPro™
More Lifting Capacity
Strength to lift weight up to 2500 kgf (optional lift capacity)



Oil immersed disc brakes
Secure, durable, no need to change gears often



Mobile Charging Point with Holder
Stay connected anytime



Hood Lock
Totally secure



John Deere 3029H engine with Inline FIP
Powerful and fuel efficient