

Miff

User Manual

Michael Dungan

Overview

Miff is an audio effect plugin (VST3/CLAP) that filters audio through a FIR kernel you draw by hand. Instead of loading a wavetable or dialing in a conventional EQ, you sketch a curve in a multi-segment envelope (MSEG) editor, and that curve *becomes* the filter's impulse response.

This makes Miff a sibling of Wavetable Filter — both are wavetable-style FIR convolution filters — but where Wavetable Filter takes its kernel from a loaded wavetable file, Miff takes its kernel from a shape you draw.

The plugin supports two filtering modes:

- **Raw** — Direct time-domain convolution. Zero reported latency.
- **Phaseless** — STFT magnitude-only filtering. No pre-ringing, at a constant 2048-sample latency.

How Miff works

Understanding one idea makes everything else in Miff make sense:

The curve you draw is the filter's impulse response — the kernel itself, in the time domain. It is *not* a picture of the frequency response. The frequency-response view in the middle of the window is the *result* of the curve (its Fourier transform), not something you draw directly.

The bipolar midline

The MSEG editor's vertical range is 0 to 1, but FIR taps are bipolar (they can be positive or negative). Miff bridges this with a simple mapping applied to every point of the curve:

$$\text{tap} = 2 \times \text{value} - 1$$

So:

- A curve value of **0.5** maps to a **zero** tap — the midline is silence.
- Values **above 0.5** produce **positive** taps.
- Values **below 0.5** produce **negative** taps.

A flat curve sitting on the 0.5 midline therefore bakes to an all-zero kernel, and Miff treats an all-zero kernel as **dry passthrough**. A freshly inserted Miff colours nothing until you draw something — it is safe to place on any track.

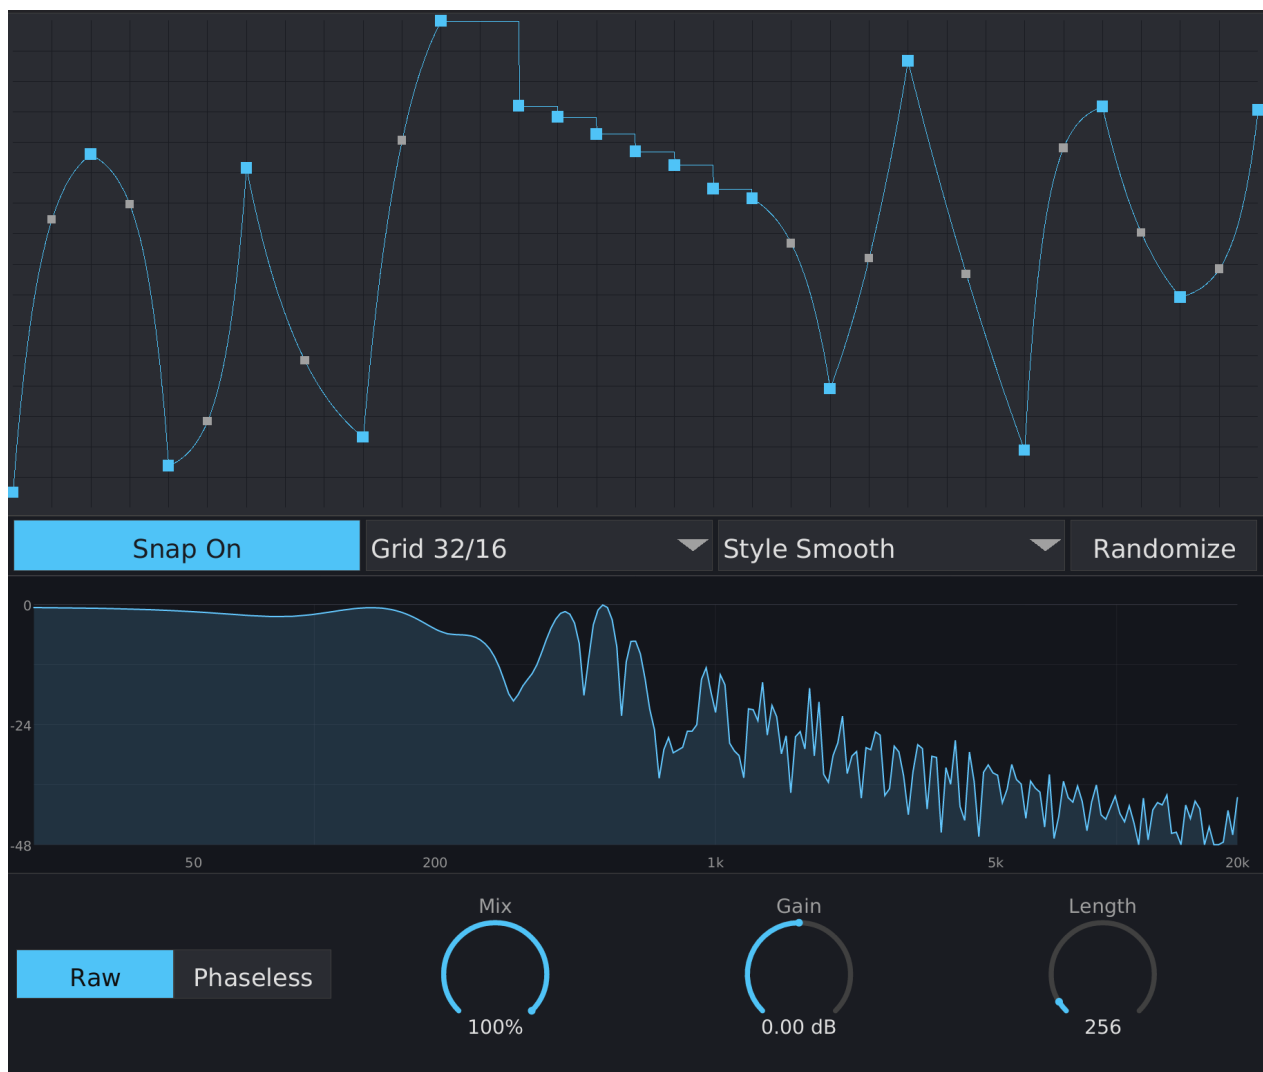


Figure 1: Miff interface

Because the midline is a true zero, drawing *across* it — partly above, partly below — is what makes highpass, bandpass, and comb-like filters possible from an editor whose Y axis only runs 0 to 1.

Peak-magnitude normalisation

After baking the curve into taps, Miff measures the kernel's strongest frequency-response magnitude and scales the whole kernel so that peak sits at exactly 0 dB. The filter therefore **never boosts** any frequency above unity, and loudness stays consistent no matter what shape you draw.

Interface

The editor window is freely resizable — drag any edge or corner. The size is persisted with your DAW project, and all elements scale proportionally. The window has three regions, top to bottom: the MSEG curve editor, the frequency-response view, and the control strip.

MSEG curve editor (top)

This is where you draw the kernel. The curve is defined by **nodes** connected by **segments**.

Drawing and editing

- **Double-click empty canvas** — add a node at the pointer. (A single click-and-drag on empty canvas draws a selection marquee instead of adding a node.)
- **Drag a node** — move it. Interior nodes stay between their neighbours; the first and last nodes are pinned to the left and right edges (their value can still move).
- **Drag a segment's tension handle** — bend the segment between two nodes from a straight line into an exponential curve.
- **Double-click a node** — delete it.
- **Right-click a segment** (or an unselected node) — toggle that segment **stepped**. A stepped segment holds its start node's value flat until the next node, instead of interpolating. **Right-click a selected node** instead opens a transform menu (Compress / Expand × values / times) acting on the current selection.
- **Shift+drag** — temporarily bypass the snap grid, for free node positioning between grid cells. (The per-pixel fine-adjust mode is a bottom-strip dial feature, not a curve-editor one.)
- **Alt+drag — stepped-draw**: paint a staircase directly. As the pointer crosses each grid cell, Miff places one stepped node at your cursor height. Dragging back over cells you have already painted *repaints* them — it does not stack extra nodes.

Control strip

A row of controls sits below the curve canvas:

- **Snap** — when on, new and dragged nodes snap to the grid (columns = *time divisions*, rows = *value steps*). Hold **Shift** while dragging to bypass snapping temporarily.
- **Grid** — a dropdown of grid presets, shown as *time divisions* / *value steps* (for example 16 / 8). The grid also drives stepped-draw cell size and the randomiser's node count.
- **Style** — a dropdown selecting the randomiser style: **Smooth**, **Ramps**, **Stepped**, **Spiky**, or **Chaos**.
- **Randomize** — replace the current curve with a fresh random one in the selected style. Each click produces a different result.

Frequency-response view (middle)

This shows the **result** of your curve: the magnitude spectrum of the baked kernel, on a log-frequency / dB scale (20 Hz-20 kHz, 0 to -48 dB). The peak of the response always sits at 0 dB because of peak-magnitude normalisation.

When audio is flowing, a faint amber shadow shows the input signal's spectrum, making it easier to line the filter's shape up with the material you are treating. With a flat (all-zero) kernel the view is empty — there is nothing to show.

See *Understanding the frequency response* below for why the response curve behaves the way it does.

Control strip (bottom)

- **Mode** — a two-segment selector: **Raw** / **Phaseless**. Click a segment to switch.
- Three dials: **Mix**, **Gain**, **Length**.

All dials support:

- **Vertical drag** — up to increase, down to decrease.
- **Shift+drag** — fine adjustment.
- **Double-click** — reset to default.
- **Right-click** — open a text-entry field seeded with the current value (unit stripped). Enter commits, Escape cancels; clicking outside or starting a drag auto-commits.

Mix

Blends the dry (unfiltered) input with the wet (filtered) output.

- Range: 0% (fully dry) to 100% (fully wet)
- Default: 100%

Gain

Output gain applied after the filter and the dry/wet mix. Useful for matching levels.

- Range: -20 dB to +20 dB
- Default: 0 dB

Length

The number of FIR taps the curve is baked into — effectively the kernel's length. Longer kernels resolve lower frequencies and roll off the high end more steeply; shorter kernels keep the response brighter (see below).

- Range: 64 to 4096 taps
- Default: 256

Length is not automatable. Re-baking the kernel is a short FFT that runs on the GUI thread — continuously as you drag the Length dial (on each cursor move), and on text-entry commit. Marking the parameter non-automatable keeps that work off the audio thread — Length will not respond to host automation lanes.

Filter Modes

Raw Mode

Direct time-domain convolution of the input with the baked kernel, accelerated with 16-wide SIMD.

Characteristics:

- Zero latency reported to the host.
- Linear-phase response — symmetric pre-ringing around sharp transients, characteristic of linear-phase FIR filters.
- A silence fast-path skips the convolution entirely while the signal and filter history are both zero.

Phaseless Mode

Short-Time Fourier Transform filtering: the input is windowed, transformed, multiplied by the kernel's *magnitude* spectrum, and inverse-transformed with 50% overlap-add. Only magnitudes are applied — the input's phase is left alone.

Characteristics:

- No pre-ringing — transient shape is preserved.
- Slight temporal smearing from the overlap-add (inherent to the technique).
- A constant **2048-sample latency**, reported to the host for delay compensation. The STFT frame is fixed at 4096 points regardless of the Length setting, so this latency never jumps when you adjust Length.

Understanding the frequency response

Because the curve is the *impulse response*, the frequency-response view is its Fourier transform — and that has some consequences worth knowing.

Why the response slopes downward

A hand-drawn curve with a handful of nodes is a **slowly varying** signal. Slow time-domain signals concentrate their energy at **low frequencies**, so the response naturally rolls off toward the top end. Two separate effects produce the downward slope you will usually see:

1. **DC tilt.** If your curve spends more area *above* the 0.5 midline than below it, the taps sum to a non-zero total — energy at 0 Hz. After normalisation that pins 0 dB at the far left and the whole curve slides downhill. **Drawing balanced around the midline** — roughly equal ink above and below 0.5 — cancels this and moves the response peak up off DC.
2. **Roll-off above the node rate.** Even with no DC tilt, a curve built from a limited number of nodes simply cannot contain detail finer than its node spacing. Above that rate the spectrum must roll off. You can move the peak higher, but the roll-off above it is unavoidable.

Pushing energy into the high end

To make a brighter filter — or to flatten the slope — give the kernel faster tap-to-tap variation:

- **Shorten Length.** The same curve shape packed into fewer taps varies faster relative to the sample rate, so the response reaches higher. Longer Length rolls off sooner.
- **Add nodes.** A finer Grid (and the grid-aware Randomize) packs in more nodes, raising the rate at which the curve can change.
- **Use stepped or spiky shapes.** Sharp, stepped tap-to-tap jumps inject broadband high-frequency content that a smooth curve never can. Alt-drag stepped-draw is the quickest way to get there.

Tips

- **A fresh Miff does nothing on purpose.** The default flat-0.5 curve bakes to an all-zero kernel — dry passthrough. Draw a shape to hear the filter.
- **Draw across the midline for highpass and comb filters.** Shapes that stay entirely above 0.5 behave lowpass-ish; crossing the midline opens up highpass, bandpass, and comb responses.
- **Balance the curve around 0.5** if the response tilts more than you want — see above.
- **Use Phaseless on transient-heavy material** (drums, percussion) to avoid linear-phase pre-ringing.
- **Use Raw on sustained sounds** (pads, drones) where zero latency and linear-phase clarity matter more than transient preservation.
- **Randomize is a fast way to explore.** Pick a Style, click Randomize until something interesting appears, then refine it by hand.
- **Watch the amber input shadow** in the response view to line the filter’s shape up with the frequencies actually present in your signal.

System Requirements

- **Formats:** VST3, CLAP, Standalone
- **OS:** Linux (other platforms may work but are untested)
- **CPU:** x86_64 or Apple Silicon (SIMD via Rust’s portable `std::simd`)
- **DAW:** Any VST3 or CLAP compatible host (tested with Bitwig Studio)

Building from Source

Requires nightly Rust (for portable SIMD).

```
# Plugin bundles (VST3 + CLAP)
cargo nih-plug bundle miff --release
```

```
# Standalone binary
cargo build --bin miff --release
```