

# AD-4328

*Weighing Indicator*



*Expand Your Potential*



**A&D**  
A&D Company, Limited  
[www.aandd.jp](http://www.aandd.jp)

*...Clearly a Better Value*



# AD-4328 *The Best of tl*

## Weighing Indicator



*The AD-4328 provides power and flexibility at an affordable price. Performs a wide range of applications from batching to simple weighing.*


*It is reliable, accurate and easy to install.*

- Accumulative data is stored in memory automatically or manually.
- Comparator output to optional relays (Hi/OK/Lo).
- Setpoint comparison for batching applications (Near Zero/Prelim/Target/Free Fall).
- Powered through AC adaptor or external DC (6 to 12V) power supply.
- Optional bi-directional RS-232C, RS-422, RS-485 interfaces and BCD, relay, current loop outputs.
- Front panel protected to IP-65.
- Powers up to 6 load cells at 350Ω.
- Gravity Compensation Function assures accurate weighing without the need for recalibration after transport.
- Standard serial output for printers, external displays, etc.
- Averaging time and width can be selected for various applications.
- Digitally span calibrated by entering a sensor output voltage through the keypad.
- 1/10000 displayed count resolution.
- Mount on panel, column, stand or desk top.
- Can be controlled by external input.
- Enters predetermined tare weight from keypad.
- RFI/EMI protected.
- Meets or exceeds OIML Class III specifications.
- An uncased version of AD-4328 is available (All options are applicable except OP-10 display stand).



# Low Cost Indications

## Communications

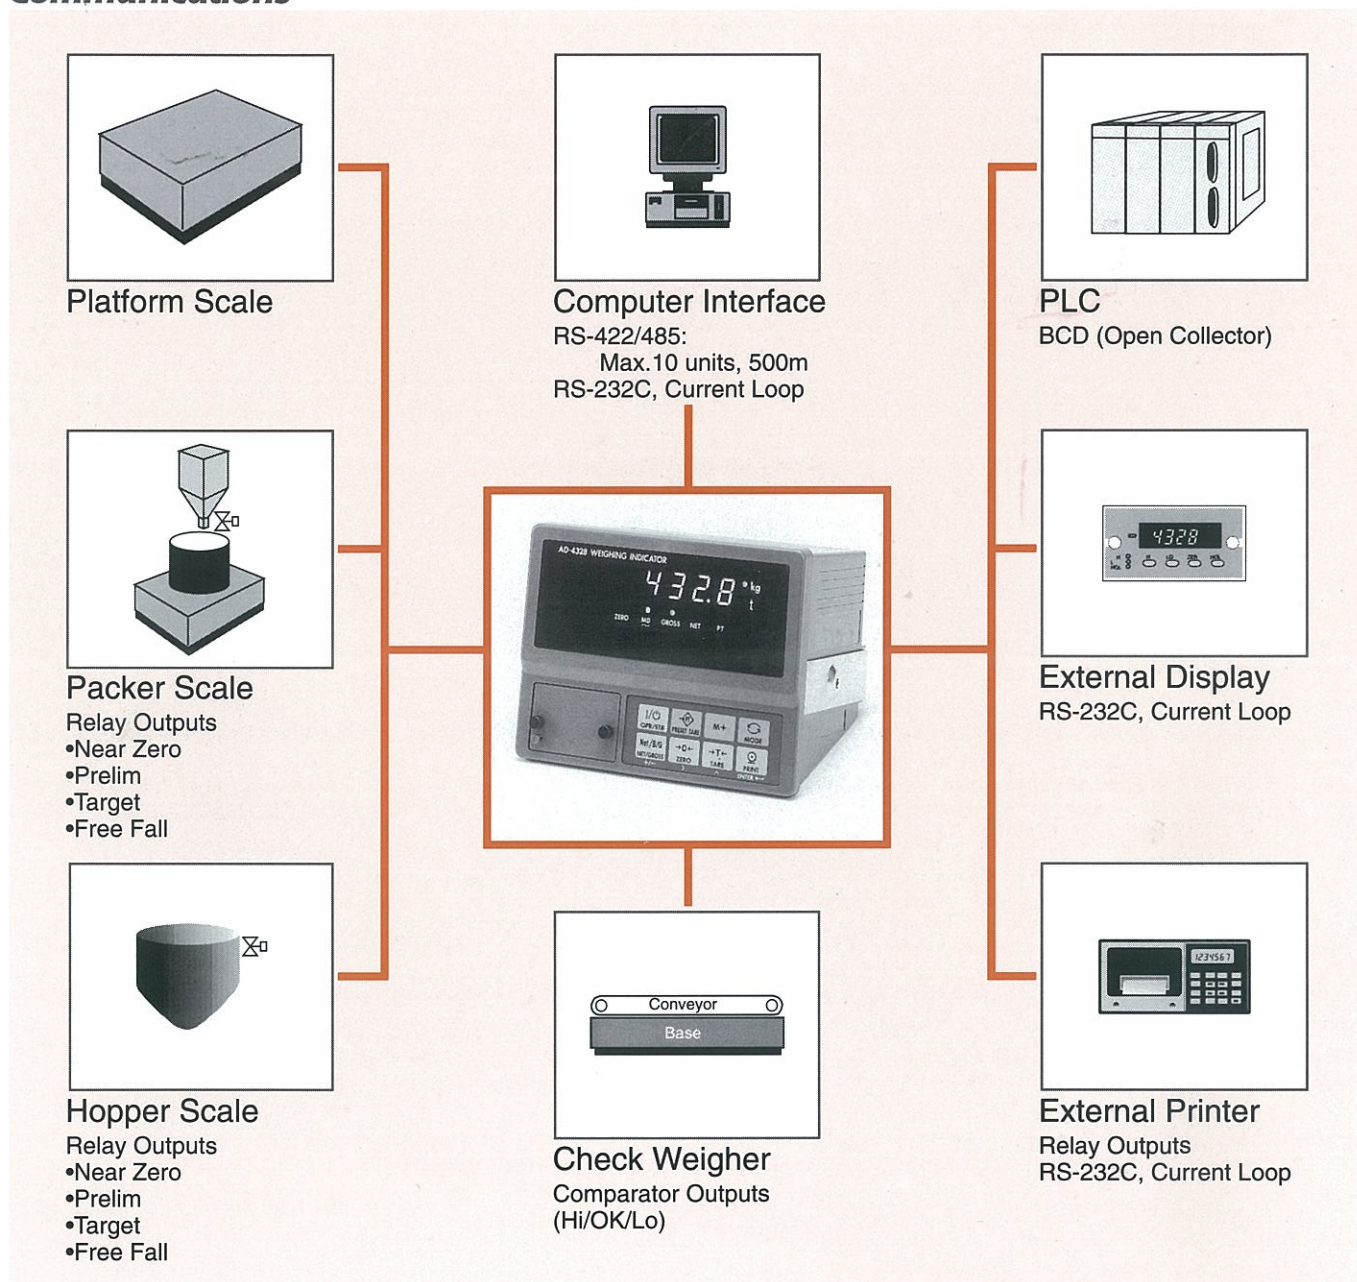


## Rear Panel View

- I/O terminals are screw type for easy maintenance.
- AC/DC selectable.
- When connected to both AC & DC, priority is given to AC.
- Remote operation of front keys.

## Terminal Locations

- |                                  |                                       |
|----------------------------------|---------------------------------------|
| ① Option installation            | ④ DC input terminals                  |
| ② Load cell connection terminals | ⑤ External front panel switch control |
| ③ AC adaptor connector           | ⑥ Standard serial output              |

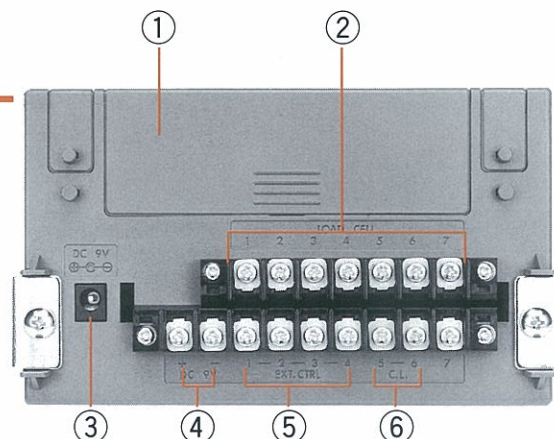




# AD-4328

## Weighing Indicator

### Physical Dimensions

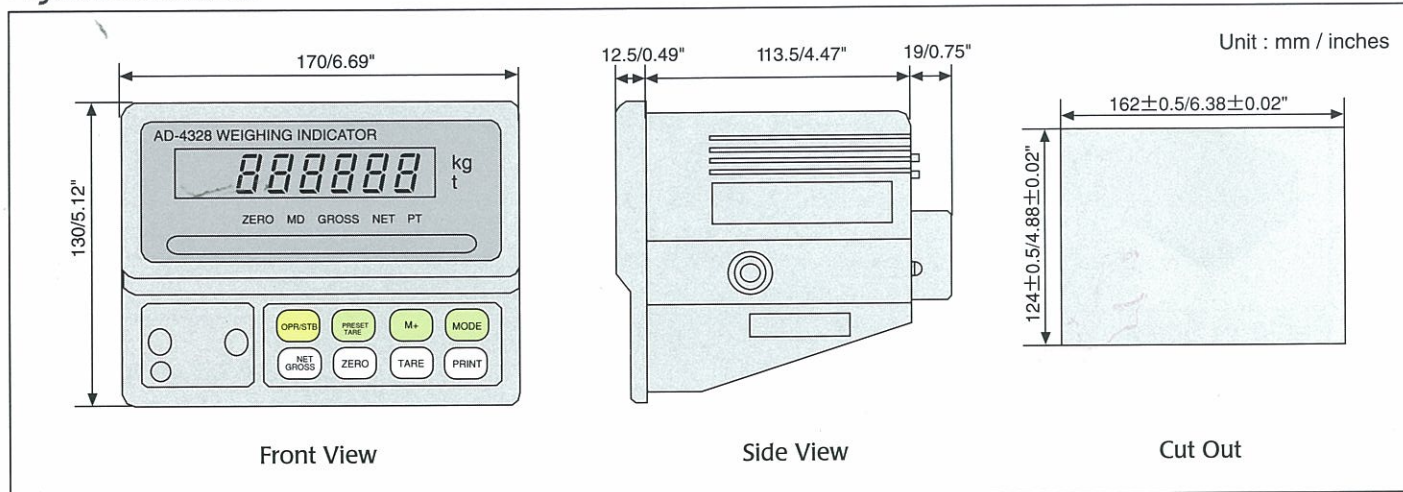

### Specifications

Input Sensitivity	0.2μV/d (Min.)
Input Signal Range	-1mV ~ +15mV
Loadcell Excitation	5V DC ±5%
Loadcell Drive Capacity	Up to 6 load cells at 350Ω/load cell (Max.90mA)
Zero Temperature Coefficient	±(0.2μV+0.0008% of dead load)/°C (typ.)
Span Temperature Coefficient	±8ppm /°C of reading (typ.)
Non-Linearity	0.01% of full scale
Input Noise	±0.2μVp-p
Input Impedance	10MΩ ± or more
A/D Conversion Method	Integrating dual-slope type
A/D Resolution	40,000 counts (Max.)
A/D Conversion Rate	Approximately. 10 times/second
Weight Display	6digits, 14.2mm / 0.56" (H) LED
Display Resolution	10,000 counts (Max.)
Minimum Division	Times ×1, ×2, ×5, ×10, ×20, ×50
Maximum Display	500000
Under ZERO Indication	'-' minus display
Annuciation	ZERO, MD, GROSS, NET, PRESET TARE, kg/t or kg/lb
Keys	STANDBY/OPERATE, NET/GROSS, PRESET TARE, ZERO, M+, TARE, MODE, PRINT

Power	DC 9V (AC Adaptor or direct input to the terminal)
Net Weight	Approximately 0.8 kg /1.8 lb
Operating Temperature	-10 °C ~ 40 °C (14 °F ~ 104 °F)
Storage Temperature	-10 °C ~ 70 °C (14 °F ~ 158 °F)
Physical Dimensions	170(W) × 126 +19* (D) × 130(H) mm *incl. terminal cover
Panel Cut out Dimensions	124 ± 0.5 × 162 ± 0.5 mm
Standard Accessories	Manual

### Options

OP-01	BCD Output (Open Collector)
OP-02	Comparator Output (Open Collector)
OP-03	RS-422/485 with Relay Output
OP-04	RS-232C/Current Loop/Relay Output
OP-10	Display Stand

Only one output can be selected from OP-01, OP-02, OP-03 and OP-04.  
One to be chosen from RS-422 or 485.

### Accessories

AC Adaptor	AX-TB163 (120V)
	AX-TB164 (220V)
	AX-TB173 (240V)

Specifications subject to change for improvement without notice.

# AND

...Clearly a Better Value

**A&D Company, Limited**

3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN  
Telephone: [81] (3) 5391-6132 Fax: [81] (3) 5391-6148  
http://www.aandd.jp

**A&D ENGINEERING, INC.**

1555 McCandless Drive, Milpitas, CA. 95035 U.S.A.  
Telephone: [1] (408) 263-5333 Fax: [1] (408) 263-0119

**A&D MERCURY PTY. LTD.**

32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA  
Telephone: [61] (8) 8301-8100 Fax: [61] (8) 8352-7409

**A&D INSTRUMENTS LTD.**

Unit 24/26 Blacklands Way Abingdon Business Park,  
Abingdon, Oxon OX14 1DY United Kingdom  
Telephone: [44] (1235) 550420 Fax: [44] (1235) 550485

<German Sales Office>

Große Straße 13 b 22926 Ahrensburg, GERMANY  
Telephone: [49] (0) 4102 459230 Fax: [49] (0) 4102 459231

**A&D KOREA Limited**

Manhattan Bldg. 8F, 36-2 Yoido-dong, Youngdeungpo-gu, Seoul, KOREA  
Telephone: [82] (2) 780-4101 Fax: [82] (2) 782-4280

\* AD4328-ADCC-06-KO6-05603