
Robotics & State Estimation (RiSE) Tutorials

Lecture Notes

Yulin Yang - yangyulin1@gmail.com
Chuchu Chen - chuchu.chen@gwu.edu
Xingxing Zuo - xingxing.zuo@mbzuai.ac.ae

Robotics & State Estimation Tutorials

<https://github.com/yangyulin/rise-tutorial>



Robotics & State Estimation (RiSE) Tutorials
Lecture Notes - RiSE-2026
Last Updated - July 12, 2026

Contents

1	Lecture 1: Foundations — Probability, Linear Algebra, and Linear Systems	1
1.1	Probability	1
1.1.1	Definition	1
1.1.2	Conditional probability	1
1.1.3	Total probability theorem	1
1.1.4	Bayes' theorem	1
1.1.5	Independence	1
1.2	Random Variables	2
1.2.1	Distribution	2
1.2.2	Probability density function (pdf)	2
1.2.3	Example distributions	2
1.2.4	Conditional distribution and density	2
1.2.5	Total probability theorem for pdfs	3
1.2.6	Continuous Bayes' theorem	3
1.3	Expectation, Variance, and Random Vectors	3
1.3.1	Mean	3
1.3.2	Variance	3
1.3.3	A set of random variables	4
1.3.4	Covariance	4
1.3.5	Random vector	4
1.3.6	Gaussian vector pdf	5
1.4	Maximum Likelihood and Maximum a Posteriori Estimation	5
1.4.1	Optimization	6
1.5	Linear Systems	6
1.5.1	Homogeneous solution	6
1.5.2	Properties of the state transition matrix	6
1.5.3	Output sequence and observability	6
1.5.4	Full LTV solution	7
1.6	Homework Problems and Solutions	7
1.6.1	Variance identity	7
1.6.2	Covariance matrix identity	7
1.6.3	Scalar covariance identity	8
1.6.4	Independence versus uncorrelatedness	8
1.6.5	The χ^2 distribution	9
2	Lecture 2: Rotation, Lie Groups, SE(3), SE₂(3), and Quaternions	11
2.1	Preliminaries: useful series	11
2.2	Frames, notation, and transformations	11
2.3	Defining rotation	12
2.3.1	Euler angles	12
2.3.2	Infinitesimal rotation and the skew-symmetric matrix	12
2.4	Axis-angle and Rodrigues' formula	13
2.4.1	Logarithmic map	14
2.5	SO(3) kinematics	14
2.5.1	Worked applications	16
2.6	Groups: SO(3) and SE(3)	16

2.6.1	Matrix Lie groups	17
2.6.2	Why this (manifold) machinery?	17
2.7	SE(3)	17
2.7.1	More operations	19
2.8	SE ₂ (3)	20
2.9	Quaternions	21
3	Lecture 3: Camera Model, Triangulation, Point/Line/Plane	23
3.1	The camera measurement model	23
3.2	The measurement Jacobian	24
3.3	A few important discussions	24
3.4	The full intrinsic calibration model	27
3.5	The extrinsic (camera-IMU) calibration	28
3.6	Point / line / plane representation	28
3.6.1	Point representation	28
3.6.2	Plane representation	29
3.6.3	Line representation	30
4	Lecture 4: Information, Marginalization, and Estimator Design	33
4.1	The matrix inversion lemma	33
4.2	Covariance and information	33
4.3	Marginalization	34
4.4	Why we care about the information matrix	35
4.5	A typical visual-odometry / SLAM pipeline	36
4.6	Designing estimators: many ways to handle $\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n}$	36
4.7	Designing a common system: from MAP to the EKF	38
4.8	The relationship between Schur complement and nullspace projection	39
5	Lecture 5: The IMU Model and IMU Integration	41
5.1	The IMU model	41
5.2	Continuous and discrete noise	42
5.3	The IMU kinematics: a first-order ODE	43
5.4	IMU integration: the big picture	43
5.5	Exact integration from t_k to t_{k+1}	44
5.6	Computing $\Delta\mathbf{R}, \Delta\mathbf{p}, \Delta\mathbf{v}$: preintegration and three methods	46
5.7	Mean and covariance propagation with $SO(3) + \mathbb{R}^3$ errors	48
5.8	The linearization using $SE_2(3)$	51
6	Lecture 6: Kalman Filter, Observability Analysis, and KF-Based VINS	54
6.1	The MAP problem behind the Kalman filter	54
6.2	Linearization	54
6.3	Solution 1: solve it incrementally — the (E)KF	55
6.4	Solution 2: solve it by batch	57
6.5	Discussion: the EKF, MLE/MAP, and the VINS system	58
6.6	Visual-inertial initialization	59
	References	61

1 Lecture 1: Foundations — Probability, Linear Algebra, and Linear Systems

1.1 Probability

1.1.1 Definition

For an event A , the probability $P(A)$ is

$$P(A) = \frac{N_A}{N}, \quad (1)$$

where N_A is the number of occurrences of A and N is the number of all possible outcomes.

1.1.2 Conditional probability

The probability of event A given that event B is true is

$$P(A | B) = \frac{P(A, B)}{P(B)}, \quad P(B) \neq 0, \quad (2)$$

which yields the product rule

$$P(A, B) = P(A | B) P(B) \quad (3)$$

$$= P(B | A) P(A). \quad (4)$$

1.1.3 Total probability theorem

If $\{A_1, \dots, A_n\}$ is a partition (mutually exclusive, $P(A_i, A_j) = 0$ for $i \neq j$) and B is an arbitrary event, then

$$P(B) = P(B | A_1)P(A_1) + \dots + P(B | A_n)P(A_n) \quad (5)$$

$$= \sum_i P(B | A_i) P(A_i). \quad (6)$$

1.1.4 Bayes' theorem

$$P(A_i | B) = \frac{P(B | A_i) P(A_i)}{P(B)} \quad (7)$$

$$= \frac{P(B | A_i) P(A_i)}{\sum_i P(B | A_i) P(A_i)}. \quad (8)$$

1.1.5 Independence

With the inclusion–exclusion relation $P(A \cup B) = P(A) + P(B) - P(A \cap B)$, two events A and B are independent when

$$P(A, B) = P(A | B) P(B) \quad (9)$$

$$= P(B | A) P(A) \quad (10)$$

$$= P(A) P(B) \quad (11)$$

$$= P(B) P(A). \quad (12)$$

1.2 Random Variables

A random variable defines a function that quantifies an experiment. For a sample space $S = \{s_1, \dots, s_n\}$, a random variable is a map $x : S \rightarrow \mathbb{R}$ with $x(s_i) = x_i$.

1.2.1 Distribution

The (cumulative) distribution of a random variable x is

$$F_x(x) = P(x \leq x), \quad (13)$$

i.e. the probability that x takes a value lower than or equal to x .

1.2.2 Probability density function (pdf)

$$p(x) = \lim_{\varepsilon \rightarrow 0} \frac{F_x(x) - F_x(x - \varepsilon)}{\varepsilon} \quad (14)$$

$$= \frac{dF_x(x)}{dx} \quad (15)$$

$$= \frac{dP(x \leq x)}{dx}, \quad (16)$$

hence

$$P(x \leq x) = \int_{-\infty}^x p(\xi) d\xi, \quad (17)$$

$$P(x \leq \infty) = \int_{-\infty}^{+\infty} p(\xi) d\xi = 1, \quad (18)$$

and for an interval

$$P(x_1 \leq x < x_2) = \int_{x_1}^{x_2} p(\xi) d\xi. \quad (19)$$

1.2.3 Example distributions

- Gaussian: $x \sim \mathcal{N}(m, \sigma) \iff p(x) = \frac{1}{\sqrt{2\pi} \sigma} e^{-\frac{(x-m)^2}{2\sigma^2}}.$

- Uniform: $p(x) = \begin{cases} 0 & x < x_1 \\ \frac{1}{x_2 - x_1} & x_1 \leq x \leq x_2 \\ 0 & x > x_2 \end{cases}$

1.2.4 Conditional distribution and density

$$P(x \leq x \mid A) = \frac{P(x \leq x, A)}{P(A)}, \quad (20)$$

$$p(x \mid A) = \frac{dP(x \leq x \mid A)}{dx}. \quad (21)$$

1.2.5 Total probability theorem for pdfs

For a mutually exclusive partition $\{A_1, \dots, A_n\}$,

$$p(x) = p(x | A_1)P(A_1) + \dots + p(x | A_n)P(A_n). \quad (22)$$

1.2.6 Continuous Bayes' theorem

Using the infinitesimal relations $P(x = x) = p(x) \delta x$ and $P(x = x | A) = p(x | A) \delta x$,

$$P(A | x = x) = \frac{P(A, x = x)}{P(x = x)} \quad (23)$$

$$= \frac{P(x = x | A) P(A)}{P(x = x)} \quad (24)$$

$$= \frac{p(x | A)}{p(x)} P(A), \quad (25)$$

so that $P(A | x = x) p(x) = p(x | A) P(A)$, which gives the continuous total-probability and Bayes' relations

$$P(A) = \int_{-\infty}^{+\infty} P(A | x = x) p(x) dx, \quad (26)$$

$$p(x | A) = \frac{P(A | x = x)}{P(A)} p(x) \quad (27)$$

$$= \frac{P(A | x = x) p(x)}{\int_{-\infty}^{+\infty} P(A | x = x) p(x) dx}. \quad (28)$$

1.3 Expectation, Variance, and Random Vectors

1.3.1 Mean

The expected value (mean) of a continuous random variable, and its conditional version, are

$$m_x = \mathbb{E}(x) \quad (29)$$

$$= \int_{-\infty}^{+\infty} x p(x) dx, \quad (30)$$

$$m_{x|A} = \mathbb{E}(x | A) \quad (31)$$

$$= \int_{-\infty}^{+\infty} x p(x | A) dx. \quad (32)$$

1.3.2 Variance

$$\sigma_x^2 = \mathbb{E}((x - m_x)^2) \quad (33)$$

$$= \int_{-\infty}^{+\infty} (x - m_x)^2 p(x) dx \quad (34)$$

$$= \mathbb{E}(x^2) - (\mathbb{E}(x))^2, \quad (35)$$

with the conditional variance

$$\sigma_{x|A}^2 = \mathbb{E}\{(x - m_{x|A})^2 \mid A\} \quad (36)$$

$$= \int_{-\infty}^{+\infty} (x - m_{x|A})^2 p(x \mid A) dx. \quad (37)$$

1.3.3 A set of random variables

The joint pdf of $x_1, \dots, x_n$ satisfies

$$\int_{-\infty}^{+\infty} \cdots \int_{-\infty}^{+\infty} p(x_1, \dots, x_n) dx_1 \cdots dx_n = 1. \quad (38)$$

If x_i, x_j are independent, $p(x_i, x_j) = p(x_i)p(x_j)$. Expectation is linear: for $y = \alpha x_i + \beta x_j$,

$$\mathbb{E}(y) = \alpha \mathbb{E}(x_i) + \beta \mathbb{E}(x_j). \quad (39)$$

1.3.4 Covariance

$$\sigma_{ij}^2 = \mathbb{E}((x_i - m_i)(x_j - m_j)) \quad (40)$$

$$= \mathbb{E}(x_i x_j) - \mathbb{E}(x_i) \mathbb{E}(x_j). \quad (41)$$

When $\sigma_{ij} = 0$ we have $\mathbb{E}(x_i x_j) = \mathbb{E}(x_i) \mathbb{E}(x_j)$ and x_i, x_j are *uncorrelated*.

Discussion questions.

1. If x_i, x_j are independent, then $p(x_i, x_j) = p(x_i)p(x_j) \Rightarrow \mathbb{E}(x_i x_j) = \mathbb{E}(x_i)\mathbb{E}(x_j)$ — so independence implies uncorrelated.
2. If x_i, x_j are uncorrelated, are they necessarily independent?
3. If x_i, x_j are jointly Gaussian, is independence equivalent to being uncorrelated?

1.3.5 Random vector

Let $\mathbf{x} = [x_1, \dots, x_n]^\top$, where all elements are random variables, with mean $\mathbb{E}(\mathbf{x}) \triangleq \mathbf{m}_x$ and covariance

$$\mathbf{P} = \mathbb{E}((\mathbf{x} - \mathbf{m}_x)(\mathbf{x} - \mathbf{m}_x)^\top) \quad (42)$$

$$= \mathbb{E}(\mathbf{x}\mathbf{x}^\top) - \mathbb{E}(\mathbf{x}) \mathbb{E}(\mathbf{x}^\top), \quad (43)$$

with entries

$$P_{ii} = \mathbb{E}((x_i - m_i)^2) \quad (44)$$

$$= \int_{-\infty}^{+\infty} (x_i - m_i)^2 p(x_i) dx_i, \quad (45)$$

$$P_{ij} = \mathbb{E}((x_i - m_i)(x_j - m_j)). \quad (46)$$

Since $P_{ij} = P_{ji}$, the covariance $\mathbf{P}$ is a symmetric matrix; it is also positive (semi-)definite.

1.3.6 Gaussian vector pdf

$$p(\mathbf{x}) = \frac{1}{(2\pi)^{n/2} \sqrt{|\mathbf{P}|}} \exp\left(-\frac{1}{2}(\mathbf{x} - \mathbf{m}_x)^\top \mathbf{P}^{-1}(\mathbf{x} - \mathbf{m}_x)\right), \quad (47)$$

where $|\mathbf{P}|$ is the determinant of $\mathbf{P}$, $\mathbf{m}_x = \mathbb{E}(\mathbf{x})$, and $\mathbf{P} = \mathbb{E}((\mathbf{x} - \mathbf{m}_x)(\mathbf{x} - \mathbf{m}_x)^\top)$.

Homework. Let $\mathbf{x} = [x_1, \dots, x_n]^\top$ with $p(\mathbf{x}) = \mathcal{N}(\mathbf{m}_x, \mathbf{P}_{xx})$. Define

$$\begin{aligned} q &= (\mathbf{x} - \mathbf{m}_x)^\top \mathbf{P}_{xx}^{-1}(\mathbf{x} - \mathbf{m}_x), \\ \mathbf{y} &= \mathbf{P}_{xx}^{-1/2}(\mathbf{x} - \mathbf{m}_x), \\ q &= \mathbf{y}^\top \mathbf{y} = \sum_i y_i^2. \end{aligned}$$

What are the mean and covariance of q ?

1.4 Maximum Likelihood and Maximum a Posteriori Estimation

For a measurement model with additive noise $z_i = h_i(\mathbf{x}) + n_i$, stacked as $\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n}$, two estimators are

- **Maximum likelihood estimation (MLE):** $\max_{\mathbf{x}} p(\mathbf{z} | \mathbf{x})$.
- **Maximum a posteriori (MAP):** $\max_{\mathbf{x}} p(\mathbf{x} | \mathbf{z})$, with $p(\mathbf{x} | \mathbf{z}) = \frac{p(\mathbf{z} | \mathbf{x}) p(\mathbf{x})}{p(\mathbf{z})}$.

For zero-mean Gaussian noise $\mathbf{n} \sim \mathcal{N}(\mathbf{0}, \mathbf{P})$,

$$\max_{\mathbf{x}} p(\mathbf{z} | \mathbf{x}) = \max_{\mathbf{x}} \frac{1}{(2\pi)^{n/2} \sqrt{|\mathbf{P}|}} \exp\left(-(\mathbf{z} - \mathbf{h}(\mathbf{x}))^\top \mathbf{P}^{-1}(\mathbf{z} - \mathbf{h}(\mathbf{x}))\right), \quad (48)$$

which is equivalent to the weighted least-squares problem

$$\min_{\mathbf{x}} C = (\mathbf{z} - \mathbf{h}(\mathbf{x}))^\top \mathbf{P}^{-1}(\mathbf{z} - \mathbf{h}(\mathbf{x})). \quad (49)$$

Linearizing about $\hat{\mathbf{x}}$ with $\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n} = \mathbf{h}(\hat{\mathbf{x}}) + \mathbf{H}(\mathbf{x} - \hat{\mathbf{x}}) + \mathbf{n}$, and defining the residual $\tilde{\mathbf{z}} = \mathbf{z} - \mathbf{h}(\hat{\mathbf{x}})$ and error $\tilde{\mathbf{x}} = \mathbf{x} - \hat{\mathbf{x}}$,

$$\min_{\tilde{\mathbf{x}}} (\tilde{\mathbf{z}} - \mathbf{H}\tilde{\mathbf{x}})^\top \mathbf{P}^{-1}(\tilde{\mathbf{z}} - \mathbf{H}\tilde{\mathbf{x}}) = \min_{\tilde{\mathbf{x}}} (\tilde{\mathbf{z}}^\top \mathbf{P}^{-1} \tilde{\mathbf{z}} - 2\tilde{\mathbf{z}}^\top \mathbf{P}^{-1} \mathbf{H}\tilde{\mathbf{x}} + \tilde{\mathbf{x}}^\top \mathbf{H}^\top \mathbf{P}^{-1} \mathbf{H}\tilde{\mathbf{x}}). \quad (50)$$

Setting the gradient to zero gives the normal equations $\mathbf{H}^\top \mathbf{P}^{-1} \mathbf{H} \tilde{\mathbf{x}} = \mathbf{H}^\top \mathbf{P}^{-1} \tilde{\mathbf{z}}$, hence

$$\boxed{\begin{aligned} \mathbf{x}^\oplus &= \hat{\mathbf{x}} + \tilde{\mathbf{x}} \\ &= \hat{\mathbf{x}} + (\mathbf{H}^\top \mathbf{P}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{P}^{-1} \tilde{\mathbf{z}}. \end{aligned}} \quad (51)$$

$$(52)$$

This is the classical weighted least-squares solution.

Questions.

1. What is the covariance of the new estimate $\mathbf{x}^\oplus$?
2. For a prior $\mathbf{x}_p = \mathbf{x} + \mathbf{n}_p$ together with $z_i = h_i(\mathbf{x}) + n_i$, $i = 1, \dots, n$, what is the MAP solution $\max_{\mathbf{x}} p(\mathbf{x} | \mathbf{z})$?

1.4.1 Optimization

Nonlinear least-squares problems are solved iteratively, e.g. Gauss–Newton (GN) and Levenberg–Marquardt (LM).

1.5 Linear Systems

A linear (continuous-time) state-space system is

$$\dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u}, \quad (53)$$

$$\mathbf{y} = \mathbf{C}\mathbf{x} + \mathbf{D}\mathbf{u}, \quad (54)$$

where $\mathbf{x}$ is the state, $\mathbf{u}$ the input, and $\mathbf{y}$ the output. Its discrete-time counterpart is

$$\mathbf{x}_{k+1} = \mathbf{A}'\mathbf{x}_k + \mathbf{B}'\mathbf{u}_k, \quad (55)$$

$$\mathbf{y}_{k+1} = \mathbf{C}'\mathbf{x}_{k+1} + \mathbf{D}'\mathbf{u}_{k+1}. \quad (56)$$

If $\mathbf{A}, \mathbf{B}, \mathbf{C}, \mathbf{D}$ are constant, the system is *linear time-invariant* (LTI); if they depend on time, it is *linear time-variant* (LTV).

1.5.1 Homogeneous solution

Consider $\dot{\mathbf{x}} = \mathbf{A}\mathbf{x}$ with $\mathbf{x}(t_0) = \mathbf{x}_0$ and $\mathbf{y} = \mathbf{C}\mathbf{x}$. From $\dot{\mathbf{x}} - \mathbf{A}\mathbf{x} = \mathbf{0}$,

$$\frac{d}{dt}(e^{-\mathbf{A}t}\mathbf{x}) = e^{-\mathbf{A}t}\dot{\mathbf{x}} + e^{-\mathbf{A}t}(-\mathbf{A})\mathbf{x} \quad (57)$$

$$= e^{-\mathbf{A}t}(\dot{\mathbf{x}} - \mathbf{A}\mathbf{x}) \quad (58)$$

$$= \mathbf{0}. \quad (59)$$

Integrating from 0 to t gives $e^{-\mathbf{A}t}\mathbf{x}(t) - \mathbf{x}(t_0) = \mathbf{0}$, so

$$\mathbf{x}(t) = e^{\mathbf{A}t}\mathbf{x}_0 \quad (60)$$

$$= \mathbf{\Phi}(t, 0)\mathbf{x}_0, \quad (61)$$

$$\mathbf{\Phi}(t, 0) = e^{\mathbf{A}t}, \quad (62)$$

where $\mathbf{\Phi}(t, 0)$ is the *state transition matrix*, and $\mathbf{y} = \mathbf{C}\mathbf{\Phi}(t, 0)\mathbf{x}_0$.

1.5.2 Properties of the state transition matrix

$$\mathbf{\Phi}(t_2, t_0) = \mathbf{\Phi}(t_2, t_1)\mathbf{\Phi}(t_1, t_0), \quad (63)$$

$$\frac{d}{dt}\mathbf{\Phi}(t, 0) = \mathbf{A}\mathbf{\Phi}(t, 0). \quad (64)$$

The second follows from $\dot{\mathbf{x}} = \dot{\mathbf{\Phi}}(t, 0)\mathbf{x}_0 = \mathbf{A}\mathbf{x} = \mathbf{A}\mathbf{\Phi}(t, 0)\mathbf{x}_0$.

1.5.3 Output sequence and observability

Sampling the homogeneous response at $t_0, t_1, \dots, t_n$ with $\mathbf{x}_k = \mathbf{\Phi}(k, 0)\mathbf{x}_0$ and $\mathbf{y}_k = \mathbf{C}\mathbf{x}_k$ stacks into

$$\begin{bmatrix} \mathbf{y}_1 \\ \vdots \\ \mathbf{y}_n \end{bmatrix} = \begin{bmatrix} \mathbf{C}\mathbf{\Phi}(1, 0) \\ \vdots \\ \mathbf{C}\mathbf{\Phi}(n, 0) \end{bmatrix} \mathbf{x}_0, \quad (65)$$

which relates the measured outputs to the initial state (an observability-type relation).

1.5.4 Full LTV solution

For the complete system $\dot{\mathbf{x}} = \mathbf{A}(t)\mathbf{x} + \mathbf{B}(t)\mathbf{u}(t)$, write $\dot{\mathbf{x}} - \mathbf{A}(t)\mathbf{x} = \mathbf{B}(t)\mathbf{u}(t)$ and use the integrating factor $e^{-\int_0^t \mathbf{A}(\tau) d\tau}$:

$$\frac{d}{dt} \left(e^{-\int_0^t \mathbf{A}(\tau) d\tau} \mathbf{x} \right) = e^{-\int_0^t \mathbf{A}(\tau) d\tau} (\dot{\mathbf{x}} - \mathbf{A}(t)\mathbf{x}) \quad (66)$$

$$= e^{-\int_0^t \mathbf{A}(\tau) d\tau} \mathbf{B}(t)\mathbf{u}(t). \quad (67)$$

Integrating,

$$e^{-\int_0^t \mathbf{A}(\tau) d\tau} \mathbf{x}(t) - \mathbf{x}_0 = \int_0^t e^{-\int_0^\tau \mathbf{A}(s) ds} \mathbf{B}(\tau)\mathbf{u}(\tau) d\tau, \quad (68)$$

so that, with $\Phi(t, 0) = e^{\int_0^t \mathbf{A}(\tau) d\tau}$ and $\Phi(t, \tau) = e^{\int_\tau^t \mathbf{A}(s) ds}$,

$$\mathbf{x}(t) = \Phi(t, 0) \mathbf{x}_0 + \int_0^t \Phi(t, \tau) \mathbf{B}(\tau) \mathbf{u}(\tau) d\tau, \quad (69)$$

$$\mathbf{y}(t) = \mathbf{C}(t) \left(\Phi(t, 0) \mathbf{x}_0 + \int_0^t \Phi(t, \tau) \mathbf{B}(\tau) \mathbf{u}(\tau) d\tau \right) + \mathbf{D}(t)\mathbf{u}(t). \quad (70)$$

This is one of the most important properties of linear systems.

1.6 Homework Problems and Solutions

1.6.1 Variance identity

Problem. Show that the variance of a scalar random variable can be written as $\sigma_x^2 = \mathbb{E}(x^2) - (\mathbb{E}(x))^2$, and discuss when it vanishes.

Solution. Expanding the definition with $m_x = \mathbb{E}(x)$,

$$\sigma_x^2 = \mathbb{E}((x - m_x)^2) \quad (71)$$

$$= \mathbb{E}(x^2 - 2m_x x + m_x^2) \quad (72)$$

$$= \mathbb{E}(x^2) - 2m_x \mathbb{E}(x) + m_x^2 \quad (73)$$

$$= \mathbb{E}(x^2) - m_x^2. \quad (74)$$

Since $\sigma_x^2 \geq 0$, we have $\mathbb{E}(x^2) \geq (\mathbb{E}(x))^2$, with equality if and only if $\sigma_x^2 = 0$, i.e. $x = m_x$ almost surely (a deterministic variable) — a degenerate special case.

1.6.2 Covariance matrix identity

Problem. For a random vector $\mathbf{x}$ with mean $\mathbf{m}_x$, show that $\mathbf{P} = \mathbb{E}((\mathbf{x} - \mathbf{m}_x)(\mathbf{x} - \mathbf{m}_x)^\top) = \mathbb{E}(\mathbf{x}\mathbf{x}^\top) - \mathbb{E}(\mathbf{x})\mathbb{E}(\mathbf{x}^\top)$.

Solution. Expanding the outer product and using linearity of expectation, together with $\mathbb{E}(\mathbf{x}) = \mathbf{m}_x$,

$$\mathbf{P} = \mathbb{E}(\mathbf{x}\mathbf{x}^\top - \mathbf{x}\mathbf{m}_x^\top - \mathbf{m}_x\mathbf{x}^\top + \mathbf{m}_x\mathbf{m}_x^\top) \quad (75)$$

$$= \mathbb{E}(\mathbf{x}\mathbf{x}^\top) - \mathbb{E}(\mathbf{x})\mathbf{m}_x^\top - \mathbf{m}_x\mathbb{E}(\mathbf{x}^\top) + \mathbf{m}_x\mathbf{m}_x^\top \quad (76)$$

$$= \mathbb{E}(\mathbf{x}\mathbf{x}^\top) - \mathbf{m}_x\mathbf{m}_x^\top - \mathbf{m}_x\mathbf{m}_x^\top + \mathbf{m}_x\mathbf{m}_x^\top \quad (77)$$

$$= \mathbb{E}(\mathbf{x}\mathbf{x}^\top) - \mathbf{m}_x\mathbf{m}_x^\top \quad (78)$$

$$= \mathbb{E}(\mathbf{x}\mathbf{x}^\top) - \mathbb{E}(\mathbf{x})\mathbb{E}(\mathbf{x}^\top). \quad (79)$$

1.6.3 Scalar covariance identity

Problem. For two random variables x_i, x_j , show that $\sigma_{ij} = \mathbb{E}(x_i x_j) - \mathbb{E}(x_i)\mathbb{E}(x_j)$.

Solution. With $m_i = \mathbb{E}(x_i)$, $m_j = \mathbb{E}(x_j)$, expand

$$\sigma_{ij} = \mathbb{E}((x_i - m_i)(x_j - m_j)) \quad (80)$$

$$= \iint (x_i - m_i)(x_j - m_j) p(x_i, x_j) dx_i dx_j \quad (81)$$

$$\begin{aligned} &= \iint x_i x_j p(x_i, x_j) dx_i dx_j - m_j \iint x_i p(x_i, x_j) dx_i dx_j \\ &\quad - m_i \iint x_j p(x_i, x_j) dx_i dx_j + m_i m_j \iint p(x_i, x_j) dx_i dx_j. \end{aligned} \quad (82)$$

Using the marginalization identities (and symmetrically for x_j)

$$\int p(x_i, x_j) dx_i = p(x_j), \quad \iint p(x_i, x_j) dx_i dx_j = 1, \quad (83)$$

we get

$$m_i \iint x_j p(x_i, x_j) dx_i dx_j = m_i \int x_j p(x_j) dx_j \quad (84)$$

$$= m_i m_j, \quad (85)$$

and likewise for the other term, so

$$\sigma_{ij} = \mathbb{E}(x_i x_j) - m_i m_j - m_i m_j + m_i m_j \quad (86)$$

$$= \mathbb{E}(x_i x_j) - \mathbb{E}(x_i)\mathbb{E}(x_j). \quad (87)$$

1.6.4 Independence versus uncorrelatedness

Problem. Resolve the three discussion questions: (1) does independence imply uncorrelatedness? (2) does uncorrelatedness imply independence? (3) for jointly Gaussian variables, are the two equivalent?

Solution. (1) *Independent $\Rightarrow$ uncorrelated.* If $p(x_i, x_j) = p(x_i)p(x_j)$, then

$$\mathbb{E}(x_i x_j) = \iint x_i x_j p(x_i, x_j) dx_i dx_j \quad (88)$$

$$= \int x_i p(x_i) dx_i \cdot \int x_j p(x_j) dx_j \quad (89)$$

$$= \mathbb{E}(x_i)\mathbb{E}(x_j), \quad (90)$$

so $\sigma_{ij} = 0$.

(2) *Uncorrelated $\nRightarrow$ independent.* Uncorrelatedness gives only

$$\mathbb{E}(x_i x_j) - \mathbb{E}(x_i)\mathbb{E}(x_j) = \iint x_i x_j (p(x_i, x_j) - p(x_i)p(x_j)) dx_i dx_j \quad (91)$$

$$= 0, \quad (92)$$

which does *not* force $p(x_i, x_j) = p(x_i)p(x_j)$ in general. Hence uncorrelated does not imply independence.

(3) *Jointly Gaussian.* For $x_i \sim \mathcal{N}(m_i, \sigma_i^2)$ and $x_j \sim \mathcal{N}(m_j, \sigma_j^2)$, the product of marginals is

$$p(x_i)p(x_j) = \frac{1}{2\pi\sigma_i\sigma_j} \exp\left\{-\frac{1}{2} \begin{bmatrix} x_i - m_i \\ x_j - m_j \end{bmatrix}^\top \begin{bmatrix} \sigma_i^2 & 0 \\ 0 & \sigma_j^2 \end{bmatrix}^{-1} \begin{bmatrix} x_i - m_i \\ x_j - m_j \end{bmatrix}\right\}. \quad (93)$$

The joint Gaussian $[x_i, x_j]^\top \sim \mathcal{N}([m_i, m_j]^\top, \mathbf{P}_{xx})$ with $\mathbf{P}_{xx} = \begin{bmatrix} \sigma_i^2 & \sigma_{ij} \\ \sigma_{ji} & \sigma_j^2 \end{bmatrix}$ is

$$p(x_i, x_j) = \frac{1}{2\pi\sqrt{|\mathbf{P}_{xx}|}} \exp\left\{-\frac{1}{2} \begin{bmatrix} x_i - m_i \\ x_j - m_j \end{bmatrix}^\top \mathbf{P}_{xx}^{-1} \begin{bmatrix} x_i - m_i \\ x_j - m_j \end{bmatrix}\right\}. \quad (94)$$

If $\sigma_{ij} = \sigma_{ji} = 0$, then $\mathbf{P}_{xx}$ is diagonal and $p(x_i, x_j) = p(x_i)p(x_j)$. Hence, for (jointly) Gaussian variables, *independent* $\Leftrightarrow$ *uncorrelated*.

1.6.5 The χ^2 distribution

Problem. Let $\mathbf{x} = [x_1, \dots, x_n]^\top$ with $p(\mathbf{x}) = \mathcal{N}(\mathbf{m}_x, \mathbf{P}_{xx})$ and define $q = (\mathbf{x} - \mathbf{m}_x)^\top \mathbf{P}_{xx}^{-1} (\mathbf{x} - \mathbf{m}_x)$. Find the mean and variance of q .

Solution. Factor $\mathbf{P}_{xx} = \mathbf{L}\mathbf{L}^\top$ (Cholesky), so $\mathbf{P}_{xx}^{-1} = \mathbf{L}^{-\top}\mathbf{L}^{-1}$, and define the whitened variable $\mathbf{y} = \mathbf{L}^{-1}(\mathbf{x} - \mathbf{m}_x)$. Then

$$q = (\mathbf{x} - \mathbf{m}_x)^\top \mathbf{L}^{-\top} \mathbf{L}^{-1} (\mathbf{x} - \mathbf{m}_x) \quad (95)$$

$$= \mathbf{y}^\top \mathbf{y} \quad (96)$$

$$= \sum_{i=1}^n y_i^2. \quad (97)$$

The whitened variable has zero mean and identity covariance,

$$\mathbf{m}_y = \mathbb{E}(\mathbf{y}) \quad (98)$$

$$= \mathbf{L}^{-1}(\mathbb{E}(\mathbf{x}) - \mathbf{m}_x) \quad (99)$$

$$= \mathbf{0}, \quad (100)$$

$$\mathbf{P}_{yy} = \mathbb{E}(\mathbf{y}\mathbf{y}^\top) \quad (101)$$

$$= \mathbf{L}^{-1} \mathbb{E}((\mathbf{x} - \mathbf{m}_x)(\mathbf{x} - \mathbf{m}_x)^\top) \mathbf{L}^{-\top} \quad (102)$$

$$= \mathbf{L}^{-1} \mathbf{P}_{xx} \mathbf{L}^{-\top} \quad (103)$$

$$= \mathbf{L}^{-1} \mathbf{L}\mathbf{L}^\top \mathbf{L}^{-\top} \quad (104)$$

$$= \mathbf{I}_n, \quad (105)$$

so $y_i \sim \mathcal{N}(0, 1)$ are independent. Therefore the mean of q is

$$\mathbb{E}(q) = \mathbb{E}(\mathbf{y}^\top \mathbf{y}) \quad (106)$$

$$= \sum_{i=1}^n \mathbb{E}(y_i^2) \quad (107)$$

$$= n. \quad (108)$$

For the variance, with $\mathbb{E}(y_i^2) = 1$ the cross terms vanish by independence, giving

$$\sigma_{qq}^2 = \mathbb{E}((q - n)^2) \quad (109)$$

$$= \mathbb{E}\left(\left(\sum_i (y_i^2 - 1)\right)^2\right) \quad (110)$$

$$= \sum_i \mathbb{E}((y_i^2 - 1)^2) \quad (111)$$

$$= \sum_i (\mathbb{E}(y_i^4) - 2\mathbb{E}(y_i^2) + 1). \quad (112)$$

The fourth moment of a standard normal follows from integration by parts (with $u = y_i^3$, $dv = y_i p(y_i) dy_i$, $v = -p(y_i)$):

$$\mathbb{E}(y_i^4) = \int_{-\infty}^{+\infty} y_i^4 p(y_i) dy_i \quad (113)$$

$$= \underbrace{[-y_i^3 p(y_i)]_{-\infty}^{+\infty}}_{=0} + \int_{-\infty}^{+\infty} 3y_i^2 p(y_i) dy_i \quad (114)$$

$$= 3 \mathbb{E}(y_i^2) \quad (115)$$

$$= 3. \quad (116)$$

Hence each term equals $3 - 2 + 1 = 2$, and

$$\sigma_{qq}^2 = \sum_{i=1}^n 2 = 2n. \quad (117)$$

So $q \sim \chi^2(n)$ has mean n and variance $2n$.

2 Lecture 2: Rotation, Lie Groups, SE(3), SE₂(3), and Quaternions

Further reading. This lecture draws on several standard references: matrix Lie groups in Barfoot [1, Ch. 7]; the Lie-group treatment of $SO(3)/SE(3)$ in the GTSAM notes [2], Atanasov's ECE276A slides [3], and the micro Lie theory of Solà, Deray & Atchuthan [4]; and quaternion algebra/kinematics in Trawny & Roumeliotis [5, Sec. 1] and Solà [6, Sec. 1–3].

2.1 Preliminaries: useful series

The matrix exponential and the sine/cosine series underpin everything that follows:

$$e^x = \exp(x) = \sum_{k=0}^{\infty} \frac{1}{k!} x^k \quad (118)$$

$$= I + x + \frac{1}{2!}x^2 + \frac{1}{3!}x^3 + \frac{1}{4!}x^4 + \dots, \quad (119)$$

$$\sin(x) = \sum_{k=0}^{\infty} \frac{(-1)^k}{(2k+1)!} x^{2k+1} \quad (120)$$

$$= x - \frac{1}{3!}x^3 + \frac{1}{5!}x^5 - \dots, \quad (121)$$

$$\cos(x) = \sum_{k=0}^{\infty} \frac{(-1)^k}{(2k)!} x^{2k} \quad (122)$$

$$= 1 - \frac{1}{2!}x^2 + \frac{1}{4!}x^4 - \dots. \quad (123)$$

For small x (so that $x^2, x^3 \rightarrow 0$), the important first-order approximations are $e^x \approx I + x$, $\sin(x) \approx x$, and $\cos(x) \approx 1$.

2.2 Frames, notation, and transformations

We work with coordinate frames $\{A\}$ and $\{B\}$. A point/vector $\mathbf{L}$ expressed in $\{A\}$ is ${}^A\mathbf{L}$, and in $\{B\}$ is ${}^B\mathbf{L}$. The angle $\theta_{A \rightarrow B}$ is the rotation about the z -axis taking $\{A\}$ to $\{B\}$ (Fig. 1).

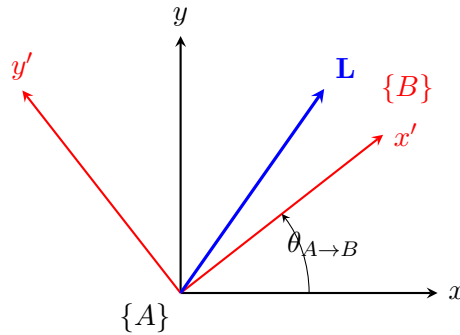


Figure 1: Frame $\{B\}$ is frame $\{A\}$ rotated by $\theta_{A \rightarrow B}$ about the z -axis; the vector $\mathbf{L}$ can be expressed in either frame.

The rotation matrix ${}^A_B\mathbf{R}$ maps a vector from $\{B\}$ to $\{A\}$:

$${}^A\mathbf{L} = {}^A_B\mathbf{R} {}^B\mathbf{L} \quad (124)$$

$$= {}^A_B\mathbf{R}(\theta_{A \rightarrow B}) {}^B\mathbf{L}. \quad (125)$$

Adding the translation ${}^A\mathbf{p}_B$ (the origin of $\{B\}$ expressed in $\{A\}$, Fig. 2) gives the full rigid-body transformation

$$\{A\}, \{B\} \Rightarrow \{{}_B^A\mathbf{R}, {}^A\mathbf{p}_B\} \Rightarrow {}_B^A\mathbf{T} = \begin{bmatrix} {}_B^A\mathbf{R} & {}^A\mathbf{p}_B \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix}. \quad (126)$$

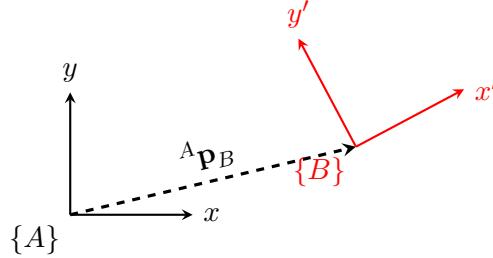


Figure 2: A rigid-body transformation combines the rotation ${}_B^A\mathbf{R}$ with the translation ${}^A\mathbf{p}_B$.

2.3 Defining rotation

2.3.1 Euler angles

With roll θ (about x), pitch r (about y), yaw ψ (about z),

$$\mathbf{R}(\theta) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta \\ 0 & \sin \theta & \cos \theta \end{bmatrix}, \quad \mathbf{R}(r) = \begin{bmatrix} \cos r & 0 & \sin r \\ 0 & 1 & 0 \\ -\sin r & 0 & \cos r \end{bmatrix}, \quad \mathbf{R}(\psi) = \begin{bmatrix} \cos \psi & -\sin \psi & 0 \\ \sin \psi & \cos \psi & 0 \\ 0 & 0 & 1 \end{bmatrix}, \quad (127)$$

and the yaw–pitch–roll composition is

$$\mathbf{R} = \mathbf{R}(\psi) \mathbf{R}(r) \mathbf{R}(\theta) \quad (128)$$

$$= \begin{bmatrix} \cos \psi & -\sin \psi & 0 \\ \sin \psi & \cos \psi & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \cos r & 0 & \sin r \\ 0 & 1 & 0 \\ -\sin r & 0 & \cos r \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta \\ 0 & \sin \theta & \cos \theta \end{bmatrix}. \quad (129)$$

2.3.2 Infinitesimal rotation and the skew-symmetric matrix

For small angles $\delta\theta, \delta r, \delta\psi \rightarrow 0$ each elementary rotation linearizes ($\cos \rightarrow 1$, $\sin \rightarrow \text{angle}$):

$$\mathbf{R}(\delta\theta) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & -\delta\theta \\ 0 & \delta\theta & 1 \end{bmatrix}, \quad \mathbf{R}(\delta r) = \begin{bmatrix} 1 & 0 & \delta r \\ 0 & 1 & 0 \\ -\delta r & 0 & 1 \end{bmatrix}, \quad \mathbf{R}(\delta\psi) = \begin{bmatrix} 1 & -\delta\psi & 0 \\ \delta\psi & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}. \quad (130)$$

Multiplying the last two and dropping all second-order products ($\delta r \delta\theta \approx 0$ etc.),

$$\mathbf{R}(\delta r) \mathbf{R}(\delta\theta) = \begin{bmatrix} 1 & 0 & \delta r \\ 0 & 1 & 0 \\ -\delta r & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & -\delta\theta \\ 0 & \delta\theta & 1 \end{bmatrix} \quad (131)$$

$$= \begin{bmatrix} 1 & 0 & \delta r \\ 0 & 1 & -\delta\theta \\ -\delta r & \delta\theta & 1 \end{bmatrix}, \quad (132)$$

and then

$$\begin{aligned}\mathbf{R} &= \mathbf{R}(\delta\psi)\mathbf{R}(\delta r)\mathbf{R}(\delta\theta) = \begin{bmatrix} 1 & -\delta\psi & 0 \\ \delta\psi & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & \delta r \\ 0 & 1 & -\delta\theta \\ -\delta r & \delta\theta & 1 \end{bmatrix} \\ &= \begin{bmatrix} 1 & -\delta\psi & \delta r \\ \delta\psi & 1 & -\delta\theta \\ -\delta r & \delta\theta & 1 \end{bmatrix} \end{aligned} \quad (133)$$

$$= \mathbf{I} + \begin{bmatrix} 0 & -\delta\psi & \delta r \\ \delta\psi & 0 & -\delta\theta \\ -\delta r & \delta\theta & 0 \end{bmatrix} \quad (134)$$

$$= \mathbf{I} + [\boldsymbol{\theta}]_{\times}, \quad (135)$$

where the small-angle vector is $\boldsymbol{\theta} = [\delta\theta, \delta r, \delta\psi]^T$. The matrix $[\boldsymbol{\theta}]_{\times}$ is skew-symmetric, $[\boldsymbol{\theta}]_{\times} = -[\boldsymbol{\theta}]_{\times}^T$. This motivates writing a finite rotation as $\mathbf{R}(\boldsymbol{\theta}) \approx \mathbf{I} + [\boldsymbol{\theta}]_{\times} \approx \exp([\boldsymbol{\theta}]_{\times})$, and defining $\text{Exp}(\boldsymbol{\theta}) \triangleq \exp([\boldsymbol{\theta}]_{\times})$. The question is then whether $\mathbf{R}(\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta})$.

2.4 Axis-angle and Rodrigues' formula

Let $\mathbf{k}$ be the unit rotation axis and θ the rotation angle, with $\boldsymbol{\theta} = \theta\mathbf{k} = [\theta_1, \theta_2, \theta_3]^T$, so

$$\mathbf{k} = \begin{bmatrix} k_1 \\ k_2 \\ k_3 \end{bmatrix}, \quad [\mathbf{k}]_{\times} = \begin{bmatrix} 0 & -k_3 & k_2 \\ k_3 & 0 & -k_1 \\ -k_2 & k_1 & 0 \end{bmatrix}, \quad [\boldsymbol{\theta}]_{\times} = \begin{bmatrix} 0 & -\theta_3 & \theta_2 \\ \theta_3 & 0 & -\theta_1 \\ -\theta_2 & \theta_1 & 0 \end{bmatrix}. \quad (136)$$

The skew operator on a unit vector satisfies the cyclic power identities

$$[\mathbf{k}]_{\times}^2 = \mathbf{k}\mathbf{k}^T - \mathbf{I}_3, \quad [\mathbf{k}]_{\times}^3 = -[\mathbf{k}]_{\times}, \quad [\mathbf{k}]_{\times}^4 = -[\mathbf{k}]_{\times}^2, \quad (137)$$

$$[\mathbf{k}]_{\times}^5 = [\mathbf{k}]_{\times}, \quad [\mathbf{k}]_{\times}^6 = [\mathbf{k}]_{\times}^2, \quad [\mathbf{k}]_{\times}^7 = -[\mathbf{k}]_{\times}. \quad (138)$$

Substituting $[\boldsymbol{\theta}]_{\times} = \theta [\mathbf{k}]_{\times}$ into the exponential series term by term,

$$\begin{aligned}\text{Exp}(\boldsymbol{\theta}) &= \exp(\theta [\mathbf{k}]_{\times}) = \mathbf{I} + \theta [\mathbf{k}]_{\times} + \frac{\theta^2}{2!} [\mathbf{k}]_{\times}^2 + \frac{\theta^3}{3!} [\mathbf{k}]_{\times}^3 + \frac{\theta^4}{4!} [\mathbf{k}]_{\times}^4 \\ &\quad + \frac{\theta^5}{5!} [\mathbf{k}]_{\times}^5 + \frac{\theta^6}{6!} [\mathbf{k}]_{\times}^6 + \frac{\theta^7}{7!} [\mathbf{k}]_{\times}^7 + \cdots \\ &= \mathbf{I} + \theta [\mathbf{k}]_{\times} + \frac{\theta^2}{2!} [\mathbf{k}]_{\times}^2 - \frac{\theta^3}{3!} [\mathbf{k}]_{\times} - \frac{\theta^4}{4!} [\mathbf{k}]_{\times}^2 \\ &\quad + \frac{\theta^5}{5!} [\mathbf{k}]_{\times} + \frac{\theta^6}{6!} [\mathbf{k}]_{\times}^2 - \frac{\theta^7}{7!} [\mathbf{k}]_{\times} + \cdots \\ &= \mathbf{I} + \underbrace{\left(\theta - \frac{\theta^3}{3!} + \frac{\theta^5}{5!} - \frac{\theta^7}{7!} + \cdots \right)}_{\sin \theta} [\mathbf{k}]_{\times} \\ &\quad + \underbrace{\left(\frac{\theta^2}{2!} - \frac{\theta^4}{4!} + \frac{\theta^6}{6!} - \cdots \right)}_{1 - \cos \theta} [\mathbf{k}]_{\times}^2, \end{aligned} \quad (139)$$

which gives **Rodrigues' rotation formula**

$$\boxed{\mathbf{R}(\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta}) = \exp(\theta [\mathbf{k}]_{\times}) = \mathbf{I} + \sin \theta [\mathbf{k}]_{\times} + (1 - \cos \theta) [\mathbf{k}]_{\times}^2.} \quad (140)$$

For a small angle $\delta\theta \rightarrow 0$, $\mathbf{R}(\delta\boldsymbol{\theta}) \approx \mathbf{I} + [\delta\boldsymbol{\theta}]_{\times}$ (small-angle approximation).

2.4.1 Logarithmic map

The log map is the inverse of the exponential map:

$$\log(\mathbf{R}) = [\boldsymbol{\theta}]_{\times}, \quad \text{Log}(\mathbf{R}) = \boldsymbol{\theta}_{3 \times 1}, \quad \theta = \arccos\left(\frac{\text{tr} \mathbf{R} - 1}{2}\right), \quad [\mathbf{k}]_{\times} = \frac{\mathbf{R} - \mathbf{R}^{\top}}{2 \sin \theta}. \quad (141)$$

2.5 SO(3) kinematics

The two directions of the maps are: from the vector space $\mathbb{R}^3$ via the Lie algebra to the Lie group, $\boldsymbol{\theta} \rightarrow [\boldsymbol{\theta}]_{\times} \rightarrow \mathbf{R} = \text{Exp}(\boldsymbol{\theta})$; and back, $\mathbf{R} \rightarrow [\boldsymbol{\theta}]_{\times} \rightarrow \boldsymbol{\theta} = \text{Log}(\mathbf{R})$.

(1) Angular-velocity kinematics. Differentiating the orthogonality constraint $\mathbf{R}\mathbf{R}^{\top} = \mathbf{I}_3$,

$$\frac{d}{dt}(\mathbf{R}\mathbf{R}^{\top}) = \mathbf{0} \Rightarrow \dot{\mathbf{R}}\mathbf{R}^{\top} + \mathbf{R}\dot{\mathbf{R}}^{\top} = \mathbf{0} \Rightarrow \dot{\mathbf{R}}\mathbf{R}^{\top} = -\mathbf{R}\dot{\mathbf{R}}^{\top} = -(\dot{\mathbf{R}}\mathbf{R}^{\top})^{\top}, \quad (142)$$

so $\dot{\mathbf{R}}\mathbf{R}^{\top}$ is skew-symmetric. Writing it as $[\boldsymbol{\omega}]_{\times}$ with $[\boldsymbol{\omega}]_{\times} = \begin{bmatrix} 0 & -\omega_3 & \omega_2 \\ \omega_3 & 0 & -\omega_1 \\ -\omega_2 & \omega_1 & 0 \end{bmatrix}$,

$$\dot{\mathbf{R}}\mathbf{R}^{\top} = [\boldsymbol{\omega}]_{\times} \Rightarrow \dot{\mathbf{R}} = [\boldsymbol{\omega}]_{\times} \mathbf{R}. \quad (143)$$

(2) Equivalent limit form. With $\mathbf{R}(t + \Delta t) = \mathbf{R}(t) \exp([\boldsymbol{\omega}]_{\times} \Delta t)$,

$$\dot{\mathbf{R}}(t) = \lim_{\Delta t \rightarrow 0} \frac{\mathbf{R}(t + \Delta t) - \mathbf{R}(t)}{\Delta t} \quad (144)$$

$$= \lim_{\Delta t \rightarrow 0} \frac{\mathbf{R}(t) \exp([\boldsymbol{\omega}]_{\times} \Delta t) - \mathbf{R}(t)}{\Delta t} \quad (145)$$

$$= \mathbf{R}(t) \lim_{\Delta t \rightarrow 0} \frac{\exp([\boldsymbol{\omega}]_{\times} \Delta t) - \mathbf{I}}{\Delta t} \quad (146)$$

$$= \mathbf{R}(t) [\boldsymbol{\omega}]_{\times}. \quad (147)$$

(3) Integration. With $\mathbf{R}_i = \exp([\boldsymbol{\omega}_i]_{\times} \Delta t_i)$, composing increments gives

$$\mathbf{R}_{1 \rightarrow k} = \mathbf{R}_k \mathbf{R}_{k-1} \cdots \mathbf{R}_2 \mathbf{R}_1 \quad (148)$$

$$= \exp([\boldsymbol{\omega}_k]_{\times} \Delta t_k) \cdots \exp([\boldsymbol{\omega}_1]_{\times} \Delta t_1). \quad (149)$$

(4) Interpolation. For ${}^G_{t_1}\mathbf{R}, {}^G_{t_2}\mathbf{R}$ and $t \in [t_1, t_2]$, define the relative rotation and its angle, and the interpolation ratio:

$${}^{t_1}_{t_2}\mathbf{R} = {}^G_{t_1}\mathbf{R}^{\top} {}^G_{t_2}\mathbf{R}, \quad (150)$$

$${}^{t_1}_{t_2}\boldsymbol{\theta} = \text{Log}({}^{t_1}_{t_2}\mathbf{R}) = \text{Log}({}^G_{t_1}\mathbf{R}^{\top} {}^G_{t_2}\mathbf{R}), \quad (151)$$

$$\lambda = \frac{t - t_1}{t_2 - t_1}. \quad (152)$$

Then

$${}^G_t\mathbf{R} = {}^G_{t_1}\mathbf{R} {}^{t_1}_t\mathbf{R} \quad (153)$$

$$= {}^G_{t_1}\mathbf{R} \text{Exp}(\lambda {}^{t_1}_{t_2}\boldsymbol{\theta}). \quad (154)$$

(5) Right Jacobian. For a rotation $\mathbf{R}(\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta})$, perturb the angle by $\delta\boldsymbol{\theta} \in \mathbb{R}^3$ and let $\delta\boldsymbol{\varphi}$ be the corresponding small rotation in $\mathfrak{so}(3)$:

$$\mathbf{R}(\boldsymbol{\theta}) \text{Exp}(\delta\boldsymbol{\varphi}) = \mathbf{R}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}) \Rightarrow \text{Exp}(\boldsymbol{\theta}) \text{Exp}(\delta\boldsymbol{\varphi}) = \text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}). \quad (155)$$

Solving for $\delta\boldsymbol{\varphi}$,

$$\text{Exp}(\delta\boldsymbol{\varphi}) = \text{Exp}(\boldsymbol{\theta})^{-1} \text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}) \Rightarrow \delta\boldsymbol{\varphi} = \text{Log}(\text{Exp}(\boldsymbol{\theta})^{-1} \text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta})), \quad (156)$$

and the *right Jacobian* is the derivative of $\delta\boldsymbol{\varphi}$ with respect to $\delta\boldsymbol{\theta}$:

$$\mathbf{J}_r(\boldsymbol{\theta}) \triangleq \frac{\partial \delta\boldsymbol{\varphi}}{\partial \delta\boldsymbol{\theta}} = \lim_{\delta\boldsymbol{\theta} \rightarrow 0} \frac{\text{Log}(\text{Exp}(\boldsymbol{\theta})^{-1} \text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}))}{\delta\boldsymbol{\theta}}. \quad (157)$$

Equivalently, $\text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta}) \text{Exp}(\mathbf{J}_r(\boldsymbol{\theta}) \delta\boldsymbol{\theta})$, and inverting,

$$\text{Exp}(\boldsymbol{\theta}) \text{Exp}(\delta\boldsymbol{\varphi}) = \text{Exp}(\boldsymbol{\theta} + \mathbf{J}_r^{-1}(\boldsymbol{\theta}) \delta\boldsymbol{\varphi}) \Rightarrow \text{Log}(\text{Exp}(\boldsymbol{\theta}) \text{Exp}(\delta\boldsymbol{\varphi})) = \boldsymbol{\theta} + \mathbf{J}_r^{-1}(\boldsymbol{\theta}) \delta\boldsymbol{\varphi}, \quad (158)$$

with the closed form

$$\mathbf{J}_r(\boldsymbol{\theta}) = \mathbf{I} - \frac{1 - \cos\|\boldsymbol{\theta}\|}{\|\boldsymbol{\theta}\|^2} [\boldsymbol{\theta}]_{\times} + \frac{\|\boldsymbol{\theta}\| - \sin\|\boldsymbol{\theta}\|}{\|\boldsymbol{\theta}\|^3} [\boldsymbol{\theta}]_{\times}^2. \quad (159)$$

(6) Left Jacobian. Applying the perturbation on the left instead defines the left Jacobian:

$$\text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta}) \text{Exp}(\mathbf{J}_r(\boldsymbol{\theta}) \delta\boldsymbol{\theta}) = \text{Exp}(\mathbf{J}_l(\boldsymbol{\theta}) \delta\boldsymbol{\theta}) \text{Exp}(\boldsymbol{\theta}). \quad (160)$$

Using the adjoint identity $\text{Exp}(\boldsymbol{\theta}) \text{Exp}(\mathbf{x}) \text{Exp}(\boldsymbol{\theta})^{-1} = \text{Exp}(\mathbf{R}(\boldsymbol{\theta})\mathbf{x})$ on the middle expression,

$$\text{Exp}(\boldsymbol{\theta}) \text{Exp}(\mathbf{J}_r \delta\boldsymbol{\theta}) = \text{Exp}(\mathbf{R}(\boldsymbol{\theta})\mathbf{J}_r \delta\boldsymbol{\theta}) \text{Exp}(\boldsymbol{\theta}) \Rightarrow \mathbf{J}_l(\boldsymbol{\theta}) = \mathbf{R}(\boldsymbol{\theta}) \mathbf{J}_r(\boldsymbol{\theta}). \quad (161)$$

(7) Sign symmetry. From $\text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta}) \text{Exp}(\mathbf{J}_r(\boldsymbol{\theta})\delta\boldsymbol{\theta})$, replacing $\boldsymbol{\theta} \rightarrow -\boldsymbol{\theta}$, $\delta\boldsymbol{\theta} \rightarrow -\delta\boldsymbol{\theta}$,

$$\text{Exp}(-\boldsymbol{\theta} - \delta\boldsymbol{\theta}) = \text{Exp}(-\mathbf{J}_l(-\boldsymbol{\theta})\delta\boldsymbol{\theta}) \text{Exp}(-\boldsymbol{\theta}) = \text{Exp}(-\mathbf{J}_r(\boldsymbol{\theta})\delta\boldsymbol{\theta}) \text{Exp}(-\boldsymbol{\theta}) \Rightarrow \mathbf{J}_l(-\boldsymbol{\theta}) = \mathbf{J}_r(\boldsymbol{\theta}). \quad (162)$$

(8) Summary. Collecting (5)–(7),

$$\text{Exp}(\boldsymbol{\theta} + \delta\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta}) \text{Exp}(\mathbf{J}_r(\boldsymbol{\theta})\delta\boldsymbol{\theta}), \quad \mathbf{J}_l(\boldsymbol{\theta}) = \mathbf{R}(\boldsymbol{\theta})\mathbf{J}_r(\boldsymbol{\theta}), \quad \mathbf{J}_l(-\boldsymbol{\theta}) = \mathbf{J}_r(\boldsymbol{\theta}). \quad (163)$$

(9) Identity $[\mathbf{R}\boldsymbol{\omega}]_{\times} = \mathbf{R} [\boldsymbol{\omega}]_{\times} \mathbf{R}^{\top}$. For any vector $\mathbf{v}$, using $\mathbf{R}(\mathbf{u} \times \mathbf{v}) = (\mathbf{R}\mathbf{u}) \times (\mathbf{R}\mathbf{v})$ and $\mathbf{R}^{\top}\mathbf{R} = \mathbf{I}$,

$$[\mathbf{R}\mathbf{u}]_{\times} (\mathbf{R}\mathbf{v}) = \mathbf{R} ([\mathbf{u}]_{\times} \mathbf{v}) \quad (164)$$

$$= \mathbf{R} ([\mathbf{u}]_{\times} \mathbf{R}^{\top} \mathbf{R}\mathbf{v}) \quad (165)$$

$$= \mathbf{R} [\mathbf{u}]_{\times} \mathbf{R}^{\top} (\mathbf{R}\mathbf{v}). \quad (166)$$

Since this holds for all $\mathbf{R}\mathbf{v}$, we conclude $[\mathbf{R}\mathbf{u}]_{\times} = \mathbf{R} [\mathbf{u}]_{\times} \mathbf{R}^{\top}$.

Homework. Prove $[\mathbf{R}\boldsymbol{\omega}]_{\times} = \mathbf{R} [\boldsymbol{\omega}]_{\times} \mathbf{R}^{\top}$.

(10) Identity $\text{Exp}(\mathbf{R}\boldsymbol{\varphi}) = \mathbf{R} \text{Exp}(\boldsymbol{\varphi}) \mathbf{R}^\top$. Using $[\mathbf{R}\boldsymbol{\varphi}]_\times^k = \mathbf{R} [\boldsymbol{\varphi}]_\times^k \mathbf{R}^\top$ (which follows from (9), since $[\mathbf{R}\boldsymbol{\varphi}]_\times^2 = \mathbf{R} [\boldsymbol{\varphi}]_\times \mathbf{R}^\top \mathbf{R} [\boldsymbol{\varphi}]_\times \mathbf{R}^\top = \mathbf{R} [\boldsymbol{\varphi}]_\times^2 \mathbf{R}^\top$, etc.),

$$\begin{aligned} \text{Exp}(\mathbf{R}\boldsymbol{\varphi}) &= \mathbf{I} + [\mathbf{R}\boldsymbol{\varphi}]_\times + \frac{1}{2!} [\mathbf{R}\boldsymbol{\varphi}]_\times^2 + \frac{1}{3!} [\mathbf{R}\boldsymbol{\varphi}]_\times^3 + \cdots \\ &= \mathbf{R}\mathbf{R}^\top + \mathbf{R} [\boldsymbol{\varphi}]_\times \mathbf{R}^\top + \frac{1}{2!} \mathbf{R} [\boldsymbol{\varphi}]_\times^2 \mathbf{R}^\top + \cdots \\ &= \mathbf{R}(\mathbf{I} + [\boldsymbol{\varphi}]_\times + \frac{1}{2!} [\boldsymbol{\varphi}]_\times^2 + \frac{1}{3!} [\boldsymbol{\varphi}]_\times^3 + \cdots) \mathbf{R}^\top \end{aligned} \quad (167)$$

$$= \mathbf{R} \text{Exp}(\boldsymbol{\varphi}) \mathbf{R}^\top. \quad (168)$$

Homework. Prove $\text{Exp}(\mathbf{R}\boldsymbol{\varphi}) = \mathbf{R} \text{Exp}(\boldsymbol{\varphi}) \mathbf{R}^\top$.

2.5.1 Worked applications

(11) Recovering ${}^C_I\mathbf{R}$ from vector pairs. Given camera frame $\{C\}$ and IMU frame $\{I\}$ with ${}^C\mathbf{v}_1 = {}^C_I\mathbf{R} {}^I\mathbf{v}_1$ and ${}^C\mathbf{v}_2 = {}^C_I\mathbf{R} {}^I\mathbf{v}_2$, the trick is to stack three independent directions (the third from the cross product) into an invertible matrix:

$$[{}^C\mathbf{v}_1 \ {}^C\mathbf{v}_2 \ {}^C\mathbf{v}_1 \times {}^C\mathbf{v}_2] = {}^C_I\mathbf{R} [{}^I\mathbf{v}_1 \ {}^I\mathbf{v}_2 \ {}^I\mathbf{v}_1 \times {}^I\mathbf{v}_2]. \quad (169)$$

(12) Given instead relative rotations ${}^{C_1}_{C_2}\mathbf{R} = {}^C_I\mathbf{R} {}^{I_1}_{I_2}\mathbf{R} {}^C_I\mathbf{R}^\top$, recover ${}^C_I\mathbf{R}$ from two such pairs.

(13) Discussion. For (11)/(12): What is the minimum number of data pairs needed? What requirements must the pairs satisfy? What if more than the minimum is available?

(14) Averaging noisy rotations. Given n measurements $\mathbf{R}_{m_i} = \mathbf{R} \exp([\mathbf{n}_i]_\times)$ with $\mathbf{n}_i \sim \mathcal{N}(\mathbf{0}_{3 \times 1}, \mathbf{P}_i)$, estimate $\mathbf{R}$ and its covariance.

2.6 Groups: SO(3) and SE(3)

SO(3) — special orthogonal group.

$$SO(3) = \{\mathbf{R} \in \mathbb{R}^{3 \times 3} \mid \mathbf{R}^\top \mathbf{R} = \mathbf{I}_3, \det(\mathbf{R}) = 1\}. \quad (170)$$

It satisfies the four group axioms: *closure* ($\mathbf{R}_1\mathbf{R}_2 \in SO(3)$), *identity* ($\mathbf{I}_3 \in SO(3)$), *inverse* ($\mathbf{R}^{-1} = \mathbf{R}^\top \in SO(3)$), and *associativity* ($(\mathbf{R}_1\mathbf{R}_2)\mathbf{R}_3 = \mathbf{R}_1(\mathbf{R}_2\mathbf{R}_3)$).

SE(3) — special Euclidean group.

$$SE(3) = \left\{ \mathbf{T} = \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \mid \mathbf{R} \in SO(3), \mathbf{p} \in \mathbb{R}^3 \right\}. \quad (171)$$

The four axioms: *closure*

$$\mathbf{T}_1\mathbf{T}_2 = \begin{bmatrix} \mathbf{R}_1 & \mathbf{p}_1 \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \mathbf{R}_2 & \mathbf{p}_2 \\ \mathbf{0} & 1 \end{bmatrix} \quad (172)$$

$$= \begin{bmatrix} \mathbf{R}_1\mathbf{R}_2 & \mathbf{R}_1\mathbf{p}_2 + \mathbf{p}_1 \\ \mathbf{0} & 1 \end{bmatrix} \in SE(3), \quad (173)$$

identity $\begin{bmatrix} \mathbf{I}_3 & \mathbf{0}_{3 \times 1} \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix}$, *inverse*

$$\begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix}^{-1} = \begin{bmatrix} \mathbf{R}^\top & -\mathbf{R}^\top \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \in SE(3), \quad (174)$$

and *associativity* $(\mathbf{T}_1\mathbf{T}_2)\mathbf{T}_3 = \mathbf{T}_1(\mathbf{T}_2\mathbf{T}_3)$.

2.6.1 Matrix Lie groups

A *group* is a set with an operation satisfying closure, associativity, identity, and invertibility. A *Lie group* is a group that is also a smooth (differentiable) manifold whose group operation is smooth. A *matrix Lie group* has matrices as its elements. The maps between the vector space, the Lie algebra, and the Lie group are

$$\mathbb{R}^m \xrightarrow{\wedge \text{ (wedge)}} \mathfrak{so}(n) \xrightarrow{\exp} SO(n), \quad SO(n) \xrightarrow{\log} \mathfrak{so}(n) \xrightarrow{\vee \text{ (vee)}} \mathbb{R}^m, \quad (175)$$

and for short we write $\mathbf{X} = \text{Exp}(\mathbf{x}) = \exp(\mathbf{x}^\wedge)$ and $\mathbf{x} = \text{Log}(\mathbf{X}) = \log(\mathbf{X})^\vee$. For $SO(3)$ specifically, $\boldsymbol{\theta} \in \mathbb{R}^3 \rightarrow [\boldsymbol{\theta}]_\times = \boldsymbol{\theta}^\wedge \rightarrow \mathbf{R} = \exp(\boldsymbol{\theta}^\wedge)$, and $\mathbf{R} \in SO(3) \rightarrow [\boldsymbol{\theta}]_\times = \log(\mathbf{R}) \rightarrow \boldsymbol{\theta} = \log(\mathbf{R})^\vee$.

2.6.2 Why this (manifold) machinery?

It *simplifies* estimation: the core idea is to use a smooth manifold to model parameters that are awkward in plain vector space, which makes optimization, interpolation, integration, and differentiation easier or even possible (Fig. 3). For example, a raw angle $\theta \in [-\pi, \pi]$ has a wrap-around cut; the circle/sphere is smooth, and the tangent line at a point models the small change / error state used in optimization.

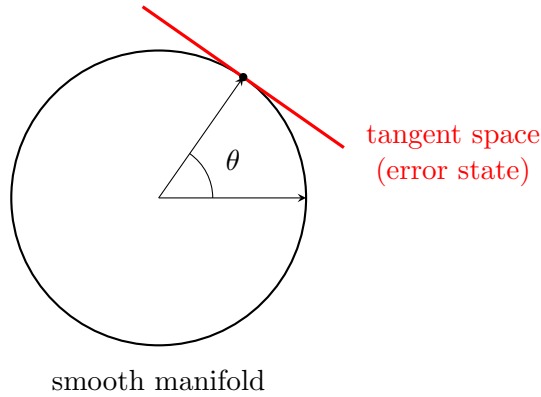


Figure 3: A smooth manifold (here a circle/sphere) avoids the wrap-around of a raw angle; the red tangent line is the local vector space used to model derivatives and error states for optimization.

For $SO(3)$ the left Jacobian also appears directly in the exponential expansion:

$$\mathbf{R}(\boldsymbol{\theta}) = \text{Exp}(\boldsymbol{\theta}) \quad (176)$$

$$= \mathbf{I}_3 + [\boldsymbol{\theta}]_\times \mathbf{J}_l(\boldsymbol{\theta}) = \mathbf{I}_3 + \boldsymbol{\theta}^\wedge \mathbf{J}_l(\boldsymbol{\theta}), \quad (177)$$

$$\mathbf{J}_l(\boldsymbol{\theta}) = \sum_{n=0}^{\infty} \frac{1}{(n+1)!} (\boldsymbol{\theta}^\wedge)^n. \quad (178)$$

2.7 SE(3)

Exp / Log. The $SE(3)$ tangent vector uses $\boldsymbol{\rho}$ for its translation component, $\boldsymbol{\xi} = \begin{bmatrix} \boldsymbol{\theta} \\ \boldsymbol{\rho} \end{bmatrix} \in \mathbb{R}^6$, which is *distinct* from the group translation $\mathbf{p}$ in $\mathbf{T} = \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix}$; the two are related by $\mathbf{p} = \mathbf{J}_l(\boldsymbol{\theta})\boldsymbol{\rho}$. With

the 4×4 algebra element $\xi^\wedge = \begin{bmatrix} [\boldsymbol{\theta}]_\times & \boldsymbol{\rho} \\ \mathbf{0}_{1 \times 3} & 0 \end{bmatrix}$,

$$\mathbf{T} = \text{Exp}(\xi) = \exp \begin{bmatrix} [\boldsymbol{\theta}]_\times & \boldsymbol{\rho} \\ \mathbf{0} & 0 \end{bmatrix} \quad (179)$$

$$= \begin{bmatrix} \exp([\boldsymbol{\theta}]_\times) & \mathbf{J}_l(\boldsymbol{\theta}) \boldsymbol{\rho} \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \quad (180)$$

$$= \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix}, \quad \mathbf{p} = \mathbf{J}_l(\boldsymbol{\theta}) \boldsymbol{\rho}, \quad (181)$$

and inverting,

$$\xi = \text{Log}(\mathbf{T})^\vee, \quad \log(\mathbf{T}) = \log \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \quad (182)$$

$$= \begin{bmatrix} \log(\mathbf{R}) & \mathbf{J}_l^{-1}(\boldsymbol{\theta}) \mathbf{p} \\ \mathbf{0} & 0 \end{bmatrix} \Rightarrow \xi = \begin{bmatrix} \boldsymbol{\theta} \\ \mathbf{J}_l^{-1}(\boldsymbol{\theta}) \mathbf{p} \end{bmatrix} = \begin{bmatrix} \boldsymbol{\theta} \\ \boldsymbol{\rho} \end{bmatrix}. \quad (183)$$

Discussion. Prove $\exp \left(\begin{bmatrix} [\boldsymbol{\theta}]_\times & \boldsymbol{\rho} \\ \mathbf{0} & 0 \end{bmatrix} \right) = \begin{bmatrix} \mathbf{R} & \mathbf{J}_l(\boldsymbol{\theta}) \boldsymbol{\rho} \\ \mathbf{0} & 1 \end{bmatrix}$.

Left/right Jacobians. With $\text{Exp}(\xi + \delta\xi) = \text{Exp}(\xi) \text{Exp}(\mathbf{J}_R(\xi) \delta\xi) = \text{Exp}(\mathbf{J}_L(\xi) \delta\xi) \text{Exp}(\xi)$,

$$\mathbf{J}_R(\xi) = \begin{bmatrix} \mathbf{J}_R(\boldsymbol{\theta}) & \mathbf{0} \\ \mathbf{Q}_R(\xi) & \mathbf{J}_R(\boldsymbol{\theta}) \end{bmatrix}_{6 \times 6}, \quad \mathbf{J}_L(\xi) = \begin{bmatrix} \mathbf{J}_L(\boldsymbol{\theta}) & \mathbf{0} \\ \mathbf{Q}_L(\xi) & \mathbf{J}_L(\boldsymbol{\theta}) \end{bmatrix}_{6 \times 6}, \quad (184)$$

and to first order, with $\xi^\wedge = \begin{bmatrix} [\boldsymbol{\theta}]_\times & \mathbf{0} \\ [\boldsymbol{\rho}]_\times & [\boldsymbol{\theta}]_\times \end{bmatrix}_{6 \times 6}$,

$$\mathbf{J}_L(\xi) \approx \mathbf{I}_6 + \frac{1}{2} \xi^\wedge, \quad \mathbf{J}_R(\xi) \approx \mathbf{I}_6 - \frac{1}{2} \xi^\wedge. \quad (185)$$

Homework. Find $\mathbf{Q}_L$ (and $\mathbf{Q}_R$).

Error states: SE(3) vs SO(3) + $\mathbb{R}^3$. Perturb $\mathbf{T}$ on the right by the SE(3) tangent $\delta\xi = [\delta\boldsymbol{\theta}^\top, \delta\boldsymbol{\rho}^\top]^\top$. Expanding with $\mathbf{J}_l(\delta\boldsymbol{\theta}) \approx \mathbf{I} + \frac{1}{2} [\delta\boldsymbol{\theta}]_\times$ and $\delta\mathbf{R} = \text{Exp}(\delta\boldsymbol{\theta})$,

$$\mathbf{T} \delta\mathbf{T} = \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \text{Exp}(\delta\boldsymbol{\theta}) & \mathbf{J}_l(\delta\boldsymbol{\theta}) \delta\boldsymbol{\rho} \\ \mathbf{0} & 1 \end{bmatrix} \quad (186)$$

$$= \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \delta\mathbf{R} & (\mathbf{I} + \frac{1}{2} [\delta\boldsymbol{\theta}]_\times) \delta\boldsymbol{\rho} \\ \mathbf{0} & 1 \end{bmatrix} \quad (187)$$

$$\approx \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \delta\mathbf{R} & \delta\boldsymbol{\rho} \\ \mathbf{0} & 1 \end{bmatrix} \quad (188)$$

$$= \begin{bmatrix} \mathbf{R} \delta\mathbf{R} & \mathbf{R} \delta\boldsymbol{\rho} + \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix}. \quad (189)$$

If instead we treat the pose as $SO(3) + \mathbb{R}^3$ (rotation and translation perturbed separately, $\mathbf{p} \rightarrow \mathbf{p} + \delta\mathbf{p}$),

$$\mathbf{T} = \begin{bmatrix} \mathbf{R}\delta\mathbf{R} & \mathbf{p} + \delta\mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \quad (190)$$

$$= \begin{bmatrix} \mathbf{R}\delta\mathbf{R} & \mathbf{p} + \mathbf{R}\mathbf{R}^\top \delta\mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \quad (191)$$

$$= \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \delta\mathbf{R} & \mathbf{R}^\top \delta\mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix}. \quad (192)$$

Comparing the two conventions gives the relation between the error states ($SE(3)$ tangent translation $\delta\boldsymbol{\rho}$ vs. naive position error $\delta\mathbf{p}$),

$$\begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \delta\mathbf{R} & \delta\mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix}_{SO(3)+\mathbb{R}^3} = \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \delta\mathbf{R} & \delta\boldsymbol{\rho} \\ \mathbf{0} & 1 \end{bmatrix}_{SE(3)} \Rightarrow \begin{cases} \delta\boldsymbol{\rho} = \mathbf{R}^\top \delta\mathbf{p} \\ \delta\mathbf{R}_{SE(3)} = \delta\mathbf{R} \end{cases}. \quad (193)$$

Adjoint. The adjoint transfers algebra elements across the group:

$$SO(3) : \mathbf{R} \text{Exp}(\boldsymbol{\varphi}) \mathbf{R}^\top = \text{Exp}(\mathbf{R}\boldsymbol{\varphi}) \Leftrightarrow \text{Ad}_{\mathbf{R}} = \mathbf{R}, \quad SE(3) : \mathbf{T} \text{Exp}(\boldsymbol{\xi}) \mathbf{T}^{-1} = \text{Exp}(\text{Ad}_{\mathbf{T}} \boldsymbol{\xi}), \quad (194)$$

with $\text{Ad}_{\mathbf{T}} = \begin{bmatrix} \mathbf{R} & \mathbf{0} \\ [\mathbf{p}]_{\times} \mathbf{R} & \mathbf{R} \end{bmatrix}_{6 \times 6}$. The adjoint is itself a Lie group, with $\text{Ad}_{\mathbf{T}} = \exp(\boldsymbol{\xi}^\wedge)$ and $\log(\text{Ad}_{\mathbf{T}})^\vee = \boldsymbol{\xi}$.

Homework. Prove $\mathbf{T} \text{Exp}(\boldsymbol{\xi}) \mathbf{T}^{-1} = \text{Exp}(\text{Ad}_{\mathbf{T}} \boldsymbol{\xi})$.

2.7.1 More operations

(1) Interpolation. For ${}^G\mathbf{T}_{t_1}, {}^G\mathbf{T}_{t_2}$, $t \in [t_1, t_2]$, $\lambda = \frac{t-t_1}{t_2-t_1}$: in $SE(3)$, with ${}^{t_1}\boldsymbol{\xi} = \text{Log}({}^G\mathbf{T}_{t_1}^{-1} {}^G\mathbf{T}_{t_2})$,

$${}_t^G\mathbf{T} = {}_{t_1}^G\mathbf{T} \text{Exp}(\lambda {}^{t_1}\boldsymbol{\xi}); \quad (195)$$

in $SO(3) + \mathbb{R}^3$, the rotation interpolates on the manifold and the position linearly:

$${}_t^G\mathbf{R} = {}_{t_1}^G\mathbf{R} \text{Exp}(\lambda \text{Log}({}_{t_1}^G\mathbf{R}^\top {}_{t_2}^G\mathbf{R})), \quad {}_t^G\mathbf{p} = {}_{t_1}^G\mathbf{p} + \lambda({}_{t_2}^G\mathbf{p} - {}_{t_1}^G\mathbf{p}). \quad (196)$$

(2) Time derivative. For $SE(3)$, with $\mathbf{T} = \mathbf{T} \text{Exp}([\delta\boldsymbol{\theta}; \delta\boldsymbol{\rho}]^\wedge)$ and body velocity, expand the limit using $\exp([\delta\boldsymbol{\theta}]_\times) - \mathbf{I}_3 \approx [\delta\boldsymbol{\theta}]_\times$ and $\mathbf{J}_l(\delta\boldsymbol{\theta}) \approx \mathbf{I} + \frac{1}{2}[\delta\boldsymbol{\theta}]_\times$:

$$\frac{d\mathbf{T}}{dt} = \lim_{\delta t \rightarrow 0} \frac{\mathbf{T}(t + \delta t) - \mathbf{T}(t)}{\delta t} \quad (197)$$

$$= \lim_{\delta t \rightarrow 0} \frac{1}{\delta t} \left(\begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \exp([\delta\boldsymbol{\theta}]_\times) & \mathbf{J}_l(\delta\boldsymbol{\theta})\delta\boldsymbol{\rho} \\ \mathbf{0} & 1 \end{bmatrix} - \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \right) \quad (198)$$

$$= \lim_{\delta t \rightarrow 0} \frac{1}{\delta t} \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} \exp([\delta\boldsymbol{\theta}]_\times) - \mathbf{I}_3 & \mathbf{J}_l(\delta\boldsymbol{\theta})\delta\boldsymbol{\rho} \\ \mathbf{0} & 0 \end{bmatrix} \quad (199)$$

$$= \lim_{\delta t \rightarrow 0} \frac{1}{\delta t} \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} [\delta\boldsymbol{\theta}]_\times & \delta\boldsymbol{\rho} \\ \mathbf{0} & 0 \end{bmatrix} \quad (200)$$

$$= \begin{bmatrix} \mathbf{R} & \mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \begin{bmatrix} [\boldsymbol{\omega}]_\times & \mathbf{v} \\ \mathbf{0} & 0 \end{bmatrix} \quad (201)$$

$$= \begin{bmatrix} \mathbf{R}[\boldsymbol{\omega}]_\times & \mathbf{R}\mathbf{v} \\ \mathbf{0} & 0 \end{bmatrix}, \quad (202)$$

where $\mathbf{v}$ is the body velocity. For $SO(3) + \mathbb{R}^3$ the same computation with

$$\mathbf{T} = \begin{bmatrix} \mathbf{R} \exp([\delta\boldsymbol{\theta}]_\times) & \mathbf{p} + \delta\mathbf{p} \\ \mathbf{0} & 1 \end{bmatrix} \quad (203)$$

gives

$$\frac{d\mathbf{T}}{dt} = \begin{bmatrix} \mathbf{R}[\boldsymbol{\omega}]_\times & {}^G\mathbf{v} \\ \mathbf{0} & 0 \end{bmatrix}, \quad (204)$$

with ${}^G\mathbf{v}$ the global velocity.

(3) Calibration. For IMU frame $\{I\}$ and camera frame $\{C\}$,

$$\begin{matrix} C_1 \\ C_2 \end{matrix} \mathbf{T} = \begin{matrix} C \\ I \end{matrix} \mathbf{T} \begin{matrix} I_1 \\ I_2 \end{matrix} \mathbf{T} \begin{matrix} C \\ I \end{matrix} \mathbf{T}^{-1}, \quad \text{Exp}(\begin{matrix} C_1 \\ C_2 \end{matrix} \boldsymbol{\xi}) = \text{Exp}(\text{Ad}_{(\begin{matrix} C \\ I \end{matrix} \mathbf{T})} \begin{matrix} I_1 \\ I_2 \end{matrix} \boldsymbol{\xi}) \Rightarrow \begin{matrix} C_1 \\ C_2 \end{matrix} \boldsymbol{\xi} = \text{Ad}_{(\begin{matrix} C \\ I \end{matrix} \mathbf{T})} \begin{matrix} I_1 \\ I_2 \end{matrix} \boldsymbol{\xi}. \quad (205)$$

Homework. Compute the Jacobians $\partial_{C_2}^{C_1} \boldsymbol{\xi} / \partial_{I_2}^{I_1} \boldsymbol{\xi}$ and $\partial_{C_2}^{C_1} \boldsymbol{\xi} / \partial_I^C \boldsymbol{\xi}$ (and the corresponding $SO(3) + \mathbb{R}^3$ versions).

2.8 $SE_2(3)$

Augmenting the pose with a velocity column gives the 5×5 group element

$$\boldsymbol{\Upsilon} = \begin{bmatrix} \mathbf{R} & \mathbf{p} & \mathbf{v} \\ \mathbf{0}_{1 \times 3} & 1 & 0 \\ \mathbf{0}_{1 \times 3} & 0 & 1 \end{bmatrix}, \quad \boldsymbol{\xi} = \begin{bmatrix} \boldsymbol{\theta} \\ \boldsymbol{\rho} \\ \boldsymbol{\nu} \end{bmatrix} \rightarrow \boldsymbol{\xi}^\wedge = \begin{bmatrix} [\boldsymbol{\theta}]_\times & \boldsymbol{\rho} & \boldsymbol{\nu} \\ \mathbf{0} & 0 & 0 \\ \mathbf{0} & 0 & 0 \end{bmatrix}_{5 \times 5}, \quad (206)$$

where (as in $SE(3)$) the tangent components $\boldsymbol{\rho}, \boldsymbol{\nu}$ are distinct from the group position/velocity $\mathbf{p} = \mathbf{J}_l(\boldsymbol{\theta})\boldsymbol{\rho}$, $\mathbf{v} = \mathbf{J}_l(\boldsymbol{\theta})\boldsymbol{\nu}$. The exponential, logarithm, and adjoint follow the same pattern as $SE(3)$:

$$\text{Exp}(\boldsymbol{\xi}) = \begin{bmatrix} \mathbf{R} & \mathbf{J}_l(\boldsymbol{\theta})\boldsymbol{\rho} & \mathbf{J}_l(\boldsymbol{\theta})\boldsymbol{\nu} \\ \mathbf{0} & 1 & 0 \\ \mathbf{0} & 0 & 1 \end{bmatrix} = \begin{bmatrix} \mathbf{R} & \mathbf{p} & \mathbf{v} \\ \mathbf{0} & 1 & 0 \\ \mathbf{0} & 0 & 1 \end{bmatrix}, \quad (207)$$

$$\text{Log}(\boldsymbol{\Upsilon})^\vee = \begin{bmatrix} \boldsymbol{\theta} \\ \mathbf{J}_l^{-1}(\boldsymbol{\theta})\mathbf{p} \\ \mathbf{J}_l^{-1}(\boldsymbol{\theta})\mathbf{v} \end{bmatrix}, \quad \text{Ad}_{\boldsymbol{\Upsilon}} = \begin{bmatrix} \mathbf{R} & \mathbf{0} & \mathbf{0} \\ [\mathbf{p}]_\times \mathbf{R} & \mathbf{R} & \mathbf{0} \\ [\mathbf{v}]_\times \mathbf{R} & \mathbf{0} & \mathbf{R} \end{bmatrix}. \quad (208)$$

2.9 Quaternions

Quaternions are presented last because $SO(3)$, $SE(3)$, and the Lie-group view already cover most needs. There are two main conventions — *Hamilton* (right-handed) and *JPL* (left-handed); we use the **Hamilton** convention. For a thorough treatment see Solà [6] (Hamilton) and Trawny & Roumeliotis [5] (JPL).

A quaternion and its imaginary units satisfy

$$Q = q_w + q_x i + q_y j + q_z k, \quad i^2 = j^2 = k^2 = ijk = -1, \quad ij = k, \quad jk = i, \quad ki = j, \quad (209)$$

written as the 4×1 vector $\bar{q} = [q_w, q_x, q_y, q_z]^\top = [q_w, \mathbf{q}_v^\top]^\top$.

Product. The quaternion product is bilinear and can be written with left/right matrices:

$$\bar{p} \otimes \bar{q} = \mathcal{L}(\bar{p}) \bar{q} = \mathcal{R}(\bar{q}) \bar{p}, \quad (210)$$

$$\mathcal{L}(\bar{p}) = p_w \mathbf{I}_4 + \begin{bmatrix} 0 & -\mathbf{p}_v^\top \\ \mathbf{p}_v & [\mathbf{p}_v]_\times \end{bmatrix}, \quad (211)$$

$$\mathcal{R}(\bar{q}) = q_w \mathbf{I}_4 + \begin{bmatrix} 0 & -\mathbf{q}_v^\top \\ \mathbf{q}_v & -[\mathbf{q}_v]_\times \end{bmatrix}. \quad (212)$$

Identity, unit quaternion, inverse. The identity is $\bar{q} = [1, \mathbf{0}_{3 \times 1}^\top]^\top$. A rotation by angle θ about unit axis $\mathbf{k}$ is the unit quaternion

$$\bar{q} = \begin{bmatrix} \cos \frac{\theta}{2} \\ \sin \frac{\theta}{2} \mathbf{k} \end{bmatrix}, \quad \bar{q}^{-1} = \begin{bmatrix} \cos \frac{\theta}{2} \\ -\sin \frac{\theta}{2} \mathbf{k} \end{bmatrix}, \quad \mathbf{R}_{12} = \mathbf{R}_1 \mathbf{R}_2 \leftrightarrow \bar{q}_{12} = \bar{q}_1 \otimes \bar{q}_2. \quad (213)$$

Why $\theta/2$? — rotating a vector. With global frame $\{G\}$ and IMU frame $\{I\}$, rotate ${}^I \mathbf{p}$ via the sandwich product and convert to matrices with $\bar{p} \otimes \bar{q} = \mathcal{R}(\bar{q}) \bar{p}$ and $\bar{p} \otimes \bar{q} = \mathcal{L}(\bar{p}) \bar{q}$:

$$\begin{bmatrix} 0 \\ {}^G \mathbf{p} \end{bmatrix} = {}^G \bar{q} \otimes \begin{bmatrix} 0 \\ {}^I \mathbf{p} \end{bmatrix} \otimes {}^I \bar{q}^{-1} \quad (214)$$

$$= \mathcal{R}({}^G \bar{q}^{-1}) \mathcal{L}({}^G \bar{q}) \begin{bmatrix} 0 \\ {}^I \mathbf{p} \end{bmatrix}. \quad (215)$$

Writing $\bar{q} = [q_w, \mathbf{q}_v^\top]^\top$ and multiplying the two matrices,

$$\begin{aligned} \mathcal{R}(\bar{q}^{-1}) \mathcal{L}(\bar{q}) &= \left(q_w \mathbf{I}_4 + \begin{bmatrix} 0 & \mathbf{q}_v^\top \\ -\mathbf{q}_v & [\mathbf{q}_v]_\times \end{bmatrix} \right) \left(q_w \mathbf{I}_4 + \begin{bmatrix} 0 & -\mathbf{q}_v^\top \\ \mathbf{q}_v & [\mathbf{q}_v]_\times \end{bmatrix} \right) \\ &= q_w^2 \mathbf{I}_4 + 2q_w \begin{bmatrix} 0 & \mathbf{0} \\ \mathbf{0} & [\mathbf{q}_v]_\times \end{bmatrix} + \begin{bmatrix} \mathbf{q}_v^\top \mathbf{q}_v & \mathbf{0} \\ \mathbf{0} & -\mathbf{q}_v \mathbf{q}_v^\top + [\mathbf{q}_v]_\times^2 \end{bmatrix}, \end{aligned} \quad (216)$$

whose lower-right 3×3 block (acting on ${}^I \mathbf{p}$) gives

$${}^G \mathbf{p} = (q_w^2 \mathbf{I}_3 + 2q_w [\mathbf{q}_v]_\times + \mathbf{q}_v \mathbf{q}_v^\top + [\mathbf{q}_v]_\times^2) {}^I \mathbf{p}. \quad (217)$$

Using $[\mathbf{q}_v]_\times^2 = \mathbf{q}_v \mathbf{q}_v^\top - (\mathbf{q}_v^\top \mathbf{q}_v) \mathbf{I}_3$ and the unit-norm condition $q_w^2 + \mathbf{q}_v^\top \mathbf{q}_v = 1$,

$$q_w^2 \mathbf{I}_3 + \mathbf{q}_v \mathbf{q}_v^\top + [\mathbf{q}_v]_\times^2 = q_w^2 \mathbf{I}_3 + (\mathbf{q}_v^\top \mathbf{q}_v) \mathbf{I}_3 + 2 [\mathbf{q}_v]_\times^2 \quad (218)$$

$$= \mathbf{I}_3 + 2 [\mathbf{q}_v]_\times^2, \quad (219)$$

so

$${}^G\mathbf{p} = (\mathbf{I}_3 + 2q_w [\mathbf{q}_v]_{\times} + 2 [\mathbf{q}_v]_{\times}^2)^I \mathbf{p}. \quad (220)$$

Finally substitute $q_w = \cos \frac{\theta}{2}$, $\mathbf{q}_v = \sin \frac{\theta}{2} \mathbf{k}$, so $2q_w [\mathbf{q}_v]_{\times} = 2 \cos \frac{\theta}{2} \sin \frac{\theta}{2} [\mathbf{k}]_{\times} = \sin \theta [\mathbf{k}]_{\times}$ and $2 [\mathbf{q}_v]_{\times}^2 = 2 \sin^2 \frac{\theta}{2} [\mathbf{k}]_{\times}^2 = (1 - \cos \theta) [\mathbf{k}]_{\times}^2$:

$${}^G\mathbf{p} = (\mathbf{I}_3 + \sin \theta [\mathbf{k}]_{\times} + (1 - \cos \theta) [\mathbf{k}]_{\times}^2)^I \mathbf{p} \quad (221)$$

$$= {}^G_I \mathbf{R}^I \mathbf{p} \quad (222)$$

$$= \text{Exp}(\theta \mathbf{k})^I \mathbf{p}, \quad (223)$$

recovering Rodrigues' formula — which is why the half-angle $\theta/2$ appears.

Derivative. With $\delta \boldsymbol{\theta} = \delta \theta \mathbf{k}$ and small-angle $\delta \bar{q} = [\cos \frac{\delta \theta}{2}, \sin \frac{\delta \theta}{2} \mathbf{k}^{\top}]^{\top} \approx [1, \frac{1}{2} \delta \boldsymbol{\theta}^{\top}]^{\top}$,

$${}_t^G \dot{\bar{q}} = \lim_{\Delta t \rightarrow 0} \frac{{}_t^G {}_{t+\Delta t} \bar{q} - {}_t^G \bar{q}}{\Delta t} \quad (224)$$

$$= \lim_{\Delta t \rightarrow 0} \frac{{}_t^G \bar{q} \otimes \begin{bmatrix} \cos \frac{\delta \theta}{2} \\ \sin \frac{\delta \theta}{2} \mathbf{k} \end{bmatrix} - {}_t^G \bar{q} \otimes \begin{bmatrix} 1 \\ \mathbf{0} \end{bmatrix}}{\Delta t} \quad (225)$$

$$= \lim_{\Delta t \rightarrow 0} \frac{{}_t^G \bar{q} \otimes \begin{bmatrix} 0 \\ \frac{1}{2} \delta \boldsymbol{\theta} \end{bmatrix}}{\Delta t} \quad (226)$$

$$= {}_t^G \bar{q} \otimes \begin{bmatrix} 0 \\ \frac{1}{2} \boldsymbol{\omega} \end{bmatrix} \quad (227)$$

$$= \frac{1}{2} \mathcal{R} \left(\begin{bmatrix} 0 \\ \boldsymbol{\omega} \end{bmatrix} \right) {}_t^G \bar{q} \quad (228)$$

$$= \frac{1}{2} \begin{bmatrix} 0 & -\boldsymbol{\omega}^{\top} \\ \boldsymbol{\omega} & -[\boldsymbol{\omega}]_{\times} \end{bmatrix} {}_t^G \bar{q} \quad (229)$$

$$= \frac{1}{2} \Omega(\boldsymbol{\omega}) {}_t^G \bar{q}, \quad (230)$$

where $\Omega(\boldsymbol{\omega}) \triangleq \begin{bmatrix} 0 & -\boldsymbol{\omega}^{\top} \\ \boldsymbol{\omega} & -[\boldsymbol{\omega}]_{\times} \end{bmatrix}$.

Integration. Given ${}_t^G \bar{q}$, $\boldsymbol{\omega}$, δt , with $\delta \boldsymbol{\theta} = \boldsymbol{\omega} \delta t = \delta \theta \mathbf{k}$ and $\delta \bar{q} = [\cos \frac{\delta \theta}{2}, \sin \frac{\delta \theta}{2} \mathbf{k}^{\top}]^{\top}$,

$${}_{t+\delta t}^G \bar{q} = {}_t^G \bar{q} \otimes \delta \bar{q}. \quad (231)$$

3 Lecture 3: Camera Model, Triangulation, Point/Line/Plane

Topics. (1) camera measurements; (2) essential matrix / triangulation; (3) point / line / plane representations.

3.1 The camera measurement model

A camera produces pixel measurements that depend on the camera pose and the observed scene:

$$\mathbf{z}_c = \mathbf{h}_c(\mathbf{x}) + \mathbf{n}_c, \quad (232)$$

where $\mathbf{z}_c$ are the pixel measurements, $\mathbf{x}$ is the state vector (camera pose and point feature), $\mathbf{h}_c(\cdot)$ is the camera model, and $\mathbf{n}_c$ is the pixel noise. The geometry is shown in Fig. 4.

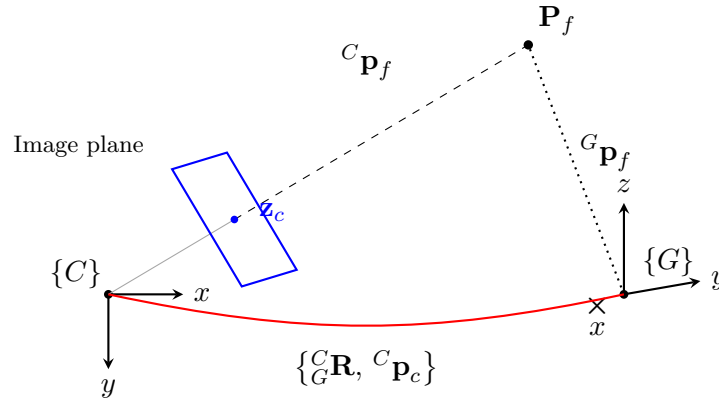


Figure 4: Camera measurement geometry: the feature $\mathbf{P}_f$ projects through the image plane to the pixel $\mathbf{z}_c$ in the camera frame $\{C\}$; the global frame $\{G\}$ and the extrinsic $\{^C_G \mathbf{R}, ^C_G \mathbf{p}_c\}$ relate the two views of the same point ($^C_G \mathbf{p}_f$ vs. $^G \mathbf{p}_f$).

Simplest pinhole model. With the feature in the camera frame $^C \mathbf{p}_f = [x, y, z]^\top$, the normalized projection is

$$\mathbf{z}_n = \begin{bmatrix} u_n \\ v_n \end{bmatrix} = \begin{bmatrix} x/z \\ y/z \end{bmatrix}, \quad \mathbf{z}_n = \mathbf{h}_p(^C \mathbf{p}_f) + \mathbf{n}_c, \quad ^C \mathbf{p}_f = ^C_G \mathbf{R}^\top (^G \mathbf{p}_f - ^G \mathbf{p}_c). \quad (233)$$

Linearizing the measurement, $\tilde{\mathbf{z}}_n = \mathbf{H}_c \tilde{\mathbf{x}} + \mathbf{n}_c$, with the residual

$$\tilde{\mathbf{z}}_n = \mathbf{z}_n - \mathbf{h}_p(^C \hat{\mathbf{p}}_f) = \begin{bmatrix} u_n \\ v_n \end{bmatrix} - \begin{bmatrix} \hat{x}/\hat{z} \\ \hat{y}/\hat{z} \end{bmatrix}. \quad (234)$$

The state and its error state are

$$\mathbf{x} : \{^C_G \mathbf{R}, ^G \mathbf{p}_c, ^G \mathbf{p}_f\}, \quad ^C_G \mathbf{R} = ^C_G \hat{\mathbf{R}} \text{Exp}(\delta \boldsymbol{\theta}), \quad ^G \mathbf{p}_c = ^G \hat{\mathbf{p}}_c + ^G \tilde{\mathbf{p}}_c, \quad ^G \mathbf{p}_f = ^G \hat{\mathbf{p}}_f + ^G \tilde{\mathbf{p}}_f, \quad (235)$$

with error state $\tilde{\mathbf{x}} = [\delta \boldsymbol{\theta}^\top, ^G \tilde{\mathbf{p}}_c^\top, ^G \tilde{\mathbf{p}}_f^\top]^\top$.

3.2 The measurement Jacobian

By the chain rule, factoring every block through ${}^C\tilde{\mathbf{p}}_f$,

$$\tilde{\mathbf{z}}_n = \mathbf{H}_c \tilde{\mathbf{x}} + \mathbf{n}_c \quad (236)$$

$$= \left[\frac{\partial \tilde{\mathbf{z}}_n}{\partial \delta \boldsymbol{\theta}} \quad \frac{\partial \tilde{\mathbf{z}}_n}{\partial {}^G\tilde{\mathbf{p}}_c} \quad \frac{\partial \tilde{\mathbf{z}}_n}{\partial {}^G\tilde{\mathbf{p}}_f} \right] \tilde{\mathbf{x}} + \mathbf{n}_c \quad (237)$$

$$= \frac{\partial \tilde{\mathbf{z}}_n}{\partial {}^C\tilde{\mathbf{p}}_f} \left[\frac{\partial {}^C\tilde{\mathbf{p}}_f}{\partial \delta \boldsymbol{\theta}} \quad \frac{\partial {}^C\tilde{\mathbf{p}}_f}{\partial {}^G\tilde{\mathbf{p}}_c} \quad \frac{\partial {}^C\tilde{\mathbf{p}}_f}{\partial {}^G\tilde{\mathbf{p}}_f} \right] \tilde{\mathbf{x}} + \mathbf{n}_c. \quad (238)$$

The projection Jacobian, writing ${}^C\mathbf{p}_f = [c_x, c_y, c_z]^\top$, is

$$\mathbf{z}_n = \begin{bmatrix} c_x/c_z \\ c_y/c_z \end{bmatrix}, \quad \frac{\partial \mathbf{z}_n}{\partial {}^C\mathbf{p}_f} = \begin{bmatrix} \frac{1}{c_z} & 0 & -\frac{c_x}{c_z^2} \\ 0 & \frac{1}{c_z} & -\frac{c_y}{c_z^2} \end{bmatrix} = \frac{1}{c_z^2} \begin{bmatrix} c_z & 0 & -c_x \\ 0 & c_z & -c_y \end{bmatrix}. \quad (239)$$

Perturbing ${}^C\mathbf{p}_f$. From ${}^C\mathbf{p}_f = {}^C\mathbf{R}^\top ({}^G\mathbf{p}_f - {}^G\mathbf{p}_c)$ with ${}^C\mathbf{R} = {}^C\hat{\mathbf{R}} \text{Exp}(\delta \boldsymbol{\theta})$ and $\text{Exp}(\delta \boldsymbol{\theta})^\top \approx \mathbf{I} - [\delta \boldsymbol{\theta}]_\times$,

$${}^C\hat{\mathbf{p}}_f + {}^C\tilde{\mathbf{p}}_f = ({}^C\hat{\mathbf{R}} \text{Exp}(\delta \boldsymbol{\theta}))^\top ({}^G\hat{\mathbf{p}}_f + {}^G\tilde{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c - {}^G\tilde{\mathbf{p}}_c) \quad (240)$$

$$= (\mathbf{I} - [\delta \boldsymbol{\theta}]_\times) {}^C\hat{\mathbf{R}}^\top ({}^G\hat{\mathbf{p}}_f + {}^G\tilde{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c - {}^G\tilde{\mathbf{p}}_c) \quad (241)$$

$$\approx {}^C\hat{\mathbf{R}}^\top ({}^G\hat{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c) - [\delta \boldsymbol{\theta}]_\times {}^C\hat{\mathbf{R}}^\top ({}^G\hat{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c) + {}^C\hat{\mathbf{R}}^\top ({}^G\tilde{\mathbf{p}}_f - {}^G\tilde{\mathbf{p}}_c). \quad (242)$$

Using $-[\delta \boldsymbol{\theta}]_\times \mathbf{a} = [\mathbf{a}]_\times \delta \boldsymbol{\theta}$ with $\mathbf{a} = {}^C\hat{\mathbf{p}}_f = {}^C\hat{\mathbf{R}}^\top ({}^G\hat{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c)$ and matching hat/tilde terms,

$$\begin{aligned} {}^C\hat{\mathbf{p}}_f + {}^C\tilde{\mathbf{p}}_f &= \underbrace{{}^C\hat{\mathbf{R}}^\top ({}^G\hat{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c)}_{{}^C\hat{\mathbf{p}}_f} + \left[{}^C\hat{\mathbf{R}}^\top ({}^G\hat{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c) \right]_\times \delta \boldsymbol{\theta} \\ &\quad - {}^C\hat{\mathbf{R}}^\top {}^G\tilde{\mathbf{p}}_c + {}^C\hat{\mathbf{R}}^\top {}^G\tilde{\mathbf{p}}_f, \end{aligned} \quad (243)$$

so that, with ${}^C\hat{\mathbf{p}}_f = {}^C\hat{\mathbf{R}}^\top ({}^G\hat{\mathbf{p}}_f - {}^G\hat{\mathbf{p}}_c)$, the three blocks are

$$\frac{\partial {}^C\tilde{\mathbf{p}}_f}{\partial \delta \boldsymbol{\theta}} = [{}^C\hat{\mathbf{p}}_f]_\times, \quad \frac{\partial {}^C\tilde{\mathbf{p}}_f}{\partial {}^G\tilde{\mathbf{p}}_c} = -{}^C\hat{\mathbf{R}}^\top, \quad \frac{\partial {}^C\tilde{\mathbf{p}}_f}{\partial {}^G\tilde{\mathbf{p}}_f} = {}^C\hat{\mathbf{R}}^\top. \quad (244)$$

Therefore $\tilde{\mathbf{z}}_n = \mathbf{H}_c \tilde{\mathbf{x}} + \mathbf{n}_c$ with

$$\mathbf{H}_c = \frac{1}{c_z^2} \begin{bmatrix} c_z & 0 & -c_x \\ 0 & c_z & -c_y \end{bmatrix} \left[[{}^C\hat{\mathbf{p}}_f]_\times \quad -{}^C\hat{\mathbf{R}}^\top \quad {}^C\hat{\mathbf{R}}^\top \right]. \quad (245)$$

3.3 A few important discussions

(1) SLAM. The pose $\{{}^C\mathbf{R}, {}^G\mathbf{p}_c\}$ is the localization of the camera, and ${}^G\mathbf{p}_f$ is a 3D feature of the environment. Solving them together means we solve localization and mapping together $\Rightarrow$ *Simultaneous Localization And Mapping* (SLAM).

(2) **PnP / P3P — known feature, solve pose.** If ${}^G\mathbf{p}_f$ is known, given (u, v) , how do we solve $\{{}_G^C\mathbf{R}, {}^C\mathbf{p}_c\}$? Here $\mathbf{x} : \{{}_G^C\mathbf{R}, {}^C\mathbf{p}_c\}$ is 6-dof, while each measurement $\mathbf{z}_n = \mathbf{h}({}_G^C\mathbf{R}, {}^C\mathbf{p}_c) + \mathbf{n}_c$ contributes 2 dof, so we need at least 3 points ${}^C\mathbf{p}_{f_i} \leftrightarrow (u_i, v_i)$ to solve $\{{}_G^C\mathbf{R}, {}^C\mathbf{p}_c\}$.

- 3 pairs ${}^C\mathbf{p}_{f_i} \leftrightarrow (u_i, v_i)$, **P3P** (perspective-3-point), i.e. 2+1 points: use 3D $\leftrightarrow$ 3D correspondences to determine the same 3D pose.
- n pairs of 3D $\leftrightarrow$ 3D correspondences, **PnP** (perspective- n -point).
- **RANSAC** (random sample consensus) for outlier rejection.

This is the *structure* $\rightarrow$ *motion* direction (known structure, solve motion).

(3) **Triangulation — known poses, solve feature.** If $\{{}_G^C\mathbf{R}, {}^C\mathbf{p}_c\}$ is known, given (u_1, v_1) , (u_2, v_2) , solve $\mathbf{P}_f$ (Fig. 5). Each pixel gives a unit bearing and an unknown range r_i :

$$(u_1, v_1) \rightarrow {}^{C_1}\mathbf{b}_1 = \frac{[u_1, v_1, 1]^\top}{\|[u_1, v_1, 1]^\top\|}, \quad (u_2, v_2) \rightarrow {}^{C_2}\mathbf{b}_2 = \frac{[u_2, v_2, 1]^\top}{\|[u_2, v_2, 1]^\top\|}, \quad (246)$$

$${}^{C_1}\mathbf{p}_f = {}^{C_1}\mathbf{b}_1 r_1, \quad {}^{C_2}\mathbf{p}_f = {}^{C_2}\mathbf{b}_2 r_2, \quad (247)$$

with r_1, r_2 unknown. From ${}^{C_1}\mathbf{p}_f = {}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{p}_f + {}^{C_1}\mathbf{p}_{C_2}$ we obtain ${}^{C_1}\mathbf{b}_1 r_1 = {}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{b}_2 r_2 + {}^{C_1}\mathbf{p}_{C_2}$.

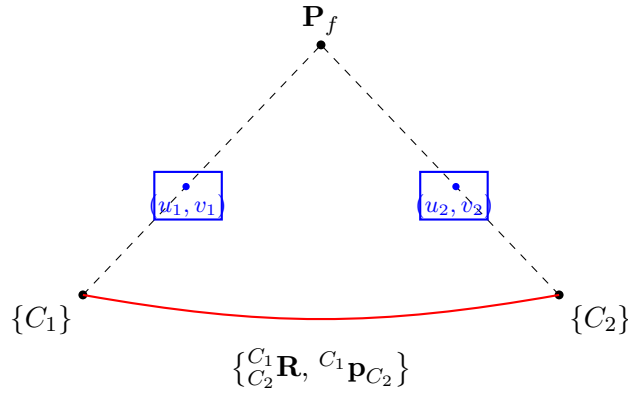


Figure 5: Two-view triangulation: bearings ${}^{C_1}\mathbf{b}_1, {}^{C_2}\mathbf{b}_2$ from pixels $(u_1, v_1), (u_2, v_2)$ and the known relative pose $\{{}_{C_2}^{C_1}\mathbf{R}, {}^{C_1}\mathbf{p}_{C_2}\}$ fix the feature $\mathbf{P}_f$ up to the two ranges r_1, r_2 .

Way 1 (stacked linear system). Collect the two ranges:

$${}^{C_1}\mathbf{b}_1 r_1 - {}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{b}_2 r_2 = {}^{C_1}\mathbf{p}_{C_2} \Rightarrow \underbrace{\begin{bmatrix} {}^{C_1}\mathbf{b}_1 & -{}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{b}_2 \end{bmatrix}}_{3 \times 2} \begin{bmatrix} r_1 \\ r_2 \end{bmatrix} = {}^{C_1}\mathbf{p}_{C_2}, \quad (248)$$

a 3×2 system; solving r_1, r_2 gives ${}^{C_1}\mathbf{p}_f, {}^{C_2}\mathbf{p}_f$.

Degenerate case. If the motion is pure rotation (no translation), then ${}^{C_1}\mathbf{b}_1 = {}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{b}_2$ and ${}^{C_1}\mathbf{p}_{C_2} = \mathbf{0}_{3 \times 1}$, so $r_1 = r_2$ and there is no way to solve r . For a monocular camera, pure rotation is dangerous.

Way 2 (left null space). With ${}^{C_1}\mathbf{b}_1 r_1 = {}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{b}_2 r_2 + {}^{C_1}\mathbf{p}_{C_2}$, collect into $\mathbf{B}^\perp = [\mathbf{b}^{\perp_1} \quad \mathbf{b}^{\perp_2}]$ two directions orthogonal to ${}^{C_1}\mathbf{b}_1$ (${}^{C_1}\mathbf{b}_1^\top \mathbf{b}^{\perp_1} = 0$, ${}^{C_1}\mathbf{b}_1^\top \mathbf{b}^{\perp_2} = 0$); projecting removes r_1 :

$$\mathbf{B}^{\perp \top} {}^{C_1}\mathbf{b}_1 r_1 = \mathbf{B}^{\perp \top} ({}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{b}_2 r_2 + {}^{C_1}\mathbf{p}_{C_2}) = \mathbf{0}_{2 \times 1} \Rightarrow \underbrace{\mathbf{B}^{\perp \top} {}_{C_2}^{C_1}\mathbf{R} {}^{C_2}\mathbf{b}_2}_{2 \times 1} r_2 = - \underbrace{\mathbf{B}^{\perp \top} {}^{C_1}\mathbf{p}_{C_2}}_{2 \times 1}. \quad (249)$$

(4) **Monocular triangulation is up to scale.** If $\{^C_G \mathbf{R}\}$ is known but for $^{C_1} \mathbf{p}_{C_2}$ we only know the direction $\overrightarrow{^{C_1} \mathbf{p}_{C_2}}$ (with $\|^{C_1} \mathbf{p}_{C_2}\|$ unknown), can we triangulate $^C \mathbf{p}_f$? Let $\|^{C_1} \mathbf{p}_{C_2}\| = \rho$, then $^{C_1} \mathbf{p}_f = \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{p}_f + ^{C_1} \mathbf{p}_{C_2}$ gives

$$^{C_1} \mathbf{b}_1 r_1 = \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{b}_2 r_2 + \rho \overrightarrow{^{C_1} \mathbf{p}_{C_2}}. \quad (250)$$

With $\mathbf{A} = [\mathbf{v}^{\perp_1} \ \mathbf{v}^{\perp_2}]^\top$ built from $\overrightarrow{^{C_1} \mathbf{p}_{C_2}}^\top \mathbf{v}^{\perp_1} = 0$, $\overrightarrow{^{C_1} \mathbf{p}_{C_2}}^\top \mathbf{v}^{\perp_2} = 0$, projecting kills the translation term:

$$\mathbf{A} \frac{C_1}{C_2} \mathbf{b}_1 r_1 = \mathbf{A} \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{b}_2 r_2 + \rho \underbrace{\mathbf{A} \overrightarrow{^{C_1} \mathbf{p}_{C_2}}}_0 \quad (251)$$

$$\Rightarrow \begin{bmatrix} \mathbf{A} \frac{C_1}{C_2} \mathbf{b}_1 & -\mathbf{A} \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{b}_2 \end{bmatrix} \begin{bmatrix} r_1 \\ r_2 \end{bmatrix} = 0. \quad (252)$$

Hence r_1, r_2 are up to scale: a monocular camera does not have scale. The above uses *motion to infer structure*.

(5) **Essential matrix — solve the motion.** Given $\{u_1, v_1\}, \{u_2, v_2\}$, can we solve $\{^C_G \mathbf{R}, ^C \mathbf{p}_c\}$? The three vectors $^{C_1} \mathbf{p}_f$, $^{C_2} \mathbf{p}_f$, $^{C_1} \mathbf{p}_{C_2}$ are coplanar (Fig. 6), so $^{C_1} \mathbf{p}_{C_2} \times ^{C_1} \mathbf{p}_f \perp \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{p}_f$:

$$(\lfloor ^{C_1} \mathbf{p}_{C_2} \rfloor_\times \frac{C_1}{C_2} \mathbf{p}_f)^\top \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{p}_f = 0 \Rightarrow ^{C_1} \mathbf{p}_f^\top \lfloor ^{C_1} \mathbf{p}_{C_2} \rfloor_\times \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{p}_f = 0. \quad (253)$$

With $^{C_1} \mathbf{p}_f = ^{C_1} \mathbf{b}_1 r_1$, $^{C_2} \mathbf{p}_f = ^{C_2} \mathbf{b}_2 r_2$,

$$\boxed{^{C_1} \mathbf{b}_1^\top \lfloor ^{C_1} \mathbf{p}_{C_2} \rfloor_\times \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{b}_2 = 0, \quad \mathbf{E} = \lfloor ^{C_1} \mathbf{p}_{C_2} \rfloor_\times \frac{C_1}{C_2} \mathbf{R} \quad (\text{essential matrix}).} \quad (254)$$

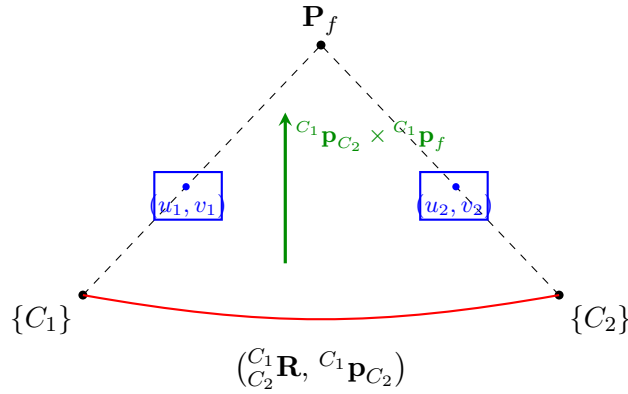


Figure 6: Epipolar geometry: $^{C_1} \mathbf{p}_f$, $^{C_2} \mathbf{p}_f$, and the baseline $^{C_1} \mathbf{p}_{C_2}$ are coplanar, giving the essential-matrix constraint $^{C_1} \mathbf{b}_1^\top \mathbf{E} ^{C_2} \mathbf{b}_2 = 0$.

Why is $\mathbf{E}$ 5-dof? Each pair $(u_1, v_1), (u_2, v_2)$ provides 1 constraint, so we need at least **5 pairs of points** to solve $\mathbf{E} \Rightarrow \frac{C_1}{C_2} \mathbf{R}$ (3 dof) and $\frac{C_1}{C_2} \mathbf{p}_{C_2}$ (2 dof, direction only). When selecting pairs of points, RANSAC (random sample consensus) comes in. Finally:

$$\text{normalized coordinates: } ^{C_1} \mathbf{b}_1^\top \lfloor ^{C_1} \mathbf{p}_{C_2} \rfloor_\times \frac{C_1}{C_2} \mathbf{R} \frac{C_2}{C_1} \mathbf{b}_2 = 0 \quad (\text{essential matrix}), \quad (255)$$

$$\text{pixel coordinates: fundamental matrix.} \quad (256)$$

This is the *motion from structure* direction.

3.4 The full intrinsic calibration model

The calibration geometry is the same as Fig. 4 (repeated here as Fig. 7). The camera model is a composition of four functions.

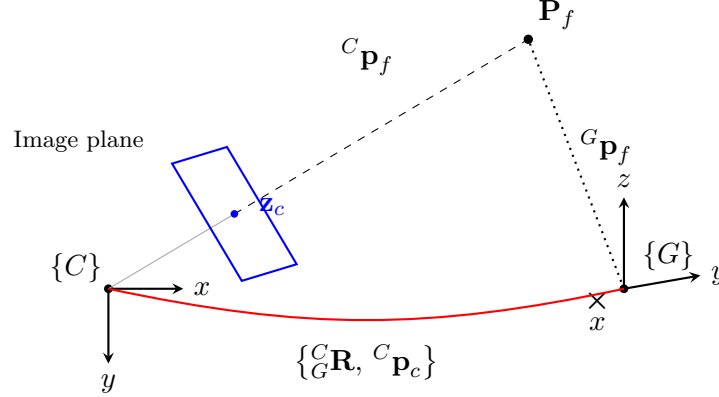


Figure 7: The intrinsic calibration sits inside the same projection geometry: the 3D feature is transformed into $\{C\}$, projected, distorted, and mapped to pixels.

Projection and transform.

$$\mathbf{z}_n = \begin{bmatrix} c_x/c_z \\ c_y/c_z \end{bmatrix} \triangleq \mathbf{h}_p({}^C\mathbf{p}_f), \quad {}^C\mathbf{p}_f = {}^C\mathbf{R}^\top ({}^G\mathbf{p}_f - {}^G\mathbf{p}_c) \triangleq \mathbf{h}_t({}^C\mathbf{R}, {}^G\mathbf{p}_c, {}^G\mathbf{p}_f), \quad (257)$$

$$\mathbf{z}_n = \mathbf{h}_p(\mathbf{h}_t({}^C\mathbf{R}, {}^G\mathbf{p}_c, {}^G\mathbf{p}_f)) + \mathbf{n}. \quad (258)$$

Distortion. Radial-tangential (for example); fisheye uses the equidistant model. With $r^2 = u_n^2 + v_n^2$ and distortion parameters $\mathbf{x}_d = [k_1, k_2, p_1, p_2]^\top$,

$$\begin{bmatrix} u_d \\ v_d \end{bmatrix} = \begin{bmatrix} u_n \\ v_n \end{bmatrix} (1 + k_1 r^2 + k_2 r^4) + \begin{bmatrix} 2p_1 u_n v_n + p_2 (r^2 + 2u_n^2) \\ p_1 (r^2 + 2v_n^2) + 2p_2 u_n v_n \end{bmatrix}, \quad \mathbf{z}_d = \begin{bmatrix} u_d \\ v_d \end{bmatrix} = \mathbf{h}_d(\mathbf{z}_n). \quad (259)$$

Intrinsics / homography. With $\mathbf{x}_{in} = [f_u, f_v, c_u, c_v]$,

$$\begin{bmatrix} u \\ v \\ 1 \end{bmatrix} = \underbrace{\begin{bmatrix} f_u & 0 & c_u \\ 0 & f_v & c_v \\ 0 & 0 & 1 \end{bmatrix}}_{\mathbf{K}} \begin{bmatrix} u_d \\ v_d \\ 1 \end{bmatrix}, \quad \mathbf{z} = \begin{bmatrix} u \\ v \end{bmatrix} = \begin{bmatrix} f_u & 0 \\ 0 & f_v \end{bmatrix} \begin{bmatrix} u_d \\ v_d \end{bmatrix} + \begin{bmatrix} c_u \\ c_v \end{bmatrix} \triangleq \mathbf{h}_k(\mathbf{z}_d, \mathbf{x}_{in}). \quad (260)$$

Full composition.

$$\mathbf{z}_c = \mathbf{h}_c(\mathbf{x}) + \mathbf{n}_c = \mathbf{h}_k(\mathbf{z}_d, \mathbf{x}_{in}) + \mathbf{n}_c \quad (261)$$

$$= \mathbf{h}_k(\mathbf{h}_d(\mathbf{z}_n, \mathbf{x}_d), \mathbf{x}_{in}) + \mathbf{n}_c \quad (262)$$

$$= \mathbf{h}_k(\mathbf{h}_d(\mathbf{h}_p({}^C\mathbf{p}_f), \mathbf{x}_d), \mathbf{x}_{in}) + \mathbf{n}_c \quad (263)$$

$$= \mathbf{h}_k\left(\mathbf{h}_d\left(\mathbf{h}_p\left(\mathbf{h}_t({}^C\mathbf{R}, {}^G\mathbf{p}_c, {}^G\mathbf{p}_f)\right), \mathbf{x}_d\right), \mathbf{x}_{in}\right) + \mathbf{n}_c, \quad (264)$$

where $\mathbf{h}_k(\cdot)$ is the camera-intrinsics homography, $\mathbf{h}_d(\cdot)$ the distortion function, $\mathbf{h}_p(\cdot)$ the projection function, $\mathbf{h}_t(\cdot)$ the transform function, $\mathbf{x}_d$ the distortion parameters, and $\mathbf{x}_{in} = \{f_u, f_v, c_u, c_v\}$ the intrinsics. The Jacobians for calibration follow by the chain rule.

3.5 The extrinsic (camera–IMU) calibration

The camera and IMU sensor frames are rigidly connected (Fig. 8).

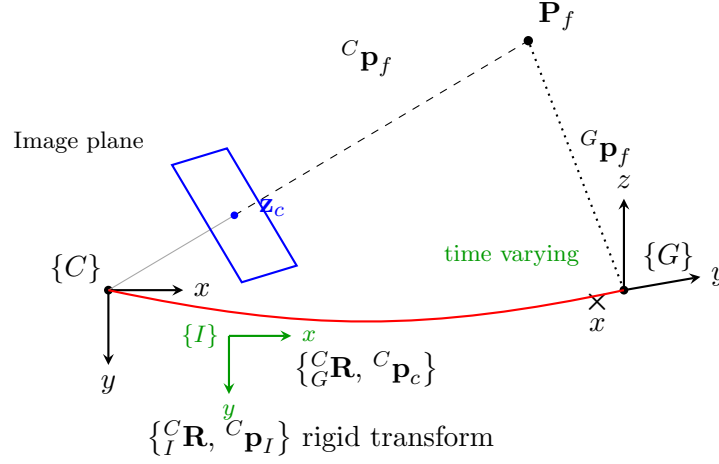


Figure 8: Extrinsic calibration: the IMU frame $\{I\}$ is rigidly fixed to the camera $\{C\}$ via $\{^C_R, ^C_p_I\}$, while the camera-to-global transform is time varying.

$$\begin{bmatrix} ^C_p_f \\ 1 \end{bmatrix} = \underbrace{\begin{bmatrix} ^C_R & ^C_p_I \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix}}_{^C_T} \underbrace{\begin{bmatrix} ^G_R & ^G_p_I \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix}^{-1}}_{^G_T^{-1}} \begin{bmatrix} ^G_p_f \\ 1 \end{bmatrix}, \quad (265)$$

$$^C_p_f = ^C_R ^I_p_f + ^C_p_I = ^C_R (^I_R (^G_p_f - ^G_p_I)) + ^C_p_I. \quad (266)$$

Time offset. How do we estimate the time offset between camera and IMU? With $t_I = t_c + t_d$,

$$\begin{bmatrix} ^{C_{t_c}}p_f \\ 1 \end{bmatrix} = ^C_T \cdot (^{G_{(t+t_d)}}T)^{-1} \begin{bmatrix} ^Gp_f \\ 1 \end{bmatrix}, \quad (267)$$

$$^{G_{(t+t_d)}}\dot{T} = \begin{bmatrix} ^G_R & ^G_p_I \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \begin{bmatrix} [^I\omega]_{\times} & ^I\mathbf{v} \\ \mathbf{0}_{1 \times 3} & 0 \end{bmatrix}. \quad (268)$$

which is the Jacobian for t_d . This is then the full calibration for the vision system.

3.6 Point / line / plane representation

3.6.1 Point representation

In $\mathbb{R}^3$ (closest point),

$$\mathbf{P}_f = \begin{bmatrix} x \\ y \\ z \end{bmatrix} = z \begin{bmatrix} x/z \\ y/z \\ 1 \end{bmatrix} = z \begin{bmatrix} u_n \\ v_n \\ 1 \end{bmatrix}. \quad (269)$$

Inverse depth. Store the inverse of the depth, $\lambda \triangleq 1/z$:

$$\mathbf{x}_f = \begin{bmatrix} x \\ y \\ 1/z \end{bmatrix} = \begin{bmatrix} x \\ y \\ \lambda \end{bmatrix}. \quad (270)$$

What is the motivation to use inverse depth? Transform the feature into a second view and divide by z :

$${}^{C_2}\mathbf{p}_f = {}^{C_2}_{C_1}\mathbf{R}({}^{C_1}\mathbf{p}_f - {}^{C_1}\mathbf{p}_{C_2}) = {}^{C_2}_{C_1}\mathbf{R}\left(\begin{bmatrix} x \\ y \\ z \end{bmatrix} - {}^{C_1}\mathbf{p}_{C_2}\right) = {}^{C_2}_{C_1}\mathbf{R}\left(z \begin{bmatrix} x/z \\ y/z \\ 1 \end{bmatrix} - {}^{C_1}\mathbf{p}_{C_2}\right), \quad (271)$$

$$\frac{{}^{C_2}\mathbf{p}_f}{z} = {}^{C_2}_{C_1}\mathbf{R}\left(\begin{bmatrix} x/z \\ y/z \\ 1 \end{bmatrix} - \frac{1}{z}{}^{C_1}\mathbf{p}_{C_2}\right) \Rightarrow \begin{bmatrix} {}^{C_2}x/z \\ {}^{C_2}y/z \\ {}^{C_2}z/z \end{bmatrix} = {}^{C_2}_{C_1}\mathbf{R}\left(\begin{bmatrix} x\lambda \\ y\lambda \\ 1 \end{bmatrix} - \lambda {}^{C_1}\mathbf{p}_{C_2}\right). \quad (272)$$

If $z \rightarrow \infty$, the feature is far away, $z \approx {}^{C_2}z \gg {}^{C_2}x, {}^{C_2}y$, then the left side tends to the bearing measurement in $\{C_2\}$:

$$\begin{bmatrix} {}^{C_2}x/z \\ {}^{C_2}y/z \\ {}^{C_2}z/z \end{bmatrix} \approx \underbrace{\begin{bmatrix} u_{n_2} \\ v_{n_2} \\ 1 \end{bmatrix}}_{\text{measurements in } C_2} \propto {}^{C_2}_{C_1}\mathbf{R}\left(\begin{bmatrix} x\lambda \\ y\lambda \\ 1 \end{bmatrix} - \lambda {}^{C_1}\mathbf{p}_{C_2}\right). \quad (273)$$

The Jacobian with respect to the inverse-depth state $\tilde{\mathbf{x}} = [\tilde{x}, \tilde{y}, \tilde{\lambda}]$ is

$$\frac{\partial[u_{n_2}; v_{n_2}]}{\partial \tilde{\mathbf{x}}} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix} [\mathbf{H}_\theta \quad \mathbf{H}_p \quad \mathbf{H}_{p_f}], \quad (274)$$

with the three blocks

$$\mathbf{H}_\theta = \left[{}^{C_2}_{C_1}\mathbf{R}([x\lambda; y\lambda; 1] - \lambda {}^{C_1}\mathbf{p}_{C_2}) \right]_{\times}, \quad \mathbf{H}_p = \underbrace{-\lambda {}^{C_2}_{C_1}\mathbf{R}}_{\lambda \rightarrow 0}, \quad (275)$$

$$\mathbf{H}_{p_f} = {}^{C_2}_{C_1}\mathbf{R} \left[\underbrace{\lambda \mathbf{e}_1}_0 \quad \underbrace{\lambda \mathbf{e}_2}_0 \quad [x; y; 0] - {}^{C_1}\mathbf{p}_{C_2} \right]. \quad (276)$$

If the feature is far away, then the rotation is improved, but the Jacobian for translation will not be improved (the $-\lambda {}^{C_2}_{C_1}\mathbf{R}$ and $\lambda \mathbf{e}_1, \lambda \mathbf{e}_2$ columns vanish as $\lambda \rightarrow 0$).

3.6.2 Plane representation

A plane is parameterized by its normal direction and distance to the origin (Fig. 9a):

$$\boldsymbol{\pi} = \begin{bmatrix} \mathbf{n}_\pi \\ d_\pi \end{bmatrix}_{4 \times 1}, \quad \mathbf{n}_\pi : \text{normal direction}, \quad d_\pi : \text{distance to origin}. \quad (277)$$

A plane is 3-dof but $\boldsymbol{\pi}$ has 4 parameters. The *closest-point representation* packs both into one vector,

$$\mathbf{P}_\pi = d_\pi \mathbf{n}_\pi = \begin{bmatrix} x \\ y \\ z \end{bmatrix}, \quad (278)$$

the closest point from the plane to the origin.

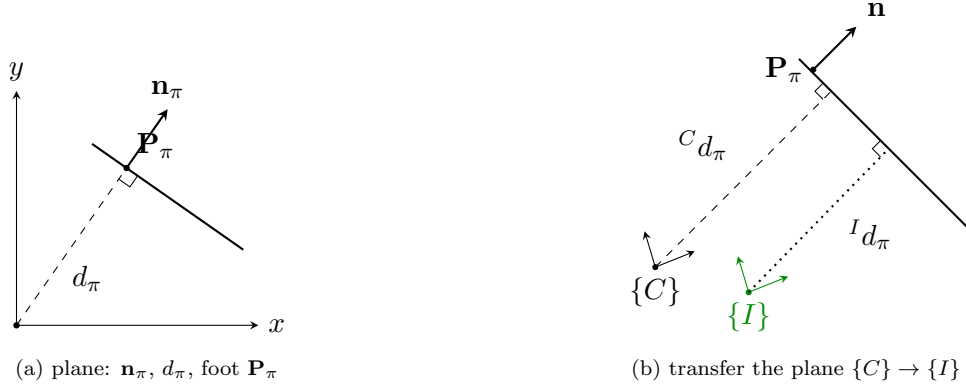


Figure 9: Plane representation (a) and its transfer between the camera and IMU frames (b).

Transfer $\{C\} \rightarrow \{I\}$. For ${}^C\mathbf{p}_\pi \leftrightarrow {}^I\mathbf{p}_\pi$ (Fig. 9b),

$$\begin{cases} {}^I\mathbf{n}_\pi = {}^I_C\mathbf{R} {}^C\mathbf{n}_\pi & \Rightarrow \text{normal direction} \\ {}^I d_\pi = {}^C d_\pi - {}^C\mathbf{n}_\pi^\top \cdot {}^C\mathbf{p}_I & \Rightarrow \text{origin to plane} \end{cases} \quad (279)$$

Hence, using ${}^I d_\pi = {}^C d_\pi - {}^C\mathbf{p}_I^\top {}^C\mathbf{n}_\pi$ and ${}^C\mathbf{p}_I = -{}^C_I\mathbf{R} {}^I\mathbf{p}_C$ (so $-{}^C\mathbf{p}_I^\top = {}^I\mathbf{p}_C^\top {}^I_C\mathbf{R}$),

$$\begin{bmatrix} {}^I\mathbf{n}_\pi \\ {}^I d_\pi \end{bmatrix} = \begin{bmatrix} {}^I_C\mathbf{R} & \mathbf{0}_{3 \times 1} \\ -{}^C\mathbf{p}_I^\top & 1 \end{bmatrix} \begin{bmatrix} {}^C\mathbf{n}_\pi \\ {}^C d_\pi \end{bmatrix} = \begin{bmatrix} {}^I_C\mathbf{R} & \mathbf{0}_{3 \times 1} \\ {}^I\mathbf{p}_C^\top {}^I_C\mathbf{R} & 1 \end{bmatrix} \begin{bmatrix} {}^C\mathbf{n}_\pi \\ {}^C d_\pi \end{bmatrix}. \quad (280)$$

The transformation chain is therefore

$${}^G\mathbf{p}_\pi \rightarrow ({}^C\mathbf{n}_\pi, {}^C d_\pi) \rightarrow ({}^I_C\mathbf{R}, {}^I\mathbf{p}_C) \rightarrow ({}^I\mathbf{n}_\pi, {}^I d_\pi) \rightarrow {}^I\mathbf{p}_\pi. \quad (281)$$

3.6.3 Line representation

How do we represent a 3D line (Fig. 10)? For a line L : $\mathbf{v}_e$ is the 3D direction, d_L is the distance from the origin to the line, and $\mathbf{n}_e$ is the normal direction of the plane (through the line and the origin).

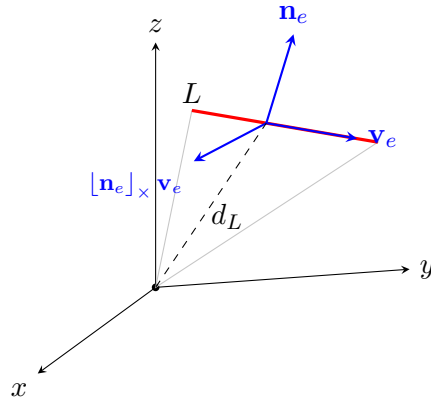


Figure 10: 3D line L : direction $\mathbf{v}_e$, plane normal $\mathbf{n}_e$, third axis $[\mathbf{n}_e]_\times \mathbf{v}_e$, and perpendicular distance d_L from the origin.

We can represent a line with $\{\mathbf{n}_e, \mathbf{v}_e, d_L\}$, where

$$\mathbf{R}_L = [\mathbf{n}_e \ \mathbf{v}_e \ [\mathbf{n}_e]_{\times} \ \mathbf{v}_e] \text{ (a rotation matrix),} \quad d_L \text{ (a distance scalar).} \quad (282)$$

So $L : \{\mathbf{R}_L, d_L\} : \{\bar{\mathbf{q}}_L, d_L\}$, packed as the 4D vector $\mathbf{P}_L = \bar{\mathbf{q}}_L \cdot d_L$, with the error states in Euclidean space. Then

$$\mathbf{P}_L = \hat{\mathbf{P}}_L + \tilde{\mathbf{P}}_L = \bar{\mathbf{q}}_L \cdot d_L = \hat{\mathbf{q}}_L \otimes \delta \mathbf{q}_L \cdot (\hat{d}_L + \tilde{d}_L) \quad (283)$$

$$\Leftrightarrow \hat{\mathbf{P}}_L + \tilde{\mathbf{P}}_L = \hat{\mathbf{q}}_L \otimes \begin{bmatrix} 1 \\ \frac{1}{2} \delta \boldsymbol{\theta}_L \end{bmatrix} (\hat{d}_L + \tilde{d}_L) \quad (284)$$

$$= \hat{\mathbf{q}}_L \otimes \begin{bmatrix} \hat{d}_L + \tilde{d}_L \\ \frac{1}{2} \hat{d}_L \delta \boldsymbol{\theta}_L \end{bmatrix} \quad (285)$$

$$= \hat{\mathbf{q}}_L \otimes \left(\begin{bmatrix} \hat{d}_L \\ \mathbf{0}_{3 \times 1} \end{bmatrix} + \begin{bmatrix} 1 & \mathbf{0} \\ \mathbf{0} & \frac{1}{2} \hat{d}_L \mathbf{I}_3 \end{bmatrix} \begin{bmatrix} \tilde{d}_L \\ \delta \boldsymbol{\theta}_L \end{bmatrix} \right), \quad (286)$$

so that, with $[\hat{\mathbf{q}}_L]_L$ the left quaternion-product matrix,

$$\tilde{\mathbf{P}}_L = [\hat{\mathbf{q}}_L]_L \begin{bmatrix} 1 & \mathbf{0} \\ \mathbf{0} & \frac{1}{2} \hat{d}_L \mathbf{I}_3 \end{bmatrix} \begin{bmatrix} \tilde{d}_L \\ \delta \boldsymbol{\theta}_L \end{bmatrix}. \quad (287)$$

A few discussions on lines with cameras. (1) How to project a 3D line to a 2D line in the image? Given a line $\{\mathbf{n}_e, \mathbf{v}_e, d_L\}$ and camera parameters f_u, f_v, c_u, c_v (Fig. 11a):

$$\begin{bmatrix} u_n \\ v_n \\ 1 \end{bmatrix} \sim \underbrace{\begin{bmatrix} f_u & 0 & c_u \\ 0 & f_v & c_v \\ 0 & 0 & 1 \end{bmatrix}}_{\mathbf{K}} \underbrace{\begin{bmatrix} x \\ y \\ z \end{bmatrix}}_{\mathbf{p}_f}, \quad \underbrace{\mathbf{p}}_{\text{pixel on image}} \sim \mathbf{K} \mathbf{p}_f. \quad (288)$$

Every $\mathbf{p}_f$ on the line lies in the plane through the line and the origin, so $\mathbf{p}_f^\top \mathbf{n}_e = 0$. With $\mathbf{p}_f \sim \mathbf{K}^{-1} \mathbf{p}$,

$$(\mathbf{K}^{-1} \mathbf{p})^\top \mathbf{n}_e = 0 \Rightarrow \mathbf{p}^\top \mathbf{K}^{-\top} \mathbf{n}_e = 0 \Rightarrow \mathbf{n}_e^\top \mathbf{K}^{-1} \mathbf{p} = 0 \Rightarrow (\mathbf{K}^{-\top} \mathbf{n}_e)^\top \mathbf{p} = 0, \quad (289)$$

so the 2D image line is

$$\mathbf{l} = \mathbf{K}^{-\top} \mathbf{n}_e, \quad \mathbf{p} \text{ is every pixel on the line.} \quad (290)$$

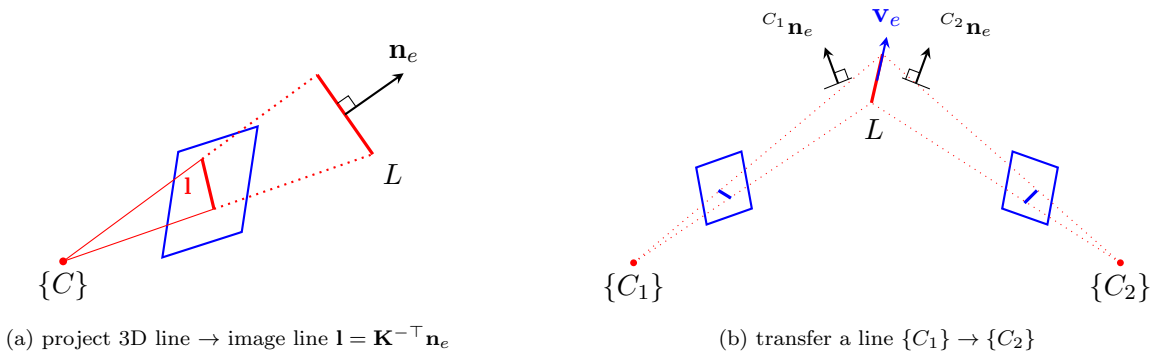


Figure 11: Lines with cameras: projecting a 3D line to a 2D image line (a) and transferring a line between two camera frames (b).

(2) How to transfer a line from frame $\{C_1\}$ to $\{C_2\}$? (Fig. 11b) The line L is given by ${}^{C_1}\mathbf{n}_e$, ${}^{C_1}\mathbf{v}_e$, ${}^{C_1}d_L$ in $\{C_1\}$ and by ${}^{C_2}\mathbf{n}_e$, ${}^{C_2}\mathbf{v}_e$, ${}^{C_2}d_L$ in $\{C_2\}$. Assume ${}^{C_1}\mathbf{p}_f$ is a point on L ; then its moment about the origin is

$$\left[{}^{C_1}\mathbf{p}_f \right]_{\times} {}^{C_1}\mathbf{v}_e = {}^{C_1}\mathbf{n}_e {}^{C_1}d_L. \quad (291)$$

The direction transforms by rotation only, and the point by the full rigid transform:

$${}^{C_2}\mathbf{v}_e = {}_{C_1}^{C_2}\mathbf{R} {}^{C_1}\mathbf{v}_e, \quad {}^{C_2}\mathbf{p}_f = {}_{C_1}^{C_2}\mathbf{R} {}^{C_1}\mathbf{p}_f + {}^{C_2}\mathbf{p}_{C_1}. \quad (292)$$

Hence the moment in $\{C_2\}$ is

$$\left[{}^{C_2}\mathbf{p}_f \right]_{\times} {}^{C_2}\mathbf{v}_e = \left[{}_{C_1}^{C_2}\mathbf{R} {}^{C_1}\mathbf{p}_f + {}^{C_2}\mathbf{p}_{C_1} \right]_{\times} {}_{C_1}^{C_2}\mathbf{R} {}^{C_1}\mathbf{v}_e = {}^{C_2}\mathbf{n}_e {}^{C_2}d_L. \quad (293)$$

Using $[\mathbf{R}\mathbf{a}]_{\times} \mathbf{R} = \mathbf{R} [\mathbf{a}]_{\times}$ on the first term,

$${}_{C_1}^{C_2}\mathbf{R} \left[{}^{C_1}\mathbf{p}_f \right]_{\times} {}^{C_1}\mathbf{v}_e + \left[{}^{C_2}\mathbf{p}_{C_1} \right]_{\times} {}_{C_1}^{C_2}\mathbf{R} {}^{C_1}\mathbf{v}_e = {}^{C_2}\mathbf{n}_e {}^{C_2}d_L, \quad (294)$$

and substituting the moment identity ${}^{C_1}\mathbf{n}_e {}^{C_1}d_L = \left[{}^{C_1}\mathbf{p}_f \right]_{\times} {}^{C_1}\mathbf{v}_e$,

$$\begin{bmatrix} {}_{C_1}^{C_2}\mathbf{R} & \left[{}^{C_2}\mathbf{p}_{C_1} \right]_{\times} {}_{C_1}^{C_2}\mathbf{R} \end{bmatrix} \begin{bmatrix} {}^{C_1}\mathbf{n}_e {}^{C_1}d_L \\ {}^{C_1}\mathbf{v}_e \end{bmatrix} = {}^{C_2}\mathbf{n}_e {}^{C_2}d_L. \quad (295)$$

Stacking the moment and the direction (${}^{C_2}\mathbf{v}_e = {}_{C_1}^{C_2}\mathbf{R} {}^{C_1}\mathbf{v}_e$) gives the full line transfer:

$$\boxed{\begin{bmatrix} {}^{C_2}\mathbf{n}_e {}^{C_2}d_L \\ {}^{C_2}\mathbf{v}_e \end{bmatrix} = \begin{bmatrix} {}_{C_1}^{C_2}\mathbf{R} & \left[{}^{C_2}\mathbf{p}_{C_1} \right]_{\times} {}_{C_1}^{C_2}\mathbf{R} \\ \mathbf{0}_3 & {}_{C_1}^{C_2}\mathbf{R} \end{bmatrix} \begin{bmatrix} {}^{C_1}\mathbf{n}_e {}^{C_1}d_L \\ {}^{C_1}\mathbf{v}_e \end{bmatrix}.} \quad (296)$$

4 Lecture 4: Information, Marginalization, and Estimator Design

Topics. (1) the matrix inversion lemma; (2) covariance vs. information; (3) marginalization and the Schur complement; (4) why the information matrix reflects problem structure; (5) a typical visual-odometry / SLAM pipeline; (6) many ways to handle $\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n}$; (7) designing a common estimator — deriving the EKF from MAP by marginalization.

4.1 The matrix inversion lemma

For a 2×2 block matrix, the inverse can be written block by block. In the general form,

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{C} & \mathbf{D} \end{bmatrix}^{-1} = \begin{bmatrix} \mathbf{E} & \mathbf{F} \\ \mathbf{G} & \mathbf{H} \end{bmatrix}, \quad \begin{cases} \mathbf{E} = (\mathbf{A} - \mathbf{B}\mathbf{D}^{-1}\mathbf{C})^{-1}, \\ \mathbf{F} = -\mathbf{E}\mathbf{B}\mathbf{D}^{-1}, \\ \mathbf{G} = -\mathbf{D}^{-1}\mathbf{C}\mathbf{E}, \\ \mathbf{H} = \mathbf{D}^{-1} + \mathbf{D}^{-1}\mathbf{C}\mathbf{E}\mathbf{B}\mathbf{D}^{-1}. \end{cases} \quad (297)$$

For the symmetric case ($\mathbf{C} = \mathbf{B}^\top$, so the inverse is symmetric too),

$$\begin{bmatrix} \mathbf{A} & \mathbf{B} \\ \mathbf{B}^\top & \mathbf{D} \end{bmatrix}^{-1} = \begin{bmatrix} \mathbf{E} & \mathbf{F} \\ \mathbf{F}^\top & \mathbf{H} \end{bmatrix}, \quad \begin{cases} \mathbf{E} = (\mathbf{A} - \mathbf{B}\mathbf{D}^{-1}\mathbf{B}^\top)^{-1}, \\ \mathbf{F} = -\mathbf{E}\mathbf{B}\mathbf{D}^{-1}, \\ \mathbf{H} = \mathbf{D}^{-1} + \mathbf{D}^{-1}\mathbf{B}^\top\mathbf{E}\mathbf{B}\mathbf{D}^{-1} = (\mathbf{D} - \mathbf{B}^\top\mathbf{A}^{-1}\mathbf{B})^{-1}. \end{cases} \quad (298)$$

The term $\mathbf{A} - \mathbf{B}\mathbf{D}^{-1}\mathbf{B}^\top$ (resp. $\mathbf{D} - \mathbf{B}^\top\mathbf{A}^{-1}\mathbf{B}$) is the *Schur complement*. This is one of the most important matrix operations for the derivations that follow.

4.2 Covariance and information

Recall the measurement model from Lecture 1, $\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n}$ with $\mathbf{n} \sim \mathcal{N}(\mathbf{0}, \mathbf{R})$ and $\mathbf{R}$ the noise covariance. The MAP / weighted-least-squares estimate is

$$\max_{\mathbf{x}} p(\mathbf{z} | \mathbf{x}) \Leftrightarrow \min_{\mathbf{x}} \|\mathbf{z} - \mathbf{h}(\mathbf{x})\|_{\mathbf{R}}^2. \quad (299)$$

Given a linearization point $\hat{\mathbf{x}}$, $\mathbf{z} = \mathbf{h}(\hat{\mathbf{x}}) + \mathbf{H}\tilde{\mathbf{x}} + \mathbf{n}$, so with the residual $\tilde{\mathbf{z}} = \mathbf{z} - \mathbf{h}(\hat{\mathbf{x}})$,

$$\tilde{\mathbf{z}} = \mathbf{H}\tilde{\mathbf{x}} + \mathbf{n}. \quad (300)$$

The normal equations and their solution are

$$\boxed{\underbrace{\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H}}_{\text{information}} \tilde{\mathbf{x}} = \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}}, \quad \tilde{\mathbf{x}} = (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}}.} \quad (301)$$

To find the covariance of the corrected estimate $\mathbf{x}^\oplus = \hat{\mathbf{x}} + \tilde{\mathbf{x}}$, substitute $\tilde{\mathbf{z}} = \mathbf{H}(\mathbf{x} - \hat{\mathbf{x}}) + \mathbf{n}$:

$$\mathbf{x}^\oplus = \hat{\mathbf{x}} + (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} \quad (302)$$

$$= \hat{\mathbf{x}} + (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} (\mathbf{H}(\mathbf{x} - \hat{\mathbf{x}}) + \mathbf{n}) \quad (303)$$

$$= \mathbf{x} + (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{n}. \quad (304)$$

Hence $\mathbf{x} - \mathbf{x}^\oplus = -(\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{n}$, and

$$\begin{aligned} \mathbf{P}_{\mathbf{x}^\oplus \mathbf{x}^\oplus} &= \mathbb{E}[(\mathbf{x} - \mathbf{x}^\oplus)(\mathbf{x} - \mathbf{x}^\oplus)^\top] \\ &= (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} \mathbb{E}(\mathbf{n} \mathbf{n}^\top) \mathbf{R}^{-1} \mathbf{H} (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \end{aligned} \quad (305)$$

$$= (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1}, \quad (306)$$

using $\mathbb{E}(\mathbf{n} \mathbf{n}^\top) = \mathbf{R}$. Therefore information and covariance are inverses of each other:

information $\Sigma = \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H}$, covariance $\mathbf{P} = (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1}$, $\Sigma = \mathbf{P}^{-1}$, $\mathbf{P} = \Sigma^{-1}$.

(307)

This is fundamental for what follows:

- for **optimization / least squares**, we keep track of the information matrix Σ ;
- for **filtering (EKF)**, we keep track of the covariance $\mathbf{P}$.

4.3 Marginalization

Let $\mathbf{x} \sim \mathcal{N}(\hat{\mathbf{x}}, \mathbf{P}_{\mathbf{xx}})$, where $\hat{\mathbf{x}}$ is the best estimate and $\mathbf{P}_{\mathbf{xx}}$ the covariance. Partition the state as $\mathbf{x} = [\mathbf{x}_A^\top, \mathbf{x}_B^\top]^\top$, with $\mathbf{x}_A$ and $\mathbf{x}_B$ both part of $\mathbf{x}$:

$$\mathbf{x} \sim \mathcal{N}\left(\begin{bmatrix} \hat{\mathbf{x}}_A \\ \hat{\mathbf{x}}_B \end{bmatrix}, \begin{bmatrix} \mathbf{P}_{AA} & \mathbf{P}_{AB} \\ \mathbf{P}_{BA} & \mathbf{P}_{BB} \end{bmatrix}\right), \quad \mathbf{P}^\top = \mathbf{P} \text{ (SPD)}, \quad \mathbf{P}_{AB} = \mathbf{P}_{BA}^\top. \quad (308)$$

Covariance form (easy). The marginal of either block is read off directly:

$$\mathbf{x}_A \sim \mathcal{N}(\hat{\mathbf{x}}_A, \mathbf{P}_{AA}), \quad \mathbf{x}_B \sim \mathcal{N}(\hat{\mathbf{x}}_B, \mathbf{P}_{BB}). \quad (309)$$

Marginalization in covariance form is straightforward: just keep the corresponding diagonal block.

Information form (Schur complement). For optimization we work with the information system $(\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H}) \tilde{\mathbf{x}} = \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}}$, i.e.

$$\Sigma \tilde{\mathbf{x}} = \mathbf{b}, \quad \begin{bmatrix} \Sigma_{AA} & \Sigma_{AB} \\ \Sigma_{AB}^\top & \Sigma_{BB} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_A \\ \tilde{\mathbf{x}}_B \end{bmatrix} = \begin{bmatrix} \mathbf{b}_A \\ \mathbf{b}_B \end{bmatrix}, \quad (310)$$

where Σ is the information matrix and $\mathbf{b}$ the residual vector. We seek $\Sigma'_{AA}, \mathbf{b}'_A$ (and $\Sigma'_{BB}, \mathbf{b}'_B$) such that $\Sigma'_{AA} \tilde{\mathbf{x}}_A = \mathbf{b}'_A$ and $\Sigma'_{BB} \tilde{\mathbf{x}}_B = \mathbf{b}'_B$ hold after eliminating the other block.

Solving $\Sigma \tilde{\mathbf{x}} = \mathbf{b}$ via the block inverse,

$$\begin{bmatrix} \tilde{\mathbf{x}}_A \\ \tilde{\mathbf{x}}_B \end{bmatrix} = \begin{bmatrix} \Sigma_{AA} & \Sigma_{AB} \\ \Sigma_{AB}^\top & \Sigma_{BB} \end{bmatrix}^{-1} \begin{bmatrix} \mathbf{b}_A \\ \mathbf{b}_B \end{bmatrix} = \begin{bmatrix} \mathbf{P}_{AA} & \mathbf{P}_{AB} \\ \mathbf{P}_{AB}^\top & \mathbf{P}_{BB} \end{bmatrix} \begin{bmatrix} \mathbf{b}_A \\ \mathbf{b}_B \end{bmatrix} = \begin{bmatrix} \mathbf{P}_{AA} \mathbf{b}_A + \mathbf{P}_{AB} \mathbf{b}_B \\ \mathbf{P}_{AB}^\top \mathbf{b}_A + \mathbf{P}_{BB} \mathbf{b}_B \end{bmatrix}, \quad (311)$$

with the blocks of the inverse given by the matrix inversion lemma,

$$\mathbf{P}_{AA} = (\Sigma_{AA} - \Sigma_{AB} \Sigma_{BB}^{-1} \Sigma_{AB}^\top)^{-1}, \quad \mathbf{P}_{AB} = -\mathbf{P}_{AA} \Sigma_{AB} \Sigma_{BB}^{-1}, \quad (312)$$

$$\mathbf{P}_{BB} = \Sigma_{BB}^{-1} + \Sigma_{BB}^{-1} \Sigma_{AB}^\top \mathbf{P}_{AA} \Sigma_{AB} \Sigma_{BB}^{-1} = (\Sigma_{BB} - \Sigma_{AB}^\top \Sigma_{AA}^{-1} \Sigma_{AB})^{-1}. \quad (313)$$

For the A block,

$$\tilde{\mathbf{x}}_A = \mathbf{P}_{AA} \mathbf{b}_A + \mathbf{P}_{AB} \mathbf{b}_B = \mathbf{P}_{AA} \mathbf{b}_A - \mathbf{P}_{AA} \Sigma_{AB} \Sigma_{BB}^{-1} \mathbf{b}_B = \mathbf{P}_{AA} (\mathbf{b}_A - \Sigma_{AB} \Sigma_{BB}^{-1} \mathbf{b}_B), \quad (314)$$

so $\mathbf{P}_{AA}^{-1}\tilde{\mathbf{x}}_A = \mathbf{b}_A - \Sigma_{AB}\Sigma_{BB}^{-1}\mathbf{b}_B$. Using the identity $\mathbf{P}_{AB} = -\mathbf{P}_{AA}\Sigma_{AB}\Sigma_{BB}^{-1} = -\Sigma_{AA}^{-1}\Sigma_{AB}\mathbf{P}_{BB}$, the B block gives symmetrically

$$\tilde{\mathbf{x}}_B = \mathbf{P}_{AB}^\top \mathbf{b}_A + \mathbf{P}_{BB}\mathbf{b}_B = \mathbf{P}_{BB}(\mathbf{b}_B - \Sigma_{AB}^\top \Sigma_{AA}^{-1} \mathbf{b}_A), \quad (315)$$

so $\mathbf{P}_{BB}^{-1}\tilde{\mathbf{x}}_B = \mathbf{b}_B - \Sigma_{AB}^\top \Sigma_{AA}^{-1} \mathbf{b}_A$. Substituting the Schur-complement expressions for $\mathbf{P}_{AA}^{-1}$ and $\mathbf{P}_{BB}^{-1}$:

$$\boxed{\text{marginalize } \mathbf{x}_B, \text{ keep } \mathbf{x}_A : (\Sigma_{AA} - \Sigma_{AB}\Sigma_{BB}^{-1}\Sigma_{AB}^\top)\tilde{\mathbf{x}}_A = \mathbf{b}_A - \Sigma_{AB}\Sigma_{BB}^{-1}\mathbf{b}_B,} \quad (316)$$

$$\boxed{\text{marginalize } \mathbf{x}_A, \text{ keep } \mathbf{x}_B : (\Sigma_{BB} - \Sigma_{AB}^\top \Sigma_{AA}^{-1} \Sigma_{AB})\tilde{\mathbf{x}}_B = \mathbf{b}_B - \Sigma_{AB}^\top \Sigma_{AA}^{-1} \mathbf{b}_A.} \quad (317)$$

Both the new information block and the new residual are Schur complements of the eliminated variable. This is exactly how variables are dropped from a sliding window while preserving their influence on the kept states.

4.4 Why we care about the information matrix

Take visual measurements as an example. A pixel observation depends on a camera pose and a feature,

$$\mathbf{z}_c = \mathbf{h}_c(\mathbf{x}) + \mathbf{n} = \mathbf{h}_c(\mathbf{x}_c, \mathbf{x}_f) + \mathbf{n}, \quad \tilde{\mathbf{z}}_c = \mathbf{H}_c \tilde{\mathbf{x}}_c + \mathbf{H}_f \tilde{\mathbf{x}}_f + \mathbf{n}. \quad (318)$$

Consider three poses $\mathbf{x}_A, \mathbf{x}_B, \mathbf{x}_C$ observing two features f_1, f_2 (Fig. 12). Stacking the four measurements as $\tilde{\mathbf{z}} = \mathbf{H}\tilde{\mathbf{x}} + \mathbf{n}$, with $\mathbf{n} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ and state $\mathbf{x} = [\mathbf{x}_A^\top, \mathbf{x}_B^\top, \mathbf{x}_C^\top, f_1^\top, f_2^\top]^\top$:

$$\begin{bmatrix} \tilde{\mathbf{z}}_{A1} \\ \tilde{\mathbf{z}}_{B1} \\ \tilde{\mathbf{z}}_{B2} \\ \tilde{\mathbf{z}}_{C2} \end{bmatrix} = \underbrace{\begin{bmatrix} \mathbf{H}_A & \mathbf{0} & \mathbf{0} & \mathbf{H}_{A1} & \mathbf{0} \\ \mathbf{0} & \mathbf{H}_B & \mathbf{0} & \mathbf{H}_{B1} & \mathbf{0} \\ \mathbf{0} & \mathbf{H}_B & \mathbf{0} & \mathbf{0} & \mathbf{H}_{B2} \\ \mathbf{0} & \mathbf{0} & \mathbf{H}_C & \mathbf{0} & \mathbf{H}_{C2} \end{bmatrix}}_{\mathbf{H}} \begin{bmatrix} \tilde{\mathbf{x}}_A \\ \tilde{\mathbf{x}}_B \\ \tilde{\mathbf{x}}_C \\ \tilde{f}_1 \\ \tilde{f}_2 \end{bmatrix} + \mathbf{n}. \quad (319)$$

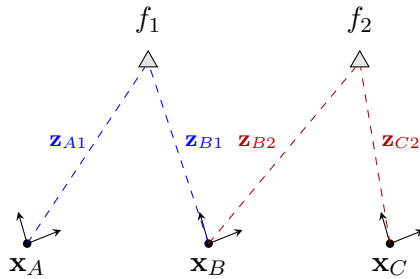


Figure 12: Visual measurement graph: poses $\mathbf{x}_A, \mathbf{x}_B, \mathbf{x}_C$ observe features f_1, f_2 . Each ray $\mathbf{z}_{(\cdot)}$ couples one pose to one feature, which determines the sparsity of $\mathbf{H}$ and of $\Sigma = \mathbf{H}^\top \mathbf{H}$.

The information matrix $\Sigma = \mathbf{H}^\top \mathbf{H}$ has a block-sparse structure (a block (i, j) is nonzero only when states i and j are co-observed in some measurement), shown in Fig. 13. Partitioning into poses $p = \{A, B, C\}$ and features $f = \{f_1, f_2\}$,

$$\Sigma = \mathbf{H}^\top \mathbf{H} \triangleq \begin{bmatrix} \Sigma_{pp} & \Sigma_{pf} \\ \Sigma_{pf}^\top & \Sigma_{ff} \end{bmatrix}. \quad (320)$$

	A	B	C	f_1	f_2	
A	$\otimes$	0	0	$\otimes$	0	Σ_{pp}
B	0	$\otimes$	0	$\otimes$	$\otimes$	
C	0	0	$\otimes$	0	$\otimes$	
f_1	$\otimes$	$\otimes$	0	$\otimes$	0	Σ_{ff}
f_2	0	$\otimes$	$\otimes$	0	$\otimes$	

Figure 13: Sparsity of $\Sigma = \mathbf{H}^\top \mathbf{H}$ ($\otimes$: nonzero block). The pose–pose block Σ_{pp} is block-diagonal, while Σ_{pf} records exactly which pose sees which feature. The information matrix reflects the problem structure.

4.5 A typical visual-odometry / SLAM pipeline

How do the previous two lectures fit together into a working monocular system? A common pipeline incrementally grows poses $C_1, C_2, \dots$ and features $f_1, f_2, \dots$ (Fig. 14):

- (1) **5-point algorithm** on C_1, C_2 : recover ${}^{C_1}\mathbf{R}$ and ${}^{C_1}\mathbf{p}_{C_2}$ (up to scale).
- (2) **Feature triangulation**: with the recovered relative pose, triangulate $f_1, f_2, \dots$.
- (3) **P3P / PnP** for C_3 : with known features, solve ${}^{C_1}\mathbf{R}$, ${}^{C_1}\mathbf{p}_{C_3}$ (then triangulate new features).
- (4) **5-point or P3P/PnP** for C_4 : solve ${}^{C_1}\mathbf{R}$, ${}^{C_1}\mathbf{p}_{C_4}$.
- (5) **Bundle adjustment (BA)** over C_1, C_2, C_3 and $f_1, f_2, f_3, \dots$ (joint refinement of poses and structure).
- (6) **BA** extended to C_1, C_2, C_3, C_4 and $f_1, f_2, f_3, \dots$ as the window grows.
- (7) **Marginalization**: when there are too many poses ($C_1, \dots, C_n$) and features ($f_1, \dots, f_m$), marginalize old states $C_1, f_1, \dots$ to keep the system light-weight.

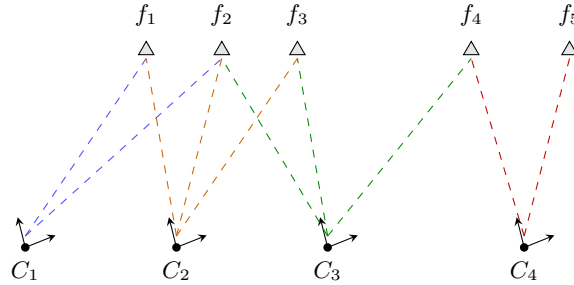


Figure 14: A monocular VO/SLAM pipeline grows poses $C_1, \dots, C_4$ and features $f_1, \dots, f_5$: bootstrap with the 5-point algorithm + triangulation, extend new poses with P3P/PnP, refine with bundle adjustment, and marginalize old states to bound cost. Combined with the previous two lectures, this builds up visual SLAM.

4.6 Designing estimators: many ways to handle $\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n}$

Given $\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n}$, $\mathbf{n} \sim \mathcal{N}(\mathbf{0}, \mathbf{R})$, there are many ways to linearize and solve, each leading to a different family of algorithms.

- (1) **Iterated re-linearization (GN / LM)**. The typical solution $\min_{\mathbf{x}} \|\mathbf{z} - \mathbf{h}(\mathbf{x})\|_{\mathbf{R}}^2$. Given a linearization $\hat{\mathbf{x}}$, $\tilde{\mathbf{z}} = \mathbf{H}\hat{\mathbf{x}} + \mathbf{n}$; update $\mathbf{x}^\oplus = \hat{\mathbf{x}} + \tilde{\mathbf{x}}$, then *redo* the linearization $\tilde{\mathbf{z}} = \mathbf{H}^\oplus \tilde{\mathbf{x}} + \mathbf{n}$ (Gauss–Newton or Levenberg–Marquardt).

(2) Linearize once + residual correction (FEJ). What if we linearize only once, at a fixed $\hat{\mathbf{x}}^0$? With $\mathbf{H}^0 = \mathbf{H}|_{\hat{\mathbf{x}}^0}$,

$$\mathbf{z} = \mathbf{h}(\hat{\mathbf{x}}^0) + \mathbf{H}^0(\mathbf{x} - \hat{\mathbf{x}}^0) + \mathbf{n} \quad (321)$$

$$\mathbf{z} - \mathbf{h}(\hat{\mathbf{x}}^0) = \mathbf{H}^0(\mathbf{x} - \hat{\mathbf{x}} + \underbrace{\hat{\mathbf{x}} - \hat{\mathbf{x}}^0}_{\Delta \mathbf{x}}) + \mathbf{n} = \mathbf{H}^0 \tilde{\mathbf{x}} + \mathbf{H}^0 \Delta \mathbf{x} + \mathbf{n}, \quad (322)$$

so moving the known offset to the left gives the *residual correction*

$$\underbrace{\mathbf{z} - \mathbf{h}(\hat{\mathbf{x}}^0)}_{\tilde{\mathbf{z}}^0} - \mathbf{H}^0 \Delta \mathbf{x} = \mathbf{H}^0 \tilde{\mathbf{x}} + \mathbf{n}. \quad (323)$$

Keeping the Jacobian fixed at the first estimate is **FEJ** (first-estimate Jacobians) [7], used e.g. in OKVIS [8]; it preserves the correct observability/nullspace structure.

(3) Partial linearization (preintegration / iSAM). For $\mathbf{x} = [\mathbf{x}_A^\top, \mathbf{x}_B^\top]^\top$, $\mathbf{z} = \mathbf{h}(\mathbf{x}_A, \mathbf{x}_B) + \mathbf{n}$, linearize only in $\mathbf{x}_B$ (about $\hat{\mathbf{x}}_B^0$) while keeping $\mathbf{x}_A$ exact:

$$\mathbf{z} = \mathbf{h}(\hat{\mathbf{x}}_A, \hat{\mathbf{x}}_B^0) + \mathbf{H}_A \tilde{\mathbf{x}}_A + \mathbf{H}_B^0 \tilde{\mathbf{x}}_B + \mathbf{H}_B^0 \Delta \mathbf{x}_B + \mathbf{n}, \quad (324)$$

$$\underbrace{\mathbf{z} - \mathbf{h}(\hat{\mathbf{x}}_A, \hat{\mathbf{x}}_B^0)}_{\tilde{\mathbf{z}}^0} - \mathbf{H}_B^0 \Delta \mathbf{x}_B = [\mathbf{H}_A \quad \mathbf{H}_B^0] \begin{bmatrix} \tilde{\mathbf{x}}_A \\ \tilde{\mathbf{x}}_B \end{bmatrix} + \mathbf{n}. \quad (325)$$

This is the idea behind IMU **pre-integration** [9] and **ACI** (analytic combined integration) [10]; **iSAM** [11] uses a similar partial-relinearization idea.

(4) Nullspace projection (MSCKF / structureless). For $\mathbf{x} = [\mathbf{x}_A^\top, \mathbf{x}_B^\top]^\top$, $\tilde{\mathbf{z}} = \mathbf{H}_A \tilde{\mathbf{x}}_A + \mathbf{H}_B \tilde{\mathbf{x}}_B + \mathbf{n}$. If we find $\mathbf{N}$ with $\mathbf{N}^\top \mathbf{H}_B = \mathbf{0}$, then projecting onto the left nullspace removes $\mathbf{x}_B$:

$$\mathbf{N}^\top \tilde{\mathbf{z}} = \mathbf{N}^\top \mathbf{H}_A \tilde{\mathbf{x}}_A + \cancel{\mathbf{N}^\top \mathbf{H}_B \tilde{\mathbf{x}}_B} + \mathbf{N}^\top \mathbf{n}. \quad (326)$$

This is the **MSCKF** [12] (multi-state constraint Kalman filter), a.k.a. the smart / structure-less vision factor: the features are eliminated without ever being added to the state.

(5) Invariant errors. Instead of $\mathbf{x} = \hat{\mathbf{x}} + \tilde{\mathbf{x}}$, put $\mathbf{x}$ on a group $SE(3)$ / $SE_2(3)$ and use a right-invariant error,

$$\mathbf{x} = \hat{\mathbf{x}} \boxplus \tilde{\mathbf{x}} = \text{Exp}(\tilde{\mathbf{x}}) \cdot \hat{\mathbf{x}} \Rightarrow \text{invariant SLAM / VIO}. \quad (327)$$

(6) Decoupled (right-)invariant errors. For $\mathbf{x} = [\mathbf{x}_A^\top, \mathbf{x}_B^\top]^\top$, mix error types per block:

$$\begin{cases} \mathbf{x}_A = \hat{\mathbf{x}}_A \boxplus \tilde{\mathbf{x}}_A = \text{Exp}(\tilde{\mathbf{x}}_A) \cdot \hat{\mathbf{x}}_A & (\text{group / invariant error}) \\ \mathbf{x}_B = \hat{\mathbf{x}}_B + \tilde{\mathbf{x}}_B & (\text{vector error}) \end{cases} \quad (328)$$

which gives decoupled right-invariant SLAM / VIO.

Use your imagination to deal with $\{\mathbf{z} = \mathbf{h}(\mathbf{x}) + \mathbf{n}, \tilde{\mathbf{z}} = \mathbf{H} \tilde{\mathbf{x}} + \mathbf{n}\}$ to design different algorithms.

4.7 Designing a common system: from MAP to the EKF

Consider the canonical prior + motion + measurement system

$$\begin{cases} \mathbf{x}_0 \sim \mathcal{N}(\hat{\mathbf{x}}_0, \mathbf{P}_0) & \rightarrow \text{prior} \\ \mathbf{x}_1 = \mathbf{f}(\mathbf{x}_0) + \mathbf{w}_0, \quad \mathbf{w}_k \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}) & \rightarrow \text{motion model} \\ \mathbf{z}_1 = \mathbf{h}(\mathbf{x}_1) + \mathbf{n}_1, \quad \mathbf{n}_1 \sim \mathcal{N}(\mathbf{0}, \mathbf{R}) & \rightarrow \text{measurement model} \end{cases} \quad (329)$$

The MAP estimate factorizes by Bayes' rule,

$$\max_{\mathbf{x}} p(\mathbf{x} | \mathbf{z}) = \max_{\mathbf{x}} \frac{p(\mathbf{z} | \mathbf{x}) p(\mathbf{x})}{p(\mathbf{z})} = \max_{\mathbf{x}} \frac{p(\mathbf{z}_1 | \mathbf{x}_1) p(\mathbf{x}_1 | \mathbf{x}_0) p(\mathbf{x}_0)}{p(\mathbf{z})}, \quad (330)$$

which is equivalent to the nonlinear least-squares cost

$$\min_{\mathbf{x}} \|\mathbf{z}_1 - \mathbf{h}(\mathbf{x}_1)\|_{\mathbf{R}}^2 + \|\mathbf{x}_1 - \mathbf{f}(\mathbf{x}_0)\|_{\mathbf{Q}}^2 + \|\mathbf{x}_0 - \hat{\mathbf{x}}_0\|_{\mathbf{P}_0}^2. \quad (331)$$

There are two ways to solve it:

1. **Batch:** minimize all three terms jointly $\Rightarrow \hat{\mathbf{x}}_1, \mathbf{P}_1$.
2. **Incremental:**
 - (i) handle the prior + motion terms $\|\mathbf{x}_0 - \hat{\mathbf{x}}_0\|_{\mathbf{P}_0}^2 + \|\mathbf{x}_1 - \mathbf{f}(\mathbf{x}_0)\|_{\mathbf{Q}}^2$;
 - (ii) marginalize $\mathbf{x}_0$, keep $\mathbf{x}_1$, giving $(\hat{\mathbf{x}}_{1|0}, \mathbf{P}_{1|0})$;
 - (iii) add the measurement $\|\mathbf{x}_1 - \hat{\mathbf{x}}_{1|0}\|_{\mathbf{P}_{1|0}}^2 + \|\mathbf{z}_1 - \mathbf{h}(\mathbf{x}_1)\|_{\mathbf{R}}^2 \Rightarrow \hat{\mathbf{x}}_1, \mathbf{P}_1$.

The incremental route is exactly the EKF predict/update, as we now derive.

Propagation (marginalize $\mathbf{x}_0$). Linearize the motion model, $\mathbf{x}_1 = \mathbf{f}(\mathbf{x}_0) + \mathbf{w}_0 \Rightarrow \hat{\mathbf{x}}_1 + \tilde{\mathbf{x}}_1 = \mathbf{f}(\hat{\mathbf{x}}_0) + \mathbf{F}\tilde{\mathbf{x}}_0 + \mathbf{w}_0$, and define the motion residual

$$\mathbf{r}_x \triangleq \hat{\mathbf{x}}_1 - \mathbf{f}(\hat{\mathbf{x}}_0) = \mathbf{F}\tilde{\mathbf{x}}_0 - \tilde{\mathbf{x}}_1 + \mathbf{w}_0, \quad \mathbf{w}_0 = \mathbf{r}_x - [\mathbf{F} \quad -\mathbf{I}] \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}. \quad (332)$$

The prior + motion cost (writing $\mathbf{Q}_0 = \mathbf{Q}$) is

$$\min \|\tilde{\mathbf{x}}_0\|_{\mathbf{P}_0}^2 + \left\| \mathbf{r}_x - [\mathbf{F} \quad -\mathbf{I}] \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} \right\|_{\mathbf{Q}_0}^2. \quad (333)$$

Collecting quadratic and linear terms, the cost C is

$$C = \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}^\top \begin{bmatrix} \mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F} & -\mathbf{F}^\top \mathbf{Q}_0^{-1} \\ -\mathbf{Q}_0^{-1} \mathbf{F} & \mathbf{Q}_0^{-1} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} - 2 \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}^\top \begin{bmatrix} \mathbf{F}^\top \\ -\mathbf{I} \end{bmatrix} \mathbf{Q}_0^{-1} \mathbf{r}_x + \mathbf{r}_x^\top \mathbf{Q}_0^{-1} \mathbf{r}_x. \quad (334)$$

Setting $\partial C / \partial [\tilde{\mathbf{x}}_0; \tilde{\mathbf{x}}_1] = \mathbf{0}$ gives the information system

$$\begin{bmatrix} \mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F} & -\mathbf{F}^\top \mathbf{Q}_0^{-1} \\ -\mathbf{Q}_0^{-1} \mathbf{F} & \mathbf{Q}_0^{-1} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} = \begin{bmatrix} \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{r}_x \\ -\mathbf{Q}_0^{-1} \mathbf{r}_x \end{bmatrix}. \quad (335)$$

Marginalizing $\mathbf{x}_0$ (Schur complement onto the $\mathbf{x}_1$ block) and applying the matrix inversion lemma,

$$\begin{aligned} \left[\mathbf{Q}_0^{-1} - \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1} \right] \tilde{\mathbf{x}}_1 &= -\mathbf{Q}_0^{-1} \mathbf{r}_x + \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{r}_x, \\ \underbrace{(\mathbf{Q}_0 + \mathbf{F} \mathbf{P}_0 \mathbf{F}^\top)^{-1}}_{\mathbf{P}_{1|0}^{-1}} \tilde{\mathbf{x}}_1 &= -(\mathbf{Q}_0 + \mathbf{F} \mathbf{P}_0 \mathbf{F}^\top)^{-1} \mathbf{r}_x. \end{aligned} \quad (336)$$

This is the EKF **propagation**: the predicted covariance and mean are

$$\boxed{\mathbf{P}_{1|0} = \mathbf{F} \mathbf{P}_0 \mathbf{F}^\top + \mathbf{Q}_0, \quad \hat{\mathbf{x}}_{1|0} = \mathbf{f}(\hat{\mathbf{x}}_0) \text{ (i.e. } \mathbf{r}_x = \mathbf{0}\text{).}} \quad (337)$$

Update (add the measurement). Now include the measurement $\mathbf{z}_1 = \mathbf{h}(\mathbf{x}_1) + \mathbf{n} \Rightarrow \tilde{\mathbf{z}} = \mathbf{H}\tilde{\mathbf{x}}_1 + \mathbf{n}$. The full cost

$$\|\tilde{\mathbf{z}} - \mathbf{H}\tilde{\mathbf{x}}_1\|_{\mathbf{R}}^2 + \left\| \mathbf{r}_{\mathbf{x}} - [\mathbf{F} \quad -\mathbf{I}] \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} \right\|_{\mathbf{Q}_0}^2 + \|\tilde{\mathbf{x}}_0\|_{\mathbf{P}_0}^2 \quad (338)$$

yields the augmented information system (the measurement adds $\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H}$ to the $\mathbf{x}_1$ block and $\mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}}$ to its residual),

$$\begin{bmatrix} \mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F} & -\mathbf{F}^\top \mathbf{Q}_0^{-1} \\ -\mathbf{Q}_0^{-1} \mathbf{F} & \mathbf{Q}_0^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} = \begin{bmatrix} \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{r}_{\mathbf{x}} \\ -\mathbf{Q}_0^{-1} \mathbf{r}_{\mathbf{x}} + \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} \end{bmatrix}. \quad (339)$$

Marginalizing $\mathbf{x}_0$ again and recognizing $\mathbf{P}_{1|0}^{-1} = (\mathbf{Q}_0 + \mathbf{F}\mathbf{P}_0\mathbf{F}^\top)^{-1}$,

$$\underbrace{(\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} + \mathbf{P}_{1|0}^{-1})}_{\Sigma = \mathbf{P}_{1|1}^{-1}} \tilde{\mathbf{x}}_1 = \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \underbrace{\mathbf{P}_{1|0}^{-1} \mathbf{r}_{\mathbf{x}}}_{\rightarrow \mathbf{0}}. \quad (340)$$

After propagation $\mathbf{r}_{\mathbf{x}} = \mathbf{0}$, so the second term drops. Applying the matrix inversion lemma to the updated covariance,

$$\mathbf{P}_{1|1} = (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} = \mathbf{P}_{1|0} - \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0}, \quad (341)$$

and for the mean correction, using the same lemma to convert information $\rightarrow$ covariance form,

$$\tilde{\mathbf{x}}_1 = (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} \quad (342)$$

$$= (\mathbf{P}_{1|0} - \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0}) \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} \quad (343)$$

$$= \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{R}^{-1} - (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top \mathbf{R}^{-1}) \tilde{\mathbf{z}} \quad (344)$$

$$= \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} ((\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R}) \mathbf{R}^{-1} - \mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top \mathbf{R}^{-1}) \tilde{\mathbf{z}} \quad (345)$$

$$= \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \tilde{\mathbf{z}}. \quad (346)$$

Finally, with the Kalman gain $\mathbf{K} = \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1}$, we recover the EKF **update**:

$$\boxed{\tilde{\mathbf{x}}_1 = \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \tilde{\mathbf{z}}, \quad \mathbf{P}_{1|1} = \mathbf{P}_{1|0} - \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0}.} \quad (347)$$

The extended Kalman filter is thus the incremental (marginalize-then-update) solution of the same MAP problem that batch least squares solves jointly — the two views are connected by the matrix inversion lemma and the Schur complement.

4.8 The relationship between Schur complement and nullspace projection

The Schur-complement marginalization (§4.3) and the nullspace projection (§4.6, item 4, the MSCKF) both eliminate $\mathbf{x}_B$ — it turns out they are the *same* operation. Take $\mathbf{z} = \mathbf{h}(\mathbf{x}_A, \mathbf{x}_B) + \mathbf{n}$, $\mathbf{n} \sim \mathcal{N}(\mathbf{0}, \mathbf{R})$, with $\tilde{\mathbf{z}} = \mathbf{H}_A \tilde{\mathbf{x}}_A + \mathbf{H}_B \tilde{\mathbf{x}}_B + \mathbf{n}$.

(1) **Information form.** The normal equations are

$$\begin{bmatrix} \mathbf{H}_A^\top \mathbf{R}^{-1} \mathbf{H}_A & \mathbf{H}_A^\top \mathbf{R}^{-1} \mathbf{H}_B \\ \mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_A & \mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_B \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_A \\ \tilde{\mathbf{x}}_B \end{bmatrix} = \begin{bmatrix} \mathbf{H}_A^\top \\ \mathbf{H}_B^\top \end{bmatrix} \mathbf{R}^{-1} \tilde{\mathbf{z}}. \quad (348)$$

Marginalizing $\mathbf{x}_B$ and keeping $\mathbf{x}_A$ via the Schur complement gives

$$\boxed{\begin{aligned} & \underbrace{(\mathbf{H}_A^\top \mathbf{R}^{-1} \mathbf{H}_A - \mathbf{H}_A^\top \mathbf{R}^{-1} \mathbf{H}_B (\mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_B)^{-1} \mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_A)}_{\text{information}} \tilde{\mathbf{x}}_A \\ & = \underbrace{\mathbf{H}_A^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \mathbf{H}_A^\top \mathbf{R}^{-1} \mathbf{H}_B (\mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_B)^{-1} \mathbf{H}_B^\top \mathbf{R}^{-1} \tilde{\mathbf{z}}}_{\text{residual}} \end{aligned}} \quad (\text{Eq. 1})$$

(2) **Nullspace form.** Take a (thin) QR-type factorization of $\mathbf{H}_B$,

$$\mathbf{H}_B = [\mathbf{Q}_e \quad \mathbf{Q}_N] \begin{bmatrix} \mathbf{U} \\ \mathbf{0} \end{bmatrix} = \mathbf{Q}_e \mathbf{U} + \mathbf{Q}_N \cdot \mathbf{0} = \mathbf{Q}_e \mathbf{U}, \quad (349)$$

with $\mathbf{U}$ upper triangular and $[\mathbf{Q}_e \quad \mathbf{Q}_N]$ orthogonal, so $\mathbf{Q}_e \mathbf{Q}_e^\top + \mathbf{Q}_N \mathbf{Q}_N^\top = \mathbf{I}$, $\mathbf{Q}_e^\top \mathbf{Q}_e = \mathbf{I}$, $\mathbf{Q}_N^\top \mathbf{Q}_N = \mathbf{I}$, and the left nullspace satisfies $\mathbf{Q}_N^\top \mathbf{H}_B = \mathbf{Q}_N^\top \mathbf{Q}_e \mathbf{U} = \mathbf{0}$. Projecting the residual onto $\mathbf{Q}_N$ removes $\mathbf{x}_B$:

$$\mathbf{Q}_N^\top \tilde{\mathbf{z}} = \mathbf{Q}_N^\top \mathbf{H}_A \tilde{\mathbf{x}}_A + \cancel{\mathbf{Q}_N^\top \mathbf{H}_B \tilde{\mathbf{x}}_B} + \mathbf{Q}_N^\top \mathbf{n} = \mathbf{Q}_N^\top \mathbf{H}_A \tilde{\mathbf{x}}_A + \mathbf{Q}_N^\top \mathbf{n}, \quad (350)$$

with projected noise covariance $\mathbf{Q}_N^\top \mathbf{R} \mathbf{Q}_N$. The resulting normal equations are

$$\boxed{(\mathbf{Q}_N^\top \mathbf{H}_A)^\top (\mathbf{Q}_N^\top \mathbf{R} \mathbf{Q}_N)^{-1} (\mathbf{Q}_N^\top \mathbf{H}_A) \tilde{\mathbf{x}}_A = (\mathbf{Q}_N^\top \mathbf{H}_A)^\top (\mathbf{Q}_N^\top \mathbf{R} \mathbf{Q}_N)^{-1} \mathbf{Q}_N^\top \tilde{\mathbf{z}}.} \quad (\text{Eq. 2})$$

Are Eq. 1 and Eq. 2 equivalent? Consider the isotropic case $\mathbf{R} = \sigma^2 \mathbf{I}$. With $\mathbf{H}_B = \mathbf{Q}_e \mathbf{U}$,

$$\mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_B = (\mathbf{Q}_e \mathbf{U})^\top \frac{\mathbf{I}}{\sigma^2} \mathbf{Q}_e \mathbf{U} = \frac{\mathbf{U}^\top \mathbf{U}}{\sigma^2}, \quad (351)$$

so the projector that appears in the Schur complement of Eq. 1 is

$$\begin{aligned} \mathbf{H}_A^\top \mathbf{R}^{-1} \mathbf{H}_B (\mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_B)^{-1} \mathbf{H}_B^\top \mathbf{R}^{-1} \mathbf{H}_A &= \mathbf{H}_A^\top \frac{\mathbf{I}}{\sigma^2} \mathbf{Q}_e \mathbf{U} \sigma^2 (\mathbf{U}^\top \mathbf{U})^{-1} \mathbf{U}^\top \mathbf{Q}_e^\top \frac{\mathbf{I}}{\sigma^2} \mathbf{H}_A \\ &= \frac{1}{\sigma^2} \mathbf{H}_A^\top \mathbf{Q}_e \mathbf{Q}_e^\top \mathbf{H}_A. \end{aligned} \quad (352)$$

Hence the Eq. 1 information becomes, using $\mathbf{Q}_e \mathbf{Q}_e^\top = \mathbf{I} - \mathbf{Q}_N \mathbf{Q}_N^\top$,

$$\frac{1}{\sigma^2} \mathbf{H}_A^\top \mathbf{H}_A - \frac{1}{\sigma^2} \mathbf{H}_A^\top \mathbf{Q}_e \mathbf{Q}_e^\top \mathbf{H}_A = \frac{1}{\sigma^2} \mathbf{H}_A^\top (\mathbf{I} - \mathbf{Q}_e \mathbf{Q}_e^\top) \mathbf{H}_A = \frac{1}{\sigma^2} \mathbf{H}_A^\top \mathbf{Q}_N \mathbf{Q}_N^\top \mathbf{H}_A. \quad (353)$$

The Eq. 2 information, using $\mathbf{Q}_N^\top \mathbf{R} \mathbf{Q}_N = \sigma^2 \mathbf{Q}_N^\top \mathbf{Q}_N = \sigma^2 \mathbf{I}$, is

$$(\mathbf{Q}_N^\top \mathbf{H}_A)^\top (\sigma^2 \mathbf{I})^{-1} (\mathbf{Q}_N^\top \mathbf{H}_A) = \frac{1}{\sigma^2} \mathbf{H}_A^\top \mathbf{Q}_N \mathbf{Q}_N^\top \mathbf{H}_A, \quad (354)$$

which is identical (the residuals match the same way). Therefore, for isotropic noise, Schur-complement marginalization and left-nullspace projection produce exactly the same information and residual — the MSCKF's structureless update is precisely the marginalization of the feature.

5 Lecture 5: The IMU Model and IMU Integration

Topics. (1) the IMU measurement model (gyroscope, accelerometer, biases, noise); (2) continuous vs. discrete noise; (3) the IMU kinematics as a first-order ODE; (4) the big picture: IMU integration in a visual-inertial navigation system; (5) exact integration from t_k to t_{k+1} ; (6) computing $\Delta \mathbf{R}, \Delta \mathbf{p}, \Delta \mathbf{v}$ — preintegration and three methods; (7) mean and covariance propagation with $SO(3) + \mathbb{R}^3$ errors; (8) the linearization using $SE_2(3)$.

5.1 The IMU model

The IMU (inertial measurement unit) is one of the most important sensors for robotics. We use two frames:

- $\{I\}$: the IMU frame (attached to the sensor, see Fig. 15);
- $\{G\}$: the global frame.

The IMU provides two readings: the **gyroscope** reads angular velocity and the **accelerometer** reads acceleration,

$${}^I\boldsymbol{\omega}_m = {}^I\boldsymbol{\omega} + \mathbf{b}_g + \mathbf{n}_g, \quad (355)$$

$${}^I\mathbf{a}_m = {}^I\mathbf{a} + \mathbf{b}_a + \mathbf{n}_a, \quad (356)$$

where

- ${}^I\boldsymbol{\omega}$ is the true angular-rate reading and ${}^I\mathbf{a}$ the true acceleration reading;
- $\mathbf{b}_g$ is the gyro bias, driven by a random walk $\dot{\mathbf{b}}_g = \mathbf{n}_{wg}$; $\mathbf{b}_a$ is the accel bias, driven by a random walk $\dot{\mathbf{b}}_a = \mathbf{n}_{wa}$;
- $\mathbf{n}_g \sim \mathcal{N}(\mathbf{0}, \sigma_g^2 \mathbf{I}_3)$ and $\mathbf{n}_a \sim \mathcal{N}(\mathbf{0}, \sigma_a^2 \mathbf{I}_3)$ are Gaussian noises.




Figure 15: The IMU carries its own frame $\{I\}$; onboard, the gyroscope reads the angular velocity and the accelerometer reads the acceleration.

Another way of modeling the accelerometer makes gravity explicit:

$${}^I\mathbf{a}_m = ({}^I\mathbf{a}_b - {}^I_G\mathbf{R}^G\mathbf{g}) + \mathbf{b}_a + \mathbf{n}_a, \quad {}^G\mathbf{g} = \begin{bmatrix} 0 \\ 0 \\ -9.8 \end{bmatrix}, \quad (357)$$

where ${}^I\mathbf{a}_b$ is the body acceleration and ${}^G\mathbf{g}$ is gravity in $\{G\}$.

We use (355) and (356) as our measurements. Inverting them gives the true readings:

$$\text{true gyro reading: } {}^I\boldsymbol{\omega} = {}^I\boldsymbol{\omega}_m - \mathbf{b}_g - \mathbf{n}_g, \quad (358)$$

$$\text{true accel reading: } {}^I\mathbf{a} = {}^I\mathbf{a}_m - \mathbf{b}_a - \mathbf{n}_a. \quad (359)$$

The IMU state. When we model the IMU, we use the following parameters:

- $\{^G_I \mathbf{R}, ^G_I \mathbf{p}_I\}$: IMU orientation and position — 6 DoF;
- $^G_I \mathbf{v}_I$: IMU velocity — 3 DoF;
- $\mathbf{b}_g$: gyro bias — 3 DoF; $\mathbf{b}_a$: accel bias — 3 DoF.

Then our state vector for the IMU is

$$\mathbf{x}_I = \{^G_I \mathbf{R}, ^G_I \mathbf{p}_I, ^G_I \mathbf{v}_I, \mathbf{b}_g, \mathbf{b}_a\}, \quad 15 \text{ DoF}. \quad (360)$$

Some places use the quaternion $^G_I \mathbf{R} \Leftrightarrow ^G_I \bar{q}$ (Lecture 2); then

$$\mathbf{x}_I = \left[^G_I \bar{q}^\top \quad ^G_I \mathbf{p}_I^\top \quad ^G_I \mathbf{v}_I^\top \quad \mathbf{b}_g^\top \quad \mathbf{b}_a^\top \right]^\top, \quad 16 \times 1 \Rightarrow 15 \text{ DoF}. \quad (361)$$

5.2 Continuous and discrete noise

For the IMU we specify *continuous-time* noise, $\mathbf{n}_c \sim \mathcal{N}(\mathbf{0}, \sigma_c^2 \mathbf{I}_3)$, characterized by

$$\mathbb{E}[\mathbf{n}_c(t)] = \mathbf{0}_{3 \times 1}, \quad \mathbb{E}[\mathbf{n}_c(t + \tau) \mathbf{n}_c^\top(t)] = \sigma_c^2 \mathbf{I}_3 \delta(\tau), \quad (362)$$

where $\delta(\tau)$ is the impulse function: $\delta(\tau) = 1$ if $\tau = 0$ and $\delta(\tau) = 0$ if $\tau \neq 0$.

Consider a random-walk bias driven by this noise, $\dot{\mathbf{b}}(t) = \mathbf{n}_c(t)$. Integrating from t_k to t_{k+1} ,

$$\int_{t_k}^{t_{k+1}} \dot{\mathbf{b}}(t) dt = \int_{t_k}^{t_{k+1}} \mathbf{n}_c(t) dt = \mathbf{b}_{k+1} - \mathbf{b}_k \Rightarrow \Delta \mathbf{b} \triangleq \mathbf{b}_{k+1} - \mathbf{b}_k = \int_{t_k}^{t_{k+1}} \mathbf{n}_c(t) dt. \quad (363)$$

Its mean is $\mathbb{E}(\Delta \mathbf{b}) = \mathbb{E}(\int_{t_k}^{t_{k+1}} \mathbf{n}_c(t) dt) = \mathbf{0}_{3 \times 1}$, and its covariance is

$$\text{Cov}(\Delta \mathbf{b}) \triangleq \mathbf{P}_{\Delta \mathbf{b}} = \mathbb{E}(\Delta \mathbf{b} \Delta \mathbf{b}^\top) = \mathbb{E} \left(\int_{t_k}^{t_{k+1}} \mathbf{n}_c(t) dt \cdot \int_{t_k}^{t_{k+1}} \mathbf{n}_c^\top(t) dt \right) \quad (364)$$

$$= \mathbb{E} \left(\int_{t_k}^{t_{k+1}} \int_{t_k}^{t_{k+1}} \mathbf{n}_c(t) \mathbf{n}_c^\top(s) dt ds \right) \quad (365)$$

$$= \int_{t_k}^{t_{k+1}} \mathbb{E}(\mathbf{n}_c(t) \mathbf{n}_c^\top(t)) dt \quad (366)$$

$$= \int_{t_k}^{t_{k+1}} \sigma_c^2 \mathbf{I}_3 dt = \delta t \sigma_c^2 \mathbf{I}_3, \quad (367)$$

where $\delta t = t_{k+1} - t_k$ (the impulse $\delta(\cdot)$ collapses the double integral). Hence we can **discretize** $\mathbf{n}_c$ in $[t_k, t_{k+1}]$ as

$$\boxed{\mathbf{n}_d \sim \mathcal{N} \left(\mathbf{0}, \frac{\sigma_c^2}{\delta t} \mathbf{I}_3 \right), \quad \delta t = t_{k+1} - t_k.} \quad (368)$$

Then $\Delta \mathbf{b} = \int_{t_k}^{t_{k+1}} \mathbf{n}_c dt = \mathbf{n}_d \cdot \delta t$, and the discrete covariance is consistent with the continuous one:

$$\text{Cov}(\Delta \mathbf{b})_d = \mathbb{E}(\mathbf{n}_d \mathbf{n}_d^\top) \delta t^2 = \delta t^2 \cdot \frac{\sigma_c^2}{\delta t} \mathbf{I}_3 = \sigma_c^2 \delta t \mathbf{I}_3 = \text{Cov}(\Delta \mathbf{b})_c. \checkmark \quad (369)$$

5.3 The IMU kinematics: a first-order ODE

The IMU state evolves by the first-order ordinary differential equation

$$\begin{cases} {}^G\dot{\mathbf{R}} = {}^G\mathbf{R} \left[{}^I\boldsymbol{\omega} \right]_{\times} = {}^G\mathbf{R} \left[{}^I\boldsymbol{\omega}_m - \mathbf{b}_g - \mathbf{n}_g \right]_{\times}, \\ {}^G\dot{\mathbf{p}}_I = {}^G\mathbf{v}_I, \\ {}^G\dot{\mathbf{v}}_I = {}^G\mathbf{a} + {}^G\mathbf{g} = {}^G\mathbf{R} \left({}^I\mathbf{a}_m - \mathbf{b}_a - \mathbf{n}_a \right) + {}^G\mathbf{g}, \\ {}^I\dot{\mathbf{b}}_g = \mathbf{n}_{wg}, \quad {}^I\dot{\mathbf{b}}_a = \mathbf{n}_{wa}. \end{cases} \quad (370)$$

Stacking, we obtain the compact form

$$\boxed{\dot{\mathbf{x}}_I = \mathbf{f}(\mathbf{x}_I, \mathbf{n}_I), \quad \mathbf{n}_I = \begin{bmatrix} \mathbf{n}_g \\ \mathbf{n}_a \\ \mathbf{n}_{wg} \\ \mathbf{n}_{wa} \end{bmatrix}, \quad \begin{array}{ll} \mathbf{n}_g \sim \mathcal{N}(\mathbf{0}, \sigma_g^2 \mathbf{I}_3), & \mathbf{n}_a \sim \mathcal{N}(\mathbf{0}, \sigma_a^2 \mathbf{I}_3), \\ \mathbf{n}_{wg} \sim \mathcal{N}(\mathbf{0}, \sigma_{wg}^2 \mathbf{I}_3), & \mathbf{n}_{wa} \sim \mathcal{N}(\mathbf{0}, \sigma_{wa}^2 \mathbf{I}_3), \end{array}} \quad (371)$$

and, per the previous subsection, the discretized noise over one interval is

$$\mathbf{n}_{Id} = \begin{bmatrix} \mathbf{n}_{gd} \\ \mathbf{n}_{ad} \\ \mathbf{n}_{wgd} \\ \mathbf{n}_{wad} \end{bmatrix}, \quad \sigma_{gd}^2 = \frac{\sigma_g^2}{\delta t}, \quad \sigma_{ad}^2 = \frac{\sigma_a^2}{\delta t}, \quad \sigma_{wgd}^2 = \frac{\sigma_{wg}^2}{\delta t}, \quad \sigma_{wad}^2 = \frac{\sigma_{wa}^2}{\delta t}. \quad (372)$$

The IMU model is done. There are various IMU models, but the basic idea is the same.

5.4 IMU integration: the big picture

Recall the typical linear system from Lecture 1 and put it side by side with our sensor models (Fig. 16):

$$\begin{cases} \dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u} & \rightarrow \text{state evolution} \rightarrow \text{IMU model: } \dot{\mathbf{x}}_I = \mathbf{f}(\mathbf{x}_I, \mathbf{n}_I), \\ \mathbf{y} = \mathbf{C}\mathbf{x} + \mathbf{D}\mathbf{u} & \rightarrow \text{observation / measurements} \rightarrow \text{vision / camera model: } \mathbf{z}_c = \mathbf{h}_c(\mathbf{x}) + \mathbf{n}_c. \end{cases} \quad (373)$$

Together they form a **VINS** (visual-inertial navigation system). These two models are the focus of our tutorials: how to process the camera measurement $\mathbf{z}_c = \mathbf{h}_c(\mathbf{x}) + \mathbf{n}_c$ was covered in Lectures 3 and 4; we will learn how to process the IMU in this Lecture 5.

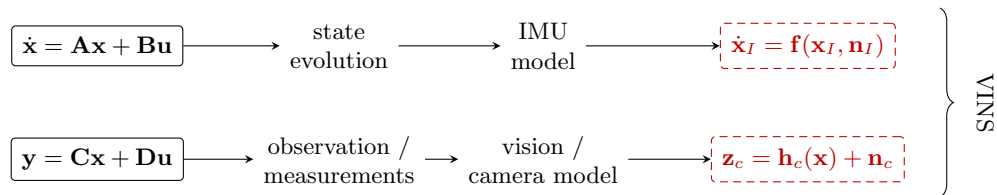


Figure 16: The big picture: the Lecture-1 linear system maps onto the two VINS models — the IMU model plays the state evolution (this lecture) and the camera model plays the observation (Lectures 3–4).

The problem formulation. Given $\mathbf{x}_k \sim \mathcal{N}(\hat{\mathbf{x}}_k, \mathbf{P}_k)$ and the IMU readings $({}^I\boldsymbol{\omega}_{m_k}, {}^I\mathbf{a}_{m_k})$, solve

$$\boxed{\mathbf{x}_{k+1} \sim \mathcal{N}(\hat{\mathbf{x}}_{k+1}, \mathbf{P}_{k+1}) \Rightarrow \text{two targets: } \hat{\mathbf{x}}_{k+1} \text{ and } \mathbf{P}_{k+1}.} \quad (374)$$

That is, the ODE $\dot{\mathbf{x}}_I = \mathbf{f}(\mathbf{x}_I, \mathbf{n}_I)$ carries the *current state distribution* $\mathbf{x}_k \sim \mathcal{N}(\hat{\mathbf{x}}_k, \mathbf{P}_k)$ into the *next state distribution* $\mathbf{x}_{k+1} \sim \mathcal{N}(\hat{\mathbf{x}}_{k+1}, \mathbf{P}_{k+1})$.

How to solve it? From $\dot{\mathbf{x}}_I = \mathbf{f}(\mathbf{x}_I, \mathbf{n}_I)$ we can get the *integrated function*

$$\mathbf{x}_{k+1} = \mathbf{f}_{\text{int}}(\mathbf{x}_k, {}^I\boldsymbol{\omega}_m, {}^I\mathbf{a}_m, \mathbf{n}_k), \quad \begin{cases} \mathbf{x}_{k+1} = \mathbf{x}_{I_{k+1}}, \\ \mathbf{x}_k = \mathbf{x}_{I_k}, \\ \mathbf{n}_k = \mathbf{n}_{I_k} \sim \mathcal{N}(\mathbf{0}, \mathbf{R}_{I_k}). \end{cases} \quad (375)$$

Hence the **mean** is propagated with zero noise,

$$\hat{\mathbf{x}}_{k+1} = \mathbf{f}_{\text{int}}(\hat{\mathbf{x}}_k, {}^I\boldsymbol{\omega}_m, {}^I\mathbf{a}_m, \mathbf{0}) \rightarrow \text{solved } \hat{\mathbf{x}}_{k+1}. \quad (376)$$

Then, linearizing $\mathbf{f}_{\text{int}}$, we get the error-state propagation with the discretized noise $\mathbf{n}_{kd}$,

$$\tilde{\mathbf{x}}_{k+1} = \boldsymbol{\Phi}_{(k+1,k)} \tilde{\mathbf{x}}_k + \mathbf{G}_k \mathbf{n}_{kd}, \quad (377)$$

and therefore the **covariance**

$$\mathbf{P}_{k+1} = \mathbb{E}(\tilde{\mathbf{x}}_{k+1} \tilde{\mathbf{x}}_{k+1}^\top) = \boldsymbol{\Phi}_{(k+1,k)} \mathbf{P}_k \boldsymbol{\Phi}_{(k+1,k)}^\top + \mathbf{G}_k \mathbf{R}_{Id} \mathbf{G}_k^\top \rightarrow \text{solved } \mathbf{P}_{k+1}. \quad (378)$$

Given the big picture, let's explore the detailed derivations.

5.5 Exact integration from t_k to t_{k+1}

The input. Split each true reading into its estimate and error,

$${}^I\boldsymbol{\omega} = {}^I\boldsymbol{\omega}_m - \mathbf{b}_g - \mathbf{n}_g = \underbrace{({}^I\boldsymbol{\omega}_m - \hat{\mathbf{b}}_g)}_{{}^I\tilde{\boldsymbol{\omega}}} + \underbrace{(-\tilde{\mathbf{b}}_g - \mathbf{n}_g)}_{{}^I\tilde{\boldsymbol{\omega}}} = {}^I\hat{\boldsymbol{\omega}} + {}^I\tilde{\boldsymbol{\omega}}, \quad (379)$$

$${}^I\mathbf{a} = {}^I\mathbf{a}_m - \mathbf{b}_a - \mathbf{n}_a = \underbrace{({}^I\mathbf{a}_m - \hat{\mathbf{b}}_a)}_{{}^I\tilde{\mathbf{a}}} + \underbrace{(-\tilde{\mathbf{b}}_a - \mathbf{n}_a)}_{{}^I\tilde{\mathbf{a}}} = {}^I\hat{\mathbf{a}} + {}^I\tilde{\mathbf{a}}. \quad (380)$$

We integrate from k to $k+1$, with $\delta t = t_{k+1} - t_k$.

For rotation.

$${}^G_{I_{k+1}} \mathbf{R} = {}^G_{I_k} \mathbf{R} \cdot {}^{I_k}_{I_{k+1}} \mathbf{R}, \quad \Delta \mathbf{R} \triangleq {}^{I_k}_{I_{k+1}} \mathbf{R}, \quad (381)$$

where $\Delta \mathbf{R}$ is the rotation integration from ${}^I\boldsymbol{\omega}$.

For velocity. From ${}^G\dot{\mathbf{v}}_{I_\tau} = {}^G_{I_\tau}\mathbf{R} {}^{I_\tau}\mathbf{a} + {}^G\mathbf{g}$,

$$\int_{t_k}^{t_{k+1}} {}^G\dot{\mathbf{v}}_{I_\tau} d\tau = \int_{t_k}^{t_{k+1}} ({}^G_{I_\tau}\mathbf{R} {}^{I_\tau}\mathbf{a} + {}^G\mathbf{g}) d\tau. \quad (382)$$

The left-hand side is $\int_{t_k}^{t_{k+1}} {}^G\dot{\mathbf{v}}_{I_\tau} d\tau = {}^G\mathbf{v}_{I_{k+1}} - {}^G\mathbf{v}_{I_k}$, and the right-hand side is

$$\int_{t_k}^{t_{k+1}} ({}^G_{I_\tau}\mathbf{R} {}^{I_\tau}\mathbf{a} + {}^G\mathbf{g}) d\tau = \int_{t_k}^{t_{k+1}} {}^G_{I_\tau}\mathbf{R} {}^{I_\tau}\mathbf{a} d\tau + {}^G\mathbf{g} \delta t \quad (383)$$

$$= \int_{t_k}^{t_{k+1}} {}^G_{I_k}\mathbf{R} {}^{I_k}\mathbf{R} {}^{I_\tau}\mathbf{a} d\tau + {}^G\mathbf{g} \delta t \quad (384)$$

$$= {}^G_{I_k}\mathbf{R} \underbrace{\int_{t_k}^{t_{k+1}} {}^{I_k}\mathbf{R} {}^{I_\tau}\mathbf{a} d\tau}_{\Delta \mathbf{v}} + {}^G\mathbf{g} \delta t. \quad (385)$$

Then

$${}^G\mathbf{v}_{I_{k+1}} = {}^G\mathbf{v}_{I_k} + {}^G_{I_k}\mathbf{R} \Delta \mathbf{v} + {}^G\mathbf{g} \delta t, \quad \Delta \mathbf{v} \triangleq \int_{t_k}^{t_{k+1}} {}^{I_k}\mathbf{R} {}^{I_\tau}\mathbf{a} d\tau, \quad (386)$$

where $\Delta \mathbf{v}$ is the integration of ${}^{I_k}\boldsymbol{\omega}$ and ${}^{I_k}\mathbf{a}$.

For position. From ${}^G\dot{\mathbf{p}}_{I_\tau} = {}^G\mathbf{v}_{I_\tau}$,

$$\int_{t_k}^{t_{k+1}} {}^G\dot{\mathbf{p}}_{I_\tau} d\tau = \int_{t_k}^{t_{k+1}} {}^G\mathbf{v}_{I_\tau} d\tau. \quad (387)$$

Note that, by the velocity result applied up to time τ (with $\delta\tau = \tau - t_k$),

$${}^G\mathbf{v}_{I_\tau} = {}^G\mathbf{v}_{I_k} + {}^G_{I_k}\mathbf{R} \int_{t_k}^{\tau} {}^{I_k}\mathbf{R} {}^{I_s}\mathbf{a} ds + {}^G\mathbf{g} \delta\tau. \quad (388)$$

The left-hand side is ${}^G\mathbf{p}_{I_{k+1}} - {}^G\mathbf{p}_{I_k}$, and the right-hand side becomes

$$\int_{t_k}^{t_{k+1}} {}^G\mathbf{v}_{I_\tau} d\tau = \int_{t_k}^{t_{k+1}} \left({}^G\mathbf{v}_{I_k} + {}^G_{I_k}\mathbf{R} \int_{t_k}^{\tau} {}^{I_k}\mathbf{R} {}^{I_s}\mathbf{a} ds + {}^G\mathbf{g} \delta\tau \right) d\tau \quad (389)$$

$$= \int_{t_k}^{t_{k+1}} {}^G\mathbf{v}_{I_k} d\tau + \int_{t_k}^{t_{k+1}} {}^G\mathbf{g} \delta\tau d\tau + {}^G_{I_k}\mathbf{R} \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} {}^{I_k}\mathbf{R} {}^{I_s}\mathbf{a} ds d\tau \quad (390)$$

$$= {}^G\mathbf{v}_{I_k} \delta t + \frac{1}{2} {}^G\mathbf{g} \delta t^2 + {}^G_{I_k}\mathbf{R} \underbrace{\int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} {}^{I_k}\mathbf{R} {}^{I_s}\mathbf{a} ds d\tau}_{\Delta \mathbf{p}}. \quad (391)$$

Then

$${}^G\mathbf{p}_{I_{k+1}} = {}^G\mathbf{p}_{I_k} + {}^G\mathbf{v}_{I_k} \delta t + {}^G_{I_k}\mathbf{R} \Delta \mathbf{p} + \frac{1}{2} {}^G\mathbf{g} \delta t^2, \quad \Delta \mathbf{p} \triangleq \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} {}^{I_k}\mathbf{R} {}^{I_s}\mathbf{a} ds d\tau, \quad (392)$$

where $\Delta \mathbf{p}$ is the *double* integration of ${}^{I_k}\boldsymbol{\omega}$ and ${}^{I_k}\mathbf{a}$.

For the biases. From $\dot{\mathbf{b}}_g = \mathbf{n}_{wg}$,

$$\int_{t_k}^{t_{k+1}} \dot{\mathbf{b}}_g d\tau = \int_{t_k}^{t_{k+1}} \mathbf{n}_{wg} d\tau \Rightarrow \mathbf{b}_{g_{k+1}} = \mathbf{b}_{g_k} + \int_{t_k}^{t_{k+1}} \mathbf{n}_{wg} d\tau, \quad (393)$$

and for the accel bias, $\mathbf{b}_{a_{k+1}} = \mathbf{b}_{a_k} + \int_{t_k}^{t_{k+1}} \mathbf{n}_{wa} d\tau$.

Finally. Collecting everything:

$\begin{aligned} {}^G_{I_{k+1}} \mathbf{R} &= {}^G_{I_k} \mathbf{R} \cdot \Delta \mathbf{R}, \\ {}^G \mathbf{p}_{I_{k+1}} &= {}^G \mathbf{p}_{I_k} + {}^G \mathbf{v}_{I_k} \delta t + {}^G_{I_k} \mathbf{R} \Delta \mathbf{p} + \frac{1}{2} {}^G \mathbf{g} \delta t^2, \\ {}^G \mathbf{v}_{I_{k+1}} &= {}^G \mathbf{v}_{I_k} + {}^G_{I_k} \mathbf{R} \Delta \mathbf{v} + {}^G \mathbf{g} \delta t, \\ \mathbf{b}_{g_{k+1}} &= \mathbf{b}_{g_k} + \int_{t_k}^{t_{k+1}} \mathbf{n}_{wg} d\tau, \\ \mathbf{b}_{a_{k+1}} &= \mathbf{b}_{a_k} + \int_{t_k}^{t_{k+1}} \mathbf{n}_{wa} d\tau, \end{aligned}$	$\begin{aligned} \Delta \mathbf{R} &= {}^{I_k}_{I_{k+1}} \mathbf{R}, \\ \Delta \mathbf{p} &= \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} {}^{I_k}_{I_s} \mathbf{R} {}^{I_s} \mathbf{a} ds d\tau, \\ \Delta \mathbf{v} &= \int_{t_k}^{t_{k+1}} {}^{I_k}_{I_\tau} \mathbf{R} {}^{I_\tau} \mathbf{a} d\tau, \\ \Delta \mathbf{b}_g &= \int_{t_k}^{t_{k+1}} \mathbf{n}_{wg} d\tau, \\ \Delta \mathbf{b}_a &= \int_{t_k}^{t_{k+1}} \mathbf{n}_{wa} d\tau. \end{aligned}$	(394)
--	--	-------

This is exactly the integrated function $\mathbf{x}_{k+1} = \mathbf{f}_{\text{int}}(\mathbf{x}_k, {}^I \boldsymbol{\omega}_m, {}^I \mathbf{a}_m, \mathbf{n}_k)$.

To this step, no assumption or approximation is made — every step is accurate. The accuracy of the integration is decided by how $\Delta \mathbf{R}$, $\Delta \mathbf{p}$, $\Delta \mathbf{v}$ are computed from ${}^I \boldsymbol{\omega}$ and ${}^I \mathbf{a}$.

5.6 Computing $\Delta \mathbf{R}$, $\Delta \mathbf{p}$, $\Delta \mathbf{v}$: preintegration and three methods

The way to compute $\Delta \mathbf{R}$, $\Delta \mathbf{p}$, $\Delta \mathbf{v}$ given $\boldsymbol{\omega}_m$ and $\mathbf{a}_m$ defines the algorithms. A few discussions follow.

(1) Connection to preintegration. $\Delta \mathbf{R}$, $\Delta \mathbf{p}$, $\Delta \mathbf{v}$ are also called the *pre-integrated measurements*: they are only affected by ${}^I \boldsymbol{\omega}_m$, ${}^I \mathbf{a}_m$ and $\mathbf{b}_g$, $\mathbf{b}_a$ (not by the global state). Inverting (394),

$$\Delta \mathbf{R} \triangleq {}^{I_k}_{I_{k+1}} \mathbf{R} = {}^G_{I_k} \mathbf{R}^\top {}^G_{I_{k+1}} \mathbf{R}, \quad (395)$$

$$\Delta \mathbf{p} \triangleq \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} {}^{I_k}_{I_s} \mathbf{R} {}^{I_s} \mathbf{a} ds d\tau = {}^G_{I_k} \mathbf{R}^\top ({}^G \mathbf{p}_{I_{k+1}} - {}^G \mathbf{p}_{I_k} - {}^G \mathbf{v}_{I_k} \delta t - \frac{1}{2} {}^G \mathbf{g} \delta t^2), \quad (396)$$

$$\Delta \mathbf{v} \triangleq \int_{t_k}^{t_{k+1}} {}^{I_k}_{I_\tau} \mathbf{R} {}^{I_\tau} \mathbf{a} d\tau = {}^G_{I_k} \mathbf{R}^\top ({}^G \mathbf{v}_{I_{k+1}} - {}^G \mathbf{v}_{I_k} - {}^G \mathbf{g} \delta t), \quad (397)$$

$$\Delta \mathbf{b}_g \triangleq \int_{t_k}^{t_{k+1}} \mathbf{n}_{wg} d\tau = \mathbf{b}_{g_{k+1}} - \mathbf{b}_{g_k}, \quad (398)$$

$$\Delta \mathbf{b}_a \triangleq \int_{t_k}^{t_{k+1}} \mathbf{n}_{wa} d\tau = \mathbf{b}_{a_{k+1}} - \mathbf{b}_{a_k}. \quad (399)$$

So the IMU integration/propagation and pre-integration are connected: they compute the same quantities.

(2) Discrete preintegration on the manifold. For example, IMU preintegration on manifold (Forster, Carlone, et al.) [9] and VINS-Mono (Tong Qin, Shaojie Shen) [13]. Assume ${}^{I_k}\boldsymbol{\omega}$ and ${}^{I_k}\mathbf{a}$ are constant in $[t_k, t_{k+1}]$ and $\delta t = t_{k+1} - t_k$ is small, so ${}^{I_\tau}\mathbf{R} \approx \mathbf{I}$ as $\delta t \rightarrow 0$:

$$\Delta \mathbf{R} \triangleq {}^{I_k}_{I_{k+1}} \mathbf{R} \approx \text{Exp}({}^{I_k}\boldsymbol{\omega} \cdot \delta t), \quad (400)$$

$$\Delta \mathbf{p} = \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} {}^{I_k}\mathbf{R} {}^{I_s}\mathbf{a} ds d\tau \approx \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} \mathbf{I}_3 \cdot {}^{I_k}\mathbf{a} ds d\tau = \frac{1}{2} {}^{I_k}\mathbf{a} \delta t^2, \quad (401)$$

$$\Delta \mathbf{v} = \int_{t_k}^{t_{k+1}} {}^{I_k}_{I_\tau} \mathbf{R} {}^{I_\tau}\mathbf{a} d\tau \approx {}^{I_k}\mathbf{a} \delta t. \quad (402)$$

Then the propagation becomes

$$\begin{cases} {}^G_{I_{k+1}} \mathbf{R} = {}^G_{I_k} \mathbf{R} \cdot \text{Exp}({}^{I_k}\boldsymbol{\omega} \delta t), \\ {}^G \mathbf{p}_{I_{k+1}} = {}^G \mathbf{p}_{I_k} + {}^G \mathbf{v}_{I_k} \delta t + \frac{1}{2} {}^G_{I_k} \mathbf{R} {}^{I_k}\mathbf{a} \delta t^2 + \frac{1}{2} {}^G \mathbf{g} \delta t^2, \\ {}^G \mathbf{v}_{I_{k+1}} = {}^G \mathbf{v}_{I_k} + {}^G_{I_k} \mathbf{R} {}^{I_k}\mathbf{a} \delta t + {}^G \mathbf{g} \delta t, \\ \mathbf{b}_{g_{k+1}} = \mathbf{b}_{g_k} + \int_{t_k}^{t_{k+1}} \mathbf{n}_{wg} d\tau, \quad \mathbf{b}_{a_{k+1}} = \mathbf{b}_{a_k} + \int_{t_k}^{t_{k+1}} \mathbf{n}_{wa} d\tau. \end{cases} \quad (403)$$

This is easy and simple, but it might lose some accuracy for fast rotation and low sampling rate (δt larger).

(3) Analytic integration: ACI² and CPI. ACI² — analytic combined IMU integration (Yulin/Chuchu) [14]; CPI — continuous preintegration (Kevin/Patrick) [15, 10]. If we assume only that ${}^{I_k}\boldsymbol{\omega}$ and ${}^{I_k}\mathbf{a}$ are constant in $[t_k, t_{k+1}]$ (without the small- δt approximation), then ${}^{I_k}_{I_\tau} \mathbf{R} = \text{Exp}({}^{I_k}\boldsymbol{\omega} \delta \tau)$ and

$$\Delta \mathbf{R} \triangleq {}^{I_k}_{I_{k+1}} \mathbf{R} = \text{Exp}({}^{I_k}\boldsymbol{\omega} \cdot \delta t), \quad (404)$$

$$\Delta \mathbf{p} = \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} {}^{I_k}\mathbf{R} {}^{I_s}\mathbf{a} ds d\tau = \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} \text{Exp}({}^{I_k}\boldsymbol{\omega} \delta s) {}^{I_k}\mathbf{a} ds d\tau, \quad (405)$$

$$\Delta \mathbf{v} = \int_{t_k}^{t_{k+1}} {}^{I_k}_{I_\tau} \mathbf{R} {}^{I_\tau}\mathbf{a} d\tau = \int_{t_k}^{t_{k+1}} \text{Exp}({}^{I_k}\boldsymbol{\omega} \delta \tau) {}^{I_k}\mathbf{a} d\tau, \quad (406)$$

which admit closed-form (analytic) solutions.

(4) Two ways to solve for $\hat{\mathbf{x}}_{k+1}$ and $\mathbf{P}_{k+1}$. We can use different ways to solve for $\hat{\mathbf{x}}_{k+1}$ and $\mathbf{P}_{k+1}$.

Way 1 — discretize, then linearize. Integrate the nonlinear ODE first, then linearize the integrated function (the route taken in this lecture):

$$\dot{\mathbf{x}} = \mathbf{f}(\mathbf{x}, \mathbf{n}_I) \rightarrow \mathbf{x}_{k+1} = \mathbf{f}_{\text{int}}(\mathbf{x}_k, \mathbf{n}_k) \rightarrow \begin{cases} \hat{\mathbf{x}}_{k+1} = \mathbf{f}_{\text{int}}(\hat{\mathbf{x}}_k, \mathbf{0}), \\ \tilde{\mathbf{x}}_{k+1} = \boldsymbol{\Phi}_{(k+1,k)} \tilde{\mathbf{x}}_k + \mathbf{G}_k \mathbf{n}_{kd}. \end{cases} \quad (407)$$

Way 2 — linearize, then integrate. Linearize the continuous ODE first to get the continuous error-state equation, then integrate it:

$$\dot{\mathbf{x}} = \mathbf{f}(\mathbf{x}, \mathbf{n}_I) \Rightarrow \dot{\tilde{\mathbf{x}}} = \mathbf{F} \tilde{\mathbf{x}} + \mathbf{J} \mathbf{n}_I, \quad (408)$$

whose solution over $[t_k, t_{k+1}]$ is

$$\tilde{\mathbf{x}}_{k+1} = \Phi_{(k+1,k)} \tilde{\mathbf{x}}_k + \int_{t_k}^{t_{k+1}} \Phi_{(k+1,\tau)} \mathbf{J}(\tau) \mathbf{n}_I d\tau, \quad \Phi_{(k+1,k)} = \exp\left(\int_{t_k}^{t_{k+1}} \mathbf{F} dt\right). \quad (409)$$

Different systems treat this state-transition matrix differently:

- **VINS-Mono** [13]: take $\mathbf{F}$ constant and $\delta t \rightarrow 0$, so $\Phi_{(k+1,k)} = \exp\left(\int_{t_k}^{t_{k+1}} \mathbf{F} dt\right) \approx \mathbf{I} + \mathbf{F} \delta t$;
- **OC-VINS** (Joel Hesch) [16] / **CPI** (Kevin/Patrick) [15] / **ACI²** (Yulin/Chuchu) [14]: keep $\Phi_{(k+1,k)} = \exp\left(\int_{t_k}^{t_{k+1}} \mathbf{F} dt\right)$, evaluated with ${}^I\boldsymbol{\omega}_m$, ${}^I\mathbf{a}_m$ constant in $[t_k, t_{k+1}]$.

How to address the noise term of (409),

$$\mathbf{n}_{\text{int}} \triangleq \int_{t_k}^{t_{k+1}} \Phi_{(k+1,\tau)} \mathbf{J}(\tau) \mathbf{n}_I d\tau ? \quad (410)$$

(1) Pull the *discrete noise* $\mathbf{n}_{Id}$ out of the integral:

$$\mathbf{n}_{\text{int}} = \int_{t_k}^{t_{k+1}} \Phi_{(k+1,\tau)} \mathbf{J}(\tau) d\tau \cdot \mathbf{n}_{Id}, \quad (411)$$

$$\Rightarrow \text{Cov}(\mathbf{n}_{\text{int}}) = \int_{t_k}^{t_{k+1}} \Phi_{(k+1,\tau)} \mathbf{J}(\tau) d\tau \cdot \mathbf{Q}_{Id} \cdot \left(\int_{t_k}^{t_{k+1}} \Phi_{(k+1,\tau)} \mathbf{J}(\tau) d\tau \right)^\top. \quad (412)$$

(2) Keep the noise inside the integral:

$$\text{Cov}(\mathbf{n}_{\text{int}}) = \mathbb{E} \left(\int_{t_k}^{t_{k+1}} \Phi_{(k+1,\tau)} \mathbf{J}(\tau) \mathbf{n}_{Id} \mathbf{n}_{Id}^\top \mathbf{J}^\top(\tau) \Phi_{(k+1,\tau)}^\top d\tau \right) \quad (413)$$

$$= \int_{t_k}^{t_{k+1}} \Phi_{(k+1,\tau)} \mathbf{J}(\tau) \mathbf{Q}_{Id} \mathbf{J}^\top(\tau) \Phi_{(k+1,\tau)}^\top d\tau. \quad (414)$$

Either way, the *linearization* itself can be carried out with different error parametrizations, all 15 DoF for $\mathbf{x}_I$:

$$\boxed{\begin{cases} SO(3) + \mathbb{R}^3 + \mathbb{R}^3 + \mathbb{R}^3 & \Rightarrow 15 \text{ DoF for } \mathbf{x}_I, \\ SE_2(3) + \mathbb{R}^3 + \mathbb{R}^3 & \Rightarrow 15 \text{ DoF for } \mathbf{x}_I, \\ SE(3) + \mathbb{R}^3 + \mathbb{R}^3 + \mathbb{R}^3 & \Rightarrow 15 \text{ DoF for } \mathbf{x}_I. \end{cases}} \quad (415)$$

We now use the analytic form from (3) for the detailed mean and covariance propagation, working out the first two parametrizations: $SO(3) + \mathbb{R}^{12}$ in §5.7 and $SE_2(3) + \mathbb{R}^6$ in the final subsection.

5.7 Mean and covariance propagation with $SO(3) + \mathbb{R}^3$ errors

The input, discretized. As in §5.5, but discretizing the noises over the interval ($\mathbf{n}_g \rightarrow \mathbf{n}_{gd}$, $\mathbf{n}_a \rightarrow \mathbf{n}_{ad}$):

$${}^I\boldsymbol{\omega} = {}^I\hat{\boldsymbol{\omega}} + {}^I\tilde{\boldsymbol{\omega}}, \quad \begin{cases} {}^I\hat{\boldsymbol{\omega}} = {}^I\boldsymbol{\omega}_m - \hat{\mathbf{b}}_g \\ {}^I\tilde{\boldsymbol{\omega}} = -\hat{\mathbf{b}}_g - \mathbf{n}_{gd} \end{cases} \quad {}^I\mathbf{a} = {}^I\hat{\mathbf{a}} + {}^I\tilde{\mathbf{a}}, \quad \begin{cases} {}^I\hat{\mathbf{a}} = {}^I\mathbf{a}_m - \hat{\mathbf{b}}_a \\ {}^I\tilde{\mathbf{a}} = -\hat{\mathbf{b}}_a - \mathbf{n}_{ad} \end{cases} \quad (416)$$

Let's integrate $\Delta\mathbf{R}$, $\Delta\mathbf{p}$, $\Delta\mathbf{v}$, $\Delta\mathbf{b}_g$, $\Delta\mathbf{b}_a$ with these perturbed inputs.

Perturbing $\Delta \mathbf{R}$. With $\hat{\boldsymbol{\theta}} \triangleq {}^{I_k} \hat{\boldsymbol{\omega}} \delta t$ and the right Jacobian $\mathbf{J}_r$ from Lecture 2,

$$\Delta \mathbf{R} = \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) = \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} + {}^{I_k} \tilde{\boldsymbol{\omega}}) \delta t \quad (417)$$

$$= \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) \text{Exp}(\mathbf{J}_r(\hat{\boldsymbol{\theta}}) {}^{I_k} \tilde{\boldsymbol{\omega}} \delta t) \quad (418)$$

$$\approx \text{Exp}(\hat{\boldsymbol{\theta}}) \left(\mathbf{I} + \left[\mathbf{J}_r(\hat{\boldsymbol{\theta}}) \delta t {}^{I_k} \tilde{\boldsymbol{\omega}} \right]_{\times} \right). \quad (419)$$

Perturbing $\Delta \mathbf{p}$. Substituting the split inputs and expanding to first order (using $[\mathbf{x}]_{\times} \mathbf{y} = -[\mathbf{y}]_{\times} \mathbf{x}$ and dropping second-order error terms),

$$\Delta \mathbf{p} = \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} + {}^{I_k} \tilde{\boldsymbol{\omega}}) \delta s \, ds \, d\tau \, ({}^{I_k} \hat{\mathbf{a}} + {}^{I_k} \tilde{\mathbf{a}}) \quad (420)$$

$$= \int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta s) \left(\mathbf{I} + [\mathbf{J}_r({}^{I_k} \hat{\boldsymbol{\omega}} \delta s) \delta s {}^{I_k} \tilde{\boldsymbol{\omega}}]_{\times} \right) ds \, d\tau \, ({}^{I_k} \hat{\mathbf{a}} + {}^{I_k} \tilde{\mathbf{a}}) \quad (421)$$

$$= \underbrace{\int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta s) ds \, d\tau \, {}^{I_k} \hat{\mathbf{a}}}_{\Delta \hat{\mathbf{p}}} + \underbrace{\int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta s) ds \, d\tau \, {}^{I_k} \tilde{\mathbf{a}}}_{\Xi_2} - \underbrace{\int_{t_k}^{t_{k+1}} \int_{t_k}^{\tau} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta s) [\mathbf{J}_r({}^{I_k} \hat{\boldsymbol{\omega}} \delta s) \delta s \delta \tau \, {}^{I_k} \tilde{\boldsymbol{\omega}}]}_{\Xi_4} \quad (422)$$

$$= \Delta \hat{\mathbf{p}} + \Xi_2 {}^{I_k} \tilde{\mathbf{a}} - \Xi_4 {}^{I_k} \tilde{\boldsymbol{\omega}}. \quad (423)$$

Perturbing $\Delta \mathbf{v}$. By the same expansion,

$$\Delta \mathbf{v} = \int_{t_k}^{t_{k+1}} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} + {}^{I_k} \tilde{\boldsymbol{\omega}}) \delta \tau \, ({}^{I_k} \hat{\mathbf{a}} + {}^{I_k} \tilde{\mathbf{a}}) \quad (424)$$

$$= \int_{t_k}^{t_{k+1}} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta \tau) \left(\mathbf{I} + [\mathbf{J}_r({}^{I_k} \hat{\boldsymbol{\omega}} \delta \tau) \delta \tau {}^{I_k} \tilde{\boldsymbol{\omega}}]_{\times} \right) d\tau \, ({}^{I_k} \hat{\mathbf{a}} + {}^{I_k} \tilde{\mathbf{a}}) \quad (425)$$

$$= \underbrace{\int_{t_k}^{t_{k+1}} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta \tau) d\tau \, {}^{I_k} \hat{\mathbf{a}}}_{\Delta \hat{\mathbf{v}}} + \underbrace{\int_{t_k}^{t_{k+1}} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta \tau) d\tau \, {}^{I_k} \tilde{\mathbf{a}}}_{\Xi_1} - \underbrace{\int_{t_k}^{t_{k+1}} \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta \tau) [\mathbf{J}_r({}^{I_k} \hat{\boldsymbol{\omega}} \delta \tau) \delta \tau \, {}^{I_k} \tilde{\boldsymbol{\omega}}]}_{\Xi_3} \quad (426)$$

$$= \Delta \hat{\mathbf{v}} + \Xi_1 {}^{I_k} \tilde{\mathbf{a}} - \Xi_3 {}^{I_k} \tilde{\boldsymbol{\omega}}. \quad (427)$$

The perturbed propagation. Then we have

$$\begin{cases} {}^G_{I_{k+1}} \mathbf{R} = {}^G_{I_k} \mathbf{R} \cdot \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) \cdot \text{Exp}(\mathbf{J}_r(\hat{\boldsymbol{\theta}}) \delta t {}^{I_k} \tilde{\boldsymbol{\omega}}), \\ {}^G \mathbf{p}_{I_{k+1}} = {}^G \mathbf{p}_{I_k} + {}^G \mathbf{v}_{I_k} \delta t + {}^G_{I_k} \mathbf{R} (\Delta \hat{\mathbf{p}} + \Xi_2 {}^{I_k} \tilde{\mathbf{a}} - \Xi_4 {}^{I_k} \tilde{\boldsymbol{\omega}}) + \frac{1}{2} {}^G \mathbf{g} \delta t^2, \\ {}^G \mathbf{v}_{I_{k+1}} = {}^G \mathbf{v}_{I_k} + {}^G_{I_k} \mathbf{R} (\Delta \hat{\mathbf{v}} + \Xi_1 {}^{I_k} \tilde{\mathbf{a}} - \Xi_3 {}^{I_k} \tilde{\boldsymbol{\omega}}) + {}^G \mathbf{g} \delta t, \\ \mathbf{b}_{g_{k+1}} = \mathbf{b}_{g_k} + \mathbf{n}_{wgd} \delta t, \\ \mathbf{b}_{a_{k+1}} = \mathbf{b}_{a_k} + \mathbf{n}_{wad} \delta t. \end{cases} \quad (428)$$

First: the mean propagation. Setting all errors and noises to zero,

$$\begin{cases} {}^G_{I_{k+1}} \hat{\mathbf{R}} = {}^G_{I_k} \hat{\mathbf{R}} \cdot \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta t), \\ {}^G \hat{\mathbf{p}}_{I_{k+1}} = {}^G \hat{\mathbf{p}}_{I_k} + {}^G \hat{\mathbf{v}}_{I_k} \delta t + {}^G_{I_k} \hat{\mathbf{R}} \Delta \hat{\mathbf{p}} + \frac{1}{2} {}^G \mathbf{g} \delta t^2, \\ {}^G \hat{\mathbf{v}}_{I_{k+1}} = {}^G \hat{\mathbf{v}}_{I_k} + {}^G_{I_k} \hat{\mathbf{R}} \Delta \hat{\mathbf{v}} + {}^G \mathbf{g} \delta t, \\ \hat{\mathbf{b}}_{g_{k+1}} = \hat{\mathbf{b}}_{g_k}, \quad \hat{\mathbf{b}}_{a_{k+1}} = \hat{\mathbf{b}}_{a_k}. \end{cases} \quad (429)$$

Hence $\hat{\mathbf{x}}_k \rightarrow \hat{\mathbf{x}}_{k+1}$: solved.

Second: the linearization for covariance propagation. Use $SO(3) + \mathbb{R}^3 + \mathbb{R}^3 + \mathbb{R}^3 + \mathbb{R}^3$ for example, i.e., a right rotation perturbation ${}^G \mathbf{R} = {}^G_{I_k} \hat{\mathbf{R}} \text{Exp}(\delta \boldsymbol{\theta})$ and additive errors elsewhere. For the rotation,

$${}^G_{I_{k+1}} \hat{\mathbf{R}} \text{Exp}(\delta \boldsymbol{\theta}_{k+1}) = {}^G_{I_k} \hat{\mathbf{R}} \text{Exp}(\delta \boldsymbol{\theta}_k) \text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) \text{Exp}(\mathbf{J}_r({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) \delta t {}^{I_k} \tilde{\boldsymbol{\omega}}), \quad (430)$$

so, moving $\text{Exp}(\delta \boldsymbol{\theta}_k)$ across $\text{Exp}({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) = \Delta \hat{\mathbf{R}}$ with the adjoint identity,

$$\delta \boldsymbol{\theta}_{k+1} = {}^{I_k}_{I_{k+1}} \hat{\mathbf{R}}^\top \delta \boldsymbol{\theta}_k + \mathbf{J}_r({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) \delta t {}^{I_k} \tilde{\boldsymbol{\omega}}. \quad (431)$$

For the position and velocity (substituting ${}^G \mathbf{R} = {}^G_{I_k} \hat{\mathbf{R}} \text{Exp}(\delta \boldsymbol{\theta}_k) \approx {}^G_{I_k} \hat{\mathbf{R}} (\mathbf{I} + [\delta \boldsymbol{\theta}_k]_\times)$ and keeping first-order terms),

$${}^G \tilde{\mathbf{p}}_{I_{k+1}} = {}^G \tilde{\mathbf{p}}_{I_k} + {}^G \tilde{\mathbf{v}}_{I_k} \delta t - {}^G_{I_k} \hat{\mathbf{R}} [\Delta \hat{\mathbf{p}}]_\times \delta \boldsymbol{\theta}_k + {}^G_{I_k} \hat{\mathbf{R}} (\Xi_2 {}^{I_k} \tilde{\mathbf{a}} - \Xi_4 {}^{I_k} \tilde{\boldsymbol{\omega}}), \quad (432)$$

$${}^G \tilde{\mathbf{v}}_{I_{k+1}} = {}^G \tilde{\mathbf{v}}_{I_k} - {}^G_{I_k} \hat{\mathbf{R}} [\Delta \hat{\mathbf{v}}]_\times \delta \boldsymbol{\theta}_k + {}^G_{I_k} \hat{\mathbf{R}} (\Xi_1 {}^{I_k} \tilde{\mathbf{a}} - \Xi_3 {}^{I_k} \tilde{\boldsymbol{\omega}}), \quad (433)$$

$$\tilde{\mathbf{b}}_{g_{k+1}} = \tilde{\mathbf{b}}_{g_k} + \mathbf{n}_{wgd} \delta t, \quad \tilde{\mathbf{b}}_{a_{k+1}} = \tilde{\mathbf{b}}_{a_k} + \mathbf{n}_{wad} \delta t, \quad (434)$$

where the input errors are

$${}^{I_k} \tilde{\mathbf{a}} = -\tilde{\mathbf{b}}_a - \mathbf{n}_{ad}, \quad {}^{I_k} \tilde{\boldsymbol{\omega}} = -\tilde{\mathbf{b}}_g - \mathbf{n}_{gd}. \quad (435)$$

Hence, stacking the error state $\tilde{\mathbf{x}} = [\delta \boldsymbol{\theta}^\top, {}^G \tilde{\mathbf{p}}_I^\top, {}^G \tilde{\mathbf{v}}_I^\top, \tilde{\mathbf{b}}_g^\top, \tilde{\mathbf{b}}_a^\top]^\top$,

$$\tilde{\mathbf{x}}_{k+1} = \boldsymbol{\Phi}_{(k+1,k)} \tilde{\mathbf{x}}_k + \mathbf{G}_k \mathbf{n}_{Id}, \quad \mathbf{n}_{Id} = \begin{bmatrix} \mathbf{n}_{gd} \\ \mathbf{n}_{ad} \\ \mathbf{n}_{wgd} \\ \mathbf{n}_{wad} \end{bmatrix}, \quad (436)$$

with the state-transition matrix

$$\boldsymbol{\Phi}_{(k+1,k)} = \begin{bmatrix} {}^{I_k}_{I_{k+1}} \hat{\mathbf{R}}^\top & \mathbf{0}_3 & \mathbf{0}_3 & -\mathbf{J}_r({}^{I_k} \hat{\boldsymbol{\omega}} \delta t) \delta t & \mathbf{0}_3 \\ -{}^G_{I_k} \hat{\mathbf{R}} [\Delta \hat{\mathbf{p}}]_\times & \mathbf{I}_3 & \mathbf{I}_3 \delta t & {}^G_{I_k} \hat{\mathbf{R}} \Xi_4 & -{}^G_{I_k} \hat{\mathbf{R}} \Xi_2 \\ -{}^G_{I_k} \hat{\mathbf{R}} [\Delta \hat{\mathbf{v}}]_\times & \mathbf{0}_3 & \mathbf{I}_3 & {}^G_{I_k} \hat{\mathbf{R}} \Xi_3 & -{}^G_{I_k} \hat{\mathbf{R}} \Xi_1 \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 \end{bmatrix}, \quad (437)$$

and the noise Jacobian

$$\mathbf{G}_k = \begin{bmatrix} -\mathbf{J}_r(I_k \hat{\boldsymbol{\omega}} \delta t) \delta t & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 \\ \begin{smallmatrix} G \\ I_k \end{smallmatrix} \hat{\mathbf{R}} \boldsymbol{\Xi}_4 & -\begin{smallmatrix} G \\ I_k \end{smallmatrix} \hat{\mathbf{R}} \boldsymbol{\Xi}_2 & \mathbf{0}_3 & \mathbf{0}_3 \\ \begin{smallmatrix} G \\ I_k \end{smallmatrix} \hat{\mathbf{R}} \boldsymbol{\Xi}_3 & -\begin{smallmatrix} G \\ I_k \end{smallmatrix} \hat{\mathbf{R}} \boldsymbol{\Xi}_1 & \mathbf{0}_3 & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 \delta t & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 \delta t \end{bmatrix}. \quad (438)$$

Hence the covariance propagation

$$\boxed{\mathbf{P}_{k+1} = \boldsymbol{\Phi}_{(k+1,k)} \mathbf{P}_k \boldsymbol{\Phi}_{(k+1,k)}^\top + \mathbf{G}_k \mathbf{Q}_d \mathbf{G}_k^\top \rightarrow \text{solved.}} \quad (439)$$

5.8 The linearization using $SE_2(3)$

Now the linearization using $SE_2(3)$ (Lecture 2). The states live on $SE_2(3) + \mathbb{R}^3 + \mathbb{R}^3$:

$$\mathbf{x}_I = (\mathbf{X}_n, \mathbf{x}_b), \quad \mathbf{X}_n = (\begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{R}, \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{p}_I, \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{v}_I) = \begin{bmatrix} \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{R} & \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{p}_I & \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{v}_I \\ \mathbf{0}_{1 \times 3} & 1 & 0 \\ \mathbf{0}_{1 \times 3} & 0 & 1 \end{bmatrix}, \quad \mathbf{x}_b = (\mathbf{b}_g, \mathbf{b}_a). \quad (440)$$

The error states. Define a left (group) error on $\mathbf{X}_n$ and additive errors on the biases,

$$\mathbf{x}_I = \hat{\mathbf{x}}_I \boxplus \delta \mathbf{x}_I = (\text{Exp}(\delta \mathbf{x}_n) \hat{\mathbf{X}}_n, \hat{\mathbf{x}}_b + \tilde{\mathbf{x}}_b), \quad (441)$$

which, writing $\delta \mathbf{x}_n = [\delta \boldsymbol{\theta}^\top, \delta \mathbf{p}^\top, \delta \mathbf{v}^\top]^\top$ and using the $SE_2(3)$ exponential (with the left Jacobian $\mathbf{J}_l$),

$$\begin{cases} \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{R} = \text{Exp}(\delta \boldsymbol{\theta}) \begin{smallmatrix} G \\ I \end{smallmatrix} \hat{\mathbf{R}}, \\ \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{p}_I = \text{Exp}(\delta \boldsymbol{\theta}) \begin{smallmatrix} G \\ I \end{smallmatrix} \hat{\mathbf{p}}_I + \mathbf{J}_l(\delta \boldsymbol{\theta}) \delta \mathbf{p}, \\ \begin{smallmatrix} G \\ I \end{smallmatrix} \mathbf{v}_I = \text{Exp}(\delta \boldsymbol{\theta}) \begin{smallmatrix} G \\ I \end{smallmatrix} \hat{\mathbf{v}}_I + \mathbf{J}_l(\delta \boldsymbol{\theta}) \delta \mathbf{v}, \\ \mathbf{b}_g = \hat{\mathbf{b}}_g + \delta \mathbf{b}_g, \quad \mathbf{b}_a = \hat{\mathbf{b}}_a + \delta \mathbf{b}_a. \end{cases} \quad (442)$$

The propagation as a group factorization. The propagation equations

$$\begin{cases} \begin{smallmatrix} G \\ I_{k+1} \end{smallmatrix} \mathbf{R} = \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{R} \cdot \Delta \mathbf{R}, \\ \begin{smallmatrix} G \\ I_{k+1} \end{smallmatrix} \mathbf{p}_{I_{k+1}} = \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{p}_{I_k} + \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{v}_{I_k} \delta t + \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{R} \Delta \mathbf{p} + \frac{1}{2} \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{g} \delta t^2, \\ \begin{smallmatrix} G \\ I_{k+1} \end{smallmatrix} \mathbf{v}_{I_{k+1}} = \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{v}_{I_k} + \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{R} \Delta \mathbf{v} + \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{g} \delta t, \\ \mathbf{b}_{g_{k+1}} = \mathbf{b}_{g_k} + \mathbf{n}_{wg d} \delta t, \quad \mathbf{b}_{a_{k+1}} = \mathbf{b}_{a_k} + \mathbf{n}_{wad} \delta t \end{cases} \quad (443)$$

factor into a product of three $SE_2(3)$ elements,

$$\boxed{\mathbf{X}_{n_{k+1}} = \boldsymbol{\Gamma}_k \cdot \boldsymbol{\Psi}(\mathbf{X}_{n_k}) \cdot \mathbf{Y}_k,} \quad (444)$$

with

$$\boldsymbol{\Gamma}_k = \begin{bmatrix} \mathbf{I}_3 & \frac{1}{2} \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{g} \delta t^2 & \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{g} \delta t \\ \mathbf{0}_{1 \times 3} & 1 & 0 \\ \mathbf{0}_{1 \times 3} & 0 & 1 \end{bmatrix}, \quad \mathbf{Y}_k = \begin{bmatrix} \Delta \mathbf{R} & \Delta \mathbf{p} & \Delta \mathbf{v} \\ \mathbf{0}_{1 \times 3} & 1 & 0 \\ \mathbf{0}_{1 \times 3} & 0 & 1 \end{bmatrix}, \quad (445)$$

$$\boldsymbol{\Psi}(\mathbf{X}_{n_k}) = \begin{bmatrix} \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{R} & \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{p}_{I_k} + \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{v}_{I_k} \delta t & \begin{smallmatrix} G \\ I_k \end{smallmatrix} \mathbf{v}_{I_k} \\ \mathbf{0}_{1 \times 3} & 1 & 0 \\ \mathbf{0}_{1 \times 3} & 0 & 1 \end{bmatrix}. \quad (446)$$

The properties of $\Psi(\cdot)$. The map Ψ satisfies

$$\begin{cases} \Psi(\mathbf{X}_{n_i} \cdot \mathbf{X}_{n_j}) = \Psi(\mathbf{X}_{n_i}) \cdot \Psi(\mathbf{X}_{n_j}), \\ \Psi(\text{Exp}(\delta \mathbf{x}_n)) \approx \text{Exp}(\mathbf{F} \delta \mathbf{x}_n), \\ \Psi(\text{Exp}(\delta \mathbf{x}_n) \hat{\mathbf{X}}_n) = \Psi(\text{Exp}(\delta \mathbf{x}_n)) \cdot \Psi(\hat{\mathbf{X}}_n) = \text{Exp}(\mathbf{F} \delta \mathbf{x}_n) \Psi(\hat{\mathbf{X}}_n), \end{cases} \quad \mathbf{F} \triangleq \begin{bmatrix} \mathbf{I}_3 & \mathbf{0}_3 & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{I}_3 & \mathbf{I}_3 \delta t \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 \end{bmatrix}. \quad (447)$$

The linearization. Hence we can do the linearization as

$$\mathbf{X}_{n_{k+1}} = \text{Exp}(\delta \mathbf{x}_{n_{k+1}}) \hat{\mathbf{X}}_{n_{k+1}} = \Gamma_k \Psi(\mathbf{X}_{n_k}) \mathbf{Y}_k \quad (448)$$

$$= \Gamma_k \Psi(\text{Exp}(\delta \mathbf{x}_{n_k}) \hat{\mathbf{X}}_{n_k}) \hat{\mathbf{Y}}_k \cdot \tilde{\mathbf{Y}}_k \quad (449)$$

$$\approx \Gamma_k \text{Exp}(\mathbf{F} \delta \mathbf{x}_{n_k}) \Psi(\hat{\mathbf{X}}_{n_k}) \hat{\mathbf{Y}}_k \tilde{\mathbf{Y}}_k \quad (450)$$

$$= \text{Exp}(\text{Ad}_{\Gamma_k} \mathbf{F} \delta \mathbf{x}_{n_k}) \underbrace{\Gamma_k \Psi(\hat{\mathbf{X}}_{n_k}) \hat{\mathbf{Y}}_k}_{\hat{\mathbf{X}}_{n_{k+1}}} \tilde{\mathbf{Y}}_k \quad (451)$$

$$= \text{Exp}(\text{Ad}_{\Gamma_k} \mathbf{F} \delta \mathbf{x}_{n_k}) \hat{\mathbf{X}}_{n_{k+1}} \tilde{\mathbf{Y}}_k \quad (452)$$

$$= \text{Exp}(\Phi_{nn} \delta \mathbf{x}_{n_k}) \hat{\mathbf{X}}_{n_{k+1}} \tilde{\mathbf{Y}}_k, \quad \boxed{\Phi_{nn} \triangleq \text{Ad}_{\Gamma_k} \mathbf{F}} \quad (453)$$

where the preintegration factor splits as $\mathbf{Y}_k = \hat{\mathbf{Y}}_k \tilde{\mathbf{Y}}_k$,

$$\mathbf{Y}_k = \hat{\mathbf{Y}}_k \tilde{\mathbf{Y}}_k = \begin{bmatrix} \Delta \hat{\mathbf{R}} & \Delta \hat{\mathbf{p}} & \Delta \hat{\mathbf{v}} \\ \mathbf{0}_{1 \times 3} & 1 & 0 \\ \mathbf{0}_{1 \times 3} & 0 & 1 \end{bmatrix} \begin{bmatrix} \Delta \tilde{\mathbf{R}} & \Delta \hat{\mathbf{R}}^\top \Delta \tilde{\mathbf{p}} & \Delta \hat{\mathbf{R}}^\top \Delta \tilde{\mathbf{v}} \\ \mathbf{0}_{1 \times 3} & 1 & 0 \\ \mathbf{0}_{1 \times 3} & 0 & 1 \end{bmatrix} = \hat{\mathbf{Y}}_k \cdot \text{Exp} \left(\begin{bmatrix} \delta \Delta \boldsymbol{\theta} \\ \Delta \hat{\mathbf{R}}^\top \Delta \tilde{\mathbf{p}} \\ \Delta \hat{\mathbf{R}}^\top \Delta \tilde{\mathbf{v}} \end{bmatrix} \right), \quad (454)$$

with $\delta \Delta \boldsymbol{\theta} = \text{Log}(\Delta \tilde{\mathbf{R}})$ (to first order). From the perturbations of §5.7,

$$\begin{bmatrix} \delta \Delta \boldsymbol{\theta} \\ \Delta \hat{\mathbf{R}}^\top \Delta \tilde{\mathbf{p}} \\ \Delta \hat{\mathbf{R}}^\top \Delta \tilde{\mathbf{v}} \end{bmatrix} = \begin{bmatrix} \mathbf{I}_3 & \mathbf{0}_3 & \mathbf{0}_3 \\ \mathbf{0}_3 & \Delta \hat{\mathbf{R}}^\top & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \Delta \hat{\mathbf{R}}^\top \end{bmatrix} \begin{bmatrix} \delta \Delta \boldsymbol{\theta} \\ \Delta \tilde{\mathbf{p}} \\ \Delta \tilde{\mathbf{v}} \end{bmatrix} \quad (455)$$

$$= \begin{bmatrix} \mathbf{I}_3 & \mathbf{0}_3 & \mathbf{0}_3 \\ \mathbf{0}_3 & \Delta \hat{\mathbf{R}}^\top & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \Delta \hat{\mathbf{R}}^\top \end{bmatrix} \begin{bmatrix} -\mathbf{J}_r(\Delta \hat{\boldsymbol{\theta}}) \delta t & \mathbf{0}_3 \\ \Xi_4 & -\Xi_2 \\ \Xi_3 & -\Xi_1 \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{b}}_g + \mathbf{n}_{gd} \\ \tilde{\mathbf{b}}_a + \mathbf{n}_{ad} \end{bmatrix} \quad (456)$$

$$= \begin{bmatrix} -\mathbf{J}_r(\Delta \hat{\boldsymbol{\theta}}) \delta t & \mathbf{0}_3 \\ \Delta \hat{\mathbf{R}}^\top \Xi_4 & -\Delta \hat{\mathbf{R}}^\top \Xi_2 \\ \Delta \hat{\mathbf{R}}^\top \Xi_3 & -\Delta \hat{\mathbf{R}}^\top \Xi_1 \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{b}}_g + \mathbf{n}_{gd} \\ \tilde{\mathbf{b}}_a + \mathbf{n}_{ad} \end{bmatrix}, \quad (457)$$

with $\Delta \hat{\boldsymbol{\theta}} = {}^{I_k} \hat{\boldsymbol{\omega}} \delta t$. Finally, move $\tilde{\mathbf{Y}}_k$ across $\hat{\mathbf{X}}_{n_{k+1}}$ with the adjoint:

$$\text{Exp}(\delta \mathbf{x}_{n_{k+1}}) = \text{Exp}(\Phi_{nn} \delta \mathbf{x}_{n_k}) \hat{\mathbf{X}}_{n_{k+1}} \tilde{\mathbf{Y}}_k \hat{\mathbf{X}}_{n_{k+1}}^{-1} \quad (458)$$

$$= \text{Exp}(\Phi_{nn} \delta \mathbf{x}_{n_k}) \text{Exp} \left(\text{Ad}_{\hat{\mathbf{X}}_{n_{k+1}}} \begin{bmatrix} -\mathbf{J}_r(\Delta \hat{\boldsymbol{\theta}}) \delta t & \mathbf{0}_3 \\ \Delta \hat{\mathbf{R}}^\top \Xi_4 & -\Delta \hat{\mathbf{R}}^\top \Xi_2 \\ \Delta \hat{\mathbf{R}}^\top \Xi_3 & -\Delta \hat{\mathbf{R}}^\top \Xi_1 \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{b}}_g + \mathbf{n}_{gd} \\ \tilde{\mathbf{b}}_a + \mathbf{n}_{ad} \end{bmatrix} \right), \quad (459)$$

so that

$$\delta \mathbf{x}_{n_{k+1}} = \Phi_{nn} \delta \mathbf{x}_{n_k} + \Phi_{nb} \begin{bmatrix} \tilde{\mathbf{b}}_g + \mathbf{n}_{gd} \\ \tilde{\mathbf{b}}_a + \mathbf{n}_{ad} \end{bmatrix}, \quad \Phi_{nb} \triangleq \text{Ad}_{\tilde{\mathbf{x}}_{n_{k+1}}} \begin{bmatrix} -\mathbf{J}_r(\Delta \hat{\boldsymbol{\theta}}) \delta t & \mathbf{0}_3 \\ \Delta \hat{\mathbf{R}}^\top \Xi_4 & -\Delta \hat{\mathbf{R}}^\top \Xi_2 \\ \Delta \hat{\mathbf{R}}^\top \Xi_3 & -\Delta \hat{\mathbf{R}}^\top \Xi_1 \end{bmatrix} \quad (460)$$

The stacked system. Then

$$\begin{cases} \delta \mathbf{x}_{n_{k+1}} = \Phi_{nn} \delta \mathbf{x}_{n_k} + \Phi_{nb} \begin{bmatrix} \tilde{\mathbf{b}}_g \\ \tilde{\mathbf{b}}_a \end{bmatrix} + \Phi_{nb} \begin{bmatrix} \mathbf{n}_{gd} \\ \mathbf{n}_{ad} \end{bmatrix}, \\ \tilde{\mathbf{b}}_{g_{k+1}} = \tilde{\mathbf{b}}_{g_k} + \mathbf{n}_{wgd} \delta t, \quad \tilde{\mathbf{b}}_{a_{k+1}} = \tilde{\mathbf{b}}_{a_k} + \mathbf{n}_{wad} \delta t, \end{cases} \quad (461)$$

which stacks into $\tilde{\mathbf{x}}_{k+1} = \Phi_{(k+1,k)} \tilde{\mathbf{x}}_k + \mathbf{G}_k \mathbf{n}_{Id}$ with

$$\Phi_{(k+1,k)} = \begin{bmatrix} \Phi_{nn} & \Phi_{nb} \\ \mathbf{0}_{6 \times 9} & \mathbf{I}_6 \end{bmatrix} = \begin{bmatrix} \mathbf{I}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \Phi_{14} & \mathbf{0}_3 \\ \frac{1}{2} \begin{bmatrix} G \\ \mathbf{g} \end{bmatrix} \times \delta t^2 & \mathbf{I}_3 & \mathbf{I}_3 \delta t & \Phi_{24} & \Phi_{25} \\ \begin{bmatrix} G \\ \mathbf{g} \end{bmatrix} \times \delta t & \mathbf{0}_3 & \mathbf{I}_3 & \Phi_{34} & \Phi_{35} \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 \end{bmatrix}, \quad (462)$$

where the first three block-columns are exactly $\Phi_{nn} = \text{Ad}_{\Gamma_k} \mathbf{F}$ and the Φ_{i4}, Φ_{i5} blocks are the columns of Φ_{nb} ($\Phi_{15} = \mathbf{0}_3$ since the accel error does not enter the rotation), and

$$\mathbf{G}_k = \begin{bmatrix} \Phi_{nb} & \mathbf{0}_{9 \times 6} \\ \mathbf{0}_{6 \times 6} & \mathbf{I}_6 \delta t \end{bmatrix} = \begin{bmatrix} \mathbf{G}_{11} & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 \\ \mathbf{G}_{21} & \mathbf{G}_{22} & \mathbf{0}_3 & \mathbf{0}_3 \\ \mathbf{G}_{31} & \mathbf{G}_{32} & \mathbf{0}_3 & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 \delta t & \mathbf{0}_3 \\ \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{0}_3 & \mathbf{I}_3 \delta t \end{bmatrix}, \quad (463)$$

with $[\mathbf{G}_{i1}, \mathbf{G}_{i2}]$ the blocks of Φ_{nb} . Hence, as before,

$$\boxed{\tilde{\mathbf{x}}_{k+1} = \Phi_{(k+1,k)} \tilde{\mathbf{x}}_k + \mathbf{G}_k \mathbf{n}_{Id} \quad \Rightarrow \quad \mathbf{P}_{k+1} = \Phi_{(k+1,k)} \mathbf{P}_k \Phi_{(k+1,k)}^\top + \mathbf{G}_k \mathbf{Q}_d \mathbf{G}_k^\top \quad \rightarrow \quad \text{solved.}} \quad (464)$$

Note that Φ_{nn} in (462) depends only on gravity and δt — not on the state estimate — which is the hallmark of the (right-)invariant error design mentioned in Lecture 4.

6 Lecture 6: Kalman Filter, Observability Analysis, and KF-Based VINS

Topics. (1) the MAP problem behind the Kalman filter; (2) linearization of the MAP problem; (3) Solution 1: solve it incrementally — the (E)KF; (4) Solution 2: solve it by batch; (5) discussion: the EKF, MLE/MAP, and the VINS system; (6) visual-inertial initialization.

6.1 The MAP problem behind the Kalman filter

The Kalman filter (KF) is a *linear* estimator based on the *Gaussian* assumption. Before deriving it, let's first start with a MAP problem. Given

$$\boxed{\begin{cases} \mathbf{x}_0 \sim \mathcal{N}(\hat{\mathbf{x}}_0, \mathbf{P}_0) & \rightarrow \text{prior,} \\ \mathbf{x}_1 = \mathbf{f}(\mathbf{x}_0) + \mathbf{w}_0, \quad \mathbf{w}_0 \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}_0) & \rightarrow \text{motion model (IMU),} \\ \mathbf{z}_1 = \mathbf{h}(\mathbf{x}_1) + \mathbf{n}_1, \quad \mathbf{n}_1 \sim \mathcal{N}(\mathbf{0}, \mathbf{R}) & \rightarrow \text{measurement model (vision),} \end{cases}} \quad (465)$$

the target is the posterior distribution of the new state:

$$\mathbf{x}_1 \sim \mathcal{N}(\hat{\mathbf{x}}_1, \mathbf{P}_1). \quad (466)$$

How to compute it? With $\mathbf{x} = \{\mathbf{x}_0, \mathbf{x}_1\}$ and $\mathbf{z} = \mathbf{z}_1$, apply Bayes' rule and factorize:

$$\max_{\mathbf{x}} p(\mathbf{x}|\mathbf{z}) = \max_{\mathbf{x}} \frac{p(\mathbf{z}|\mathbf{x}) p(\mathbf{x})}{p(\mathbf{z})} = \max_{\mathbf{x}} \frac{p(\mathbf{z}_1|\mathbf{x}_1, \mathbf{x}_0) p(\mathbf{x}_1, \mathbf{x}_0)}{p(\mathbf{z}_1)} \quad (467)$$

$$= \max_{\mathbf{x}} \frac{p(\mathbf{z}_1|\mathbf{x}_1, \mathbf{x}_0) p(\mathbf{x}_1|\mathbf{x}_0) p(\mathbf{x}_0)}{p(\mathbf{z}_1)} \quad (468)$$

$$= \max_{\mathbf{x}} \frac{p(\mathbf{z}_1|\mathbf{x}_1) p(\mathbf{x}_1|\mathbf{x}_0) p(\mathbf{x}_0)}{p(\mathbf{z}_1)}, \quad (469)$$

where in the last step $\mathbf{z}_1$ only depends on $\mathbf{x}_1$, so we drop $\mathbf{x}_0$ from the measurement factor. Taking the negative log-likelihood of the three Gaussian factors (and recalling $\|\mathbf{e}\|_{\mathbf{P}}^2 \triangleq \mathbf{e}^\top \mathbf{P}^{-1} \mathbf{e}$), the MAP problem is equivalent to

$$\boxed{\min_{\mathbf{x}} \|\mathbf{z}_1 - \mathbf{h}(\mathbf{x}_1)\|_{\mathbf{R}}^2 + \|\mathbf{x}_1 - \mathbf{f}(\mathbf{x}_0)\|_{\mathbf{Q}_0}^2 + \|\mathbf{x}_0 - \hat{\mathbf{x}}_0\|_{\mathbf{P}_0}^2}. \quad (470)$$

6.2 Linearization

Stack the state and choose the linearization point:

$$\mathbf{x} = \begin{bmatrix} \mathbf{x}_0 \\ \mathbf{x}_1 \end{bmatrix}, \quad \text{linearization point: } \hat{\mathbf{x}} = \begin{bmatrix} \hat{\mathbf{x}}_0 \\ \hat{\mathbf{x}}_1 \end{bmatrix}, \quad \tilde{\mathbf{x}} = \mathbf{x} - \hat{\mathbf{x}}. \quad (471)$$

Motion model. From $\mathbf{x}_1 = \mathbf{f}(\mathbf{x}_0) + \mathbf{w}_0$, linearizing $\mathbf{f}$ at $\hat{\mathbf{x}}_0$ with Jacobian $\mathbf{F}$,

$$\hat{\mathbf{x}}_1 + \tilde{\mathbf{x}}_1 \approx \mathbf{f}(\hat{\mathbf{x}}_0) + \mathbf{F}(\mathbf{x}_0 - \hat{\mathbf{x}}_0) + \mathbf{w}_0 = \mathbf{f}(\hat{\mathbf{x}}_0) + \mathbf{F} \tilde{\mathbf{x}}_0 + \mathbf{w}_0. \quad (472)$$

Define the *motion residual* $\mathbf{r}_x$:

$$\mathbf{r}_x \triangleq \hat{\mathbf{x}}_1 - \mathbf{f}(\hat{\mathbf{x}}_0) = \mathbf{F} \tilde{\mathbf{x}}_0 - \tilde{\mathbf{x}}_1 + \mathbf{w}_0 = [\mathbf{F} \quad -\mathbf{I}] \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} + \mathbf{w}_0. \quad (473)$$

Measurement model. From $\mathbf{z}_1 = \mathbf{h}(\mathbf{x}_1) + \mathbf{n}_1$, linearizing $\mathbf{h}$ at $\hat{\mathbf{x}}_1$ with Jacobian $\mathbf{H}$,

$$\mathbf{z}_1 = \mathbf{h}(\hat{\mathbf{x}}_1) + \mathbf{H}(\mathbf{x}_1 - \hat{\mathbf{x}}_1) + \mathbf{n}_1 \Rightarrow \tilde{\mathbf{z}}_1 \triangleq \mathbf{z}_1 - \mathbf{h}(\hat{\mathbf{x}}_1) = \mathbf{H}\tilde{\mathbf{x}}_1 + \mathbf{n}_1 = \begin{bmatrix} \mathbf{0} & \mathbf{H} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} + \mathbf{n}_1. \quad (474)$$

The linearized cost. Then the cost function (470) becomes

$$C = \|\tilde{\mathbf{z}}_1 - \mathbf{H}\tilde{\mathbf{x}}_1\|_{\mathbf{R}}^2 + \|\mathbf{r}_x - [\mathbf{F} \quad -\mathbf{I}] \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}\|_{\mathbf{Q}_0}^2 + \|\tilde{\mathbf{x}}_0\|_{\mathbf{P}_0}^2. \quad (475)$$

6.3 Solution 1: solve it incrementally — the (E)KF

Solve (475) in two steps:

$$\begin{cases} \text{step 1: } \|\tilde{\mathbf{x}}_0\|_{\mathbf{P}_0}^2 + \|\mathbf{r}_x - [\mathbf{F} \quad -\mathbf{I}] \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}\|_{\mathbf{Q}_0}^2 & \rightarrow \mathbf{x}_{1|0} \sim \mathcal{N}(\hat{\mathbf{x}}_{1|0}, \mathbf{P}_{1|0}), \\ \text{step 2: } \|\tilde{\mathbf{x}}_{1|0}\|_{\mathbf{P}_{1|0}}^2 + \|\tilde{\mathbf{z}}_1 - \mathbf{H}\tilde{\mathbf{x}}_1\|_{\mathbf{R}}^2 & \rightarrow \mathbf{x}_{1|1} \sim \mathcal{N}(\hat{\mathbf{x}}_{1|1}, \mathbf{P}_{1|1}). \end{cases} \quad (476)$$

Step 1: prior + motion. We solve

$$\min_{\tilde{\mathbf{x}}} \|\tilde{\mathbf{x}}_0\|_{\mathbf{P}_0}^2 + \|\mathbf{r}_x - [\mathbf{F} \quad -\mathbf{I}] \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}\|_{\mathbf{Q}_0}^2. \quad (477)$$

Expanding, the cost is

$$C_1 = \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}^\top \begin{bmatrix} \mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F} & -\mathbf{F}^\top \mathbf{Q}_0^{-1} \\ -\mathbf{Q}_0^{-1} \mathbf{F} & \mathbf{Q}_0^{-1} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} - 2 \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}^\top \begin{bmatrix} \mathbf{F}^\top \\ -\mathbf{I} \end{bmatrix} \mathbf{Q}_0^{-1} \mathbf{r}_x + \mathbf{r}_x^\top \mathbf{Q}_0^{-1} \mathbf{r}_x. \quad (478)$$

Setting $\frac{\partial C_1}{\partial \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix}} = \mathbf{0}$ gives the *information system*:

$$\begin{bmatrix} \mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F} & -\mathbf{F}^\top \mathbf{Q}_0^{-1} \\ -\mathbf{Q}_0^{-1} \mathbf{F} & \mathbf{Q}_0^{-1} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} = \begin{bmatrix} \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{r}_x \\ -\mathbf{Q}_0^{-1} \mathbf{r}_x \end{bmatrix}. \quad (479)$$

Then, marginalizing $\tilde{\mathbf{x}}_0$ (Schur complement onto the $\tilde{\mathbf{x}}_1$ block, Lecture 4),

$$\left[\mathbf{Q}_0^{-1} - \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1} \right] \tilde{\mathbf{x}}_1 = -\mathbf{Q}_0^{-1} \mathbf{r}_x + \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{r}_x, \quad (480)$$

and applying the matrix inversion lemma to both sides,

$$\underbrace{(\mathbf{Q}_0 + \mathbf{F} \mathbf{P}_0 \mathbf{F}^\top)^{-1}}_{\mathbf{P}_{1|0}^{-1}} \tilde{\mathbf{x}}_1 = -(\mathbf{Q}_0 + \mathbf{F} \mathbf{P}_0 \mathbf{F}^\top)^{-1} \mathbf{r}_x. \quad (481)$$

Hence

$$\boxed{\tilde{\mathbf{x}}_1 = -\mathbf{r}_x, \quad \mathbf{P}_{1|0} = \mathbf{Q}_0 + \mathbf{F} \mathbf{P}_0 \mathbf{F}^\top.} \quad (482)$$

Interpreting $\tilde{\mathbf{x}}_1 = -\mathbf{r}_x$:

$$\begin{cases} \text{if } \mathbf{r}_x = \mathbf{0}, & \hat{\mathbf{x}}_{1|0} = \mathbf{f}(\hat{\mathbf{x}}_0), \\ \text{if } \mathbf{r}_x \neq \mathbf{0}, & \hat{\mathbf{x}}_{1|0} = \mathbf{f}(\hat{\mathbf{x}}_0) - \mathbf{r}_x. \end{cases} \quad (483)$$

Step 2: + update. Since step 1 left $\tilde{\mathbf{x}}_1$ with mean $-\mathbf{r}_x$ and covariance $\mathbf{P}_{1|0}$, the remaining problem is

$$\min_{\tilde{\mathbf{x}}_1} \|\tilde{\mathbf{x}}_1 + \mathbf{r}_x\|_{\mathbf{P}_{1|0}}^2 + \|\tilde{\mathbf{z}}_1 - \mathbf{H}\tilde{\mathbf{x}}_1\|_{\mathbf{R}}^2. \quad (484)$$

Expanding (one step per row, dropping the tilde-1 subscript on $\tilde{\mathbf{z}}$ for brevity):

$$C_2 = (\tilde{\mathbf{x}}_1 + \mathbf{r}_x)^\top \mathbf{P}_{1|0}^{-1} (\tilde{\mathbf{x}}_1 + \mathbf{r}_x) + (\tilde{\mathbf{z}} - \mathbf{H}\tilde{\mathbf{x}}_1)^\top \mathbf{R}^{-1} (\tilde{\mathbf{z}} - \mathbf{H}\tilde{\mathbf{x}}_1) \quad (485)$$

$$= \tilde{\mathbf{x}}_1^\top \mathbf{P}_{1|0}^{-1} \tilde{\mathbf{x}}_1 + 2 \tilde{\mathbf{x}}_1^\top \mathbf{P}_{1|0}^{-1} \mathbf{r}_x + \mathbf{r}_x^\top \mathbf{P}_{1|0}^{-1} \mathbf{r}_x + \tilde{\mathbf{z}}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - 2 \tilde{\mathbf{z}}^\top \mathbf{R}^{-1} \mathbf{H} \tilde{\mathbf{x}}_1 + \tilde{\mathbf{x}}_1^\top \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} \tilde{\mathbf{x}}_1 \quad (486)$$

$$= \tilde{\mathbf{x}}_1^\top (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H}) \tilde{\mathbf{x}}_1 + 2 \tilde{\mathbf{x}}_1^\top (\mathbf{P}_{1|0}^{-1} \mathbf{r}_x - \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}}) + \tilde{\mathbf{z}}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} + \mathbf{r}_x^\top \mathbf{P}_{1|0}^{-1} \mathbf{r}_x. \quad (487)$$

Hence, $\frac{\partial C_2}{\partial \tilde{\mathbf{x}}_1} = \mathbf{0}$ gives

$$\underbrace{(\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})}_{\boldsymbol{\Sigma} = \mathbf{P}_{1|1}^{-1}} \tilde{\mathbf{x}}_1 = \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \mathbf{P}_{1|0}^{-1} \mathbf{r}_x, \quad (488)$$

so that

$$\tilde{\mathbf{x}}_1 = (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} (\mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \mathbf{P}_{1|0}^{-1} \mathbf{r}_x) \quad (489)$$

$$= (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{P}_{1|0}^{-1} \mathbf{r}_x. \quad (490)$$

The gain equivalence. For the first term of (490), apply the matrix inversion lemma, $(\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} = \mathbf{P}_{1|0} - \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0}$, and simplify step by step:

$$\begin{aligned} & (\mathbf{P}_{1|0} - \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0}) \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} \\ &= (\mathbf{P}_{1|0} \mathbf{H}^\top \mathbf{R}^{-1} - \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top \mathbf{R}^{-1}) \tilde{\mathbf{z}} \end{aligned} \quad (491)$$

$$= \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{R}^{-1} - (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top \mathbf{R}^{-1}) \tilde{\mathbf{z}} \quad (492)$$

$$= \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} ((\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R}) \mathbf{R}^{-1} - \mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top \mathbf{R}^{-1}) \tilde{\mathbf{z}} \quad (493)$$

$$= \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \tilde{\mathbf{z}}. \quad (494)$$

Hence we got

$$\boxed{\tilde{\mathbf{x}}_1 = \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \tilde{\mathbf{z}} - (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{P}_{1|0}^{-1} \mathbf{r}_x.} \quad (495)$$

If $\mathbf{r}_x \rightarrow \mathbf{0}$, then

$$\tilde{\mathbf{x}}_1 = \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \tilde{\mathbf{z}}, \quad (496)$$

and the posterior covariance follows from (488) (matrix inversion lemma again):

$$\mathbf{P}_{1|1} = (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} = \mathbf{P}_{1|0} - \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} \mathbf{H} \mathbf{P}_{1|0}. \quad (497)$$

Therefore, we have the posterior $\mathbf{x}_{1|1} \sim \mathcal{N}(\hat{\mathbf{x}}_{1|1}, \mathbf{P}_{1|1})$.

Summary of the process. Collecting the two steps ($\mathbf{r}_x \rightarrow \mathbf{0}$):

prior:	$\mathbf{x}_0 \sim \mathcal{N}(\hat{\mathbf{x}}_0, \mathbf{P}_0),$	(498)
propagation:	$\mathbf{x}_1 = \mathbf{f}(\mathbf{x}_0) + \mathbf{w}_0,$	
	$\hat{\mathbf{x}}_{1 0} = \mathbf{f}(\hat{\mathbf{x}}_0), \quad \mathbf{P}_{1 0} = \mathbf{F}\mathbf{P}_0\mathbf{F}^\top + \mathbf{Q}_0,$	
update:	$\mathbf{z}_1 = \mathbf{h}(\mathbf{x}_1) + \mathbf{n}_1,$	
	$\tilde{\mathbf{z}}_1 = \mathbf{z}_1 - \mathbf{h}(\hat{\mathbf{x}}_{1 0}), \quad \tilde{\mathbf{z}}_1 = \mathbf{H}\tilde{\mathbf{x}}_1 + \mathbf{n}_1,$	
	$\mathbf{S}_1 = \mathbf{H}\mathbf{P}_{1 0}\mathbf{H}^\top + \mathbf{R} \rightarrow \text{innovation covariance},$	
	$\mathbf{K} = \mathbf{P}_{1 0}\mathbf{H}^\top\mathbf{S}_1^{-1} \rightarrow \text{Kalman gain},$	
	$\hat{\mathbf{x}}_{1 1} = \hat{\mathbf{x}}_{1 0} + \mathbf{K}\tilde{\mathbf{z}}_1,$	
	$\mathbf{P}_{1 1} = \mathbf{P}_{1 0} - \mathbf{P}_{1 0}\mathbf{H}^\top\mathbf{S}_1^{-1}\mathbf{H}\mathbf{P}_{1 0}.$	

This is the **EKF** from the MLE/MAP formulation.

6.4 Solution 2: solve it by batch

Alternatively, solve the full linearized cost (475) in one shot. Setting the gradient with respect to $[\tilde{\mathbf{x}}_0; \tilde{\mathbf{x}}_1]$ to zero now includes the measurement term in the information system:

$$\begin{bmatrix} \mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F} & -\mathbf{F}^\top \mathbf{Q}_0^{-1} \\ -\mathbf{Q}_0^{-1} \mathbf{F} & \mathbf{Q}_0^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} \end{bmatrix} \begin{bmatrix} \tilde{\mathbf{x}}_0 \\ \tilde{\mathbf{x}}_1 \end{bmatrix} = \begin{bmatrix} \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{r}_x \\ -\mathbf{Q}_0^{-1} \mathbf{r}_x + \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} \end{bmatrix}. \quad (499)$$

Then, marginalizing $\tilde{\mathbf{x}}_0$ (Schur complement),

$$\begin{aligned} & \left[\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} + \underbrace{\mathbf{Q}_0^{-1} - \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1}}_{\mathbf{P}_{1|0}^{-1}} \right] \tilde{\mathbf{x}}_1 \\ &= \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \mathbf{Q}_0^{-1} \mathbf{r}_x + \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{r}_x \end{aligned} \quad (500)$$

$$= \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \underbrace{\left(\mathbf{Q}_0^{-1} - \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1} \right)}_{\mathbf{P}_{1|0}^{-1}} \mathbf{r}_x. \quad (501)$$

If we define $\mathbf{P}_{1|0}^{-1} \triangleq \mathbf{Q}_0^{-1} - \mathbf{Q}_0^{-1} \mathbf{F} (\mathbf{P}_0^{-1} + \mathbf{F}^\top \mathbf{Q}_0^{-1} \mathbf{F})^{-1} \mathbf{F}^\top \mathbf{Q}_0^{-1}$ — which by the matrix inversion lemma is exactly $(\mathbf{Q}_0 + \mathbf{F}\mathbf{P}_0\mathbf{F}^\top)^{-1}$, the same $\mathbf{P}_{1|0}$ as in (482) — then

$$(\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} + \mathbf{P}_{1|0}^{-1}) \tilde{\mathbf{x}}_1 = \mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \mathbf{P}_{1|0}^{-1} \mathbf{r}_x, \quad (502)$$

and hence

$$\boxed{\mathbf{P}_{1|1} = (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1}, \quad \tilde{\mathbf{x}}_1 = (\mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} + \mathbf{P}_{1|0}^{-1})^{-1} (\mathbf{H}^\top \mathbf{R}^{-1} \tilde{\mathbf{z}} - \mathbf{P}_{1|0}^{-1} \mathbf{r}_x).} \quad (503)$$

It's the same as the **EKF** as $\mathbf{r}_x \rightarrow \mathbf{0}$.

6.5 Discussion: the EKF, MLE/MAP, and the VINS system

- (1) We need to *linearize* the nonlinear motion and measurement models — the KF is actually a *linear* estimator. We derived it based on MLE/MAP (nonlinear least squares); the Gaussian assumption is the foundation.
- (2) The EKF is the way to solve the MLE/MAP *incrementally*; (nonlinear) least squares solve it in *batch*.
- (3) The VINS system has exactly the structure of (465), repeated over time:

$$\left\{ \begin{array}{ll} \mathbf{x}_k \sim \mathcal{N}(\hat{\mathbf{x}}_k, \mathbf{P}_k) & \rightarrow \text{prior of the IMU state,} \\ \mathbf{x}_{k+1} = \mathbf{f}(\mathbf{x}_k) + \mathbf{w}_k & \rightarrow \text{IMU integration model,} \\ \mathbf{z}_{k+1} = \mathbf{h}(\mathbf{x}_{k+1}) + \mathbf{n}_{k+1} & \rightarrow \text{vision measurements} \end{array} \right\} \text{ VINS,} \quad (504)$$

the visual-inertial navigation system (when used for odometry: VIO, visual-inertial odometry).

- (4) The two models are the ones we have built in the previous lectures:
 - IMU model (Lecture 5): $\dot{\mathbf{x}} = \mathbf{f}(\mathbf{x}, \mathbf{n}_I) \Rightarrow \mathbf{x}_{k+1} = \mathbf{f}_{\text{int}}(\mathbf{x}_k, \mathbf{n}_{Id})$;
 - vision model (Lectures 3–4): $\mathbf{z}_c = \mathbf{h}_c(\mathbf{x}) + \mathbf{n}_c$.
- (5) The Kalman gain can be written in equivalent forms — by (494),

$$\mathbf{K} = \mathbf{P}_{1|0} \mathbf{H}^\top \mathbf{S}_1^{-1} = \mathbf{P}_{1|0} \mathbf{H}^\top (\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1} = (\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H})^{-1} \mathbf{H}^\top \mathbf{R}^{-1}, \quad (505)$$

where $\mathbf{P}_{1|0}$ is the *propagated covariance* of $\mathbf{x}_1$; $\mathbf{S}_1$ is the *residual covariance* (of $\tilde{\mathbf{z}}_1$); $\mathbf{R}$ is the measurement noise; and $\mathbf{P}_{1|0}^{-1} + \mathbf{H}^\top \mathbf{R}^{-1} \mathbf{H} = \mathbf{\Sigma}_{1|1} = \mathbf{P}_{1|1}^{-1}$ is the posterior information matrix.

- (6) The covariance update can likewise be written in equivalent forms:

$$\mathbf{P}_{1|1} = \mathbf{P}_{1|0} - \mathbf{P}_{1|0} \mathbf{H}^\top \underbrace{(\mathbf{H} \mathbf{P}_{1|0} \mathbf{H}^\top + \mathbf{R})^{-1}}_{\mathbf{S}_1^{-1}} \mathbf{H} \mathbf{P}_{1|0} = \mathbf{P}_{1|0} - \mathbf{K} \mathbf{S}_1 \mathbf{K}^\top. \quad (506)$$

Moreover, substituting the linearized measurement into the state update,

$$\hat{\mathbf{x}}_{1|1} = \hat{\mathbf{x}}_{1|0} + \tilde{\mathbf{x}}_1 = \hat{\mathbf{x}}_{1|0} + \mathbf{K} \tilde{\mathbf{z}}_1 = \hat{\mathbf{x}}_{1|0} + \mathbf{K} (\mathbf{H} \tilde{\mathbf{x}}_{1|0} + \mathbf{n}_1), \quad (507)$$

the posterior covariance follows step by step:

$$\mathbf{P}_{1|1} = \mathbb{E} \left((\mathbf{x} - \hat{\mathbf{x}}_{1|1}) (\mathbf{x} - \hat{\mathbf{x}}_{1|1})^\top \right) \quad (508)$$

$$= \mathbb{E} \left(\underbrace{[\mathbf{x} - \hat{\mathbf{x}}_{1|0}]_{\tilde{\mathbf{x}}_{1|0}}} - \mathbf{K} (\mathbf{H} \tilde{\mathbf{x}}_{1|0} + \mathbf{n}_1) \right) [\mathbf{x} - \hat{\mathbf{x}}_{1|0} - \mathbf{K} (\mathbf{H} \tilde{\mathbf{x}}_{1|0} + \mathbf{n}_1)]^\top \quad (509)$$

$$= \mathbb{E} \left([(\mathbf{I} - \mathbf{K} \mathbf{H}) \tilde{\mathbf{x}}_{1|0} - \mathbf{K} \mathbf{n}_1] [(\mathbf{I} - \mathbf{K} \mathbf{H}) \tilde{\mathbf{x}}_{1|0} - \mathbf{K} \mathbf{n}_1]^\top \right), \quad (510)$$

hence

$$\boxed{\mathbf{P}_{1|1} = (\mathbf{I} - \mathbf{K} \mathbf{H}) \mathbf{P}_{1|0} (\mathbf{I} - \mathbf{K} \mathbf{H})^\top + \mathbf{K} \mathbf{R} \mathbf{K}^\top} \quad (\text{Joseph form}). \quad (511)$$

(7) **A practical problem for the KF: initialization.** To run the filter we need the prior

$$\mathbf{x}_k \sim \mathcal{N}(\hat{\mathbf{x}}_k, \mathbf{P}_k) \Rightarrow \text{how to get } \hat{\mathbf{x}}_k, \mathbf{P}_k? \quad (512)$$

For the IMU state (Lecture 5)

$$\mathbf{x}_I = \{ {}^G_I \mathbf{R}, {}^G \mathbf{p}_I, {}^G \mathbf{v}_I, \mathbf{b}_g, \mathbf{b}_a \}, \quad (513)$$

this is the subject of the next subsection.

6.6 Visual-inertial initialization

Consider three consecutive images and the IMU between them (Fig. 17).

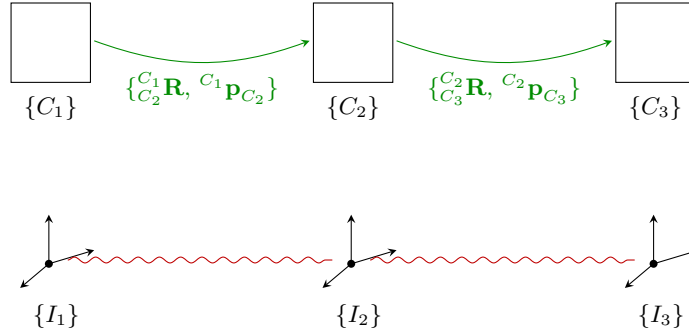


Figure 17: Visual-inertial initialization: the relative camera poses from the visual SLAM pipeline (top, green) are aligned with the IMU integration over the same intervals (bottom, red wavy links) through the camera–IMU extrinsics.

From these, we want to **initialize**:

$$\boxed{\begin{cases} (1) & {}^{I_1} \mathbf{g} \\ (2) & {}^{I_1} \mathbf{v}_{I_1}, {}^{I_1} \mathbf{v}_{I_2}, {}^{I_1} \mathbf{v}_{I_3}, \dots \\ (3) & s \quad (\text{mono camera}) \\ (4) & \mathbf{b}_g, \mathbf{b}_a \end{cases}} \quad (514)$$

From vision. Using the visual SLAM pipeline (Lectures 3–4), we obtain the relative camera poses

$$\{ {}^{C_1}_{C_2} \mathbf{R}, {}^{C_1}_{C_2} \mathbf{p}_{C_2} \}, \quad \{ {}^{C_2}_{C_3} \mathbf{R}, {}^{C_2}_{C_3} \mathbf{p}_{C_3} \}, \quad (515)$$

where for a monocular camera the translations are recovered only *up to a scale* s .

From IMU integration. Recall the exact integration results of Lecture 5 (writing $\Delta \mathbf{p}_k, \Delta \mathbf{v}_k$ for the preintegrated measurements over $[t_k, t_{k+1}]$, $\delta t_k = t_{k+1} - t_k$):

$${}^{I_k}_{I_{k+1}} \mathbf{R} = {}^G_{I_k} \mathbf{R}^\top {}^G_{I_{k+1}} \mathbf{R}, \quad (516)$$

$${}^G \mathbf{p}_{I_{k+1}} = {}^G \mathbf{p}_{I_k} + {}^G \mathbf{v}_{I_k} \delta t_k + {}^G_{I_k} \mathbf{R} \Delta \mathbf{p}_k + \frac{1}{2} {}^G \mathbf{g} \delta t_k^2, \quad (517)$$

$${}^G \mathbf{v}_{I_{k+1}} = {}^G \mathbf{v}_{I_k} + {}^G_{I_k} \mathbf{R} \Delta \mathbf{v}_k + {}^G \mathbf{g} \delta t_k. \quad (518)$$

Rotate the position update into the local frame $\{I_k\}$, defining ${}^{I_k}\mathbf{v}_{I_k} \triangleq {}^G\mathbf{R}^\top {}^G\mathbf{v}_{I_k}$ and ${}^{I_k}\mathbf{g} \triangleq {}^G\mathbf{R}^\top {}^G\mathbf{g}$:

$${}^{I_k}\mathbf{p}_{I_{k+1}} = {}^G\mathbf{R}^\top ({}^G\mathbf{p}_{I_{k+1}} - {}^G\mathbf{p}_{I_k}) = {}^{I_k}\mathbf{v}_{I_k} \delta t_k + \Delta \mathbf{p}_k + \frac{1}{2} {}^{I_k}\mathbf{g} \delta t_k^2, \quad (519)$$

and, one interval later, expressing everything with $\{I_k\}$ -frame quantities via the (gyro-integrated, hence known) rotation ${}^{I_{k+1}}\mathbf{R} = ({}^{I_k}_{I_{k+1}}\mathbf{R})^\top$:

$${}^{I_{k+1}}\mathbf{p}_{I_{k+2}} = {}^G\mathbf{R}^\top ({}^G\mathbf{p}_{I_{k+2}} - {}^G\mathbf{p}_{I_{k+1}}) = {}^{I_{k+1}}\mathbf{v}_{I_{k+1}} \delta t_{k+1} + \Delta \mathbf{p}_{k+1} + \frac{1}{2} {}^{I_{k+1}}\mathbf{g} \delta t_{k+1}^2 \quad (520)$$

$$= \Delta \mathbf{p}_{k+1} + {}^{I_k}_{I_{k+1}}\mathbf{R} \left({}^{I_k}\mathbf{v}_{I_{k+1}} \delta t_{k+1} + \frac{1}{2} {}^{I_k}\mathbf{g} \delta t_{k+1}^2 \right). \quad (521)$$

Connecting the two. With the camera-IMU extrinsics $\{{}^I_C\mathbf{R}, {}^I\mathbf{p}_C\}$ (inverse $\{{}^C_I\mathbf{R}, {}^C\mathbf{p}_I\}$) and the monocular scale s on the vision translation, chain the transformations:

$$\begin{bmatrix} {}^{I_k}_{I_{k+1}}\mathbf{R} & {}^{I_k}\mathbf{p}_{I_{k+1}} \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} = \begin{bmatrix} {}^I_C\mathbf{R} & {}^I\mathbf{p}_C \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \begin{bmatrix} {}^{C_k}_{C_{k+1}}\mathbf{R} & s {}^{C_k}\mathbf{p}_{C_{k+1}} \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \begin{bmatrix} {}^C_I\mathbf{R} & {}^C\mathbf{p}_I \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \quad (522)$$

$$= \begin{bmatrix} {}^I_C\mathbf{R} {}^{C_k}_{C_{k+1}}\mathbf{R} & s {}^I_C\mathbf{R} {}^{C_k}\mathbf{p}_{C_{k+1}} + {}^I\mathbf{p}_C \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \begin{bmatrix} {}^C_I\mathbf{R} & {}^C\mathbf{p}_I \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix} \quad (523)$$

$$= \begin{bmatrix} {}^I_C\mathbf{R} {}^{C_k}_{C_{k+1}}\mathbf{R} {}^C_I\mathbf{R} & {}^I_C\mathbf{R} {}^{C_k}_{C_{k+1}}\mathbf{R} {}^C\mathbf{p}_I + s {}^I_C\mathbf{R} {}^{C_k}\mathbf{p}_{C_{k+1}} + {}^I\mathbf{p}_C \\ \mathbf{0}_{1 \times 3} & 1 \end{bmatrix}. \quad (524)$$

Hence, equating the translation of (524) with (519) and (521), we get the two *position constraints*

$${}^I_C\mathbf{R} {}^{C_k}_{C_{k+1}}\mathbf{R} {}^C\mathbf{p}_I + s {}^I_C\mathbf{R} {}^{C_k}\mathbf{p}_{C_{k+1}} + {}^I\mathbf{p}_C = \Delta \mathbf{p}_k + {}^{I_k}\mathbf{v}_{I_k} \delta t_k + \frac{1}{2} {}^{I_k}\mathbf{g} \delta t_k^2, \quad (525)$$

$${}^I_C\mathbf{R} {}^{C_{k+1}}_{C_{k+2}}\mathbf{R} {}^C\mathbf{p}_I + s {}^I_C\mathbf{R} {}^{C_{k+1}}\mathbf{p}_{C_{k+2}} + {}^I\mathbf{p}_C = \Delta \mathbf{p}_{k+1} + {}^{I_{k+1}}\mathbf{R} \left({}^{I_k}\mathbf{v}_{I_{k+1}} \delta t_{k+1} + \frac{1}{2} {}^{I_k}\mathbf{g} \delta t_{k+1}^2 \right). \quad (526)$$

At the same time, rotating the velocity updates into $\{I_k\}$ gives the two *velocity constraints*

$${}^{I_k}\mathbf{v}_{I_{k+1}} - {}^{I_k}\mathbf{v}_{I_k} - {}^{I_k}\mathbf{g} \delta t_k = \Delta \mathbf{v}_k, \quad (527)$$

$${}^{I_{k+1}}\mathbf{R} ({}^{I_k}\mathbf{v}_{I_{k+2}} - {}^{I_k}\mathbf{v}_{I_{k+1}} - {}^{I_k}\mathbf{g} \delta t_{k+1}) = \Delta \mathbf{v}_{k+1}. \quad (528)$$

The linear system. Stacking the four constraints into $\mathbf{A}\mathbf{u} = \mathbf{b}$ with the unknowns $\mathbf{u} = [s \quad {}^{I_k}\mathbf{g}^\top \quad {}^{I_k}\mathbf{v}_{I_k}^\top \quad {}^{I_k}\mathbf{v}_{I_{k+1}}^\top \quad {}^{I_k}\mathbf{v}_{I_{k+2}}^\top]^\top$ (13×1), and abbreviating $\bar{\mathbf{R}} \triangleq {}^{I_{k+1}}\mathbf{R}$:

$$\begin{bmatrix} -{}^I_C\mathbf{R} {}^{C_k}_{C_{k+1}}\mathbf{R} {}^C\mathbf{p}_{C_{k+1}} & \frac{1}{2}\delta t_k^2 \mathbf{I}_3 & \delta t_k \mathbf{I}_3 & \mathbf{0}_3 & \mathbf{0}_3 \\ -{}^I_C\mathbf{R} {}^{C_{k+1}}_{C_{k+2}}\mathbf{R} {}^C\mathbf{p}_{C_{k+2}} & \frac{1}{2}\delta t_{k+1}^2 \bar{\mathbf{R}} & \mathbf{0}_3 & \delta t_{k+1} \bar{\mathbf{R}} & \mathbf{0}_3 \\ \mathbf{0}_{3 \times 1} & -\delta t_k \mathbf{I}_3 & -\mathbf{I}_3 & \mathbf{I}_3 & \mathbf{0}_3 \\ \mathbf{0}_{3 \times 1} & -\delta t_{k+1} \bar{\mathbf{R}} & \mathbf{0}_3 & -\bar{\mathbf{R}} & \bar{\mathbf{R}} \end{bmatrix} \begin{bmatrix} s \\ {}^{I_k}\mathbf{g} \\ {}^{I_k}\mathbf{v}_{I_k} \\ {}^{I_k}\mathbf{v}_{I_{k+1}} \\ {}^{I_k}\mathbf{v}_{I_{k+2}} \end{bmatrix} = \begin{bmatrix} {}^I_C\mathbf{R} {}^{C_k}_{C_{k+1}}\mathbf{R} {}^C\mathbf{p}_I + {}^I\mathbf{p}_C - \Delta \mathbf{p}_k \\ {}^I_C\mathbf{R} {}^{C_{k+1}}_{C_{k+2}}\mathbf{R} {}^C\mathbf{p}_I + {}^I\mathbf{p}_C - \Delta \mathbf{p}_{k+1} \\ \Delta \mathbf{v}_k \\ \Delta \mathbf{v}_{k+1} \end{bmatrix}.$$

(529)

Solving this linear system recovers targets (1)–(3) of (514): the scale, the gravity direction in $\{I_k\}$ (hence the initial orientation up to yaw), and the velocities.

How many frames do we need? The system (529) has 12 constraints and 13 unknowns. In general, every pair of consecutive frames gives 6 constraints (3 position + 3 velocity), so n frames give $6(n - 1)$, while we totally need to solve $1 + 3 + 3n$ unknowns (s , gravity, and n velocities):

- if s is known (stereo camera): 3 frames are good to solve the initialization;
- if s is unknown (mono camera):

$$6(n - 1) - (4 + 3n) > 0 \Rightarrow n > \frac{10}{3} \Rightarrow n = 4 \text{ frames minimum (3 intervals)}. \quad (530)$$

References

- [1] Timothy D. Barfoot. *State Estimation for Robotics*. See Chapter 7 (matrix Lie groups). Cambridge University Press, 2017.
- [2] Frank Dellaert and GTSAM contributors. *Lie Groups for 2D and 3D Transformations*. GT-SAM documentation, borglab/gtsam. URL: <https://github.com/borglab/gtsam/blob/develop/doc/LieGroups.pdf>.
- [3] Nikolay Atanasov. *Rotations $SO(3)$ and Rigid-Body Motions $SE(3)$* . ECE276A: Sensing & Estimation in Robotics, Lecture 12, UC San Diego. 2020. URL: https://natanaso.github.io/ece276a2020/ref/ECE276A_12_S03_SE3.pdf.
- [4] Joan Solà, Jérémie Deray, and Dinesh Atchuthan. “A Micro Lie Theory for State Estimation in Robotics”. In: *arXiv preprint arXiv:1812.01537* (2018). URL: <https://arxiv.org/pdf/1812.01537>.
- [5] Nikolas Trawny and Stergios I. Roumeliotis. *Indirect Kalman Filter for 3D Attitude Estimation*. Tech. rep. 2005-002. See Section 1 (quaternion algebra). University of Minnesota, Dept. of Computer Science & Engineering, MARS Lab, 2005. URL: https://mediawiki.isr.tecnico.ulisboa.pt/images/d/db/Indirect_Kalman_Filter_for_3D_Attitude_Estimation.pdf.
- [6] Joan Solà. “Quaternion Kinematics for the Error-State Kalman Filter”. In: *arXiv preprint arXiv:1711.02508* (2017). See Sections 1–3 (quaternion definition, properties, conversions). URL: <https://www.iri.upc.edu/people/jsola/JoanSola/objectes/notes/kinematics.pdf>.
- [7] G. Huang, A. I. Mourikis, and S. I. Roumeliotis. “A First-Estimates Jacobian EKF for Improving SLAM Consistency”. In: *Proc. of the 11th International Symposium on Experimental Robotics*. Athens, Greece, 2008.
- [8] Stefan Leutenegger et al. “Keyframe-based visual-inertial odometry using nonlinear optimization”. In: *International Journal of Robotics Research* (Dec. 2014).
- [9] C. Forster et al. “On-Manifold Preintegration for Real-Time Visual-Inertial Odometry”. In: *IEEE Transactions on Robotics* 33.1 (2017), pp. 1–21. ISSN: 1552-3098. DOI: [10.1109/TR0.2016.2597321](https://doi.org/10.1109/TR0.2016.2597321).
- [10] Kevin Eickenhoff, Patrick Geneva, and Guoquan Huang. “Direct visual-inertial navigation with analytical preintegration”. In: *Robotics and Automation (ICRA), 2017 IEEE International Conference on*. IEEE. 2017, pp. 1429–1435.

- [11] M. Kaess et al. “iSAM2: Incremental Smoothing and Mapping Using the Bayes Tree”. In: *International Journal of Robotics Research* 31 (Feb. 2012), pp. 217–236.
- [12] A. I. Mourikis and S. I. Roumeliotis. “A multi-state constraint Kalman filter for vision-aided inertial navigation”. In: *Proceedings of the IEEE International Conference on Robotics and Automation*. Rome, Italy, 2007, pp. 3565–3572.
- [13] Tong Qin, Peiliang Li, and Shaojie Shen. “VINS-Mono: A Robust and Versatile Monocular Visual-Inertial State Estimator”. In: *arXiv preprint arXiv:1708.03852* (2017).
- [14] Yulin Yang et al. “Analytic Combined IMU Integration (ACI²) for Visual Inertial Navigation”. In: *2020 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE. 2020, pp. 4680–4686.
- [15] Kevin Eickenhoff, Patrick Geneva, and Guoquan Huang. “Closed-form Preintegration Methods for Graph-based Visual-Inertial Navigation”. In: *International Journal of Robotics Research* 38.5 (2019), pp. 563–586.
- [16] J.A. Hesch et al. “Consistency Analysis and Improvement of Vision-aided Inertial Navigation”. In: *IEEE Transactions on Robotics* PP.99 (2013), pp. 1–19. DOI: [10.1109/TR0.2013.2277549](https://doi.org/10.1109/TR0.2013.2277549).