



NETWORK TARIFF & NEGOTIATED SERVICES

Manual No. 18

Published: June 2014

SA Power Networks
www.sapowernetworks.com.au



Copyright © 2014 SA Power Networks.

This publication is copyright protected. SA Power Networks reserves to itself all rights in such material. You shall not reproduce any content of this document by any process without first obtaining SA Power Networks permission, except as permitted under the Copyright Act 1968.

All rights reserved.

DATE	EXPLANATION
3 September 2012	Company name changed from ETSA Utilities to SA Power Networks. No other content of this Manual has been altered. Any revision markings are from the August 2012 edition.
18 March 2013	- Section 9 - Page 65 Removed charges for pre-payment metering. - Page 68 added new Meter Test and Meter Inspection charges where a customer/retailer has requested an appointment. - Page 68 changed title category for PV Meter Test. - Page 73 changes wording for AH appointments back to original terminology of Priority Appointment.
June 2013	- Section 1 1.2 Terms & Definitions – added Excess kVAr charge. - Section 4 (4.3 Network Tariffs). - Section 5 (5.1 Marketing Types). - Section 7 (7.2 Process – Residential Customer, 7.3.3 Residential House – Meter/Tariff). - Section 8 (8.1 Excess kVAr Charges). - Section 9 Network Distribution Services - Added 9.3.3. - Section 10 Feeder Charges. - Section 11 Tariff Schedule.
October 2013	- Section 11 - Clarification to Sub-Transmission and Back-up Tariffs. - Section 12 – Added note 2 (p).
June 2014	- Section 1 – updated definitions. - Sections 8, 9, 11, 12 and 13 updated.

Contents

1. INTRODUCTION	6
1.1 Scope and Purpose	6
1.2 Terms and Definitions	6
1.3 Referenced Documents, Codes and Regulations	10
2. REQUIREMENTS OF THE NATIONAL ELECTRICITY RULES AND THE AER'S 2010 DISTRIBUTION DETERMINATION.....	11
3. TARIFF CLASS ASSIGNMENT PROCEDURES	11
3.1 Tariffs and Tariff Classes.....	11
3.2 Assignment of new customers to a tariff class.....	12
3.3 Reassignment of existing customers to another existing or a new tariff class during the next regulatory control period.	13
3.4 Objections to proposed tariff class assignments and reassignments	13
4. TARIFFS.....	14
4.1 General	14
4.2 Categories.....	16
4.2.1 Residential Use.....	16
4.2.2 Business Use.....	16
4.2.3 Combined Business/Residential Use.....	16
4.2.4 Controlled Load.....	17
4.3 Network Tariffs.....	17
4.3.1 Residential Tariffs.....	18
4.3.2 Business Tariffs – Energy Only	19
4.3.3 Business Tariffs – Demand	21
4.3.4 Solar Generation Tariffs	25
4.3.5 Un-metered.....	26
5. METERING	28
5.1 Market Types.....	28
5.2 Terminology.....	28
5.3 Regulated / Excluded / Contestable Meter Provision	30
5.4 NER Metering Requirements.....	31
5.5 Metering for Tariff Requirements	32
5.6 Parent / Child Metering.....	32
5.7 Meter Reading	33
6. NMIS.....	33
6.1 Background.....	33
6.2 NER Requirements.....	34

6.3	Allocation Process	34
6.4	NMIs and Meter Grouping	35
6.5	NMIs and Connections	36
6.5.1	Upgrades	36
6.5.2	New Supply	36
7.	PROCESS	37
7.1	General Principles	37
7.2	Process	38
7.2.1	NMI Allocation Check List for Upgrades	39
7.2.2	Meter Selection for New NMIs (Non Residential)	41
7.2.3	Meter Selection for Existing NMIs (Non Residential)	42
7.2.4	Demand Tariff Selection (LV)	43
7.3	Examples	44
7.3.1	Residential House – New Connection	44
7.3.2	Residential House – Alteration	44
7.3.3	Residential House – Meter / Tariff Change Request	45
7.3.4	Small Commercial – New Connection	46
7.3.5	Small Commercial – Alteration	46
7.3.6	Small Commercial – Meter / Tariff Change Request	47
7.3.7	Large Commercial – New Connection	48
7.3.8	Large Commercial – Alteration	49
7.3.9	Large Commercial – Meter / Tariff Change Request	50
7.3.10	Commercial – Meter / Tariff Change Request	50
8.	POWER FACTOR	52
8.1	Excess kVAR Charges	52
9.	NEGOTIATED DISTRIBUTION SERVICES	54
9.1	Basic Connection Services	54
9.1.1	Purpose	54
9.1.2	Discussion	54
	Basic Connection Services Indicative Price List	55
9.2	Negotiated Connection Services	62
9.2.1	Purpose	62
9.2.2	Discussion	62
	Negotiated Connection Services Indicative Price List	63
9.3	Negotiated Distribution Services (Non Connection)	64
9.3.1	Purpose	64
9.3.2	Discussion	64
9.3.3	Pre-payment Metering	64

Negotiated Distribution Services (Non Connection) Indicative Price List.....	65
Fees for Provision of Public Lighting	80
10. FEEDER CHARGES	83
10.1 Background to these charges	83
11. TARIFF SCHEDULE FOR 2014-15	84
Back up supply tariffs:.....	87
12. Notes Accompanying 2014/15 Tariffs.....	88
13. TARIFF MAPPING.....	91

1. INTRODUCTION

1.1 Scope and Purpose

SA Power Networks May 2010 Pricing Proposal has established five tariff classes into which the tariffs that its customers for direct control services have been separated:

- Major Business;
- High Voltage Business;
- Residential (including Controlled Load); and
- Metering Services.

SA Power Networks is required to assign a Network tariff to each of a customer's connection points, on the basis of a number of factors set out in the National Electricity Rules (the Rules) and procedures established by the AER. SA Power Networks is also permitted to reassign a customer's tariff class, if appropriate. This assignment and reassignment of customers to tariff classes is required by the Rules to be subject to an effective system of assessment and review.

This document sets out:

- The factors to be considered in assessing how customer connections are assigned to Network tariffs and tariff classes in a consistent and appropriate manner;
- The information that will be provided to customers concerning their tariff class assignment and reassignment;
- The process by which a tariff class assignment or reassignment may be reviewed and
- Default fees associated with basic connection services and negotiated services.

This Tariff Manual is published on SA Power Networks website and will be made available to any customer or intending customer upon request.

While this document's primary purpose is to describe Network tariffs, negotiated services and the process for their assignment, it also is designed to ensure that the NMI allocation and metering requirements are consistent, as a number of interdependencies exist between these three core areas.

1.2 Terms and Definitions

Note: Specific metering terminology is located in the metering section of the document.

Term	Definition
AEMO	Australian Energy Market Operator. Incorporates the functions of NEMMCO (National Electricity Market Management Company).
AER	Australian Energy Regulator.
Agreed Additional Demand	Is the amount that the Agreed Anytime Demand exceeds the Agreed Annual Demand. If the Agreed Anytime Demand is less than Agreed Annual Demand then the Agreed Additional Demand is zero.
Agreed Annual Demand	Is the highest demand expected to be required in the period 12:00 to 20:00 on working days in December through March (Central Standard Summer Time). This may be determined by agreement or by recorded demand.

Term	Definition
Agreed Anytime Demand	Is the highest demand expected to be required outside of the times that the Agreed Annual Demand applies. This may be determined by agreement or by recorded demand. This may be equal or higher than the Agreed Annual Demand but not less.
Augmentation	Means works to enlarge the capability of the SA Power Networks distribution network to distribute electricity.
Authorised Capacity	Is the supply capacity that the customer is authorised to use. This is generally the demand capacity specified in SA Power Networks offer letter up to the first three years from connection. The capacity then becomes the agreed demand and could be less than what was agreed to in the offer letter. Where a customer requests a reduction in their Agreed Demands then subject to approval the reduced Agreed Demands also becomes the Authorised Capacity.
Basic Connection Service	Means a connection service related to a connection (or proposed connection) no greater than 63 Amps per phase low voltage between SA Power Networks distribution system and a customer's premises (including a small embedded generator no more than 10kVA per phase and a total of 5kVA SWER connections). The provision of this connection service involves minimal or no augmentation of the distribution network.
Connection	Means a physical link between SA Power Networks distribution system and a customer's premises to allow the flow of electricity.
Connection Point	The physical location of connection between a customer's electrical installation and SA Power Networks distribution system assets.
Customer	Distribution Network User.
DLF	Distribution Loss Factor – measure of the percentage of energy lost through line losses on the distribution network between the transmission connection point and the customer connection point.
Entry Point	The physical point at which SA Power Networks distribution system (feeder) or the customer's consumers mains cross the property boundary operated or owned by the customer and where the energy flow is from the outside to the inside of the property.
Excess kVAr charge	If a customer installation is not power factor compliant at times of the NMI monthly peak demand, then an annual charge is applied. The charge equates to the amount of kVAr's required to make the site compliant times a fixed charge.

Term	Definition
Exit Point	The physical point at which SA Power Networks distribution system (feeder) crosses the customers property boundary operated or occupied by the customer and where the energy flow is from the inside to the outside of the property.
Expedited Connection	A basic connection service can be expedited by accepting both the Terms and Conditions of the MSO and the default price when the application is made.
Extension	This term applies to extending the distribution network into areas not previously supplied at that voltage. The extension is likely to be used by more customers than those initially being supplied. This includes building new HV mains above existing LV mains, new radial extensions of HV mains, LV mains and SWER lines and may include new transformers.
FRMP	Financially Responsible Market Participant ie the Retailer.
Indicative Price List	A set of default connection service charges that indicates the average price for the provision of each service. These charges do not apply if you choose a negotiated service.
kVA	kVA essentially represents demand. kVA includes both Active and Reactive power to give a better indication of the demand on an electrical supply system. (Apparent Power).
kW	Watts are the electrical unit of power, 1kW = 1,000 Watts – A measure of demand however this unit only includes the electrical properties that actually perform electrical work (Also known as Active or Real power).
kWh	The unit used for electrical energy consumed eg 1kW of load used for 1 hour equals 1kWh.
kVAr	The unit used for the measurement of reactive power.
LNSP	Local Network Service Provider – For customers directly connected to SA Power Networks distribution system the LNSP is SA Power Networks.
MDP	Metering Data Provider – the organisation responsible for collecting and ‘publishing’ meter readings or consumption data.
MLF	Marginal Loss Factor – a measure of the percentage of energy lost through line losses in the Transmission system compared to that lost in supplying the Reference Node.
Model Standing Offers (MSO)	Provides the Terms and Conditions of a basic connection service which have been approved by the AER.
MPB	Meter Provider – the organisation responsible for providing and/or maintaining the metering installation under the NER.
Negotiated Services	All services that are not a basic connection service.

Term	Definition
Negotiated Connection Services	Are all services that relate to a connection (or a proposed connection) between SA Power Networks distribution system and the customers premises but are not basic connection services.
Negotiated Distribution Services	Are all services that are not related to a connection (or a proposed connection) between SA Power Networks distribution system and the customer's premises.
NER	National Electricity Rules – formerly called NEC.
NMI	National Metering Identifier. A unique number for a customer's metered connection point or points. A customer may have more than one metered connection point; therefore a customer could have more than one NMI. A NMI is 10 characters long with an additional check digit eg SAAAAAXXXX / X or 200XXXXXXX / X
Off-peak Energy	Energy consumed that is other than peak energy.
Peak Energy	Energy consumed on business days between the hours of 0700 and 2100 (Central Standard Time). For customers with metering that does not recognise specific days, peak energy is energy consumed on each day between the hours of 0700 and 2100 (Central Standard Time).
PF	Power Factor is essentially a type of efficiency measure and is the ratio of Active and Apparent power. ie $PF = kW/kVA$.
PV	Photovoltaic.
PV JSO	This is a charge to recover the SA Government solar feed in subsidy provided to customers that qualify for the solar feed in tariff.
Real Estate Development	Means the commercial development of land including its development in one or more of the following ways: Residential, industrial or commercial subdivision; The construction of multi tenanted commercial or industrial premises (or both); The construction of multiple new residential premises ie multi tenanted apartment building.
RP	Responsible Person – the organisation responsible for managing a metering installation under the NER.
Sub-Transmission	Is the SA Power Networks 33kV backbone and 66kV network.
Sub-Transmission Tariff	To be eligible for a Sub-Transmission Tariff the customer must take direct supply from the SA Power Networks Sub-Transmission network.

Term	Definition
SWER	Single Wire Earth Return.
Termination Point	The physical point at which SA Power Networks distribution system (feeder) terminates within the customers property boundary.
URD	Underground Residential Development.
Zone Substation	A Zone Substation is an SA Power Networks premise in which HV supply is converted, controlled or transferred.
Zone Substation Tariff	To be eligible for a Zone Substation Tariff the customer must take direct supply from an SA Power Networks Zone Substation. The supply is taken from the secondary side of the transformer located at the substation.

1.3 Referenced Documents, Codes and Regulations

The following documents have been referenced in this Network Tariff & Negotiated Services manual:

- The South Australian Electricity Distribution Code ¹;
- South Australian Electricity Metering Code ²;
- National Electricity Rules ³;
- AER Final Determination for South Australia ⁴; and
- SA Power Networks Pricing Proposal ⁵.

¹ Available at: <http://www.aer.gov.au/node/11641>

² Available at: <http://www.escosa.sa.gov.au/library/101221-ElectricityMeteringCode EMT07.pdf>

³ National Electricity Rules Version 49, 5 April 2012.

⁴ Australian Energy Regulator, Final decision – South Australia distribution determination 2010-11 to 2014-15, May 2010.

⁵ SA Power Networks Pricing Proposal, April 2012.

2. REQUIREMENTS OF THE NATIONAL ELECTRICITY RULES AND THE AER'S 2010 DISTRIBUTION DETERMINATION

SA Power Networks May 2010 Pricing Proposal was prepared in accordance with Clause 6.18.2 of the Rules. That Pricing Proposal defined the five tariff classes into which the customers of its direct control services were separated.

Pursuant to the principles set out in clause 6.18.4 of the Rules, the AER agreed to assign all existing SA Power Networks customers to these five tariff classes in 2010/11.

Appendix B of the AER's Final Decision set out the procedures which SA Power Networks must follow in assigning customers to tariff classes or reassigning customers from one tariff class to another during the 2010-15 regulatory control period. The procedures also cover the following matters pertaining to tariff class assignment and reassignment:

- Assignment of new customers to a tariff class;
- Reassignment of existing customers to another existing or a new tariff class; and
- Objections to proposed assignments and reassignments.

3. TARIFF CLASS ASSIGNMENT PROCEDURES

This section sets out the tariff and tariff class assignment procedures to be followed by SA Power Networks 2014/15.

3.1 Tariffs and Tariff Classes

SA Power Networks regulated services are classified in accordance with the Rules as direct control services and include its network services and some metering services. These services have been further divided into:

- Standard control services (network services); and
- Alternative control services (certain specified metering services).

Each of these classifications of service is subject to separate regulatory determinations by the AER.

SA Power Networks 25 standard control services tariffs have been grouped into four tariff classes. This grouping is illustrated below.

SA Power Networks standard control services tariff classes

Type 1-4 meter Monthly billing	Type 5,6 meter		Type 7 (unmetered)
	Monthly billing	Quarterly billing	Monthly billing
Major business (11, 33, 66 kV) kVA demand (locational TUoS) kVA demand (loc'l TUoS) >10MW kVA demand Zone ZVS			
High voltage business (11 kV) kVA demand VHVS kVA demand VHLVS (<1000kVA) 2 rate B2R124HV			
Low voltage business kVA demand VLVS 2 rate B2R124	2 rate MB2R	2 rate QB2R	LVUU LVUU24 OUU
Low voltage residential MRSRI With cont. load MRSRCLI	MRSR With cont. load MRSROPCL	QRSR With cont. load QRSROPCL	

SA Power Networks alternative control services tariffs have all been grouped into a single tariff class. This arrangement is illustrated below.

SA Power Networks alternative control services tariff classes

Metering services tariff class
Meter provision type 6 DCC
Meter provision type 6 CTC
Meter provision Type 1–4 Exceptional
Meter service other meter provider customer
Meter service exit fee type 6 CTC
Meter service exit fee type 1–4

3.2 Assignment of new customers to a tariff class

Upon receipt of an Application for Connection/Alteration and Removal of Supply ([Form A](#)) for the provision of a new or altered network connection⁶, the SA Power Networks Project Officer responsible for managing the Application for Connection will determine the tariff and tariff class to be applied to the new or upgraded customer connection.

The tariff and tariff class to be assigned, or reassigned, to a customer will be chosen by the Project Officer in accordance with the requirements set out in Sections 4 and 5 of this Network Tariff & Negotiated Services manual. This tariff and tariff class assignment takes into account one or more of the following factors⁷:

- Customers with similar connection and usage profiles are treated equally; and
- Customers that have micro-generation facilities are not treated less favourably than customers with similar load profiles without such facilities.

⁶ Form A is available at: www.sapowernetworks.com.au/centric/contractors_and_designers/contractor_forms_and_guides.jsp

⁷ In the event that a future regulatory obligation requires remotely-read interval metering or other similar metering technology to be installed at the customer's premises, this procedure may be modified.

Customer notification of tariff class assignment

The Project Officer is responsible for notifying the retailer, customer or intending customer who lodged the Application to Connect, of the proposed network tariff and tariff class assignment. These details are to be provided together with SA Power Networks connection offer to the customer.

The connection offer will include the additional information set out in Section 3.4.

3.3 Reassignment of existing customers to another existing or a new tariff class during the next regulatory control period.

SA Power Networks Major Customer Manager is required to carry out a bi-annual review of the consumption of customer. This review is intended to identify whether:

- An existing customer's load or connection characteristics have changed, such that it is no longer allowable for that customer to be assigned to the current tariff class; or
- A customer no longer has the same or materially similar load or connection characteristics as other customers on the customer's existing tariff class.

In the event that this review identifies customers whose tariff class is no longer appropriate, then SA Power Networks Major Customer Manager may propose to reassign that customer to another tariff class.

Customer notification of tariff class reassignment

The Major Customer Manager is responsible for notifying any customers in writing of the proposed reassignment of their network tariff. If the identity of the customer is not known, then the customer's retailer is to be notified instead.

The tariff reassignment advice will include the additional information set out in Section 3.4.

One months notice is to be provided to the customer of a proposed tariff class reassignment.

3.4 Objections to proposed tariff class assignments and reassignments

Information provided to customers concerning tariff class assignment and reassignment

Where SA Power Networks notifies customers of a tariff class assignment or reassignment in Sections 3.1 and 3.2 above, such notification will include reference to the web address from which this Tariff Manual may be obtained and also include the following advice that:

- The customer may request further information from SA Power Networks Regulatory Manager;
- The customer may object in writing to SA Power Networks Regulatory Manager concerning the proposed tariff or tariff class assignment;
- In the event that the customer is not satisfied with SA Power Networks internal resolution of such an objection, the customer may be entitled to appeal to the Energy Industry Ombudsman (South Australia); and
- In the event that an objection is not resolved to the satisfaction of the customer under SA Power Networks internal review system, then the customer is entitled to seek resolution via the dispute resolution process available under Part 10 of the NEL.

Upon receipt of a request for further information concerning a tariff class assignment or reassignment, SA Power Networks Regulatory Manager is to arrange the provision of relevant information to the customer concerning the tariff class assignment or reassignment, provided that such information is not confidential.

Internal review process of tariff class assignment and reassignment

Upon receipt of an objection by a customer to a tariff class assignment or reassignment, SA Power Networks Regulatory Manager will reconsider the relevant tariff class assignment or reassignment, having regard to the following:

- The basis of the customer's objection;
- The principles for tariff assignment and reassignment set out in clauses 6.18.3 and 6.18.4 of the Rules;
- The procedures for tariff assignment and reassignment set out in Appendix B, of the AER's Determination; and
- The process and guidelines for tariff assignment and reassignment set out in Sections 3 and 4 of this Tariff Manual.

The Regulatory Manager will notify the customer of the outcome of SA Power Networks internal review and the reasons for accepting or rejecting the customer's objection to the tariff class assignment or reassignment. The notification by the Regulatory Manager will also advise that:

- In the event that the customer is not satisfied with SA Power Networks internal resolution of such an objection, the customer may be entitled to appeal to the Energy Industry Ombudsman (South Australia); and
- In the event that an objection is not resolved to the satisfaction of the customer under the SA Power Networks internal review system, then the customer is entitled to seek resolution via the dispute resolution process available under Part 10 of the NEL.

External review of tariff class assignment and reassignment

If a customer's objection to a tariff class assignment or reassignment is upheld by a relevant external dispute resolution body, then any adjustment which needs to be made to prices will be done by SA Power Networks as part of the next annual review of prices.

4. TARIFFS

4.1 General


A customer's retail electricity bill will generally comprise the following components, although particularly for smaller customers, these components may not be separately itemised:

- Retail charges;
- NEM charges;
- Network charges; and
- Metering charges.

Retail charges cover the cost of a retailer buying energy from the national pool or directly from a generator and selling it to the customer. The retail charge is the component that a customer negotiates a pricing plan for when entering into a market contract.

The components of a customer's retail electricity bill are shown in the following illustration. With regard to metering services, certain components of the metering service may be provided by SA Power Networks, may be supplied by the retailer or may be procured directly by the customer.

Components of a retail electricity bill

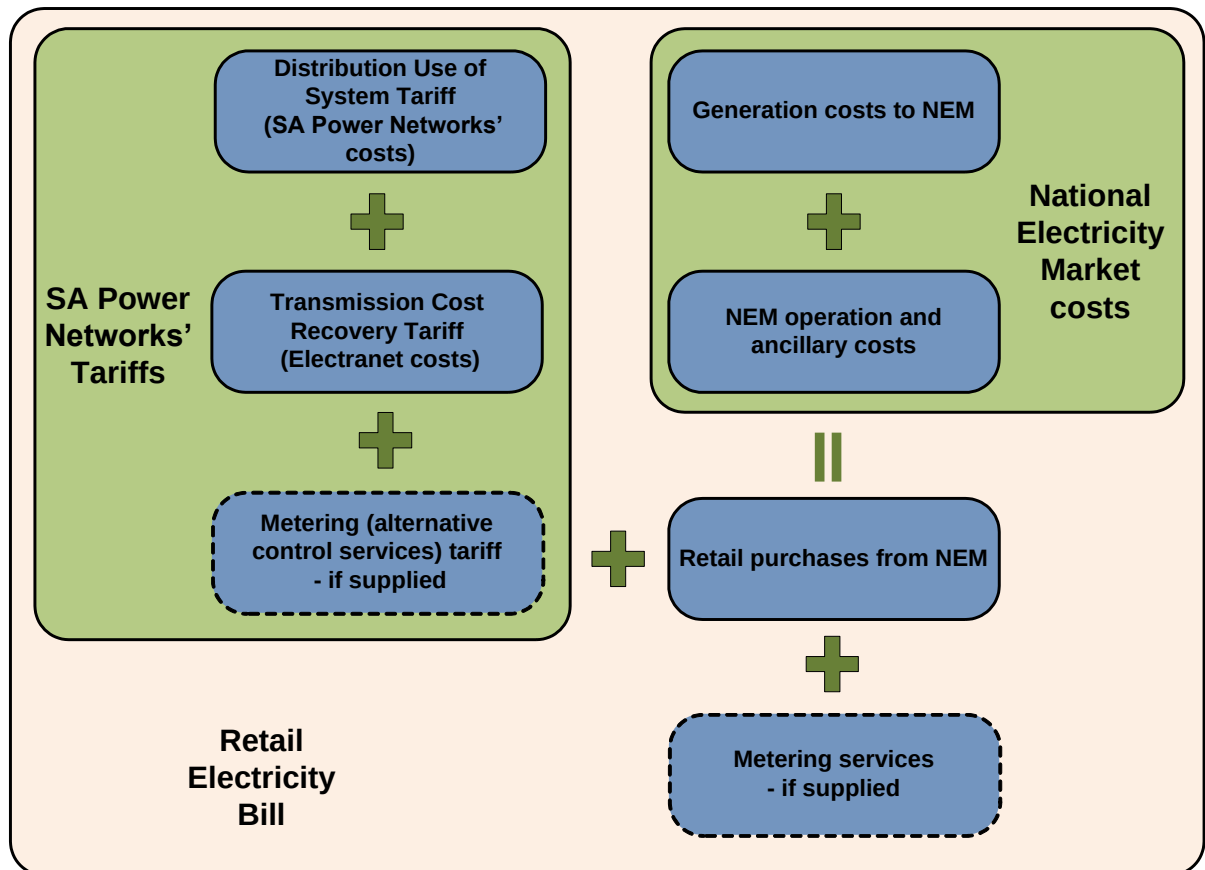

Network Tariffs are set in accordance with the requirements of:

- The Electricity Act;
- The NER; and
- The AER's Determination.

SA Power Networks is required to assign a network tariff and tariff class to each customer using the procedure set out in Appendix B of the AER's determination. In practical terms, the following factors determine the nature and extent of the customer's usage and the nature of the customer's network connection:

- Type of use (ie residential or business);
- The connection point characteristics (eg low or high voltage); and
- The maximum electrical demand.

Network tariffs include components for:

- Distribution (DUoS – Distribution Use of System);
- Transmission (TUoS – Transmission Use of System); and may also include
- Metering Services.

In some cases a network tariff is required to be assigned and in other cases the customer or retailer can elect a tariff subject to meeting eligibility criteria.

4.2 Categories

Tariffs are to be assigned subject to the requirements specified in the “Notes accompanying the Distribution Tariffs” as issued from time to time. Customers must advise SA Power Networks of their particular circumstances in order for the correct tariff(s) to be assigned (Distribution Code). For situations not specifically covered, the following general principles apply.

4.2.1 Residential Use

Residential use is electricity consumed by a Customer at a domestic dwelling and who lives in that dwelling. This may include consumption from an office located within the home so long as there is no more than one employee normally working within the dwelling. Note: For the purposes of this definition hired domestic help or carers are not to be considered employees.

Residential use can also include:

- Electricity used in outbuildings etc located on the same property as the Customers dwelling and where the primary use of the outbuilding is domestic;
- Short term accommodation provided due to the nature and location of the property eg shearing quarters (accommodation provided as term of employment); and
- Electricity used in the pumping of water for domestic use (or effluent) for a single premises of the same Customer and on the same property (or multiple premises where eligible for residential tariff – as above.

Residential use does not include:

- Boarding houses, nursing homes or accommodation of motel or bed and breakfast type ie short term accommodation or where a fee is charged for the use of facilities;
- A clearly public office or shop attached to a dwelling;
- Temporary supplies; and
- One metered connection for three or more independent (or semi independent) dwelling(s).

4.2.2 Business Use

Business use is electricity used for any purpose other than residential. This includes industrial, commercial, accommodation, hospitality and agricultural uses.

4.2.3 Combined Business/Residential Use

The customer is responsible for ensuring that facilities are provided for metering the use of electricity for each purpose. Where such facilities are impractical or not provided the distribution tariff can be assigned on the basis of majority use.

Where it is known that a connection to a dwelling is subject to dual business/residential usage (and separate metering can not be installed) then, in the absence of any detailed information, the category should be determined by the majority floor space usage of the building for which the electricity supply is provided for.

4.2.4 Controlled Load

Controlled load tariff is permitted to be used in conjunction with another tariff for specific thermal storage applications. Controlled Load tariff is available for new or existing supplies in conjunction with Residential Single Rate tariff or Low Voltage Residential single rate monthly demand tariff only. Where an existing supply has some other tariff in conjunction with Controlled Load then the combination may remain as is, however, if the customer seeks to change tariff or make alterations to their electrical installation (eg from BSROPLC to VLVS or shift of meter position) then they can no longer retain the OPCL component.

OPCL tariff is available for approved applications via a time switch controlled by SA Power Networks. The timing of night time availability is set in accordance with SA Power Networks requirements. If the customer requests any additional time (eg afternoon boost) then that is subject to approval from their retailer. Existing OPCL installations with afternoon boost are maintained with no change to their timing.

Where dual element system has switched OPCL supply for the bottom element and continuous OPCL supply for the top element then that arrangement can be retained as is. For new or additional OPCL installations continuous supply on OPCL tariff is no longer available only switched supply.

Approved applications of OPCL are permanently installed storage water heaters with a capacity of 125 litres or more, underfloor (slab heating), heat bank, swimming pool or spa heating. For swimming pool or spa applications only the heating element is permitted to be connected to OPCL, pumps and auxiliaries are to be on the accompanying tariff.

4.3 Network Tariffs

The network tariff is independent of any retail pricing plan, contract or tariff.

There are only a few core tariffs in each group with minor variants.

The variants allow for:

- Optional metering needs (eg type 1-5);
- Monthly/quarterly readings; and
- Combination with controlled load tariff.

The current tariffs and eligibility criteria are listed on the SA Power Networks internet and intranet sites: Please go to Section 11 for 2014/2015 Network Tariffs.

4.3.1 Residential Tariffs

Tariff Name	Tariff Description	Tariff Code
Low Voltage Residential - Single Rate	Low Voltage Residential - Single Rate - Quarterly	QRSR
	Low Voltage Residential - Single Rate Quarterly with Controlled Load	QRSROPCL
	Low Voltage Residential - Single Rate - Quarterly with Controlled Load - interval	QRSROPCLi
	Low Voltage Residential - Single Rate Quarterly interval	QRSRi
	Low Voltage Residential - Single Rate - Monthly	MRSR
	Low Voltage Residential - Single Rate – Monthly- with Controlled Load	MRSROPCL
	Low Voltage Residential - Single Rate – Monthly- with Controlled Load - interval	MRSROPCLi
	Low Voltage Residential - Single Rate Monthly interval	MRSRi
	Low Voltage Residential - Single Rate – type 1-4 meter	MRSRI
	Low Voltage Residential - Single Rate – type 1-4 meter with Controlled Load	MRSRIOPCL
	Low Voltage Residential - Single Rate – type 1-4 meter with Controlled Load interval	MRSRIOPCLi
	Low Voltage Residential - Single Rate – type 1-4 meter interval	MRSRIi
	Low Voltage Residential – Single Rate – Monthly Demand	MRMD
	Low Voltage Residential – Single Rate – Monthly Demand with Controlled Load	MRMDOPCL
OPCL	Controlled Load - Tariff Component	Included above

Note: A retailer may offer a residential customer a two rate contract which will require a two rate meter to be installed however, the network tariff will remain as RSR.

Note: For 2014/2015, SA Power Networks has introduced a monthly demand tariff (tariff codes MRMD and MRMDOPCL). This tariff is available to low voltage residential customers only (on an optional basis), and requires a type 1-4 or type 5 monthly read meter.

4.3.2 Business Tariffs – Energy Only

These tariffs are generally for business customers where the Service Capacity is <75kVA or 100 amps. They are not available to new customers with a service capacity or demand greater than 75kVA eg 100 amps. Existing customers between 75kVA or 100 amps and 250kVA connected before 1 July 2011 can remain on their existing tariff.

Not available to residential customers.

Business single rate tariffs have become obsolete tariffs only available to existing customers who remain on that tariff.

Tariff Name	Tariff Description	Tariff Codes
Obsolete tariff only available to existing customers connected before 1 July 2010 Low Voltage Business Single Rate	Low Voltage - Business - Single Rate - Quarterly	QBSR
	Low Voltage - Business - Single Rate – Quarterly with Controlled Load	QBSROPCL
	Low Voltage - Business - Single Rate – Quarterly with Controlled Load interval	QBSROPCLi
	Low Voltage - Business - Single Rate – Quarterly interval	QBSRi
	Low Voltage - Business - Single Rate - Monthly	MBSR
	Low Voltage - Business - Single Rate – Monthly with Controlled Load	MBSROPCL
	Low Voltage - Business - Single Rate – Monthly with Controlled Load - interval	BSROPCLi
	Low Voltage - Business - Single Rate – Monthly - interval	MBSRi
	Low Voltage - Business - Single Rate –Type 1 – 4 Meter	
	Low Voltage - Business - Single Rate –Type 1 – 4 Meter with Controlled Load	BSR124
	Low Voltage - Business - Single Rate –Type 1 – 4 Meter with Controlled Load - interval	BSR124OPCL
	Low Voltage - Business - Single Rate –Type 1 – 4 Meter - interval	BSR124OPCi
		BSR124i

Tariff Name	Tariff Description	Tariff Codes
Low Voltage Business - 2 Rate	Low Voltage Business - 2 Rate - Quarterly	QB2R
	Low Voltage Business - 2 Rate – Quarterly with Controlled Load	<i>QB2ROPCL *</i>
	Low Voltage Business - 2 Rate – Quarterly with Controlled Load - interval	<i>QB2ROPCLi*</i>
	Low Voltage Business - 2 Rate – Quarterly - interval	QB2Ri
	Low Voltage Business - 2 Rate - Monthly	MB2R
	Low Voltage Business - 2 Rate – Monthly with Controlled Load	<i>MB2ROPCL *</i>
	Low Voltage Business - 2 Rate – Monthly - interval	MB2Ri
	Low Voltage Business - 2 Rate Type 1-4 Meter	B2R124
	Low Voltage Business - 2 Rate Type 1-4 Meter with Controlled Load	<i>B2R124OPCL *</i>
	Low Voltage Business - 2 Rate Type 1-4 Meter with Controlled Load - interval	<i>B2R124OPCLi*</i>
	Low Voltage Business - 2 Rate Type 1-4 Meter - interval	B2R124i
	Low Voltage Business - 2 Rate Type 1-4 Meter - interval	B2R124N
Controlled Load - Tariff Component	Included above (subject to qualification	OPCL

* These combinations are only available to existing customers taking supply under this tariff arrangement prior to 30 June 2003.

Tariff Name	Tariff Description	Tariff Code
High Voltage Business - Two Rate	High Voltage Business - Two Rate	B2R124H
	High Voltage Business - Two Rate - interval	B2R124Hi

HV Business Two rate tariffs have become obsolete tariffs only available to existing customers who remain on that tariff.

4.3.3 Business Tariffs – Demand

These tariffs are for customers with a Service Capacity or an Agreed Maximum Demand > 70kVA or 100 amps. Customers on business two rate tariff connected at 30 June 2011 with a demand less than 250kVA will also be able to remain on the business two rate tariff provided that the customer does not alter their electrical installation or seek a tariff change (eg Solar installed requiring an embedded generation tariff or a shift of meter position).

These tariffs all require a Type 1-3 meter, or a Type 4 or Type 5 meter with kVAr functionality.

The setting of the agreed demand is a very important part of the tariff as this then becomes a contractual agreement with the customer for the capacity in kVA that is available to the NMI. The customer can negotiate changes to this agreed demand or capacity and there are processes for these requests. For sites that are still within the three year revenue rebate period, a demand reduction request will also require a negotiated change to the connection contract and this may result in a one-off charge. SA Power Networks Network Customer Manager or Customer Solutions need to be part of these negotiations.

If a customer requests a reduction in demand then they need to apply in writing and if their demand increases within 12 months of the change, then SA Power Networks will back date the increased demand network charges to the date of the reduction. If the customer increases demand beyond 12 month from the requested reduction in demand then normal processes will be followed and all charges and rebates will be applied.

If the customer wishes to increase their agreed demand or they breach their existing agreed demand, the customer manager will consult with Customer Solutions who will provide an offer letter with all applicable charges for the customer.

Tariff Name	Tariff Description	Tariff Code
Low Voltage Stepped Demand KVA	Low Voltage Stepped Demand KVA	VLVS
	Low Voltage Demand kVA Back-Up	VLVSB
	Low Voltage Demand Sportsground Lighting kVA	VLVSS
	Low Voltage Stepped Demand KVA - interval	VLVSi
	Low Voltage Stepped Demand KVA - interval	VLVSN
High Voltage - Stepped Demand KVA	High Voltage - Stepped Demand KVA < 1,000KVA	VHLVS
	High Voltage - Stepped Demand KVA < 1,000KVA - interval	VHLVSi
	High Voltage - Stepped Demand Sportsground Lighting KVA < 1,000KVA - interval	VHLVSSi
	High Voltage - Stepped Demand KVA	VHVS
	High Voltage - Stepped Demand KVA - interval	VHVSi
	High Voltage - Stepped Demand KVA - interval	VHVSN
Zone Sub-station (KVA)	Zone Sub-station (KVA) (load<10MW and consumption <40GWh pa)	VZS
	Zone Sub-station (KVA) (load<10MW and consumption <40GWh pa) - interval	VZSi
	Zone Sub-station (KVA) with locational transmission charges (the NMI numbers are shown on these tariffs)	VZSN
Sub Transmission (KVA)	Sub Transmission (KVA) with locational transmission charges (the NMI numbers are shown on these tariffs)	VSTN
High Voltage Obsolete (KVA)	High Voltage Obsolete (KVA)	VHVO*
	High Voltage Obsolete (KVA) - interval	VHVOi*

Note:

- There are a few variants used in the billing process to allow for some legacy situations without adversely affecting the customer.
- This Low Voltage Demand Sportsground Lighting kVA tariff is only for community sporting clubs with a large lighting load with a demand greater than 100 amps and less than 1,000kVA.
- For connections with very large usage where individual transmission charges apply XXX is replaced with the last three digits of the specific NMI.

Demand and Energy Time Periods

Annual Demand Period 12:00pm to 8:00pm on working days between Dec-March

December to March:

	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
1:00							
2:00							
3:00							
4:00							
5:00							
6:00	Anytime Demand Period						
7:00							
8:00							
9:00							
10:00							
11:00							
12:00	Annual Demand Period 1200-2000						
13:00							
14:00							
15:00							
16:00							
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
0:00							

Except on Public Holidays

Additional Demand is the difference between the Anytime Demand and the Annual Demand only when the result is positive i.e. where the Anytime Demand is greater than the Annual Demand.
Additional Demand = Anytime Demand - Annual Demand

Example:

Annual Demand = 157 kVA, Anytime Demand = 170 kVA

Additional Demand = 170kVA - 157kVA = 13 kVA

Peak Energy 7:00am to 9:00pm during working days

	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
1:00							
2:00							
3:00							
4:00	Off Peak Energy (kWh)						
5:00							
6:00							
7:00	Peak Energy (kWh) 0700-2100						
8:00							
9:00							
10:00							
11:00							
12:00							
13:00							
14:00							
15:00							
16:00							
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
0:00							

Residential Demand Tariff

Summer Peak Demand period applies in November-March

Winter Peak Demand period applies in April-October

Peak Demand period (always Local time):

	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
1:00							
2:00							
3:00							
4:00							
5:00							
6:00							
7:00							
8:00							
9:00							
10:00							
11:00							
12:00							
13:00							
14:00							
15:00							
16:00	Peak Demand (kW) 1600-2100						
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
0:00							

Sportsground Lighting Demand Tariff

Peak Demand period applies December to February only, Central Daylight Saving Time

December to February (Central Daylight Saving Time):

	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
1:00							
2:00							
3:00							
4:00							
5:00							
6:00							
7:00							
8:00							
9:00							
10:00							
11:00							
12:00	Peak Demand (kVa) 1200-1900						
13:00							
14:00							
15:00							
16:00							
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
0:00							

4.3.4 Solar Generation Tariffs

SA Power Networks is obliged by the provisions of the Electricity (Feed-in Scheme – Solar Systems) Amendment Act to provide a credit in accordance with the Electricity Act requirements for each kWh for power fed back into the grid generated by a qualifying Small Embedded Generator, (conditions apply, refer to the SA Government Energy website for more details). The system shall only measure export when the PV system output exceeds the instantaneous load requirements of the customers' load at the installation (Net metering).

General Requirements

- Customer needs to qualify for small market status (less than 160MWh per annum).
- Customer using an 'approved' inverter supplied via a solar panel array.
- Have an approved import / export meter.
- No other generation connected to the export meter.

Note:

- This includes both residential and business customers.
- Business customers that request an alteration via their electricity retailer (eg to install embedded generation) on an energy only business tariff with a capacity >75kVA or 100 amps will be shifted to a demand tariff as this is the applicable tariff for a customer with this capacity.

Tariff Name	Tariff Description	Tariff Code
Solar Co - Gen	Solar Co Generation	GENR GENR2028 GENR2028S GENR2016
	Solar Co Generation - interval	GENRi GENR2028i GENR2028Si GENR2016i
Zero Rate Solar Co Gen	Zero Rate Solar Co Gen	ZGENR XGENR
	Zero Rate Solar Co Gen - interval	ZGENRi XGENRi

Government Feed-in Tariff as per Electricity Act

Tariff Name	Tariff Rebate Description
GENR2028	The original Scheme which closed to new applicants in August 2010. The Scheme requires payments to qualifying generators of 44 cents per kWh for all export until 20 June 2028.
GENR2028S	The Scheme announced by the Government in August 2010, for all subsequent qualifying applications and installations till September 2011. The Scheme requires payments to qualifying generators of 44 cents per kWh for all export until 30 June 2028, up to a daily export of 45kWh.
GENR2016	The Scheme introduced by the Government during 2011 for all subsequent qualifying applications and installations from October 2011 to September 2013. The Scheme requires payments to qualifying generators of 16 cents per kWh for all export until 30 June 2016, up to a daily export of 45kWh.

4.3.5 Un-metered

The default supply is metered. Only where a load is too small (<5 amps) to register on a meter or where metering is deemed to be impractical by SA Power Networks, may a customer apply to have the load connected as un-metered. SA Power Networks is not under any obligation to accept an un-metered load until its suitability is established. In considering the suitability of a load for un-metered tariff SA Power Networks must be satisfied that the electrical usage can be accurately estimated and that the load will not vary.

General requirements

- Load to be located in a accessible public area (to permit inspection and validation);
- Load limiting circuit break with provision for SA Power Networks seal must be provided and the circuit breaker is to be set at the load level being requested eg 0.5 amps;
- Loads must be hard wired. Socket outlets are not permitted (unless specifically authorised by the responsible SA Power Networks manager for that specific application);
- The connected equipment must not be changed or altered without prior written notice to, and acceptance from SA Power Networks (other than repair or replace like for like ie same electrical ratings);
- The characteristics, timing or programming of the load must not be altered without prior written notice to and acceptance by SA Power Networks; and
- Equipment specifications, inventory tables and test results must be provided prior to a load being considered for connection.

There are many variants used in the billing process which primarily identify the type of un-metered load and the electrical rating. Irrespective of the billing tariff used the network (energy delivery) component is based on one of the two tariffs below. The billing tariff may include additional consideration for excluded services such as lamp replacement (CLER lighting).

Generic Tariff	Tariff Name
LVUU	Low Voltage Un-Metered Usage (Overnight Usage)
LVUUi	Low Voltage Un-Metered Usage (Overnight Usage) - interval
LVUU24	Low Voltage Un-Metered Usage (24 Hour Usage)
LVUU24i	Low Voltage Un-Metered Usage (24 Hour Usage) - interval

Type 7 Loads

Unmetered loads are described as having “Type 7” metering in the Rules and their consumption is estimated for the purposes of market settlements.

Approved Type 7 loads are contestable in the NEM ie choice of retailer. Type 7 load tables are published on AEMO’s website at <http://www.aemo.com.au/electricityops/640-0138.html>. The current approved Type 7 loads include loads of the following types:

- **Street lighting** – Where SA Power Networks owns and maintains the light fittings. The lighting is installed by SA Power Networks on SA Power Networks poles for illumination of public roads. This category also includes lighting standards installed to SA Power Networks specifications in URDs;
- **CLER** (Customer Lantern Equipment Rate) – Lighting for public areas where the customer (Council) own the luminaire and SA Power Networks has the responsibility for changing globes only;
- **Energy only** – Where the Council / Customer own the fitting and are responsible for all maintenance;
- Traffic signals; and
- **Traffic signalling equipment** – of a type specified in the approved Type 7 load tables.

The approval of a Type 7 load is dependent on the assessment of the load characteristics as well as the processes used to maintain an inventory of the loads. Consequently, only loads of types in the published load tables and belonging to approved deemed parties. The TUoS and DUoS charges are levied in accordance with the published network tariffs however, street lighting and CLER both require an additional component for provision of excluded services (eg lamp replacement with CLER) – the pricing for these services is termed negotiated and is described in Section 9 of this manual.

Other Un-Metered Loads

Other un-metered loads are not Type 7. These other loads include:

- Night sight lighting;
- Phone booths;
- Telstra CMUX; and
- Bus shelters.

These can only be with the Tier 1 retailer (AGL in SA). These loads all require individual consideration by the responsible SA Power Networks manager. There are many system codes used in CIS-OV as ‘tariffs’ – these are not separate tariffs as such rather just the above tariffs calculated as a fixed charge based on a load type. For the current list of system codes for un-metered loads refer to Revenue Management Group.

These un-metered loads may become contestable (as Type 7) at the request of the customer. This will require the development of load tables to meet the requirements of a type 7.

5. METERING


5.1 Market Types

Type	Description	Min Data Type As per NER	Provision
Type 1	Remotely read interval meter	Interval kWh & kVArh	Contestable
Type 2	Remotely read interval meter	Interval kWh & kVArh	Contestable
Type 3	Remotely read interval meter	Interval kWh & kVArh	Contestable
Type 4	Remotely read interval meter	Interval kWh	Contestable
Type 5R	Remotely read interval meter	Interval kWh	SA Power Networks Only
Type 5M	Manually read interval meter	Interval kWh	SA Power Networks Only
Type 6	Manually read basic meter	Basic kWh	SA Power Networks Only
Type 7	Virtual interval meter	Calculated Interval kWh	N/A
UMS*	Virtual basic meter	Calculated Basic kWh	N/A

* not actually a NEM meter type but listed to illustrate difference to type 7.

ie Type 1 is the highest class and Type 6 is the lowest class of meter.

5.2 Terminology

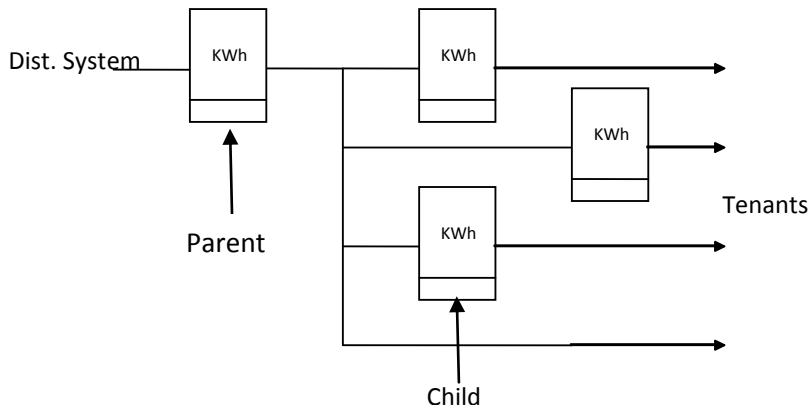Term	Description
Advanced	Electronic metering where additional functionality is provided. This may provide a user interface with additional information regarding daily use, peak usage, graphs, CO2 etc
Basic	A meter which records the usage as a cumulative total (like an odometer). May be single or two rate, may be rotating disc or electronic
Bulk Meter	Sometimes used to refer to as a parent meter in other cases the term is used in respect of a high voltage metering installation.
Child Meter	Where the meter is downstream of a parent meter. ie where electricity is resold eg larger shopping centres, caravan parks etc 

Term	Description
Combination Meter	A single meter which can separately meter several tariffs. Eg an EMS meter which is used for residential tariff and controlled load tariff.
CT Meter	Current Transformer (CT) connected metering is where the load current is too large to be practically passed through a whole current meter (ie where the load is greater than 100Amps). The load current is passed through Current transformers and the output current from the transformers is metered. The metered current is substantially smaller than the load current and its relationship is determined by the transformer ratio which is used to determine the K factor or multiplier.
Direct	A parent meter. Note: some may use the term to refer to whole current meters.
Electronic Meter	A meter where the current flow is measured by means of an electronic device with the reading or consumption data stored in electronic memory. May be Basic or Interval.
Import / Export	A meter which will record imported and exported energy in separate registers. As required for grid connected generators where a retailer buys the surplus energy generated by the customer.
Interval	A meter which records the usage in half hour intervals. This enables demand measurement and load profiles. Note – some meters use 15 minute intervals.
Master Meter	Refer parent meter.
Multi Phase	Where the meter can record the usage for the load on two or three active conductors.
Parent Meter	Where the meter is the first meter downstream from the distribution network.
PV metering	Is Import/ export metering.
Register	A set of dials, a counter or electronic memory used to store consumption data.
Rotating Disc Meter	A meter where the load current runs through a coil. This generates a magnetic field which drives a rotating disc at a speed proportional to the current flow. The disk drives a set of dials which records the total electricity used. These are Basic meters.
Single Phase	Where the meter records the usage for the load on one active conductor.
Single Rate Meter	A single register basic meter.
Smart	Not a defined term in the NEM. Market participants tend to use the term for Type 1-4 metering while media and residential customers generally use the term to refer to advanced metering.
Sub Meter	A Child meter.
Three Phase	Where the meter can record the usage for load on three active conductors.
Two Rate	A two register basic meter where the usage is recorded on a peak register at peak tariff times and the off-peak register during off- peak tariff times.
Whole Current	A meter where the entire load current runs though the meter.

5.3 Regulated / Excluded / Contestable Meter Provision

Types of metering

The different specifications of metering that are established in the NEM are provided as follows:

- **Type 1-4 metering** is a contestable service;
- **Type 5 metering** can only be provided by SA Power Networks as a negotiated service; and
- **Type 6 metering** can only be provided by SA Power Networks as a regulated (alternative control) service. Where a customer requests extra functionality eg advanced metering, that becomes a negotiated service).

Default fees for negotiated services are contained in Section 9 of this manual.

Responsibilities


In the National Market the retailer can be responsible for the metering or request that the distributor be the 'responsible person'.

The 'responsible person' (RP) commissions a registered meter provider to install the appropriate class of metering. The 'responsible person' is also charged with ensuring that metering installations are maintained to the standards required by the NER.

The Meter Provider is essentially an accredited metering contractor who undertakes the installation, maintenance and testing of the metering installation.

Refer to Section 3.7 for Child metering responsibilities.

Metering Responsibility / Choices

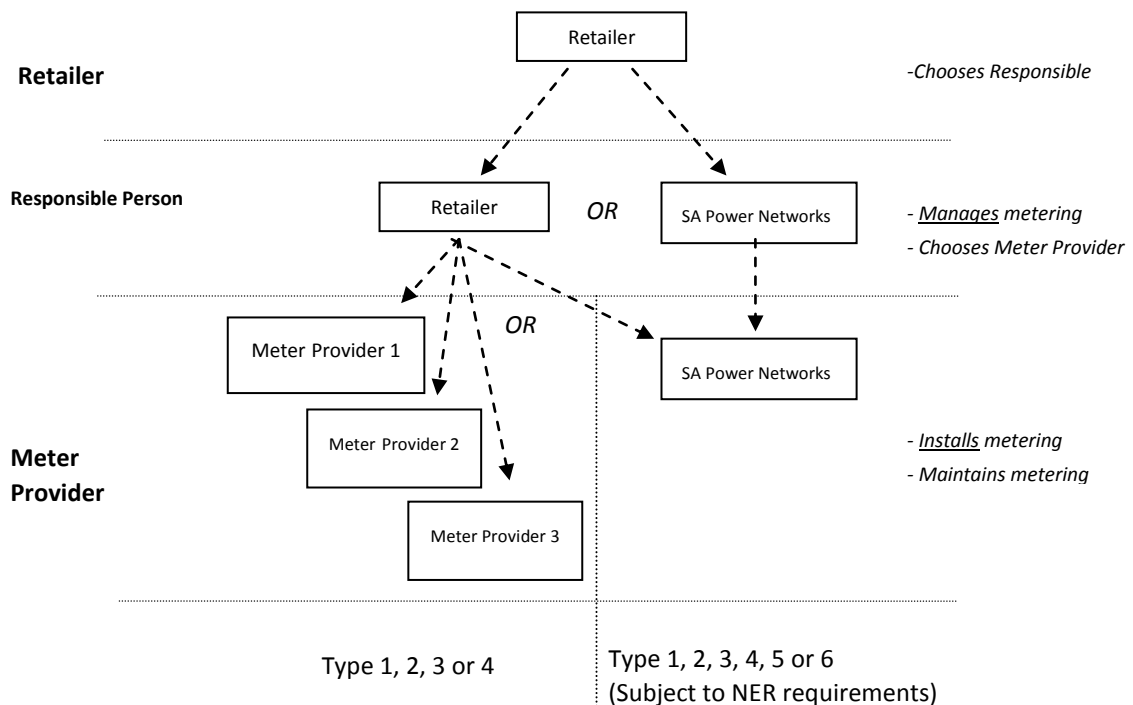

Note: Metering services group contract as installers (only) to some of the other meter providers.

5.4 NER Metering Requirements

The NER requires different accuracy classes for specified energy throughputs. The code also requires a Type 1-4 for all Tier 2 connections where the energy throughput is greater than 160MWh pa (160,000 kWh).

- An interval meter must not be replaced with a basic meter.
- The correct metering is determined on a case by case basis for each NMI.
- All metering at a NMI must be of the same type.

Tier 1 (Retailer AGL)

Energy Use	Minimum Meter Type	Installed By	Type Description	Alternative Types
>= 100GWh pa	Type 2	Contestable	Remotely read interval meter	1, 2
750MWh to 100GWh pa	Type 3	Contestable	Remotely read interval meter	1, 2
160 to 750MWh pa	Type 5M	SA Power Networks	Manually read interval meter	1, 2, 3, 4, 5R
0 to 750MWh pa	Type 6	SA Power Networks	Manually read accumulation (basic)	1, 2, 3, 4, 5R, 5M

Tier 2 (Retailer NOT AGL)

Energy Use	Minimum Meter Type	Installed By	Type Description	Alternative Types
>= 100GWh pa	Type 2	Contestable	Remotely read interval meter	1, 2
750MWh to 100GWh pa	Type 3	Contestable	Remotely read interval meter	1, 2
160 to 750MWh pa	Type 4	Contestable	Remotely read interval meter	1, 2, 3
0 to 160MWh pa	Type 5M	SA Power Networks	Manually read interval meter	1, 2, 3, 4, 5R
0 to 160MWh pa	Type 6	SA Power Networks	Manually read accumulation (basic)	1, 2, 3, 4, 5R, 5M

5.5 Metering for Tariff Requirements

Basic meters need to have the right register configuration to capture usage data applicable to each tariff rate.

With interval meters the data is collected as a 'table' and processed into individual rate periods or demand values in the various billing systems.

Tariff	Min Meter requirement	Acceptable Alternative Type
RSR	Type 6 with Single Register	Types 1, 2, 3, 4, 5R, 5M
BSR (obsolete)	Type 6 with Single Register	Types 1, 2, 3, 4, 5R, 5M
B2R	Type 6 with Two Registers	Types 1, 2, 3, 4, 5R, 5M
OPCL	As per associated tariff	
Any kVA based demand tariffs	Type 4 or 5 with additional kVA _r functionality	or Types 1,2, 3
Any kW based demand tariff eg WLV (obsolete)	Type 4 or 5 with additional kVA _r functionality	Types 1, 2, 3

5.6 Parent / Child Metering

In some situation (eg shopping centres) the end user purchases electricity from their landlord. This is usually done via a private child meter. Subject to regulatory requirements these end users can buy electricity from a retailer of choice.

Where the end user elects to contract to a retailer of choice their retailer will need to engage an authorised meter provider to install the suitable type of market metering. SA Power Networks connection and metering processes are for direct connection of customers to the distribution network and are not suitable for child metering purposes. Please note that network charges are only billed to the parent meters retailer and therefore the parent (landlord) will recover these charges from the child metered tenancies.

SA Power Networks does not manage connections or metering for child NMIs.

Customers seeking advice in relation to child metering and their rights should be referred to the website of The Essential Services Commission of SA for a copy of the 'Advisory Bulletin 1: Electricity Reselling'.

Where a service order is received in relation to child metering then a Network Customer Solutions Manager must be consulted.

Child metering must not be installed by SA Power Networks staff without specific authorisation from a Network Customer Solutions Manager. Customers wishing child metering should contact our Metering Services Manager for information and costing.

5.7 Meter Reading

Tariff	Min Meter requirement	Acceptable Alternative Type	Reading frequency	Billed
RSR	Type 6 with Single Register	Types 1, 2, 3, 4, 5R, 5M	90 days for type 5 & 6 Daily read for all other types	Generally quarterly billed
BSR	Type 6 with Single Register	Types 1, 2, 3, 4, 5R, 5M	Type 1 to 4 are read daily and type 5 & 6 can be read monthly or quarterly 90 days	Generally quarterly but larger sites can be monthly
B2R	Type 6 with Two Registers	Types 1, 2, 3, 4, 5R, 5M	Type 1 to 4 are read daily and type 5 & 6 can be read monthly or quarterly 90 days	Generally quarterly but larger sites can be monthly
OPCL	As per associated tariff		quarterly 90 days for type 5 & 6	Generally quarterly but larger sites can be monthly
Any kVA based demand tariffs	Type 4 or 5 with additional kVA functionality	or Types 1, 2, 3	Type 1 to 4 are read daily and type 5 can be read monthly or quarterly 90 days	monthly
Any kW based demand tariff eg WLV (obsolete)	Type 4 or 5 with additional kVA functionality	Types 1, 2, 3	Type 1 to 4 are read daily and type 5 can be read monthly or quarterly 90 days	monthly

6. NMIS

6.1 Background

Under the NER SA Power Networks is required to assign a 'National Metering Identified' (NMI) to each customer connection point. The NMI is the common identifier for the supply address, metering installation and account for each customer's supplies.

SA Power Networks registers its customers' NMIs and the relevant standing data in AEMO's MSATS (Market Settlement and Transfers System) which enables retailers and other market participants to obtain information about the NMIs for which they are responsible and thus undertake their responsibilities.

Information registered in MSATS includes:

- NMI;
- Address;
- Network Tariff;
- Distribution Loss Factor;
- Marginal Loss Factor;
- Market roles for the NMI ie:
 - Retailer (FRMP);
 - Responsible Person (RP);
 - Distributor (LNSP);
 - Meter Provider (MPB); and
 - Data Provider (MDP, MPC).

6.2 NER Requirements

The NMI is assigned to the unique combination of connection point (to distribution system) and customer premises. Should the connection point be changed eg through upgrade then a new NMI may be required.

The NMI remains with the installation as long as the metering and tenancy relationships remain in the initial configuration.

If a single tenancy is split into two each with individual direct meters, then new NMIs are required similarly when a supply is withdrawn (demolition) the NMI is retired permanently.

6.3 Allocation Process

A NMI is to be assigned to each individual connect/customer/tenancy combination.

Examples

Example & Tariff	No of connection Points	No of (direct) meters	No of customers / tenancies	No of NMIs	Notes
Single house RSR	1	1	1	1	
Single house RSROPCL	1	2 (1 RSR & 1 OPCL)	1	1	
House and granny flat RSROPCL x1	1	2 (1 RSR & 1 OPCL)	1	1	Not separately metered
House and granny flat RSROPCL x 2	1	4 (2 RSR & 2 OPCL)	2	2	Separately metered
High rise 50 x RSR 6 x B2R 1 x BSR	1	57	57	57	
House with 3 EMS RSROPCL x1	1	3	1	1	Combination meters for underfloor heating
5 Factory units supplied from 1 padmount transformer	1	5	5	5	

6.4 NMIs and Meter Grouping

Metering that can be grouped (or consolidated) on an individual NMI on application.

- Where it is known that the usage of a series of meters relates to common area usage (eg communal lighting) and all meters have the same point of connection to SA Power Networks distribution system.
- Metering located in the same meter box relating to one commercial or residential premise that was installed for old lighting and power tariffs (prior to 1970).
- Where SA Power Networks agrees to provide alternative metering arrangements for an individual premises (eg 3 x EMS for underfloor heating or Import/Export for photo voltaic) and the meters are connected to the same connection point).

Note: Controlled Load metering will always be associated with another meter. It shall be grouped with the meter that relates to the same customer and tenancy or outbuilding.


Grouping cannot be performed where:

- The premises are tenancies within a commercial office/retail complex;
- The metering relates to a number of individual independent residential premises;
- It is likely that changes in tenancies may occur;
- The retailers are different; and
- The metering types are different.

Where grouping cannot be undertaken the customer can however engage an electrical contractor (to transfer load) in order to reduce the number of metering points required.


The following example illustrates meter consolidation. Communal lighting meters in meter boxes A and B may be grouped as they relate to same connection point. Metering for tenancies 2 and 3 (each individually metered) can not be grouped due to the transient nature of the occupancies. The customer may undertake physical consolidation with the assistance of an electrician to transfer load to one meter with the subsequent removal of the redundant meter by SA Power Networks (or meter provider).

eg Retail or office complex

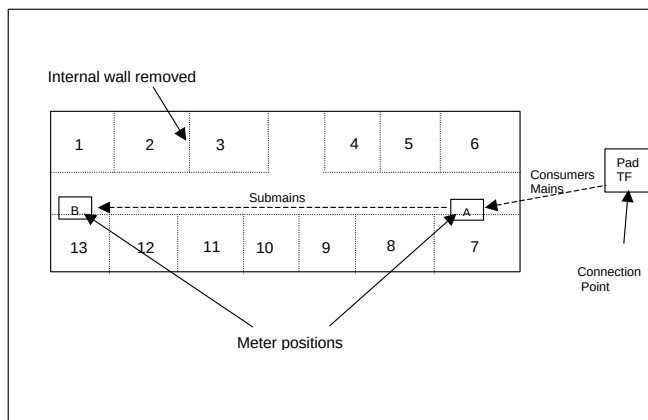

Where multiple meters relate to multiple tenancies or dwellings the metering must be assigned to separate NMIs; as explained by the following diagram:

eg Multiple residential

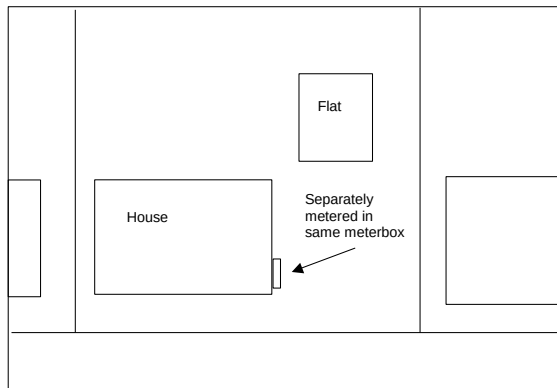

Note: The above arrangements must be in accordance with the Service & Installation Rules.

6.5 NMIs and Connections

Where connection work is undertaken the NMI allocation is likely to be affected.

6.5.1 Upgrades

Where an installation undergoes an upgrade the original NMI may remain where:

- The connection point location remains the same;
- The original supply is disconnected before the replacement is connected;
- There is no substantial change in the connection point characteristics.

Some examples of this would be:

- For an upgrade from 45 Amps to 63 Amps from the same pole; or
- A change of tariff and/or metering only (eg from single rate to two rate).

Slow Changeover

This is where a connection project involves the connection of the new supply while the original supply remains connected. By doing this the electrical contractor can transfer the customers circuits to the new supply one at a time and minimise the disruption to the customers business. Where this occurs a new NMI must be issued for the replacement supply and the original NMI will be discontinued when the original supply is disconnected.

In all other cases a new NMI is required. For example:

- Change from street service to padmount transformer service;
- Change from low voltage supply to high voltage; and
- Where a parent / child network is converted to direct metering.

6.5.2 New Supply

In all cases a new NMI is required.

Note: For Dual and back up supplies individual consideration for compliance with AEMO's NMI Allocation Procedure.

7. PROCESS

The tariff and metering is assigned to a NMI with unique consideration for the characteristics at the NMI. These characteristics are:

- Estimated or measured maximum demand;
- Estimated or actual annual energy throughput;
- Retailer (Tier 1 or 2);
- Physical configuration of the connection point;
- Changes to the connection point configuration;
- Existing tariff;
- Existing metering;
- Meter provider;
- Retailer / customer choice; and
- Type of installation.

7.1 General Principles

NMIs

For purposes of tariffs and metering selection a new supply will be referred to as 'New NMI'. For an alteration a decision has to be made as to whether the altered or replacement connection is to be considered as a 'New NMI' or as an altered NMI.

Metering

An interval meter must not be replaced with basic meter (SA Metering Code).

All meters for a NMI must be the same type (ie Type 6, Type 5, or Type 1-4).

All newly installed interval meters are charged to the customer via the normal periodic bill (via retailer).

The responsibility for metering is determined by market rules on a connection by connection basis.

Where SA Power Networks is not the meter provider a type 1-4 meter will be installed by the other provider.

A tier 2 (Non AGL retailer) connection with estimated or actual energy use >160MWh pa requires type 1-4 meter (NER).

SA Power Networks Metering Charges

Type	Description	Required for Tier 1 (AGL)	Required for Tier 2 (non AGL)	Typical Cost to Customer Refer to Default Fees in Section 9 of this manual
1-4	Remotely read interval meter	Demand >250kVA	Demand >250 kVA OR Usage >160MWh pa	
5	Manually read interval meter	Demand <250 kVA	Usage <160MWh pa	
6	Basic, Accumulation meter	Demand <250 kVA	Usage <160MWh pa	Install* \$0 Annual \$0

**Note: charges apply for additional functions eg import / export, replace rotating disc with electronic for customer convenience, temporary supplies, pulse output etc – refer Section 9.*

Tariffs

A demand tariff requires a type 1-4 or type 5 meter.

A business NMI with a demand greater than 75kVA or 100 amps requires a demand tariff.

For new supplies, a controlled load tariff is only permitted with a residential tariff. For existing supplies the addition of controlled load tariff is only permitted with a residential single rate tariff (RSR).

7.2 Process**Residential Customer**

For residential installations the tariff will be RSR with or without the OPCL option.

The meter type will be the highest class of what is currently installed and what is requested. (Highest is type 1-4, lowest is type 6).

For all single residential installations a type 6 meter is adequate, but if the residential customer has a capacity >100amps and has a CT metered installation, then type 5 meter is required unless a higher class of meter is either already installed or requested.

Where the retailer requests a Two Rate meter, the meter (type 5) can be provided (charges apply), however, the Network Tariff will remain as RSR (Network tariffs must be applied as per the rules while retailers are free to offer 'flexible' plans – the meter must be able to adequately capture the data to satisfy both pricing requirements).

Non Residential Customer

ie commercial, rural, industrial, accommodation etc.

Steps

1. Determine whether the project will require a new NMI, Section 5.2.1.
2. For non residential refer to the relevant flowchart to select meter type and tariff class:
 - New NMI 5.2.2.
 - Existing NMI 5.2.3.
3. If demand tariff is required then refer to section 5.2.4 for tariff selection.


For any new or upgraded CT metered non residential installation, the minimum class of metering required is type 5.

Multiple Customers

For multiple customer supply (ie where each tenant contracts directly to their own chosen retailer) the metering and tariff requirements are determined individually for each particular tenancy / metering point / NMI.

The estimated demand and energy figures in 5.2.2 and 5.2.3 refer to the estimates for each separately metered tenancy and not the total aggregate supply.

7.2.1 NMI Allocation Check List for Upgrades

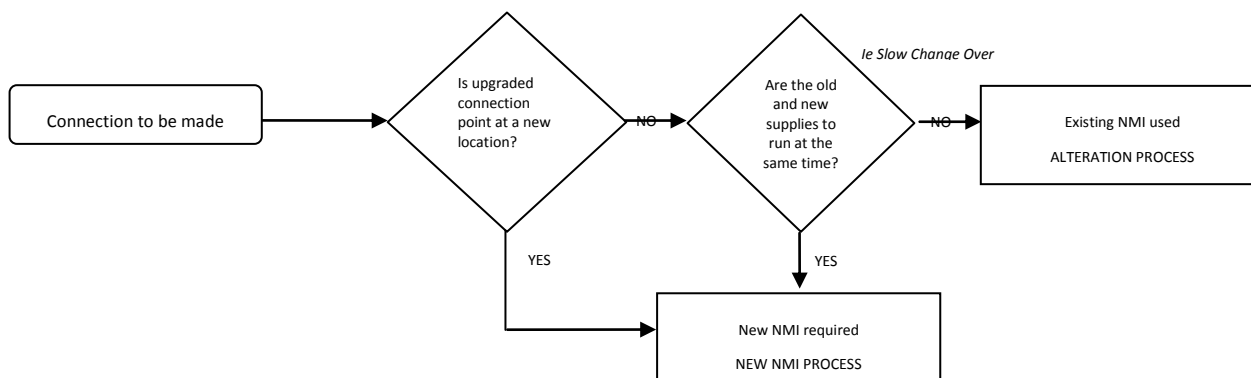

Specific Examples

If any of the criteria are met with a resulting action of “New NMI required” then that is the required action.


Criteria	Description	NMI Action	Example
New Connection Point	A new supply at a new site.	New NMI required	New padmount
Additional Connection Point	An additional supply at a different or adjacent location on an existing site.	New NMI required *	New padmount to independently feed additional building on industrial site.
New connection point location	Where the connection point is relocated to a different pole or pit.	No change	PLEC, Service relocation, upgrade from street feed to pad mount supply
Slow Changeover - Additional or replacement connection	Existing and new supplies run simultaneously throughout a portion of the changeover period	New NMI required *	Upgrade where continuous supply is maintained.
Whole Current to Whole Current (meter relocation)	Meter relocated to new location/enclosure	No Change	Domestic meter relocation (inside to outside)
Whole Current to CT Metered	Increase in load	No Change	Upgrade of installation (same connection point used)
CT to Whole current	Reduction in load	No Change	Downgrade of installation (same connection point used)
CT Ratio Change	Increase in load	No Change	Transformer ‘swap’ (same pad)

Criteria	Description	NMI Action	Example
Relocate CTs	Physical location of CTs altered	No change	Relocation of switchboard
Consolidation of meters	Removal of surplus meters (where already grouped on one NMI)	No Change	Consolidation of meters or surplus tariff
Additional Meter with no change in use type ** (ie no change between business and residential)	Addition of meter for tariff not previously on NMI or Addition of meter due to supply/ tariff requirements	No Change	J Add, Or 3x EMS for underfloor or PV import metering
Additional Meter	New tenancy within existing installation.	New NMI required	Multistorey offices - portion of floor redistributed to new tenant Shop subdivided into 2
Upgrade consumers mains	Replacement for maintenance or increase in load	No change	Replacement of damaged consumer's mains.


** Refer to Network Customer Manager for case by case decision for supplies where the existing NMI has multiple meters.*

*** Subject to tariff eligibility criteria.*

7.2.2 Meter Selection for New NMIs (Non Residential)

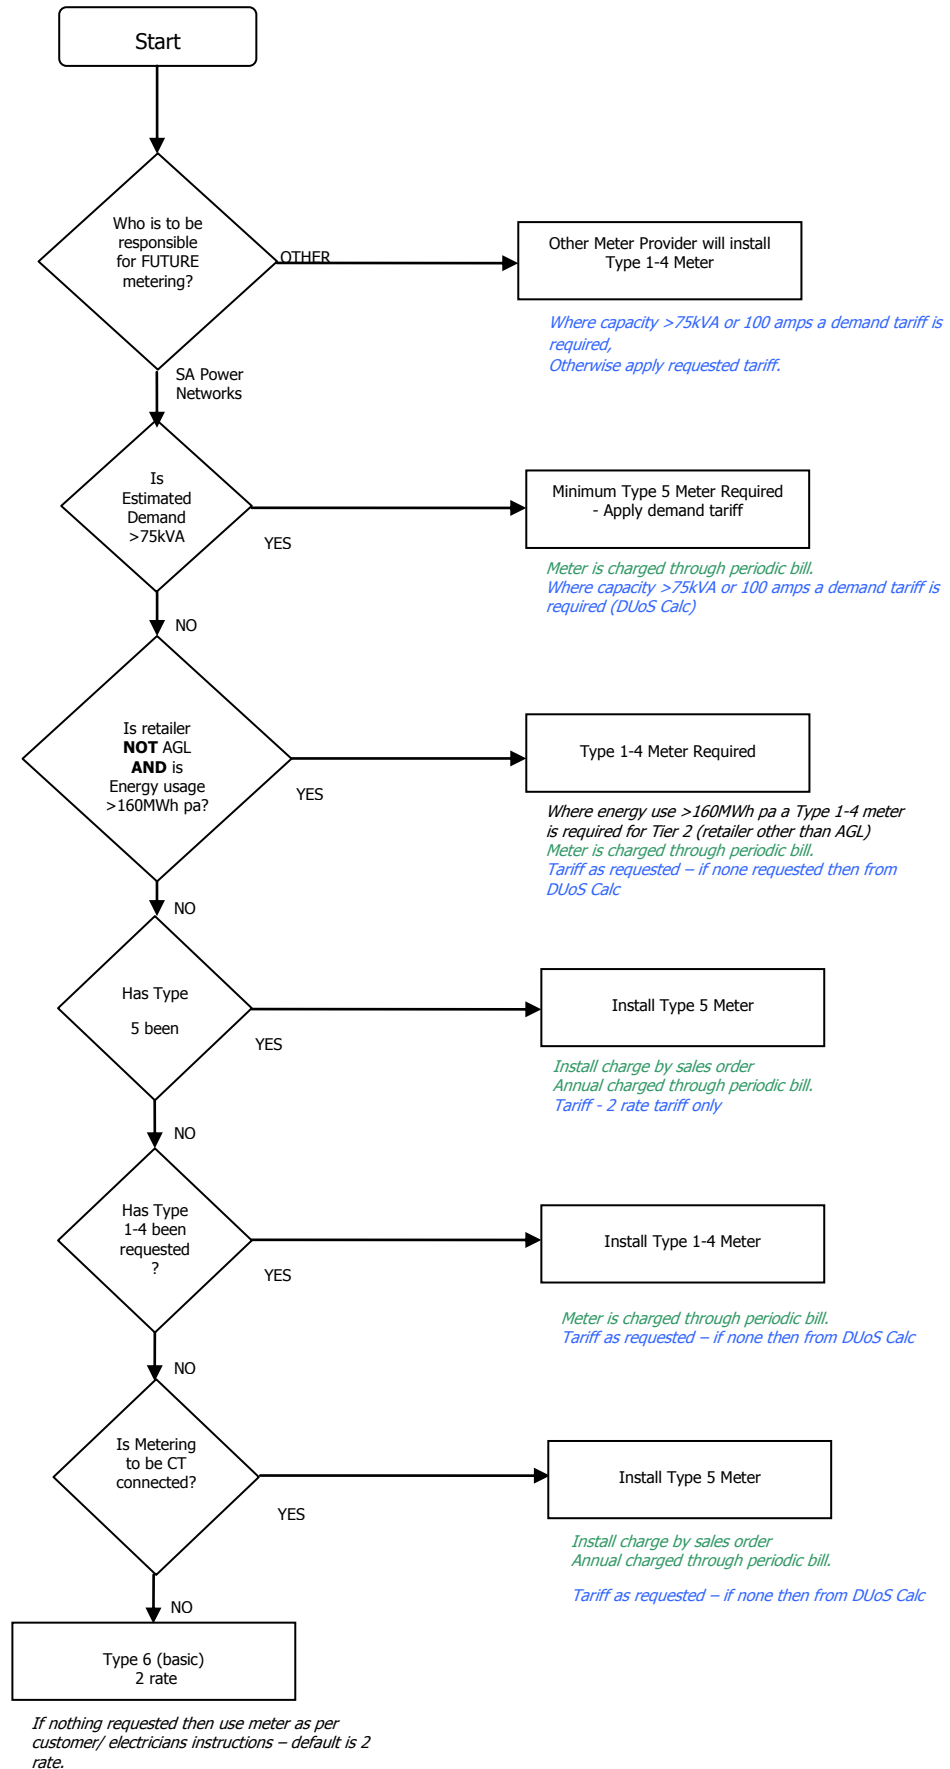


7.2.3 Meter Selection for Existing NMIs (Non Residential)

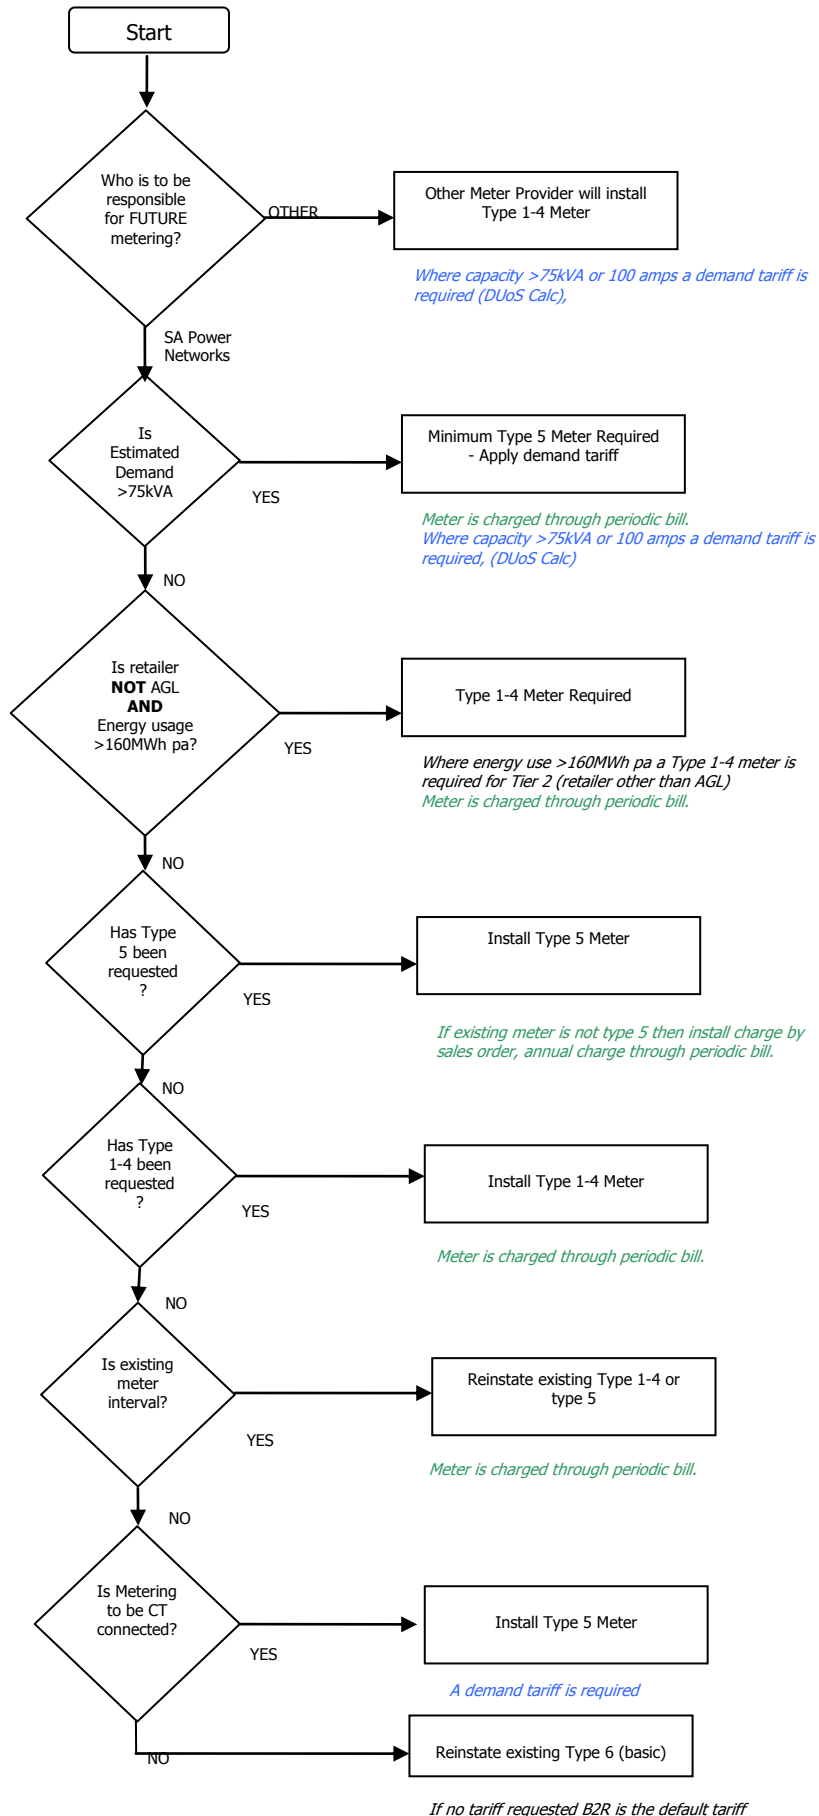

7.2.4 Demand Tariff Selection (LV)

The following flowchart can be used for determining the tariff for low voltage connections where the estimated demand is greater than 75kVA or 100 amps and therefore requiring a demand tariff to be applied. Decisions regarding the applications high voltage tariffs should be referred to a Customer Manager or Manager Regulation.

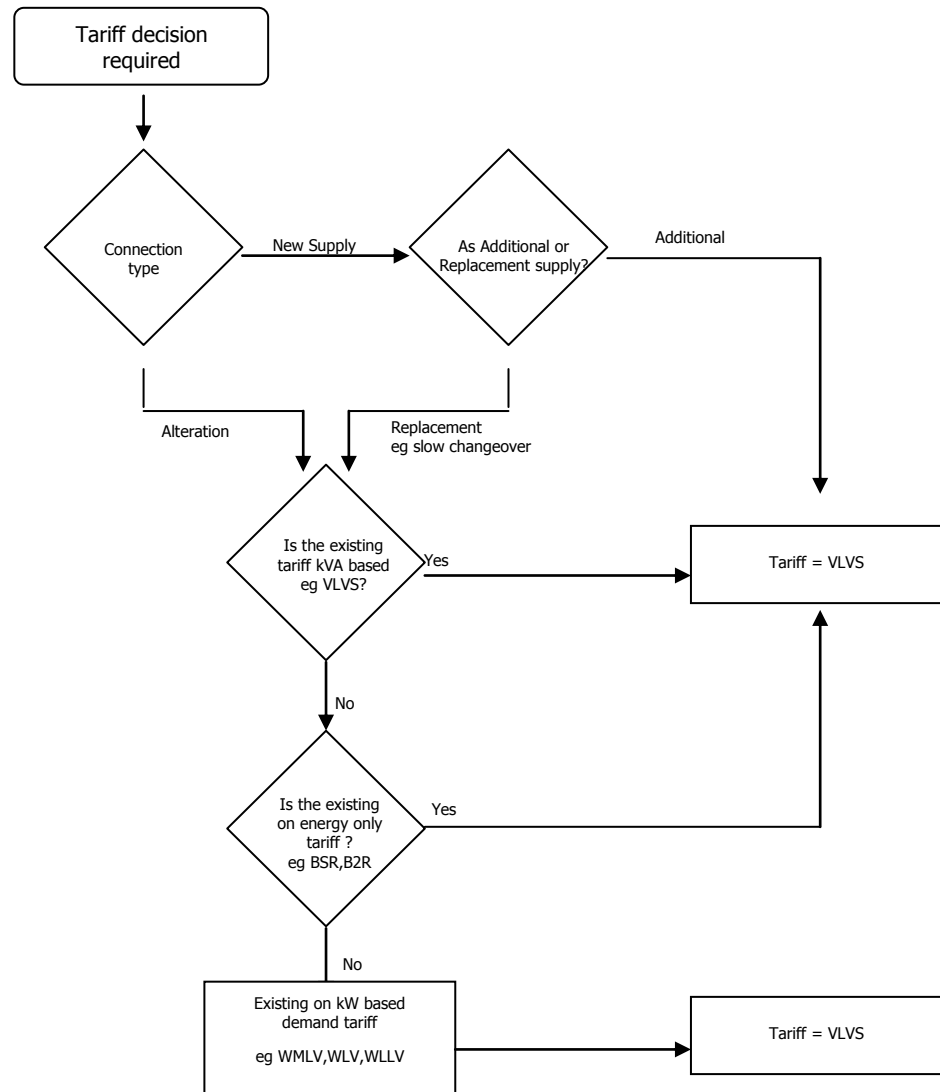

7.3 Examples

7.3.1 Residential House – New Connection

Job Type	New Supply	
Installation Type	Residential	

Retailer request	Current	Requested
Retailer	-	TRU
Meter Provider	-	SA Power Networks
Meter Type	-	Type 6
Tariff	-	QRSROPCL

Project Info	Value	Source
Estimated Demand	60 Amps 1ph (ie14kVA)	Form A / B or SIF
Estimated Energy	Not known	
Service Info	New supply from pit	

Assessment	Action	Reason
NMI	New	
Tariff	QRSROPCL	
Meter	Type 6 – Combination meter	

Comments: As the supply is for a residential premise the tariff will be RSR. Although the energy use is not known it is safe to assume the energy used for conventional residential premises is less than 160MWh per annum and therefore a type 1-4 meter is not required (the average usage for single residential premises is SA is around 5MWh pa for RSR and 8MWh pa for RSROPCL).

7.3.2 Residential House – Alteration

Alteration for new meter position and increase in maximum demand.

Job Type	Alteration	
Installation Type	Residential	

Retailer request	Current	Requested
Retailer	Origin	Origin
Meter Provider	SA Power Networks	SA Power Networks
Meter Type	Type 6	Type 6
Tariff	QRSROPCL	QRSROPCL

Project Info	Value	Source
Estimated Demand	50 Amps 1ph (ie12kVA)	Form A / B or SIF
Estimated Energy	Not known	
Service Info	Replace o/h service with o/u on pole	

Assessment	Action	Reason
NMI	Existing	Old supply is removed before replacement connected and supply from same pole.
Tariff	QRSROPCL	No change requested or required
Meter	Type 6	No change requested or required

7.3.3 Residential House – Meter / Tariff Change Request

Job Type	Meter Work	
Installation Type	Residential	

Retailer request	Current	Requested
Retailer	AGL	AGL
Meter Provider	SA Power Networks	SA Power Networks
Meter Type	Type 6	Type 5 – 2 rate
Tariff	QRSR	QR2R

Project Info	Value	Source
Estimated Demand	Not known	
Estimated Energy	Not known	
Service Info	Existing	

Assessment	Action	Reason
NMI	No Change	
Tariff	QRSR	There is no residential 2 rate Network tariff however a retailer is able to offer a 2 rate Retail tariff.
Meter	Type 5 – Two rate	

Comments: If a retailer does offer a two rate tariff then the meter will need to be changed to accommodate this (costs as per Section 9). The network tariff however, will remain as RSR ie the meter needs to be suitable or better than the network tariff requirement.

7.3.4 Small Commercial – New Connection

Job Type	New Supply	
Installation Type	Commercial	

Retailer request	Current	Requested
Retailer	-	Aurora
Meter Provider	-	SA Power Networks
Meter Type	-	Type 6
Tariff	-	QBSR

Project Info	Value	Source
Estimated Demand	60 Amps 1ph (ie14kVA)	Form A / B or SIF
Estimated Energy	Not known	
Service Info	New supply from pit	

Assessment	Action	Reason
NMI	New	
Tariff	QB2R	
Meter	Type 6	

Comments: As the capacity/demand is clearly less than 75kVA or 100 amps a demand tariff is not required.

7.3.5 Small Commercial – Alteration

Alteration for new meter position and increase in maximum demand.

Job Type	Alteration	
Installation Type	Commercial	

Retailer request	Current	Requested
Retailer	Origin	Origin
Meter Provider	SA Power Networks	SA Power Networks
Meter Type	Type 6	Type 6
Tariff	QB2R	QB2R

Project Info	Value	Source
Estimated Demand	100 Amps 3ph (ie75kVA)	Form A / B or SIF
Estimated Energy	Not known	
Service Info	Replace 3ph o/h service with 100 o/u on pole	

Assessment	Action	Reason
NMI	Existing	Old supply is removed before replacement connected and supply from same pole.
Tariff	QB2R	No change requested or required
Meter	Type 6	No change requested or required

Comments: As the capacity/demand is clearly less than 75kVA or 100 amps a demand tariff is not required. Even though the future energy use is not known, it is safe to assume that it will be less than 160MWh pa for a less than 100Amp connection.

7.3.6 Small Commercial – Meter / Tariff Change Request

Job Type	Meter Work	
Installation Type	Commercial	

Retailer request	Current	Requested
Retailer	AGL	AGL
Meter Provider	SA Power Networks	SA Power Networks
Meter Type	Type 6-	Type 6 – 2 rate
Tariff	QBSROPCL	QB2ROPCL

Project Info	Value	Source
Estimated Demand	Not known	
Estimated Energy	Not known	
Service Info	Existing	

Assessment	Action	Reason
NMI	No Change	
Tariff	QB2R	As the customer does not currently have OPCL with B2R they are not eligible for the tariff. The customer change to B2R tariff.
Meter	Type 6 – Two rate	As required by selected tariff

Comments: As the customer does not currently have OPCL with B2R they are not eligible for the tariff. The customer must change to B2R for network tariff as the BSR tariff is obsolete.

7.3.7 Large Commercial – New Connection

Job Type	New Supply	
Installation Type	Commercial	

Retailer request	Current	Requested
Retailer	-	TRU
Meter Provider	-	SA Power Networks
Meter Type	-	Type 6
Tariff	-	QB2R

Project Info	Value	Source
Estimated Demand	600kVA	DUoS Rebate estimate
Estimated Energy	1300MWh pa	DUoS Rebate estimate
Service Info	New supply from new padmount	

Assessment	Action	Reason
NMI	New	
Tariff	VLVS	Capacity/Demand greater than 75kVA or 100 amps therefore demand tariff required.
Agreed Demand	600kVA	Required for demand tariff use ADMD (ie demand from DUoS rebate)
Meter	Type 1-4	Type 1-4 required for demand tariff and Type 1-4 required because estimated energy use greater than 160MWh pa.

7.3.8 Large Commercial – Alteration

Alteration for new meter position and increase in maximum demand. The old connection will be remaining connected for approximately one week to minimise disruption to the customer while the contractor transfers load to the new connection.

Job Type	Alteration	
Installation Type	Commercial	

Retailer request	Current	Requested
Retailer	Origin	Origin
Meter Provider	Infomet	Infomet
Meter Type	Type 1-4	
Tariff	VLVS	VLVS

Project Info	Value	Source
Estimated Total Demand	600kVA (570kW)	DUoS Rebate estimate
Estimated Energy	1300MWh pa	DUoS Rebate estimate
Service Info	New padmount installed for increased demand	

Assessment	Action	Reason
NMI	New NMI and abolish old NMI	Replacement supply is from different connection point and old supply will still be connected when replacement energised.
Tariff	VLVSi	KVA tariff is applied to the new NMI.
Agreed Demand	600KVA	kVA demand .
Meter	Type 1-4	Type 1-4 required due to demand tariff and other meter provider can only install Type 1-4.

Comments: Where the customer installs power factor correction as part of the upgrade process the customer should be advised to submit a tariff change request via their retailer. Validation of correct power factor is incorporated in the tariff change process.

7.3.9 Large Commercial – Meter / Tariff Change Request

Customer is downgrading site from production to warehousing. Want to save on metering and demand charges.

Job Type	Meter work	
Installation Type	Commercial	

Retailer request	Current	Requested
Retailer	Powerdirect	Powerdirect
Meter Provider	Powerdirect	SA Power Networks
Meter Type	Type 1-4	Type 5
Tariff	VLVS	MB2R

Project Info	Value	Source
Estimated Demand	Existing Agreed Demand 320kVA Future requirement 100kVA	CIS OV or NESS for current Form A or tariff change form for future
Estimated Energy	100MWh pa	CIS OV or NESS (look at usage since production ceased scaled for annual)
Service Info	Existing	

Assessment	Action	Reason
NMI	No Change	
Tariff	VLVS	As reduced Agreed demand is greater than 75kVA or 100 amps a demand tariff is mandatory.
Meter	Type 5	Ok to downgrade meter as energy less than 160MWh pa – cannot go to type 6 due to non reversion requirement.

Comments: The reduction of agreed maximum demand needs to be approved by Customer Manager (tariff change process) before tariff or meter can be changed. The customer remains on VLVS with an agreed capacity/demand of 100kVA.

7.3.10 Commercial – Meter / Tariff Change Request

Customer is downgrading site from production to warehousing. Want to save on metering and demand charges and propose to limit load to < 100amps.

Job Type	Meter work
Installation Type	Commercial

Retailer request	Current	Requested
Retailer	Powerdirect	Powerdirect
Meter Provider	Powerdirect	SA Power Networks
Meter Type	Type 1-4	Type 5
Tariff	VLVS	MB2R

Project Info	Value	Source
Estimated Demand	Existing Agreed Demand 320kVA Future requirement 70kVA controlled by meter isolator	CIS OV or NESS for current Form A or tariff change form for future
Estimated Energy	100MWh pa	CIS OV or NESS (look at usage since production ceased scaled for annual)
Service Info	Existing	

Assessment	Action	Reason
NMI	No Change	
Tariff	VLVS	As reduced Agreed demand is less than 75kVA or 100 amps a change to Business two rate tariff is acceptable
Meter	Type 5 whole current meter	Ok to downgrade meter as energy less than 160MWh pa – cannot go to type 6 due to non reversion requirement.

Comments: The reduction of agreed maximum demand needs to be approved by Customer Manager (tariff change process) before tariff or meter can be changed. The customer can change to business two rate but load limited and using a whole current meter.

8. POWER FACTOR

8.1 Excess kVAr Charges

Customers must comply with the South Australian Distribution Code requirements in particular Part B Connection and Supply Contract Power Factor. If a customer installation is not compliant at times of their monthly peak demand then an annual charge is applied of \$47.50 per kVAr excluding GST that SA Power Networks calculates that would be required to make the site compliant.

NMI	Excess kVAr 2014/15 excl GST \$ pa	NMI	Excess kVAr 2014/15 excl GST \$ pa	NMI	Excess kVAr 2014/15 excl GST \$ pa
2001000050	\$1,080	2001679263	\$2,517	2002138235	\$2,211
2001000238	\$1,297	2001680160	\$1,148	2002147430	\$974
2001000247	\$1,373	2001682184	\$2,276	2002149755	\$1,688
2001000264	\$5,228	2001692061	\$2,447	2002150864	\$2,066
2001000367	\$1,180	2001693002	\$1,494	2002165011	\$1,084
2001000371	\$4,137	2001693979	\$1,470	2002171029	\$2,380
2001000381	\$10,640	2001695197	\$1,725	2002175466	\$985
2001000409	\$5,080	2001701898	\$1,765	2002175831	\$1,131
2001000514	\$1,519	2001705303	\$1,901	2002185358	\$3,417
2001000595	\$1,544	2001707190	\$2,172	2002187203	\$1,105
2001000675	\$2,623	2001715435	\$1,751	2002187426	\$1,732
2001000711	\$1,071	2001718841	\$1,017	2002188613	\$1,659
2001000769	\$973	2001719748	\$1,874	2002192562	\$1,296
2001004507	\$1,339	2001728102	\$1,423	2002196085	\$1,982
2001004598	\$1,750	2001733244	\$3,288	2002196090	\$1,795
2001004779	\$1,164	2001734682	\$1,231	2002199862	\$1,567
2001004842	\$1,008	2001738496	\$1,063	2002204539	\$954
2001004844	\$981	2001738744	\$1,431	2002204924	\$3,619
2001005110	\$2,249	2001753386	\$1,092	2002204941	\$4,858
2001005226	\$1,168	2001753604	\$1,396	2002215222	\$1,587
2001005395	\$1,525	2001753637	\$2,404	2002219768	\$5,850
2001005647	\$1,172	2001754603	\$1,662	2002228553	\$2,046
2001005686	\$1,103	2001761001	\$1,108	2002230443	\$1,033
2001005733	\$2,184	2001762676	\$1,302	2002233093	\$1,188
2001005775	\$3,424	2001765086	\$2,098	2002235232	\$1,634
2001006182	\$1,396	2001775602	\$1,343	2002235933	\$1,837
2001007006	\$2,131	2002103747	\$1,223	2002246732	\$2,326
2001008075	\$1,199	2002108661	\$1,681	SAAAAAA049	\$10,772
2001008078	\$956	2002112609	\$100,000	SAAAAAA054	\$1,116
2001008216	\$1,047	2002115113	\$1,249	SAAAAAA078	\$4,620
2001008428	\$1,126	2002125966	\$1,434	SAAAAAA141	\$2,286
2001212208	\$1,124	2002127173	\$1,091	SAAAAAA143	\$14,605
2001400874	\$1,284	2002127179	\$3,315	SAAAAAA145	\$2,037
2001417065	\$2,453	2002130604	\$1,138	SAAAAAA164	\$2,420
2001417609	\$1,594	2002131783	\$4,169	SAAAAAA165	\$1,119
2001510498	\$1,229	2002132493	\$2,579	SAAAAAA171	\$3,194
2001600967	\$1,424	2002133171	\$1,168	SAAAAAA186	\$13,637
2001614019	\$1,368	2002135010	\$3,298	SAAAAAA191	\$10,329
2001637910	\$1,257	2002135194	\$1,006	SAAAAAA233	\$3,342
2001678019	\$1,665	2002136097	\$1,209	SAAAAAA270	\$1,725

NMI	Excess kVAr 2014/15 excl GST \$ pa	NMI	Excess kVAr 2014/15 excl GST \$ pa
SAAAAA323	\$2,105	SAAAAAC271	\$1,881
SAAAAA339	\$1,517	SAAAAAC471	\$3,464
SAAAAA350	\$10,465	SAAAAAC473	\$2,444
SAAAAA381	\$3,388	SAAAAAC476	\$1,606
SAAAAA439	\$20,523	SAAAAAC477	\$2,201
SAAAAA443	\$1,498	SAAAAAC493	\$2,021
SAAAAA547	\$1,511	SAAAAAC500	\$2,341
SAAAAA595	\$1,660	SAAAAAC558	\$2,749
SAAAAA675	\$1,701	SAAAAAC575	\$1,053
SAAAAA753	\$1,395	SAAAAAC667	\$1,458
SAAAAA761	\$7,743	SAAAAAC807	\$1,434
SAAAAA784	\$1,606	SAAAAAD028	\$1,458
SAAAAA891	\$1,634	SAAAAAD099	\$1,655
SAAAAA902	\$5,119	SAAAAAD183	\$3,070
SAAAAA978	\$4,237	SAAAAAD324	\$4,092
SAAAAA999	\$2,924	SAAAAAD328	\$2,343
SAAAAAB048	\$3,947	SAAAAAD500	\$984
SAAAAAB049	\$1,136	SAAAAAD639	\$2,051
SAAAAAB069	\$1,286	SAAAAAD665	\$2,025
SAAAAAB082	\$2,328	SAAAAAD738	\$1,061
SAAAAAB184	\$2,070	SAAAAAE043	\$1,312
SAAAAAB197	\$1,886	SAAAAAE072	\$1,037
SAAAAAB266	\$1,284	SAAAAAE110	\$981
SAAAAAB372	\$960	SAAAAAE300	\$4,899
SAAAAAB420	\$1,216	SAAAAAE367	\$4,737
SAAAAAB432	\$1,152	SAAAAAE381	\$2,409
SAAAAAB446	\$4,158	SAAAAAE483	\$1,306
SAAAAAB447	\$2,530	SAAAAAE494	\$1,601
SAAAAAB451	\$1,900	SAAAAAE571	\$996
SAAAAAB453	\$1,478	SAAAAAE645	\$1,034
SAAAAAB485	\$2,152	SAAAAAE742	\$1,256
SAAAAAB509	\$1,037	SAAAAAE752	\$7,456
SAAAAAB551	\$8,251		
SAAAAAB552	\$2,595		
SAAAAAB642	\$1,647		
SAAAAAB675	\$2,152		
SAAAAAB708	\$3,125		
SAAAAAB882	\$1,038		
SAAAAAB883	\$1,209		
SAAAAAB900	\$1,364		
SAAAAAB904	\$2,074		

9. NEGOTIATED DISTRIBUTION SERVICES

9.1 Basic Connection Services

9.1.1 Purpose

This section details the basic connection services provided to customers for which a default fee will be charged. These connection services are of such a nature that a default charge can be calculated and listed in the indicative price list below.

9.1.2 Discussion

Basic connection services relate to a connection (or a proposed connection) between SA Power Networks distribution system and the customers premises.

The basic connection services offered by SA Power Networks are listed in the table on indicative prices below. The provision of these services involve minimal or no augmentation of the distribution network.

Under the National Energy Customer Framework (NECF), there are two categories of connection contracts which are:

1. Connection contract – which is associated with establishing or altering the physical connection to the distribution system.

SA Power Networks has two connection contracts for basic connection services and each have a model standing offer (MSO):

- i. Basic connection service with no embedded generators: and/or
- ii. Small embedded generators (SEG).

2. Customer connection contract – which is associated with the ongoing supply of energy to a retail customer's premises and are normally deemed (ie customer does not need to sign or agree to the contract) to apply. These contracts commence on energisation or when a customer starts consuming energy.

The two model standing offers along with the table of Basic Connection Services indicative prices have been approved by the Australian Energy Regulator (AER) and are published on our website at www.sapowernetworks.com.au.

The customer connection contract is a Deemed Standard Connection Contract (DSCC) that applies to all small customers (ie electricity consumption less than 160MWh pa).

A request for a basic connection service can be expedited by not requesting a formal offer and when signing our application form you can accept both the Terms and Conditions of the MSO and the default charge when the application is made.

The charge recovers the average cost of performing such work including labour, materials, vehicles, other services, overheads and a return on investment.

SA Power Networks default service is a low voltage single phase up to 63Amps. This service is provided by the installation of an over to under service on an existing low voltage stobie pole or from an existing service pit/pillar that is located up to 25 metres from the property boundary on the same side of the street.

Variations to the default service may include a combination of the charges in the tables below. For example, a new multi phase service (using over to under or existing service pit) with import export metering to suit would require 2 charges combined, being fee codes BCS 101 and BCS 115.

Basic Connection Services Indicative Price List

New Supply – (Service provision charges, excluding metering charges)*

Category	Service Type	Service Description	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
1 phase 63Amp	Over to under service (see diagram 1) or Existing pit/pillar (see diagram 2)	Provision of an over to under service on an existing low voltage stobie pole or from an existing service pit/pillar that is located up to 25 metres from the customers property boundary on the same side of the street	No charge	No charge	BCS 100	NSC02
multi phase 63Amp	Over to under service (see diagram 1) or Existing pit/pillar (see diagram 2)	Provision of an over to under service on an existing low voltage stobie pole or from an existing service pit/pillar that is located up to 25 metres from the customers property boundary on the same side of the street and the requested number of phases are available	\$274.00	\$301.40	BCS 101	NSC03
1 phase or multi phase 63Amps	Overhead service (see diagram 3)	Provision of a multi phase overhead service from an existing low voltage stobie pole in lieu of an over to under or underground connection and the requested number of phases are available	\$311.00	\$342.10	BCS 102	NSC06
Temporary supply 63Amp 1 phase	Over to under service (see diagram 1) or Overhead Service (see diagram 3)	Provision of an over to under service on an existing low voltage stobie pole or an overhead service from an existing low voltage stobie pole to a structure provided by the customer i.e. customer installs a temporary pole and meter box	\$321.00	\$353.10	BCS 103	NSC12

* Refer note 9.1.2 – Variations to the default service charge may include a combination of charges, (i.e. all charges will include a combination of a service provision charge and a metering provision charge)

New Supply (cont.)

Category	Service Type	Service Description	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Temporary supply 63Amp multi phase	Over to under service (see diagram 1) or Overhead Service (see diagram 3)	Provision of an over to under service on an existing low voltage stobie pole or an overhead service from an existing low voltage stobie pole to a structure provided by the customer i.e. customer installs a temporary pole and meter box and the requested number of phases are available	\$911.00	\$1,002.10	BCS 104	NSC14
Temporary supply 63Amp 1 phase or multi phase (existing connection point available)	Over to under service (see diagram 1) or Existing pit/pillar (see diagram 2)	Connection from an existing over to under service or from an existing service pit / pillar and the requested number of phases are available	\$118.00	\$129.80	BCS 105	NSC13

Service Alterations (Service provision charges, excluding meter charges)*

Category	Service Type	Service Description	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Replace existing 63Amp 1phase service or multi phase 63Amp service	Over to under service (see diagram 1) or Existing pit/pillar (see diagram 2) or Overhead service (see diagram 3)	Replacement of an existing overhead, over to under or underground service 'like with like' or a reduction in the number of phases (1 phase with 1 phase or multi phase with multi phase) SA Power Network agreement required	No Charge	No charge	BCS 106	N/A
Relocate existing 1 phase 63Amp or multi phase 63Amp overhead service	Overhead service (see diagram 3)	Customer request for relocation of an existing overhead service to accommodate building extensions, verandas, carports etc	\$311.00	\$342.10	BCS 107	AAC02
Relocate existing metering outside to outside	Over to under service (see diagram 1) or Existing pit/pillar (see diagram 2) or Overhead service (see diagram 3)	Reinstall metering from an existing outside location to a new outside metering enclosure with no change to the existing service as a result of building alterations ie customer convenience	\$97.00	\$106.70	BCS 108	AAC08
Upgrade to a multi phase 63Amp service	Over to under service (see diagram 1) or Overhead service (see diagram 3)	Provision of an over to under service on an existing low voltage stobie pole or an overhead service from an existing low voltage stobie pole and the requested number of phases are available	\$493.00	\$542.30	BCS 109	AAC03
Upgrade to a multi phase 63Amp service	Existing service pit/pillar (see diagram 2)	Connection provided from an existing suitable low voltage service pit / pillar and the requested number of phases are available at the service point	\$107.00	\$117.70	BCS 110	AAC04

* Refer note 9.1.2 – Variations to the default service charge may include a combination of charges, (ie all charges will include a combination of a service provision charge and a metering provision charge)

Alterations (cont.)

Category	Service Type	Service Description	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Additional 63Amp service for a duplex split i.e. Existing metered strata title split into two Torrens titles (no additional load)	Over to under service (see diagram 1) or Existing pit/pillar (see diagram 2)	Provision of an over to under service on an existing low voltage stobie pole or from an existing service pit/pillar that is located up to 25 metres from the customers property boundary on the same side of the street and the requested number of phases are available	\$395.00	\$434.50	BCS 111	N/A

Unmetered Supply

Category	Service Type	Service Description	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
1 phase unmetered supply only for approved applications e.g. public telephones, traffic signals, council lighting, parking machines, bus shelters	Over to under service (see diagram 1) or Existing pit/pillar (see diagram 2)	Provision of an over to under service on an existing low voltage stobie pole or from an existing service pit/pillar	\$311.00	\$342.10	BCS 112	NSC09

Metering provision charges (excluding service charges)*
New Installation

Category	Service Type	Service Description	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Whole current type 6 meter (manually read basic accumulation meter)	1 phase	Installation of a single phase meter (includes off peak controlled load)	No charge	No charge	BCS 113	N/A
Import / Export Whole Current type 6 meter (manually read basic accumulation meter)	1 phase	Installation of a single phase import/export meter (includes off peak controlled load)	No charge	No charge	BCS 114	N/A
Connection of an embedded generator up to 10kW single phase and 30kW three phase (up to 5kW SWER)	multi phase	Installation of a three phase import/export meter	\$139.00	\$152.90	BCS 115	N/A
Type 5 metering (manually read interval meter) Whole current up to 100amps	1 phase 1 element	Installation of a single phase single element manually read interval meter	\$92.00	\$101.20	BCS 116	N/A
		Annual asset fee	\$65.00	\$71.50	BCS 117	N/A
	1 phase 2 element	Installation of a single phase dual element manually read interval meter eg off peak controlled load	\$92.00	\$101.20	BCS 118	N/A
		Annual asset fee	\$91.00	\$100.10	BCS 119	N/A
	multi phase	Installation of a multi phase single element manually read interval meter	\$45.00	\$49.50	BCS 120	N/A
		Annual asset fee	\$148.00	\$162.80	BCS 121	N/A

* Refer note 9.1.2 – Variations to the default service charge may include a combination of charges, (ie all charges will include a combination of a service provision charge and a metering provision charge).

Metering provision charges (excluding service charges)*
Existing Installation

Category	Service Type	Service Description	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Import / Export Whole Current type 6 meter (manually read basic accumulation meter)	1 phase	Installation of a single phase import/export meter includes off peak controlled load	\$294.00	\$323.40	BCS 122	N/A
	multi phase	Installation of a three phase import/export meter	\$636.00	\$699.60	BCS 123	N/A
Type 5 metering (manually read interval meter) Whole current up to 100amps	1 phase 1 element	Installation of a single phase single element manually read interval meter	\$145.00	\$159.50	BCS 124	N/A
		Annual asset fee	\$65.00	\$71.50	BCS 125	N/A
	1 phase 2 element	Installation of a single phase dual element manually read interval meter eg off peak controlled load	\$155.00	\$170.50	BCS 126	N/A
		Annual asset fee	\$91.00	\$100.10	BCS 127	N/A
	multi phase	Installation of a multi phase single element manually read interval meter	\$215.00	\$236.50	BCS 128	N/A
		Annual asset fee	\$148.00	\$162.80	BCS 129	N/A
Import / Export & Type 5 metering (manually read interval meter)	Reprogram meter	Existing meters that are able to be reprogrammed for import/export	\$85.00	\$93.50	BCS 130	N/A

* Refer note 9.1.2 – Variations to the default service charge may include a combination of charges, (ie all charges will include a combination of a service provision charge and a metering provision charge).


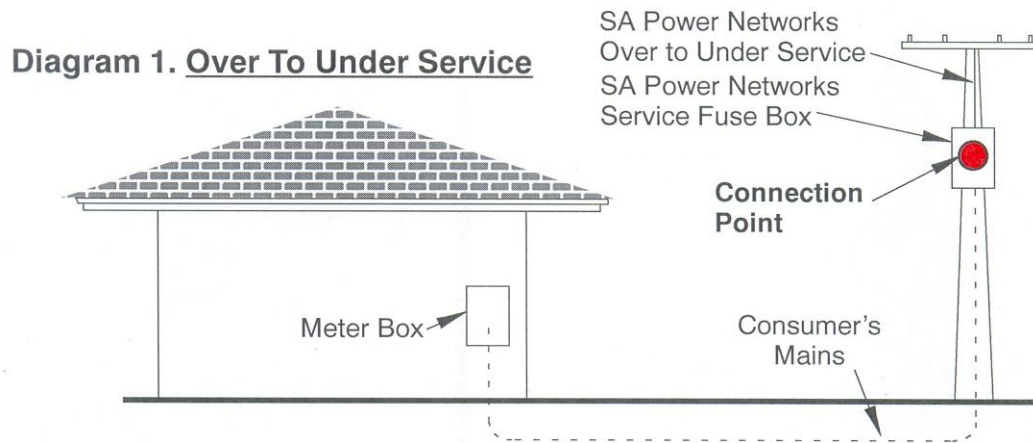



Diagram 2. Underground Service

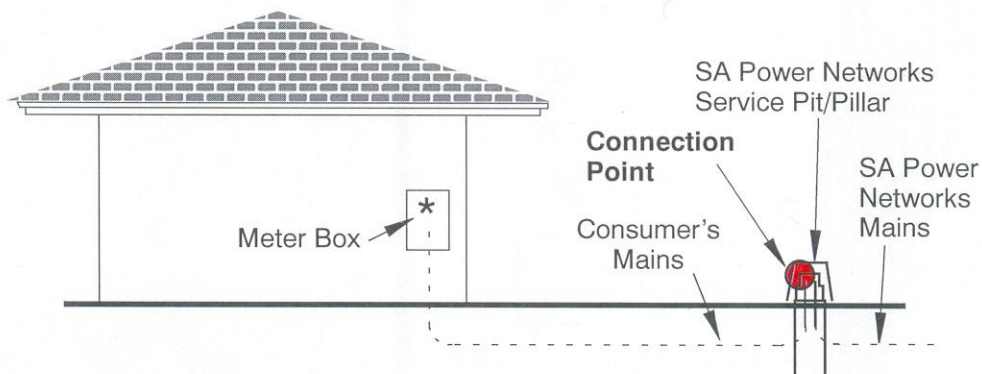

NOTE:

In some cases *SA Power Networks Service Fuse may be installed in Meter box

Diagram 3. Overhead Service

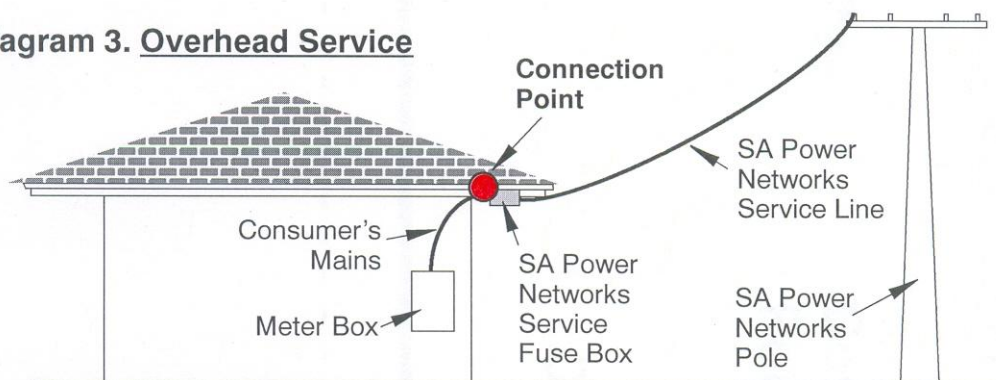

9.2 Negotiated Connection Services

9.2.1 Purpose

This section details the negotiated connection services provided to customers. A fee will normally be charged for the provision of an offer. This fee is deducted from the connection service charge and is non-refundable if you don't proceed with the connection.

9.2.2 Discussion

Negotiated connection services are all services that relate to a connection (or a proposed connection) between SA Power Networks distribution system and the customers premises but are not basic connection services as outlined in 9.1 above.

In relation to a negotiated connection service for a customers supply, SA Power Networks offer will be based on our most technically feasible and minimum cost option for our works to make the connection. Any requested work in excess of the most technically feasible option will be at the customer's expense.

The negotiated connection contract is SA Power Networks formal written offer and the associated terms and conditions. Note: this contract is separate to the ongoing customer connection contract which commences upon energisation.

The work (if over \$1,000); 50% to be paid on acceptance and 50% balance to be paid prior to energisation. If the charges are less than \$1,000, payment will be charged at the completion of work.

Negotiated Connection Services Indicative Price List

Negotiated Connection Services

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Installation of a service pit / pillar	Work to provide a supply by installing a low voltage service pit / pillar		Full cost less Rebate (if applicable)	Full cost less Rebate (if applicable)	NCS 200	N/A
Installation of a service pole	Work to provide a supply by installing a low voltage stobie pole, mains and service		Full cost less Rebate (if applicable)	Full cost less Rebate (if applicable)	NCS 201	N/A
1 Phase or multi phase 63Amp	Provision of one span of LV ABC Mains (up to 20m for 4X50mm ² or 40M of 2X50mm ²) and installation of an over to under service on a steel tubular pole with type 6 meters. (Includes regulated DUoS rebate)	1 phase	No charge	No charge	NCS 202	NSC04
		Multi phase 63Amp	\$274.00	\$301.40	NCS 203	N/A
Flying service	Provision of a flying service where technically feasible in lieu of an over to under service on an existing stobie pole that is located up to 25 metres from the property boundary and the requested number of phases are available	1 phase or multi phase 63Amp	\$579.00	\$636.90	NCS 204	NSC08
Overhead service	Change from an existing over to under or underground service to an overhead service and the requested number of phases are available	1 phase 63Amp	Full cost	Full cost	NCS 205	N/A
		Multi phase 63Amp	Full cost	Full cost	NCS 206	N/A

9.3 Negotiated Distribution Services (Non Connection)

9.3.1 Purpose

This section details the negotiated distribution services provided to customers. A fee will normally be charged for these services.

9.3.2 Discussion

Negotiated distribution services are all services that are not related to a connection (or proposed connection) between SA Power Networks distribution system and the customer's premises.

SA Power Networks charge will be based on the cost of the works to provide the service. The work (if over \$1,000), will not be undertaken until the necessary fee is paid by the customer. If the charges are less than \$1,000 payment will be charged at the completion of work.

The application of all connection and/or disconnection default fees are NMI based, and are applied to each and every NMI impacted by the work undertaken by SA Power Networks, irrespective of the number of service connection points to a property. Alterations and changes to specific metering types can only be provided where permitted under the National Electricity Rules and by the relevant market participants.

9.3.3 Pre-payment Metering

Pre-payment metering is not currently being offered by any retailer in the South Australian market. As a result prices relating to pre-payment metering will depend upon the future product being offered by a retailer.

Negotiated Distribution Services (Non Connection) Indicative Price List

Mains & Services

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Additional service 1 phase or multi phase	Provision of an additional service - SA Power Networks agreement required. Augmentation may apply.	Provision of an over to under, underground or overhead service	Full cost	Full cost	NDS 300	N/A
Permanent Removal of LV Supply (Abolishment)	Request from customer for the permanent abolishment of supply/NMI (May include removal of O/H service or disconnection of O/U or U/G service but not the removal of additional distribution assets i.e. poles and transformers.		\$118.00	\$129.80	NDS 301	N/A
Temporary Disconnect and Reconnect for safety of customer or their contractor.	For requests for a temporary D/C & R/C of LV service for facia or gutter replacement.		\$118.00	\$129.80	NDS 302	N/A
	Temporary isolation of customers supply eg For periodic inspection of switchboard.		Full cost	Full cost	NDS 303	N/A

Metering Charges

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Charge for Meter Removal	Includes both single and multi phase meters eg removal of redundant Controlled Load tariff meter. (Not permanent removal of supply or NMI).	First meter	\$85.00	\$93.50	NDS 304	RMFE
		Each additional meter	No charge	No charge	NDS 305	RMFA
Upgrade of meters	Request by a customer to change meters to electronic meter eg to make room in a meter box for an RCD or extra equipment thereby avoiding the need to increase the size of the meter box or replace the board.	One single phase electronic meter	\$423.00	\$465.30	NDS 306	N/A
		Cost per additional single phase electronic meter	\$268.00	\$294.80	NDS 307	N/A
Meter Reconfiguration	On-site reconfiguration of meters in response to customer requests for changes to tariffs, two-rate meter settings or timeclocks.	First meter	\$85.00	\$93.50	NDS 308	MRFE
		Each additional meter	No charge	No charge	NDS 309	MRFA
Install 2 Rate Meter	Installation of 2 rate metering at an existing installation with no service work (eg Remove flat rate and install 2 rate only).		\$257.00	\$282.70	NDS 310	N/A
Import / Export Whole Current type 6 meter (manually read basic accumulation meter) where customer has multiphase controlled load.	Supply and install Basic multi phase import/export metering equipment (type 6) at customer request - in normal time, where customer also has multiphase controlled load.	Multi phase dual register meter to measure import consumption against export and reconfigure controlled load metering to suit	\$636.00	\$699.60	NDS 311	N/A

Metering Charges (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Type 1-4 Meter Charges (Meter provision only, excludes meter read fees).	Installation where reliable mobile telecommunications service is available.		No charge	No charge	NDS 312	N/A
	Installation where reliable mobile telecommunications service is not available.		Full cost	Full cost	NDS 313	N/A
	Annual Asset Fee (Type 4 meter).	Charge per meter per annum	\$643.00	\$707.30	NDS 314	N/A
	Exit Fee where meter is removed within the first 12 months of installation.		\$1,072.00	\$1,179.20	NDS 315	N/A
	Annual Asset Fee (Type 3 meter).		Full cost	Full cost	NDS 316	N/A
	Annual Asset Fee (Type 2 meter).				NDS 317	N/A
	Annual Asset Fee (Type 1 meter).				NDS 318	N/A
	Exit Fee - Applies to network customers with Type 1-4 (non-exceptional) meter where the meter is removed any time after the first 12 months of installation.	Charge per meter per exit transaction	\$590.00	\$649.00	NDS 319	N/A

Metering Charges (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Type 5 Meter Charges	Applies for a customer or their agent requesting the installation of a three phase CT connected type 5 meter. (includes import / export metering)	Existing premise installation charge	\$191.00	\$210.10	NDS 320	N/A
		New premise installation charge	\$45.00	\$49.50	NDS 321	N/A
		Annual asset fee	\$214.00	\$235.40	NDS 322	N/A
	Exit Fee - Applies to network customers with Type 5 meter churning to another meter provider.	Charge per meter per exit transaction	\$264.00	\$290.40	NDS 323	N/A
Type 5 Meter - communications device	Installation of communications device for Type 5 CT connected and whole current meters. (Where operational difficulties reasonably require the metering installation to be capable of remote acquisition).	New premise installation charge	\$62.00	\$68.20	NDS 324	N/A
		Existing premise installation charge	\$183.00	\$201.30	NDS 325	N/A
		Annual asset fee - this is in addition to the Type 5 Meter annual fee	\$359.00	\$394.90	NDS 326	N/A
		Exit fee for the communications device	\$183.00	\$201.30	NDS 327	N/A
Type 6 Meter Charges	Applies to large customers (>160MWh pa) having a Type 6 meter.	Charge per meter per annum	\$234.00	\$257.40	NDS 328	N/A
	Exit Fee - Applies to large network customers with Type 6 meter churning to another meter provider.	Charge per meter per exit transaction	\$264.00	\$290.40	NDS 329	N/A

Third Party Connection Works Charges

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Specification Fees	This covers the costs of work undertaken in preparing and issuing the specification including 1 site visit (within 100km of regional head office) for customer extension works.	\$20 - \$85k project	\$1,750.00	\$1,925.00	NDS 340	N/A
		\$85 - \$150k project	\$2,900.00	\$3,190.00	NDS 341	N/A
		> \$150k project	Full cost	Full cost	NDS 342	N/A
Specification re-compliance	Resubmission of a design which previously did not satisfy the SA Power Networks spec.		Full cost	Full cost	NDS 343	N/A
Works/Design compliance	Works/design compliance of an asset to be vested by a customer/developer to SA Power Networks. This includes administration, design compliance against specification and vesting. Applies to contestable works such as RDs (real estate developments) and contestable connections where SA Power Networks is not the constructor.		Full cost	Full cost	NDS 344	N/A
Works re-inspection for compliance	Re-inspection of an asset issued with a non-compliance notice, (including travelling time).	Minimum (up to 3 hours) normal time	\$300.00	\$330.00	NDS 345	N/A
		Hourly rate after 3 hrs normal time	\$97.00	\$106.70	NDS 346	N/A
		Hourly rate out of hours or part thereof	\$118.00	\$129.80	NDS 347	N/A
Network Infrastructure Connection Re-Appointment	When SA Power Networks is required to re-attend a Network Infrastructure Connection Appointment because the network connection could not be completed on the initial appointment as the infrastructure was incomplete, unsafe or inaccessible.		Full cost	Full cost	NDS 348	N/A

Third Party Connection Works Charges (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Indicative Letter	This covers the costs of work undertaken in preparing and issuing an indicative estimate letter for customer projects. Includes customer extension works, asset connection and network augmentation charges (excludes rebates). The indicative fee is non-refundable and non-deductible should the applicant proceed to a firm offer.	< 6 hours work	No charge	No charge	NDS 349	N/A
	Larger jobs and multiple requests.	> 6 hours work or part thereof	\$85.45/Hr	\$94.00/Hr	NDS 350	N/A
Offer Letter	These are MAXIMUM amounts that can be charged. This covers the costs of work undertaken in preparing and issuing an offer letter for customer projects. Includes customer extension works, asset connection and network augmentation charges. This includes rebates but may exclude underground development extension costs. Firm offer is non-refundable but deductible from the final project amount should the connection proceed within the validity period of the first quote. For all subsequent quotes for the same project the initial fee will be non-deductible, each additional quote will be charged using the initial firm offer principles (ie non-refundable but deductible).	> \$20k < \$85k project	\$510.00	\$561.00	NDS 351	N/A
		\$85k - \$150k project	\$1,730.00	\$1,903.00	NDS 352	N/A
		> \$150k project	Full cost	Full cost	NDS 353	N/A

Miscellaneous Fees

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Monthly Meter Reading Fee (extra cost of monthly meter reading)	Daily Charge.		\$0.126190/day	\$0.138809/day	NDS 354	N/A
Install pulsed output from existing SA Power Networks metering capable of this functionality (Existing metering may need to be changed for this functionality which will incur the relevant additional metering costs listed for Type 1-4 and Type 5 meters)	Customer requests a pulsed output from the meter for energy management or to display consumption in some form.	Annual charge	\$107.00	\$117.70	NDS 355	N/A
Charge for Meter Test	This charge applies when a customer requests a meter test due to high account or a suspected incorrect functioning PV installation and the SA Power Networks meter is not faulty.	Single phase	\$125.00	\$137.50	NDS 356	SPFE
		Each additional single phase meter	No charge	No charge	NDS 357	SPFA
		3 Phase Meter	\$125.00	\$137.50	NDS 358	MPFE
		Each additional multi phase meter	No charge	No charge	NDS 359	MPFA

Miscellaneous Fees (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Charge for Meter Test (where an appointment has been requested by the customer's retailer)	This charge applies when a customer requests an appointment for a meter test due to high account or a suspected incorrect functioning PV installation and the SA Power Networks meter is not faulty.	Single phase	\$293.00	\$322.30	N/A	APTMT
		Each additional single phase meter	No charge	No charge	N/A	APTMT
		3 Phase Meter	\$293.00	\$322.30	N/A	APTMT
		Each additional multi phase meter	No charge	No charge	N/A	APTMT
Charge for PV Installation Enquiry	Charge applicable when customer requests SA Power Networks to attend a PV installation which is not functioning correctly and it is determined by the SA Power Networks personnel the problem is a result of the customer's PV installation being incorrectly set/malfunctioning.	Single phase Installation	\$125.00	\$137.50	NDS 360	SPFE
		3 phase Installation	\$125.00	\$137.50	NDS 362	MPFE
Meter Inspection Fee	This charge applies when a physical inspection is requested due to suspected meter tampering, equipment damage or by request by customer or their retailer.	First meter	\$32.00	\$35.20	NDS 364	MIFE
		Each additional meter	No charge	No charge	NDS 365	N/A
Meter Inspection Fee (where an appointment has been requested by the customer's retailer)	This charge applies when an appointment for a physical inspection is requested due to suspected meter tampering, equipment damage or by request by customer or their retailer.	First meter	\$165.00	\$181.50	N/A	APTIN
		Each additional meter	No charge	No charge	N/A	APTIN

Miscellaneous Fees (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Excess kVAr Incentive Charge	The Excess kVAr Incentive Charge rate is applied to each excess kVAr required over and above the implied kVAr allowance provided in the South Australian Electricity Distribution Code to meet a customer's Agreed Maximum Demand based on their recorded power factor at the time of their Actual Maximum Demand. The charge is applied to customers currently assigned to a network demand tariff who are not code compliant with respect to power factor at the time of their Actual Maximum Demand requiring greater than 10kVAr of correction. The charge is reviewed annually after the completion of the maximum demand period and is invoiced monthly (ie the annual charge divided by 12) effective 1 July following the maximum demand period. Customers will cease being levied the charge once the site has become compliant by installation of power factor correction equipment or other measures deemed acceptable to SA Power Networks and have also notified SA Power Networks of the compliance.	Rate applied per amount of excess kVAr	\$47.50/kVAr	\$52.25/kVAr	NDS 366	N/A
Back up feeder charge	This charge is applied when a customer has two connection points supplying their site and full supply can be taken from either supply point.	These charges are negotiated with the Major Customer Manager	Full cost	Full cost	NDS 367	N/A
Pole Relocation	Relocation of an existing electricity pole for a customer convenience.		Full cost	Full cost	NDS 368	N/A

Miscellaneous Fees (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Service pit / pillar Relocation	Relocation of an existing electricity pit / pillar customer convenience.		Full cost	Full cost	NDS 369	N/A
Service pit / pillar Raising/Lowering	Raise or lower a pit / pillar including a driveway pit. (Where pit was at satisfactory level when installed and vested to SA Power Networks). Price can vary dependent on crew travelling time.		Full cost	Full cost	NDS 370	N/A
Temporary covering (not full insulation) of LV Mains (excluding road crossings which will be estimated as required based on number of units and time).	Work to erect and remove 'Tiger Tails' from LV Mains. Costs are based on replacement costs and a 2 year life of 'Tiger Tails'. (NOTE: Price is for a 3 month period only and an additional charge(s) of the same amount will be applied for each subsequent 3 month period beyond the initial installation date until the tails are removed).	Normal Time	\$8.64 per unit (min fee \$117.64)	\$9.50 per unit (min fee \$129.40)	NDS 371	N/A
		Overtime	\$8.64 per unit plus \$588.36	\$9.50 per unit plus \$647.20	NDS 372	N/A
Location of underground mains at the request of a customer	Provision of plans from the office.		No charge	No charge	NDS 373	N/A
	Site visit.	Under 1 hour in Normal time	No charge	No charge	NDS 374	N/A
		Over 1 hour in Normal Time	\$102.00 Per hour or part thereof	\$112.20 Per hour or part thereof	NDS 375	N/A
		Out of Normal Time	\$148.00 Per hour or part thereof	\$162.80 Per hour or part thereof	NDS 376	N/A
Asset Information Requests	Provision of asset information relating to condition, rating or available capacity to engineering consultants and electrical contractors and the supply of GIS information to customers or authorities.	Less than 1hrs work - per request	\$80.00	\$88.00	NDS 377	N/A
		Over 1 hours work	Full cost	Full cost	NDS 378	N/A
	Confirmation of available equipment in ground level transformers where the door needs to be opened by a Customer Service Officer.		\$129.00	\$141.90	NDS 379	N/A

Miscellaneous Fees (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Network Access Request	Organisation of switching requirements and field work to allow 3rd party access to de-energised assets.		Full cost plus \$257 for admin & billing	Full cost plus \$282.70 for admin & billing	NDS 380	N/A
Network Access Management Fee	Management of access request.	Where under 1/2 day of planning required	\$257.00	\$282.70	NDS 381	N/A
Repeated Call Outs for repairs to SA Power Networks equipment caused by the customer (not first call out)	Following notification of requirement to upgrade service size. Typically \$452 + GST for LV and \$803 + GST for HV fuses.	LV fuse	Full cost	Full cost	NDS 382	N/A
		HV fuse	Full cost	Full cost	NDS 383	N/A
	Wasted visit where not able to perform service or discharge obligation due to customer or agent's fault.	Wasted Visit - Business Hrs	Full cost	Full cost	NDS 384	N/A
		Wasted Visit - A/Hrs	Full cost	Full cost	NDS 385	N/A
Special Meter Reader Visit	A Special Meter Reading Visit occurs when a customer requests a check read or special read at a Service Provision.		\$11.95	\$13.14	NDS 386	SRFE
	A Special Meter Reading Visit occurs when a customer requests a check read or special read at a Service Provision after business hours.		\$73.00	\$80.30	NDS 387	N/A
	A Special Meter Reading visit which is subsequently cancelled.		\$11.95	\$13.14	NDS 388	N/A

Miscellaneous Fees (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Subsequent Attempt to Read Meter	This relates to subsequent attempts to read a meter after a reasonable attempt has been made but has been unsuccessful due to access difficulties.		\$11.95	\$13.14	NDS 389	SUB
High Load Escorts	Assistance to a third party to transport a large vehicular load. Includes provision of labour and equipment to temporarily raise or remove mains to allow load to pass freely.	Hourly rate for administration & checking of route if over 1 hour	\$119.00	\$130.90	NDS 390	N/A
		Minimum Charge	No charge	No charge	NDS 391	N/A
Connection of Security Cameras NOTE: SA Power Networks pole rental extra, also energy tariff to retailer for unmetered supply	Security camera fitted to Stobie pole. Single connection. (Multiple connections at the one location will incur additional costs).		\$215.00	\$236.50	NDS 392	N/A
	Security camera fitted to light column.		\$488.00	\$536.80	NDS 393	N/A
Larceny of Supply - remedial work	Remedial costs where larceny or tampering of SA Power Networks equipment is established (does not include investigation).		Full cost	Full cost	NDS 394	N/A
Responsible Person as defined in NEM	Customers via their retailers may designate SA Power Networks in MSATS to be responsible for this role. If SA Power Networks choose to accept this role in MSATS then it would be implied that the customer / retailer will accept the annual charge.	Annual fee charged monthly	\$2,143.00	\$2,357.30	NDS 395	N/A
Wasted Visit – Customer Connection Appointment	Where SA Power Networks was unable to complete the connection or metering works due to the customers installation not being ready or compliant.		\$78.00	\$85.80	NDS 396	N/A

Miscellaneous Fees (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Late Cancellation of Connection Appointment	Where a connection appointment is cancelled with less than 2 full business days notice prior to the connection date by the customer or their agent.		\$78.00	\$85.80	NDS 397	N/A
Site inspection	A site inspection in order to determine the nature of the requested connection service.	Allows 2 hours with travelling	\$215.00	\$236.50	NDS 398	N/A
Negotiation Fee	This fee covers the SA Power Networks Management costs when a customer elects to negotiate the Terms and Conditions of the On Going Connection Contract. The fee includes the cost of resources in the negotiation process. This is in addition to the offer letter fee.	Minimum fee for up to 4 hours	\$383.64 plus \$95.91 per hour thereafter	\$422 plus \$105.50 per hour thereafter	NDS 399	N/A
Late payment fee	A late payment fee is charged for non payment of an invoice by the due date. The late fee is for processing and sending a new invoice. Further costs will be incurred if further debt recovery is required.		\$67.00	\$73.70	NDS 400	N/A

Miscellaneous Fees (cont.)

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Priority Appointment or Pre-arranged out of hours appointment for new connection or alteration of supply (fixed or anytime)	Provision of a priority connection at the customer's request. Work will be undertaken out of hours or during normal business hours in which case another job will be done after hours to accommodate the requested connection date. Note. When calculating the charge apply the appropriate dollar figure per person having to attend site. Example given below is for a Fixed Appointment time eg 2 Linesman being 2X\$350 = \$700 eg 1 Electrical Mechanic 1X\$350 = \$350 eg Combination 1 Mechanic & 2 Linesman 3X\$350 = \$1,050.	Fixed appointment up to 3hrs (inc requests for specific time and weekends). Additional hours charged at the "no fixed appt." rate below	\$375.00 per person	\$412.50 per person	NDS 401	NSC15 / AAC09
		No fixed appointment – arranged next available time i.e. straight after last job	\$107.00 per person per hour	\$117.70 per person per hour	NDS 402	NSC16 / AAC10
Fee for Reconnection and Disconnection (Retailer Fee)	Includes fee for disconnection and reconnection of supply.	D/N at meter	\$33.00	\$36.30	NDS 403	DNFE
		R/C at meter	\$33.00	\$36.30	NDS 404	RCFE
		R/C at meter A/Hours	\$73.00	\$80.30	NDS 405	RCAH
	The fee for reconnection or disconnection at the meter assumes replacement or removal of the fuse at an existing supply point.	D/N at Pole	Full cost	Full cost	NDS 406	PDNFE
		R/C at Pole	Full cost	Full cost	NDS 407	PRCFE
		R/C at Pole A/Hours	Full cost	Full cost	NDS 408	PDNAH
Charge for swing and sag calculation	This will cover the cost of Project Management and the survey work undertaken in preparing and issuing a swing and sag calculation letter for the customer.		\$500.00	\$550.00	NDS419	N/A

Public Lighting

Category	Service Description	Option	Price (GST Exclusive)	Price (GST Inclusive)	Fee Code	Retail Product Code
Temporary Public Lighting NB: SA Power Networks must notify Council's retailer.	Erection and removal of a second light on an existing lighting pole.	80W MV	\$240.00	\$264.00	NDS 409	N/A
		360W HPS	\$240.00	\$264.00	NDS 410	N/A
	Erection and removal of a light on an existing pole or column.	360W HPS	\$186.00	\$204.60	NDS 411	N/A
Night Security Lighting NB: Retailer authorisation must be sighted before connection.	Install a security light where requested, (includes future removal cost).	360W & 400W (HPS or MV)	\$381.00	\$419.10	NDS 412	N/A
		360W HPS & 400W MV	N/A	N/A	NDS 413	N/A
	Where a school requests light and agrees to retain it for a minimum 5 years.	360W HPS & 400W MV	\$118.00	\$129.80	NDS 414	N/A
Installation of an Aeroscreen	Conversion of existing fitting to reduce glare.		\$80.00 plus remaining SLUoS if less than 15 years old	\$88.00 plus remaining SLUoS if less than 15 years old	NDS 415	N/A
	New Installation.	80W MV, 50 HPS or 42W CF	\$85.00	\$93.50	NDS 416	N/A
Installation of Long Pipe Bracket	For installations after 1/7/05 an upfront capital contribution is in place of the ongoing tariff.		\$530.00	\$583.00	NDS 417	N/A
Charge For Road Lighting Design Compliance To AS 1158 Assessment	This charge may be applied to a council which uses a service provider external to SA Power Networks to supply road lighting schemes/designs, which when constructed, will be vested to or installed on SA Power Networks plant, ie non CLER.	Per Hour	\$94.00	\$103.40	NDS 418	N/A

Fees for Provision of Public Lighting

STREET LIGHTING

ID	SERVICE	OPTION	PRICE (Excl GST)	PRICE (Incl GST)
PPL 502	SLUos (\$ pa)	Fluorescent 40	\$ 90.40	\$ 99.44
PPL 503		Compact Fluorescent 32	\$ 88.20	\$ 97.02
PPL 504		Compact Fluorescent 42	\$ 88.20	\$ 97.02
PPL 506		Fluorescent 2x20	\$ 103.10	\$ 113.41
PPL 507		Fluorescent 2x40	\$ 103.10	\$ 113.41
PPL 508		Fluorescent 4x40	\$ 103.10	\$ 113.41
PPL 509		Fluorescent 4x20	\$ 103.10	\$ 113.41
PPL 510		Fluorescent T5 X 2 tubes	\$ 81.20	\$ 89.32
PPL 511		Sodium 18 LP	\$ 81.80	\$ 89.98
PPL 512		Sodium 26 LP	\$ 81.80	\$ 89.98
PPL 513		Sodium 50 HP	\$ 87.80	\$ 96.58
PPL 514		Mercury 50	\$ 68.80	\$ 75.68
PPL 516		Mercury 80	\$ 68.80	\$ 75.68
PPL 517		Incandescent 60	\$ 98.40	\$ 108.24
PPL 518		Incandescent 100	\$ 100.40	\$ 110.44
PPL 519		Metal Halide 50	\$ 111.70	\$ 122.87
PPL 520		Metal Halide 70	\$ 111.70	\$ 122.87
PPL 525	CLER (\$ pa)	Fluorescent 20	\$ 44.00	\$ 48.40
PPL 526		Fluorescent 40	\$ 44.00	\$ 48.40
PPL 527		Compact Fluorescent 32	\$ 37.40	\$ 41.14
PPL 528		Compact Fluorescent 42	\$ 37.40	\$ 41.14
PPL 530		Fluor/Gas Tube 2x8	\$ 49.90	\$ 54.89
PPL 531		Fluorescent 2x20	\$ 49.90	\$ 54.89
PPL 532		Fluorescent 2x40	\$ 49.90	\$ 54.89
PPL 533		Fluorescent 4x40	\$ 49.90	\$ 54.89
PPL 534		Fluorescent 4x20	\$ 49.90	\$ 54.89
PPL 535		Fluorescent T5 X 2 tubes	\$ 29.70	\$ 32.67
PPL 536		Sodium 18 LP	\$ 52.00	\$ 57.20
PPL 537		Sodium 26 LP	\$ 52.00	\$ 57.20
PPL 538		Sodium 50 HP	\$ 31.80	\$ 34.98
PPL 539		Mercury 50	\$ 28.10	\$ 30.91
PPL 540		Mercury 70	\$ 28.10	\$ 30.91
PPL 541		Mercury 80	\$ 25.20	\$ 27.72
PPL 542		Metal Halide 50	\$ 63.20	\$ 69.52
PPL 543		Metal Halide 70	\$ 63.20	\$ 69.52
PPL 548	Energy Only (\$ pa)	Sodium 50 HP	\$ 6.90	\$ 7.59
PPL 549		LED Ribbon Flex Strip	\$ 6.90	\$ 7.59
PPL 550		Metal Halide 70	\$ 6.90	\$ 7.59
PPL 551		Metal Halide 150	\$ 6.90	\$ 7.59
PPL 552		RUUD LED 20x1.3W	\$ 6.90	\$ 7.59
PPL 553		RUUD LED 30x1.3W	\$ 6.90	\$ 7.59
PPL 554		Sodium 18	\$ 6.90	\$ 7.59

Fees for Provision of Public Lighting (cont.)
Road Lighting

ID	SERVICE	OPTION	PRICE (Excl GST)	PRICE (Incl GST)
PPL 555	SLUos (\$ pa)	Sodium 55 LP	\$ 105.50	\$ 116.05
PPL 556		Sodium 70 HP	\$ 95.70	\$ 105.27
PPL 557		Sodium 90 LP	\$ 95.70	\$ 105.27
PPL 558		Sodium 135 LP	\$ 96.50	\$ 106.15
PPL 560		Mercury 125	\$ 79.10	\$ 87.01
PPL 561		Mercury 250	\$ 79.90	\$ 87.89
PPL 562		Mercury 400	\$ 81.50	\$ 89.65
PPL 563		Mercury 2x400	\$ 86.10	\$ 94.71
PPL 565		Sodium 100 HP	\$ 98.90	\$ 108.79
PPL 566		Sodium 150 HP	\$ 83.80	\$ 92.18
PPL 567		Sodium 250 HP	\$ 88.20	\$ 97.02
PPL 568		Sodium 400 HP	\$ 90.10	\$ 99.11
PPL 521		Metal Halide 100	\$ 111.70	\$ 122.87
PPL 522		Metal Halide 150	\$ 111.70	\$ 122.87
PPL 523		Metal Halide 250	\$ 107.30	\$ 118.03
PPL 524		Metal Halide 400	\$ 107.30	\$ 118.03
PPL 569	CLER (\$ pa)	Sodium 55 LP	\$ 56.40	\$ 62.04
PPL 570		Sodium 70 HP	\$ 43.20	\$ 47.52
PPL 571		Sodium 90 LP	\$ 42.80	\$ 47.08
PPL 572		Sodium 135 LP	\$ 46.50	\$ 51.15
PPL 573		Mercury 100	\$ 27.30	\$ 30.03
PPL 574		Mercury 125	\$ 27.30	\$ 30.03
PPL 575		Mercury 250	\$ 28.30	\$ 31.13
PPL 576		Mercury 400	\$ 29.30	\$ 32.23
PPL 577		Mercury 2x400	\$ 34.30	\$ 37.73
PPL 578		Mercury 3x125	\$ 34.30	\$ 37.73
PPL 579		Sodium 100 HP	\$ 40.00	\$ 44.00
PPL 580		Sodium 150 HP	\$ 32.50	\$ 35.75
PPL 581		Sodium 250 HP	\$ 37.40	\$ 41.14
PPL 582		Sodium 400 HP	\$ 39.50	\$ 43.45
PPL 544		Metal Halide 100	\$ 63.20	\$ 69.52
PPL 545		Metal Halide 150	\$ 63.20	\$ 69.52
PPL 546		Metal Halide 250	\$ 58.40	\$ 64.24
PPL 547		Metal Halide 400	\$ 58.40	\$ 64.24
PPL 583	Energy Only (\$ pa)	Sodium 100 HP	\$ 6.90	\$ 7.59

Fees for Provision of Public Lighting (cont.)

Flood Lighting

ID	SERVICE	OPTION	PRICE (Excl GST)	PRICE (Incl GST)
PPL 584	SLUos (\$ pa)	Mercury Flood 80	\$ 177.30	\$ 195.03
PPL 585		Mercury Flood 250	\$ 177.30	\$ 195.03
PPL 586		Mercury Flood 400	\$ 177.30	\$ 195.03
PPL 588		Mercury Flood 1000	\$ 177.30	\$ 195.03
PPL 589		Sodium Flood 360 HP	\$ 177.30	\$ 195.03
PPL 590		Sodium Flood 400 HP	\$ 177.30	\$ 195.03
PPL 591		Incandescent Flood 150	\$ 177.30	\$ 195.03
PPL 593		Incandescent Flood 500	\$ 177.30	\$ 195.03
PPL 594		Incandescent Flood 750	\$ 177.30	\$ 195.03
PPL 597	CLER (\$ pa)	Mercury Flood 80	\$ 99.00	\$ 108.90
PPL 598		Mercury Flood 250	\$ 99.00	\$ 108.90
PPL 599		Mercury Flood 400	\$ 99.00	\$ 108.90
PPL 600		Mercury Flood 750	\$ 99.00	\$ 108.90
PPL 601		Mercury Flood 1000	\$ 99.00	\$ 108.90
PPL 602		Sodium Flood 360 HP	\$ 99.00	\$ 108.90
PPL 603		Sodium Flood 400 HP	\$ 99.00	\$ 108.90
PPL 604		Incandescent Flood 150	\$ 99.00	\$ 108.90
PPL 609		Incandescent Flood 1500	\$ 99.00	\$ 108.90
PPL 610	Other Items (\$ pa)	Long pipe	\$ 18.10	\$ 19.91
PPL 611		Closed Circuit Television	\$ 54.60	\$ 60.06

10. FEEDER CHARGES

10.1 Background to these charges

Some large customers have negotiated with SA Power Networks for the use of existing SA Power Networks assets to supply more reliability or access to a better tariff. These customers are aware of these negotiated charges that are increased by CPI annually on 1 July. The prices exclude GST.

Standby Feeder and Asset Charges 2014/15

\$ per month excl GST

NMI Number	Charge type	Monthly charge
2002108649	Standby Feeder Charge	\$2,230
2002108650	Standby Feeder Charge	\$1,050
2002147255	Standby Feeder Charge	\$17,810
SAAAAAA104	Standby Feeder Charge	\$14,710
SAAAAAA177	Standby Feeder Charge	\$10,370
SAAAAAA323	Standby Feeder Charge	\$6,620
SAAAAAA814	Standby Feeder Charge	\$3,950
SAAAAAA891	Standby Feeder Charge	\$4,340
SAAAAAB123	Standby Feeder Charge	\$2,380
2002174265	Standby Feeder Charge	\$12,000
SAAAAAC195	Standby Feeder Charge	\$2,730
SAAAAAB017	Standby Feeder Charge	\$6,170
SAAAAAA256	Standby Feeder Charge	\$19,970
2002106430	Dedicated Asset Charge	\$6,120
SAAAAAA022	Dedicated Feed Charge	\$19,720
SAAAAAA026	Dedicated Feed Charge	\$4,160
2002155381	Dedicated Feed Charge	\$9,630
2001000608	Dedicated Feed Charge	\$2,310
2002112609	Substation Charge	\$53,910

11. TARIFF SCHEDULE FOR 2014-15

The 2014-15 tariff schedule is provided on the following pages.

SA Power Networks NETWORK TARIFFS											
APPLIES TO USAGE FROM 1 JULY 2014											
Customer Category	Units	Min Qty.	DUOS	excl GST	Veg Mgmt excl GST	METER excl GST	Total SA- PN excl GST	TUOS excl GST	PV JSO excl GST	Total excl GST	Total incl GST
Low Voltage Residential - Single Rate											
Supply Rate	\$/day			0.301000	0.000000	0.089200	0.390200		0.000000	0.390200	0.429220
Block 1 Usage Rate	\$/kWh	First 333.3 kWh/mth		0.093500	0.004800		0.098300	0.024800	0.023000	0.146100	0.160710
Block 2 Usage Rate	\$/kWh	Next 500 kWh/mth		0.129500	0.006600		0.136100	0.037200	0.024700	0.198000	0.217800
Block 3 Usage Rate	\$/kWh	Next 833.3 kWh/mth		0.129500	0.006600		0.136100	0.037200	0.024700	0.198000	0.217800
Block 4 Usage Rate	\$/kWh	Balance Usage		0.129500	0.006600		0.136100	0.037200	0.024700	0.198000	0.217800
Low Voltage Residential - Single Rate with Controlled Load											
Supply Rate	\$/day			0.301000	0.000000	0.089200	0.390200		0.000000	0.390200	0.429220
Block 1 Usage Rate	\$/kWh	First 333.3 kWh/mth		0.093500	0.004800		0.098300	0.024800	0.023000	0.146100	0.160710
Block 2 Usage Rate	\$/kWh	Next 500 kWh/mth		0.129500	0.006600		0.136100	0.037200	0.024700	0.198000	0.217800
Block 3 Usage Rate	\$/kWh	Next 833.3 kWh/mth		0.129500	0.006600		0.136100	0.037200	0.024700	0.198000	0.217800
Block 4 Usage Rate	\$/kWh	Balance Usage		0.129500	0.006600		0.136100	0.037200	0.024700	0.198000	0.217800
Controlled Load Block 1 Usage Rate	\$/kWh	First 666.7 kWh/mth		0.036800	0.001900		0.038700	0.008300	0.007000	0.054000	0.059400
Controlled Load Block 2 Usage Rate	\$/kWh	Balance Usage		0.036800	0.001900		0.038700	0.008300	0.007000	0.054000	0.059400
Low Voltage Business - 2 Rate											
Supply Rate	\$/day			0.301000	0.000000	0.089200	0.390200		0.000000	0.390200	0.429220
Peak Block 1 Usage Rate	\$/kWh	First 1,666.7 kWh/mth		0.136200	0.006900		0.143100	0.042000	0.026600	0.211700	0.232870
Peak Block 2 Usage Rate	\$/kWh	Next 6,666.7 kWh/mth		0.136200	0.006900		0.143100	0.042000	0.026600	0.211700	0.232870
Peak Block 3 Usage Rate	\$/kWh	Next 8,333.3 kWh/mth		0.136200	0.006900		0.143100	0.042000	0.026600	0.211700	0.232870
Peak Block 4 Usage Rate	\$/kWh	Balance Usage		0.136200	0.006900		0.143100	0.042000	0.026600	0.211700	0.232870
Off-Peak Usage Rate	\$/kWh	Balance Usage		0.049700	0.002500		0.052200	0.008900	0.010100	0.071200	0.078320
High Voltage Business - 2 Rate											
Supply Rate	\$/day			0.301000	0.000000	0.089200	0.390200		0.000000	0.390200	0.429220
Peak Block 1 Usage Rate	\$/kWh	First 1,666.7 kWh/mth		0.136200	0.006900		0.143100	0.042900	0.026600	0.212600	0.233860
Peak Block 2 Usage Rate	\$/kWh	Next 6,666.7 kWh/mth		0.136200	0.006900		0.143100	0.042900	0.026600	0.212600	0.233860
Peak Block 3 Usage Rate	\$/kWh	Next 8,333.3 kWh/mth		0.136200	0.006900		0.143100	0.042900	0.026600	0.212600	0.233860
Peak Block 4 Usage Rate	\$/kWh	Balance Usage		0.136200	0.006900		0.143100	0.042900	0.026600	0.212600	0.233860
Off-Peak Usage Rate	\$/kWh	Balance Usage		0.049700	0.002500		0.052200	0.008900	0.010100	0.070300	0.077330
Low Voltage Unmetered Usage (Overnight Usage)											
Anytime Usage Rate	\$/kWh			0.062100	0.002900		0.065000	0.014700	0.012100	0.091800	0.100980
Low Voltage Unmetered Usage (24 Hour Usage)											
Anytime Usage Rate	\$/kWh			0.055400	0.002500		0.057900	0.012400	0.010900	0.081200	0.089320
Low Voltage Stepped Demand (KVA)											
		min 70 KVA Annual									
Supply Rate	\$/day			0.000000	0.000000		0.000000		0.000000	0.000000	0.000000
Annual Block 1 Demand Rate	\$/kVA/mth	First 100 KVA		13.560000	0.690000		14.250000	3.540000	2.580000	20.370000	22.407000
Annual Block 2 Demand Rate	\$/kVA/mth	Next 150 KVA		7.910000	0.400000		8.310000	3.540000	1.510000	13.360000	14.696000
Annual Block 3 Demand Rate	\$/kVA/mth	Next 750 KVA		5.790000	0.290000		6.080000	3.540000	1.100000	10.720000	11.792000
Annual Block 4 Demand Rate	\$/kVA/mth	Balance KVA		4.380000	0.220000		4.600000	3.540000	0.830000	8.970000	9.867000
Additional Demand	\$/kVA/mth			4.380000	0.220000		4.600000	0.000000	0.830000	5.430000	5.973000
Peak Usage Rate	\$/kWh			0.028000	0.001400		0.029400	0.007600	0.005300	0.042300	0.046530
Off-Peak Usage Rate	\$/kWh			0.028000	0.001400		0.029400	0.007600	0.005300	0.042300	0.046530
High Voltage Stepped Demand (KVA) <1,000KVA											
		min 70 KVA Annual									
Supply Rate	\$/day			0.000000	0.000000		0.000000		0.000000	0.000000	0.000000
Annual Block 1 Demand Rate	\$/kVA/mth	First 100 KVA		13.560000	0.690000		14.250000	3.540000	2.580000	20.370000	22.407000
Annual Block 2 Demand Rate	\$/kVA/mth	Next 150 KVA		7.910000	0.400000		8.310000	3.540000	1.510000	13.360000	14.696000
Annual Block 3 Demand Rate	\$/kVA/mth	Next 750 KVA		5.790000	0.290000		6.080000	3.540000	1.100000	10.720000	11.792000
Annual Block 4 Demand Rate	\$/kVA/mth	Balance KVA		4.380000	0.220000		4.600000	3.540000	0.830000	8.970000	9.867000
Additional Demand	\$/kVA/mth			4.380000	0.220000		4.600000	0.000000	0.830000	5.430000	5.973000
Peak Usage Rate	\$/kWh			0.028000	0.001400		0.029400	0.007600	0.005300	0.042300	0.046530
Off-Peak Usage Rate	\$/kWh			0.028000	0.001400		0.029400	0.007600	0.005300	0.042300	0.046530
High Voltage Stepped Demand (KVA)											
		min 1,000 KVA Annual									
Supply Rate	\$/day			0.000000	0.000000		0.000000		0.000000	0.000000	0.000000
Annual Block 1 Demand Rate	\$/kVA/mth	First 100 KVA		13.560000	0.690000		14.250000	3.540000	2.580000	20.370000	22.407000
Annual Block 2 Demand Rate	\$/kVA/mth	Next 2,000 KVA		3.380000	0.170000		3.550000	3.470000	0.640000	7.660000	8.426000
Annual Block 3 Demand Rate	\$/kVA/mth	Balance KVA		2.600000	0.130000		2.730000	3.470000	0.500000	6.700000	7.370000
Additional Demand	\$/kVA/mth			2.600000	0.130000		2.730000	0.000000	0.500000	3.230000	3.530000
Peak Usage Rate	\$/kWh			0.024100	0.001200		0.025300	0.007400	0.004600	0.037300	0.041030
Off-Peak Usage Rate	\$/kWh			0.024100	0.001200		0.025300	0.007400	0.004600	0.037300	0.041030
Zone Sub-station (KVA) (Load <10MW and Consumption <40GWh pa)											
		min 5,000 KVA Annual									
Supply Rate	\$/day			2.600000	0.130000		2.730000	3.380000	0.500000	6.610000	7.271000
Annual Demand Rate	\$/kVA/mth			1.810000	0.090000		1.900000	0.000000	0.340000	2.240000	2.464000
Additional Demand	\$/kVA/mth			0.008500	0.000400		0.008900	0.007300	0.001600	0.017800	0.019580
Peak Usage Rate	\$/kWh	) min 25 GWh pa		0.008500	0.000400		0.008900	0.007300	0.001600	0.017800	0.019580
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak		0.008500	0.000400		0.008900	0.007300	0.001600	0.017800	0.019580
Zone Sub-station (KVA) Locational											
		min 5,000 KVA Annual									
TUoS Supply Charge	\$/day										
Supply Rate	\$/day			2.600000	0.130000		2.730000		0.500000	3.230000	3.553000
Annual Demand Rate	\$/kVA/mth			1.810000	0.090000		1.900000		0.340000	2.240000	2.464000
Additional Demand	\$/kVA/mth			0.008500	0.000400		0.008900		0.001600	0.010500	0.011550
Peak Usage Rate	\$/kWh	) min 25 GWh pa		0.008500	0.000400		0.008900		0.001600	0.010500	0.011550
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak		0.008500	0.000400		0.008900		0.001600	0.010500	0.011550
Sub-Transmission (KVA) (Load <10MW and Consumption <40GWh pa)											
		min 5,000 KVA Annual									
Supply Rate	\$/day			0.790000	0.040000		0.830000	3.380000	0.150000	4.360000	4.796000
Annual Demand Rate	\$/kVA/mth			0.790000	0.040000		0.830000	0.000000	0.150000	0.980000	1.078000
Additional Demand	\$/kVA/mth			0.002800	0.000100		0.002900	0.007300	0.000500	0.010700	0.011770
Peak Usage Rate	\$/kWh	) min 25 GWh pa		0.002800	0.000100		0.002900	0.007300	0.000500	0.010700	0.011770
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak		0.002800	0.000100		0.002900	0.007300	0.000500	0.010700	0.011770
Subtransmission (KVA) Locational											
		min 10,000 KVA									
TUoS Supply Charge	\$/day										
Supply Rate	\$/day			0.790000	0.040000		0.830000		0.150000	0.980000	1.078000
Annual Demand Rate	\$/kVA/mth	) Annual or Additional		0.790000	0.040000		0.830000		0.150000	0.980000	1.078000
Additional Demand	\$/kVA/mth			0.002800	0.000100		0.002900		0.000500	0.003400	0.003740
Peak Usage Rate	\$/kWh			0.002800	0.000100		0.002900		0.000500	0.003400	0.003740
Off-Peak Usage Rate	\$/kWh			0.002800	0.000100		0.002900		0.000500	0.003400	0.003740

SA Power Networks NETWORK TARIFFS											
APPLIES TO USAGE FROM 1 JULY 2014											
Zone Substation (KVA) Locational			NMI								
TuOS Supply Charge	\$/day	2001000608	0.000000	0.000000	0.000000	44.000000	0.000000	44.000000	48.400000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	4.900000	0.500000	8.130000	8.943000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
TuOS Supply Charge	\$/day	2002133131	0.000000	0.000000	0.000000	165.000000	0.000000	165.000000	181.500000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	4.850000	0.500000	8.080000	8.888000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
TuOS Supply Charge	\$/day	SAAAAAA021	0.000000	0.000000	0.000000	494.000000	0.000000	494.000000	543.400000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	6.490000	0.500000	9.720000	10.692000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
TuOS Supply Charge	\$/day	SAAAAAA022	0.000000	0.000000	0.000000	148.000000	0.000000	148.000000	162.800000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	4.860000	0.500000	8.090000	8.899000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
TuOS Supply Charge	\$/day	SAAAAAA024	0.000000	0.000000	0.000000	189.000000	0.000000	189.000000	207.900000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	4.870000	0.500000	8.100000	8.910000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
TuOS Supply Charge	\$/day	SAAAAAA026	0.000000	0.000000	0.000000	37.000000	0.000000	37.000000	40.700000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	4.950000	0.500000	8.180000	8.898000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
TuOS Supply Charge	\$/day	SAAAAAA035	0.000000	0.000000	0.000000	155.000000	0.000000	155.000000	170.500000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	6.420000	0.500000	9.650000	10.615000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
TuOS Supply Charge	\$/day	SAAAAAA438	0.000000	0.000000	0.000000	84.000000	0.000000	84.000000	92.400000		
Annual Demand Rate	\$/kVA/mth	min 5,000 KVA Annual	2.600000	0.130000	2.730000	4.890000	0.500000	8.120000	8.932000		
Additional Demand	\$/kVA/mth		1.810000	0.090000	1.900000		0.340000	2.240000	2.464000		
Peak Usage Rate	\$/kWh	) min 25 GWh pa	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Off-Peak Usage Rate	\$/kWh	) Peak or Off-Peak	0.008500	0.000400	0.008900		0.001600	0.010500	0.011550		
Sub-Transmission (KVA) Locational			NMI								
TuOS Supply Charge	\$/day	2001000378	0.000000	0.000000	0.000000	404.000000	0.000000	404.000000	444.400000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	5.890000	0.150000	6.870000	7.557000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002112609	0.000000	0.000000	0.000000	1,709.000000	0.000000	1,709.000000	1,879.900000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	6.760000	0.150000	7.740000	8.514000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002213788	0.000000	0.000000	0.000000	1,228.000000	0.000000	1,228.000000	1,350.800000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	0.960000	0.150000	1.940000	2.134000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002213796	0.000000	0.000000	0.000000	164.000000	0.000000	164.000000	180.400000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	4.830000	0.150000	5.810000	6.391000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002216840	0.000000	0.000000	0.000000	99.000000	0.000000	99.000000	108.900000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	4.990000	0.150000	5.970000	6.567000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002217226	0.000000	0.000000	0.000000	347.000000	0.000000	347.000000	381.700000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	4.990000	0.150000	5.970000	6.567000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002246502	0.000000	0.000000	0.000000	347.000000	0.000000	347.000000	381.700000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	4.990000	0.150000	5.970000	6.567000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002257162	0.000000	0.000000	0.000000	461.000000	0.000000	461.000000	507.100000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	4.970000	0.150000	5.950000	6.545000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	2002257164	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	0.000000	0.150000	0.980000	1.078000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	SAAAAAA018	0.000000	0.000000	0.000000	742.000000	0.000000	742.000000	816.200000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	6.450000	0.150000	7.430000	8.173000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	SAAAAAA084	0.000000	0.000000	0.000000	979.000000	0.000000	979.000000	1,076.900000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	5.890000	0.150000	6.870000	7.557000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000	0.830000		0.150000	0.980000	1.078000		
Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
Off-Peak Usage Rate	\$/kWh		0.002800	0.000100	0.002900		0.000500	0.003400	0.003740		
TuOS Supply Charge	\$/day	SAAAAAB557	0.000000	0.000000	0.000000	1,470.000000	0.000000	1,470.000000	1,617.000000		
Annual Demand Rate	\$/kVA/mth	) min 10,000 KVA	0.790000	0.040000	0.830000	2.680000	0.150000	3.660000	4.026000		
Additional Demand	\$/kVA/mth	) Annual or Additional	0.790000	0.040000							

SA Power Networks NETWORK TARIFFS											
APPLIES TO USAGE FROM 1 JULY 2014											
OBSOLETE TARIFFS											
High Voltage Obsolete (KVA)											
Supply Rate	\$/day							0.000000		0.000000	0.000000
Annual Demand Rate	\$/kVA/mth	min 100 KVA	5.570000	0.280000				5.550000	3.470000	1.060000	10.380000
Additional Demand	\$/kVA/mth		2.600000	0.130000				2.730000	0.000000	0.500000	3.230000
Peak Usage Rate	\$/kWh		0.024100	0.001200				0.025300	0.007400	0.004600	0.037300
Off-Peak Usage Rate	\$/kWh		0.024100	0.001200				0.025300	0.007400	0.004600	0.037300
Low Voltage Business - Single Rate											
Supply Rate	\$/day		0.301000	0.000000	0.089200			0.390200	0.000000	0.000000	0.390200
Block 1 Usage Rate	\$/kWh	First 833.3 kWh/mth	0.107300	0.005500				0.112800	0.030900	0.022500	0.166200
Block 2 Usage Rate	\$/kWh	Next 7,500 kWh/mth	0.127300	0.006500				0.133800	0.037200	0.024300	0.195300
Block 3 Usage Rate	\$/kWh	Next 8,333.3 kWh/mth	0.127300	0.006500				0.133800	0.037200	0.024300	0.195300
Block 4 Usage Rate	\$/kWh	Balance Usage	0.127300	0.006500				0.133800	0.037200	0.024300	0.195300
Low Voltage Business - Single Rate with Controlled Load											
Supply Rate	\$/day		0.301000	0.000000	0.089200			0.390200	0.000000	0.000000	0.390200
Block 1 Usage Rate	\$/kWh	First 833.3 kWh/mth	0.107300	0.005500				0.112800	0.030900	0.022500	0.166200
Block 2 Usage Rate	\$/kWh	Next 7,500 kWh/mth	0.127300	0.006500				0.133800	0.037200	0.024300	0.195300
Block 3 Usage Rate	\$/kWh	Next 8,333.3 kWh/mth	0.127300	0.006500				0.133800	0.037200	0.024300	0.195300
Block 4 Usage Rate	\$/kWh	Balance Usage	0.127300	0.006500				0.133800	0.037200	0.024300	0.195300
Controlled Load Block 1 Usage Rate	\$/kWh	First 666.7 kWh/mth	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
Controlled Load Block 2 Usage Rate	\$/kWh	Balance Usage	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
Low Voltage Business - 2 Rate with Controlled Load											
Supply Rate	\$/day		0.301000	0.000000	0.089200			0.390200	0.000000	0.000000	0.390200
Peak Block 1 Usage Rate	\$/kWh	First 1,666.7 kWh/mth	0.136200	0.006900				0.143100	0.042000	0.026600	0.211700
Peak Block 2 Usage Rate	\$/kWh	Next 6,666.7 kWh/mth	0.136200	0.006900				0.143100	0.042000	0.026600	0.211700
Peak Block 3 Usage Rate	\$/kWh	Next 8,333.3 kWh/mth	0.136200	0.006900				0.143100	0.042000	0.026600	0.211700
Peak Block 4 Usage Rate	\$/kWh	Balance Usage	0.136200	0.006900				0.143100	0.042000	0.026600	0.211700
Off-Peak Usage Rate	\$/kWh		0.049700	0.002500				0.052200	0.008900	0.010100	0.071200
Controlled Load Block 1 Usage Rate	\$/kWh	First 666.7 kWh/mth	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
Controlled Load Block 2 Usage Rate	\$/kWh	Balance Usage	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
Low Voltage Controlled Load											
Controlled Load Block 1 Usage Rate	\$/kWh	First 666.7 kWh/mth	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
Controlled Load Block 2 Usage Rate	\$/kWh	Balance Usage	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
NEW TARIFFS											
Low Voltage Residential - Monthly Demand											
Supply Rate	\$/day		0.000000					0.000000			0.000000
Summer Monthly Demand Rate	\$/kWh/mth	min 1.5 KW	11.140000	0.480000				11.620000	2.670000	2.070000	16.360000
Winter Monthly Demand Rate	\$/kWh/mth	min 1.5 KW	5.570000	0.240000				5.810000	1.335000	1.035000	8.180000
Additional Monthly Demand Rate	\$/kWh/mth		0.000000	0.000000				0.000000	0.000000	0.000000	0.000000
Usage Rate	\$/kWh		0.061900	0.002700				0.064600	0.014600	0.011500	0.090700
Low Voltage Residential - Monthly Demand with Controlled Load											
Supply Rate	\$/day		0.000000					0.000000			0.000000
Summer Monthly Demand Rate	\$/kWh/mth	min 1.5 KW	11.140000	0.480000				11.620000	2.670000	2.070000	16.360000
Winter Monthly Demand Rate	\$/kWh/mth	min 1.5 KW	5.570000	0.240000				5.810000	1.335000	1.035000	8.180000
Additional Monthly Demand Rate	\$/kWh/mth		0.000000	0.000000				0.000000	0.000000	0.000000	0.000000
Usage Rate	\$/kWh		0.061900	0.002700				0.064600	0.014600	0.011500	0.090700
Controlled Load Block 1 Usage Rate	\$/kWh	First 666.7 kWh/mth	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
Controlled Load Block 2 Usage Rate	\$/kWh	Balance Usage	0.036800	0.001900				0.038700	0.008300	0.007000	0.054000
Low Voltage Sportsgrounds Stepped Demand (KVA)											
Supply Rate	\$/day	min 70 KVA Annual Peak + Additional	0.000000	0.000000				0.000000	0.000000	0.000000	0.000000
Annual Block 1 Demand Rate	\$/kVA/mth	First 100 KVA	13.560000	0.690000				14.250000	3.540000	2.580000	20.370000
Annual Block 2 Demand Rate	\$/kVA/mth	Next 150 KVA	7.910000	0.400000				8.310000	3.540000	1.510000	13.360000
Annual Block 3 Demand Rate	\$/kVA/mth	Next 750 KVA	5.790000	0.290000				6.080000	3.540000	1.100000	10.720000
Annual Block 4 Demand Rate	\$/kVA/mth	Balance KVA	4.380000	0.220000				4.600000	3.540000	0.830000	8.970000
Additional Demand	\$/kVA/mth		4.380000	0.220000				4.600000	0.000000	0.830000	5.430000
Peak Usage Rate	\$/kWh		0.028000	0.001400				0.029400	0.007600	0.005300	0.042300
Off-Peak Usage Rate	\$/kWh		0.028000	0.001400				0.029400	0.007600	0.005300	0.042300
High Voltage Sportsgrounds Stepped Demand (KVA)											
Supply Rate	\$/day	min 70 KVA Annual Peak + Additional	0.000000	0.000000				0.000000	0.000000	0.000000	0.000000
Annual Block 1 Demand Rate	\$/kVA/mth	First 100 KVA	13.560000	0.690000				14.250000	3.540000	2.580000	20.370000
Annual Block 2 Demand Rate	\$/kVA/mth	Next 150 KVA	7.910000	0.400000				8.310000	3.540000	1.510000	13.360000
Annual Block 3 Demand Rate	\$/kVA/mth	Next 750 KVA	5.790000	0.290000				6.080000	3.540000	1.100000	10.720000
Annual Block 4 Demand Rate	\$/kVA/mth	Balance KVA	4.380000	0.220000				4.600000	3.540000	0.830000	8.970000
Additional Demand	\$/kVA/mth		4.380000	0.220000				4.600000	0.000000	0.830000	5.430000
Peak Usage Rate	\$/kWh		0.028000	0.001400				0.029400	0.007600	0.005300	0.042300
Off-Peak Usage Rate	\$/kWh		0.028000	0.001400				0.029400	0.007600	0.005300	0.042300

Back up supply tariffs:

These tariffs are only available for sites with more than one National Market Meter Identifier where the second NMI is for a back up supply to the site on a stepped demand tariff. Typically these sites are customers with greater than 4MVA demands and for critical infrastructure; eg Water assets, Hospitals, telecommunications sites or data centre's. These tariffs recognise that the primary NMI demand charges are contributing to the transmission costs for the site. The back up NMI's are charging for the demand at the Distribution Use of System charge and the energy component of the tariff is equal to the primary NMI tariff rates.

12. NOTES ACCOMPANYING 2014/15 TARIFFS

Notes accompanying 2014/15 Tariffs

Notes:

1. Distribution tariffs are determined on a GST exclusive basis. GST is added to the distribution tariffs.
2. SA Power Networks must assign each Distribution Network User to a distribution tariff in respect of each of its connection points in accordance with the following principles.
 - (a) A Distribution Network User connected to the Distribution Network from 1 July 2010 requiring more than 100 amps (70 kVA) supply must be assigned to a distribution network tariff that includes a demand component in respect of that connection point.
 - (b) A Distribution Network User connected to the Distribution Network at 30 June 2011 that has a maximum demand of 250 kVA or more in respect of a connection point, must be assigned to a distribution tariff that includes a demand component in respect of that connection point.
 - (c) A Sub-Transmission (kVA) Network User is a Distribution Network User taking supply at 66 kV, or at 33 kV outside of the Adelaide Metropolitan area. A minimum annual demand of 10 MVA applies. A NEM compliant type 1-4 interval meter is required with the ability to measure both active and reactive power. These tariffs are invoiced monthly.
 - (d) A Zone Substation (kVA) customer is a Distribution Network User taking supply generally at 11kV from the low voltage transformer terminals. Supply may also be taken at lower voltages that exceed 1 kV. A minimum annual peak demand of 5 MVA and a minimum annual usage of 25 GWh apply. A NEM compliant type 1-4 interval meter is required with the ability to measure both active and reactive power. These tariffs are invoiced monthly.
 - (e) A High Voltage Stepped Demand (kVA) customer is a Distribution Network User taking supply generally at 11 kV. Supply may also be taken at lower voltages that exceed 1 kV or at 33 kV in metropolitan Adelaide. A minimum annual peak demand of 1 MVA applies. The steps to be applied to the annual demand are detailed in the Tariff Schedule. A NEM compliant type 1-4 interval meter is required with the ability to measure both active and reactive power. These tariffs are invoiced monthly.
 - (f) A High Voltage Stepped Demand (kVA) <1,000 kVA customer is a Distribution Network User taking supply generally at 11 kV with a kVA demand generally less than 1,000 kVA. Supply may also be taken at lower voltages that exceed 1 kV or at 33 kV in metropolitan Adelaide. A minimum annual peak demand of 70 kVA applies. The steps to be applied to the annual demand are detailed in the Tariff Schedule. A NEM compliant type 1-4 interval meter is required with the ability to measure both active and reactive power. These tariffs are invoiced monthly.
 - (g) A High Voltage Sports Ground Stepped Demand (kVA) <1,000 kVA customer is a Distribution Network User taking supply generally at 11 kV with a kVA demand generally less than 1,000 kVA that utilizes a significant quantity of floodlighting. Supply may also be taken at lower voltages that exceed 1 kV or at 33 kV in metropolitan Adelaide. A minimum annual demand of 70 kVA applies. The steps to be applied to the annual demand are detailed in the Tariff Schedule. The time periods when the demand is measured are set out in 4(c) below. A NEM compliant type 1-4 interval meter is required with the ability to measure both active and reactive power. These tariffs are invoiced monthly.
 - (h) A High Voltage (kVA) (Obsolete) customer is a Distribution Network User taking supply generally at 11 kV. This tariff is available only to Distribution Network Users that were taking supply under the High Voltage Demand (kW) (Obsolete) tariff as at 11 October 1999. Supply may also be taken at lower voltages that exceed 1 kV or at 33 kV in metropolitan Adelaide. A minimum annual peak demand of 100 kVA applies. A NEM compliant type 1-5 interval meter is required with the ability to measure both active and reactive power. An excluded charge applies for the monthly reading of Type 5 meters. These tariffs are invoiced monthly.
 - (i) A High Voltage Business 2 rate customer is a Distribution Network User taking supply generally at 11 kV. Supply may also be taken at lower voltages that exceed 1 kV or at 33 kV in metropolitan Adelaide. A NEM compliant type 1-5 interval meter is required with the ability to measure both active and reactive power. Peak consumption is charged at a flat rate, as is Off Peak consumption. An excluded service charge applies where SA Power Networks is required to read the type 1-4 meter (eg for tier one customers and for tier two customers < 160MWh pa). This tariff is available only to Distribution Network Users requiring less than 70 kVA demand, except where a Distribution Network User was taking supply under this tariff as at 30 June 2010. This tariff is invoiced monthly. An excluded charge applies for the monthly reading of Type 5 meters.
 - (j) A Low Voltage Stepped Demand (kVA) customer is a Distribution Network User generally taking supply at less than 1 kV and generally from the low voltage distribution transformer terminals. A minimum agreed peak maximum demand of 70 KVA applies. The steps to be applied to the annual demand are detailed in the Tariff Schedule. A NEM compliant type 1-5 interval meter is required with the ability to measure both active and reactive power. An excluded charge applies for the monthly reading of Type 5 meters. These tariffs are invoiced monthly.
 - (k) A Low Voltage Sports Ground Stepped Demand (kVA) customer is a Distribution Network User generally taking supply generally at less than 1 kV with a kVA demand and generally from the low voltage distribution transformer terminals that utilizes a significant quantity of floodlighting. A minimum annual demand of 70 kVA applies. The steps to be applied to the annual demand are detailed in the Tariff Schedule. The time periods when the demand is measured are set out in 4(c) below. A NEM compliant type 1-4 interval meter is required with the ability to measure both active and reactive power. These tariffs are invoiced monthly.

- (l) A Low Voltage Business 2 rate customer is a Distribution Network User that is not a residential customer generally taking supply at less than 1 kV and using peak and off-peak network charges. The User utilises a type 1-6 NEM compliant meter. Where a Type 1-5 meter is utilised, the meter must have the ability to measure both active and reactive power. Peak consumption is charged at a flat rate as is Off Peak consumption. An excluded service charge applies where SA Power Networks is required to read the type 1-4 meter (eg for tier one customers and for tier two customers < 160MWh pa). This tariff is available only to Distribution Network Users requiring less than 70 kVA demand, except where a Distribution Network User was taking supply under this tariff as at 30 June 2010 and where the customer's supply arrangements have not altered. An excluded charge also applies for the monthly reading of Type 5-6 meters. This tariff is invoiced monthly or quarterly.
 - (m) A Low Voltage Business single rate customer is a Distribution Network User that is not a residential customer generally taking supply at less than 1 kV. Consumption is charged at two blocks of consumption and is detailed in the Tariff Schedule. The User utilises a type 1-6 NEM compliant meter. Where a Type 1-5 meter is utilised, the meter must have the ability to measure both active and reactive power. An excluded service charge applies where SA Power Networks is required to read the type 1-4 meter (eg for tier one customers and for tier two customers < 160MWh pa). An excluded charge also applies for the monthly reading of Type 5-6 meters. This tariff is available only to Distribution Network Users that were taking supply under this tariff as at 30 June 2010 and where the customer's supply arrangements have not altered. This tariff is invoiced monthly or quarterly.
 - (n) A Low Voltage Residential single rate customer is a Distribution Network User that is a residential customer taking supply at less than 1 kV. Consumption is charged at two blocks of consumption and is detailed in the Tariff Schedule. The User utilises a type 1-6 NEM compliant meter. Where a Type 1-5 meter is utilised, the meter must have the ability to measure both active and reactive power. An excluded service charge applies where SA Power Networks is required to read the type 1-4 meter (eg for tier one customers and for tier two customers < 160MWh pa). An excluded charge also applies for the monthly reading of Type 5-6 meters. This tariff is invoiced monthly or quarterly.
 - (o) A Low Voltage Residential monthly demand customer is a Distribution Network User that is a residential customer taking supply at less than 1 kV. Consumption is charged at a flat rate. A charge also applies for the maximum demand each month with different prices applying in the summer months (November to March) and the winter months (April to October), as detailed in the Tariff Schedule. The time period when the monthly peak demand is measured is between 1600 and 2100 local SA time. The User utilises a type 1-5 NEM compliant meter read monthly. An excluded service charge applies where SA Power Networks is required to read the type 1-4 meter (eg for tier one customers and for tier two customers < 160MWh pa). An excluded charge also applies for the monthly reading of Type 5 meters. This tariff is invoiced monthly. Note that this is an optional tariff. A customer may elect to switch to another tariff after 12 months on this tariff.
 - (p) A Low Voltage Controlled Load is used by a Distribution Network User for permanently installed storage water heaters with a rated delivery of not less than 125 litres, storage space heaters and other approved applications involving a time switch and separate metering where the timing has been set in accordance with SA Power Networks' requirements regarding the timing of loads. Consumption is charged at a flat rate. This tariff is available only to Distribution Network Users that were taking supply under the Controlled Load tariff as at 30 June 2003, or are utilising a business single or residential tariff at the NMI in conjunction with the controlled load. This tariff is invoiced at the same frequency as other tariffs used by the Distribution Network User at that NMI.
 - (q) Unmetered Overnight Usage supply is defined as overnight use by a Distribution Network User for public lighting. These tariffs are generally invoiced monthly, unless otherwise agreed by SA Power Networks.
 - (r) Unmetered 24 Hour Usage supply is defined as constant 24 hour per day use by a Distribution Network User, typically public phones, traffic lights and telecommunications installations. These tariffs are generally invoiced monthly, unless otherwise agreed by SA Power Networks.
3. The supply and demand charges are levied and billed to Distribution Network Users periodically on a pro-rata basis.
4. Demand charges for business customers are determined on the basis of:
- (a) Agreed maximum demand (Annual Demand); and
 - (b) Agreed additional maximum demand (Additional Demand), determined in accordance with Schedule 2 of Part B of the 2005-2010 Electricity Distribution Price Determination.
 - (c) For business customers on the Sports Ground demand kVA tariff, the Annual Demand shall be determined between 1200 and 1900 CDST during December to February only. Additional Demand shall be determined using all other times of the year.
5. Peak energy is energy consumed on business days between the hours of 0700 and 2100 (Central Standard Time). For Distribution Network Users with metering that does not recognise specific days, peak energy is energy consumed on each day between the hours of 0700 and 2100 (Central Standard Time).
6. Off-peak energy is energy consumed other than peak energy.
7. For monthly energy blocks still in use in 2014/15,
- (a) 333.3 kWh/mth approximates 4,000 kWh per annum (residential tariffs); and

(b) 833.3 kWh/mth approximates 10,000 kWh per annum (business single-rate tariffs).

8. The following meter charges apply

- | | |
|--|--------------------------------|
| • Meter Provision Type 6 Direct Current Connected | \$32.56 per annum excl GST. |
| • Meter Provision Type 6 Current Transformer Connected | \$142.35 per annum excl GST. |
| • Meter Provision Type 1-4 Exceptional | \$498.96 per annum excl GST. |
| • Meter Service Other Meter Provider Customer | \$0.00 per annum |
| • Meter Service Exit Fee Type 6 CT | \$264 excl GST per transaction |
| • Meter Service Exit Fee Type 1-4 | \$590 excl GST per transaction |

Residential, Business Single Rate and Business Two Rate tariffs incorporate the Type 6 Direct Current Connected Meter Charge. If a customer assigned to these tariffs is using that meter then no further adjustments are required.

If a customer assigned to a Residential, Business Single Rate or Business Two Rate tariff is using a Type 6 Current Transformer Connected Meter, then an additional charge of the difference from the Type 6 Direct Current Connected Meter will apply.

If a customer assigned to a Residential, Business Single Rate or Business Two Rate tariff is using another meter provider's meter, then the Type 6 Direct Current Connected Meter charge will be rebated.

For those customers on demand tariffs that are using a Type 1-4 Exceptional meter then an additional charge of the Type 1-4 Exceptional Meter will apply. A Type 1-4 Exceptional Meter is meter provision services provided in respect of meters meeting the requirements of a metering installation type 1, metering installation type 2, metering installation type 3 or metering installation type 4 installed prior to 1 July 2000 provided in accordance with the requirement of clause 27 of SA Power Networks' distribution licence as in force at 30 June 2005.

Exit fees apply to type 6 CT meters and to Type 1-4 Exceptional meters where customers elect to switch to another meter type and/or meter provider.

13. TARIFF MAPPING

CODE	DESCRIPTION	BILL_TEXT	MINCHG	MINIMUM_UNITS	UPPER_LIMIT	CHARGE
B2R124	LV Bus 2 Rate Type 1 to 4 Meter	Supply Charge	0	0	999999999	0.301
B2R124	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	1666.7	0.2117
B2R124	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	8333.4	0.2117
B2R124	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	16666.7	0.2117
B2R124	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	999999999	0.2117
B2R124	LV Bus 2 Rate Type 1 to 4 Meter	Off Peak Use	0	0	999999999	0.0712
B2R124H	HV Bus 2 Rate	Supply Charge	0	0	999999999	0.301
B2R124H	HV Bus 2 Rate	Peak Use	0	0	1666.7	0.2126
B2R124H	HV Bus 2 Rate	Peak Use	0	0	8333.4	0.2126
B2R124H	HV Bus 2 Rate	Peak Use	0	0	16666.7	0.2126
B2R124H	HV Bus 2 Rate	Peak Use	0	0	999999999	0.2126
B2R124H	HV Bus 2 Rate	Off Peak Use	0	0	999999999	0.0703
B2R124HI	HV Bus 2 Rate	Supply Charge	0	0	999999999	0.301
B2R124HI	HV Bus 2 Rate	Peak Use	0	0	1666.7	0.2126
B2R124HI	HV Bus 2 Rate	Peak Use	0	0	8333.4	0.2126
B2R124HI	HV Bus 2 Rate	Peak Use	0	0	16666.7	0.2126
B2R124HI	HV Bus 2 Rate	Peak Use	0	0	999999999	0.2126
B2R124HI	HV Bus 2 Rate	Off Peak Use	0	0	999999999	0.0703
B2R124I	LV Bus 2 Rate Type 1 to 4 Meter	Supply Charge	0	0	999999999	0.301
B2R124I	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	1666.7	0.2117
B2R124I	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	8333.4	0.2117
B2R124I	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	16666.7	0.2117
B2R124I	LV Bus 2 Rate Type 1 to 4 Meter	Peak Use	0	0	999999999	0.2117
B2R124I	LV Bus 2 Rate Type 1 to 4 Meter	Off Peak Use	0	0	999999999	0.0712
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Supply Charge	0	0	999999999	0.301
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	1666.7	0.2117
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	8333.4	0.2117
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	16666.7	0.2117
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	999999999	0.2117
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	999999999	0.0712
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	666.7	0.054
B2R124OPCI	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	999999999	0.054
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Supply Charge	0	0	999999999	0.301
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	1666.7	0.2117
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	8333.4	0.2117
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	16666.7	0.2117
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	999999999	0.2117
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	999999999	0.0712
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	666.7	0.054
B2R124OPCL	LV Bus 2 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	999999999	0.054
BSR124	LV Bus 1 Rate Type 1 to 4 Meter	Supply Charge	0	0	999999999	0.301
BSR124	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	833.3	0.1662
BSR124	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	8333.3	0.1953
BSR124	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	16666.6	0.1953
BSR124	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	999999999	0.1953
BSR124I	LV Bus 1 Rate Type 1 to 4 Meter	Supply Charge	0	0	999999999	0.301
BSR124I	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	833.3	0.1662
BSR124I	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	8333.3	0.1953
BSR124I	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	16666.6	0.1953

BSR124I	LV Bus 1 Rate Type 1 to 4 Meter	Peak Use	0	0	999999999	0.1953
BSR124OPCI	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Supply Charge	0	0	999999999	0.301
BSR124OPCI	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	833.3	0.1662
BSR124OPCI	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	8333.3	0.1953
BSR124OPCI	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	16666.6	0.1953
BSR124OPCI	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	999999999	0.1953
BSR124OPCI	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	666.7	0.054
BSR124OPCI	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	999999999	0.054
BSR124OPCL	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Supply Charge	0	0	999999999	0.301
BSR124OPCL	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	833.3	0.1662
BSR124OPCL	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	8333.3	0.1953
BSR124OPCL	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	16666.6	0.1953
BSR124OPCL	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Peak Use	0	0	999999999	0.1953
BSR124OPCL	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	666.7	0.054
BSR124OPCL	LV Bus 1 Rate 1 to 4 Meter & Cntl Load	Off Peak Use	0	0	999999999	0.054
GENR2016	GENR2016 - PV Rebate 45kwh Step 2016	Peak Use	0	0	1368	-0.16
GENR2016	GENR2016 - PV Rebate 45kwh Step 2016	Peak Use	0	0	999999999	0
GENR2016I	GENR2016I - PV Rebate 45 kwh Step 2016	Peak Use	0	0	1368	-0.16
GENR2016I	GENR2016I - PV Rebate 45 kwh Step 2016	Peak Use	0	0	999999999	0
GENR2028	GENR2028 - Photo Voltaic Rebate	Peak Use	0	0	999999999	-0.44
GENR2028I	GENR2028I - Photo Voltaic Rebate	Peak Use	0	0	999999999	-0.44
GENR2028S	GENR2028S - PV Rebate 45kwh Step 2028	Peak Use	0	0	1368	-0.44
GENR2028S	GENR2028S - PV Rebate 45kwh Step 2028	Peak Use	0	0	999999999	0
GENR2028SI	GENR2028SI - PV Rebate 45 kwh Step 2028	Peak Use	0	0	1368	-0.44
GENR2028SI	GENR2028SI - PV Rebate 45 kwh Step 2028	Peak Use	0	0	999999999	0
GENRI	Solar Co Gen	Peak Use	0	0	999999999	-0.44
LVUU	Low Voltage Unmetered (Overnight Usage)	Peak Use	0	0	999999999	0.0918
LVUU24	Low Voltage Unmetered (24 Hour Usage)	Peak Use	0	0	999999999	0.0812
LVUU24I	Low Voltage Unmetered (24 Hour Usage)	Peak Use	0	0	999999999	0.0812
LVUUI	Low Voltage Unmetered (Overnight Usage)	Peak Use	0	0	999999999	0.0918
MB2R	Monthly LV Bus 2 Rate	Supply Charge	0	0	999999999	0.3902
MB2R	Monthly LV Bus 2 Rate	Peak Use	0	0	1666.7	0.2117
MB2R	Monthly LV Bus 2 Rate	Peak Use	0	0	8333.4	0.2117
MB2R	Monthly LV Bus 2 Rate	Peak Use	0	0	16666.7	0.2117
MB2R	Monthly LV Bus 2 Rate	Peak Use	0	0	999999999	0.2117
MB2R	Monthly LV Bus 2 Rate	Off Peak Use	0	0	999999999	0.0712
MB2R	Monthly LV Bus 2 Rate	Meter Reading Charge	0	0	999999999	0.12619
MB2RI	Monthly LV Bus 2 Rate	Supply Charge	0	0	999999999	0.3902
MB2RI	Monthly LV Bus 2 Rate	Meter Reading Charge	0	0	999999999	0
MB2RI	Monthly LV Bus 2 Rate	Peak Use	0	0	1666.7	0.2117
MB2RI	Monthly LV Bus 2 Rate	Peak Use	0	0	8333.4	0.2117
MB2RI	Monthly LV Bus 2 Rate	Peak Use	0	0	16666.7	0.2117
MB2RI	Monthly LV Bus 2 Rate	Peak Use	0	0	999999999	0.2117
MB2RI	Monthly LV Bus 2 Rate	Off Peak Use	0	0	999999999	0.0712
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	1666.7	0.2117
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	8333.4	0.2117
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	16666.7	0.2117
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	999999999	0.2117
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.0712

MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
MB2ROPCL	Monthly LV Bus 2 Rate & Cntl Load	Meter Reading Charge	0	0	999999999	0.12619
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Meter Reading Charge	0	0	999999999	0
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	1666.7	0.2117
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	8333.4	0.2117
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	16666.7	0.2117
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	999999999	0.2117
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.0712
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
MB2ROPCLI	Monthly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
MBSR	Monthly LV Bus 1 Rate	Supply Charge	0	0	999999999	0.3902
MBSR	Monthly LV Bus 1 Rate	Peak Use	0	0	833.3	0.1662
MBSR	Monthly LV Bus 1 Rate	Peak Use	0	0	8333.3	0.1953
MBSR	Monthly LV Bus 1 Rate	Peak Use	0	0	16666.6	0.1953
MBSR	Monthly LV Bus 1 Rate	Peak Use	0	0	999999999	0.1953
MBSR	Monthly LV Bus 1 Rate	Meter Reading Charge	0	0	999999999	0.12619
MBSRI	Monthly LV Bus 1 Rate	Supply Charge	0	0	999999999	0.3902
MBSRI	Monthly LV Bus 1 Rate	Peak Use	0	0	833.3	0.1662
MBSRI	Monthly LV Bus 1 Rate	Peak Use	0	0	8333.3	0.1953
MBSRI	Monthly LV Bus 1 Rate	Peak Use	0	0	16666.6	0.1953
MBSRI	Monthly LV Bus 1 Rate	Peak Use	0	0	999999999	0.1953
MBSRI	Monthly LV Bus 1 Rate	Meter Reading Charge	0	0	999999999	0
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.1662
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	8333.3	0.1953
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	16666.6	0.1953
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.1953
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Meter Reading Charge	0	0	999999999	0.12619
MBSROPCL	Monthly LV Bus 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
MBSROPCLI	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.1662
MBSROPCLI	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	8333.3	0.1953
MBSROPCLI	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	16666.6	0.1953
MBSROPCLI	Monthly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.1953
MBSROPCLI	Monthly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
MBSROPCLI	Monthly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
MBSROPCLI	Monthly LV Bus 1 Rate & Cntl Load	Meter Reading Charge	0	0	999999999	0
MOPCL	Monthly Ctl Load	Off Peak Use	0	0	666.7	0.054
MOPCL	Monthly Ctl Load	Off Peak Use	0	0	999999999	0.054
MOPCL	Monthly Ctl Load	Meter Reading Charge	0	0	999999999	0.12619
MOPCLI	Monthly Ctl Load	Meter Reading Charge	0	0	999999999	0
MOPCLI	Monthly Ctl Load	Off Peak Use	0	0	666.7	0.054
MOPCLI	Monthly Ctl Load	Off Peak Use	0	0	999999999	0.054
MRSR	Monthly LV Res 1 Rate	Supply Charge	0	0	999999999	0.3902
MRSR	Monthly LV Res 1 Rate	Peak Use	0	0	333.3	0.1461
MRSR	Monthly LV Res 1 Rate	Peak Use	0	0	833.3	0.198
MRSR	Monthly LV Res 1 Rate	Peak Use	0	0	1666.6	0.198

MRSR	Monthly LV Res 1 Rate	Peak Use	0	0	999999999	0.198
MRSR	Monthly LV Res 1 Rate	Meter Reading Charge	0	0	999999999	0.12619
MRSRI	Monthly LV Res 1 Rate Type 1 - 4	Supply Charge	0	0	999999999	0.3902
MRSRI	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	333.3	0.1461
MRSRI	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	833.3	0.198
MRSRI	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	1666.6	0.198
MRSRI	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	999999999	0.198
MRSRI	Monthly LV Res 1 Rate Type 1 - 4	Meter Reading Charge	0	0	999999999	0
MRSRII	Monthly LV Res 1 Rate Type 1 - 4	Supply Charge	0	0	999999999	0.3902
MRSRII	Monthly LV Res 1 Rate Type 1 - 4	Meter Reading Charge	0	0	999999999	0
MRSRII	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	333.3	0.1461
MRSRII	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	833.3	0.198
MRSRII	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	1666.6	0.198
MRSRII	Monthly LV Res 1 Rate Type 1 - 4	Peak Use	0	0	999999999	0.198
MRSRIOPCL	Monthly LV Res SR Type 1-4 Cntl Load	Supply Charge	0	0	999999999	0.3902
MRSRIOPCL	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	333.3	0.1461
MRSRIOPCL	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	833.3	0.198
MRSRIOPCL	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	1666.6	0.198
MRSRIOPCL	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	999999999	0.198
MRSRIOPCL	Monthly LV Res SR Type 1-4 Cntl Load	Off Peak Use	0	0	666.7	0.054
MRSRIOPCL	Monthly LV Res SR Type 1-4 Cntl Load	Off Peak Use	0	0	999999999	0.054
MRSRIOPCLI	Monthly LV Res SR Type 1-4 Cntl Load	Supply Charge	0	0	999999999	0.3902
MRSRIOPCLI	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	333.3	0.1461
MRSRIOPCLI	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	833.3	0.198
MRSRIOPCLI	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	1666.6	0.198
MRSRIOPCLI	Monthly LV Res SR Type 1-4 Cntl Load	Peak Use	0	0	999999999	0.198
MRSRIOPCLI	Monthly LV Res SR Type 1-4 Cntl Load	Off Peak Use	0	0	666.7	0.054
MRSRIOPCLI	Monthly LV Res SR Type 1-4 Cntl Load	Off Peak Use	0	0	999999999	0.054
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	333.3	0.1461
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.198
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	1666.6	0.198
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.198
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
MRSROPCL	Monthly LV Res 1 Rate & Cntl Load	Meter Reading Charge	0	0	999999999	0.12619
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Meter Reading Charge	0	0	999999999	0
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	333.3	0.1461
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.198
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	1666.6	0.198
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.198
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
MRSROPCLI	Monthly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
QB2R	Quarterly LV Bus 2 Rate	Supply Charge	0	0	999999999	0.3902
QB2R	Quarterly LV Bus 2 Rate	Peak Use	0	0	1666.7	0.2117
QB2R	Quarterly LV Bus 2 Rate	Peak Use	0	0	8333.4	0.2117
QB2R	Quarterly LV Bus 2 Rate	Peak Use	0	0	16666.7	0.2117
QB2R	Quarterly LV Bus 2 Rate	Peak Use	0	0	999999999	0.2117
QB2R	Quarterly LV Bus 2 Rate	Off Peak Use	0	0	999999999	0.0712

QB2RI	Quarterly LV Bus 2 Rate	Supply Charge	0	0	999999999	0.3902
QB2RI	Quarterly LV Bus 2 Rate	Peak Use	0	0	1666.7	0.2117
QB2RI	Quarterly LV Bus 2 Rate	Peak Use	0	0	8333.4	0.2117
QB2RI	Quarterly LV Bus 2 Rate	Peak Use	0	0	16666.7	0.2117
QB2RI	Quarterly LV Bus 2 Rate	Peak Use	0	0	999999999	0.2117
QB2RI	Quarterly LV Bus 2 Rate	Off Peak Use	0	0	999999999	0.0712
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	1666.7	0.2117
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	8333.4	0.2117
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	16666.7	0.2117
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	999999999	0.2117
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.0712
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
QB2ROPCL	Quarterly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	1666.7	0.2117
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	8333.4	0.2117
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	16666.7	0.2117
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Peak Use	0	0	999999999	0.2117
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.0712
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
QB2ROPCLI	Quarterly LV Bus 2 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
QBSR	Quarterly LV Bus 1 Rate	Supply Charge	0	0	999999999	0.3902
QBSR	Quarterly LV Bus 1 Rate	Peak Use	0	0	833.3	0.1662
QBSR	Quarterly LV Bus 1 Rate	Peak Use	0	0	8333.3	0.1953
QBSR	Quarterly LV Bus 1 Rate	Peak Use	0	0	16666.6	0.1953
QBSR	Quarterly LV Bus 1 Rate	Peak Use	0	0	999999999	0.1953
QBSRI	Quarterly LV Bus 1 Rate	Supply Charge	0	0	999999999	0.3902
QBSRI	Quarterly LV Bus 1 Rate	Peak Use	0	0	833.3	0.1662
QBSRI	Quarterly LV Bus 1 Rate	Peak Use	0	0	8333.3	0.1953
QBSRI	Quarterly LV Bus 1 Rate	Peak Use	0	0	16666.6	0.1953
QBSRI	Quarterly LV Bus 1 Rate	Peak Use	0	0	999999999	0.1953
QBSROPCL	Quarterly LV Bus 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
QBSROPCL	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.1662
QBSROPCL	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	8333.3	0.1953
QBSROPCL	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	16666.6	0.1953
QBSROPCL	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.1953
QBSROPCL	Quarterly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
QBSROPCL	Quarterly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
QBSROPCLI	Quarterly LV Bus 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
QBSROPCLI	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.1662
QBSROPCLI	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	8333.3	0.1953
QBSROPCLI	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	16666.6	0.1953
QBSROPCLI	Quarterly LV Bus 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.1953
QBSROPCLI	Quarterly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
QBSROPCLI	Quarterly LV Bus 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
QOPCL	Quarterly Ctl Load	Off Peak Use	0	0	666.7	0.054
QOPCL	Quarterly Ctl Load	Off Peak Use	0	0	999999999	0.054
QOPCLI	Quarterly Ctl Load	Off Peak Use	0	0	666.7	0.054
QOPCLI	Quarterly Ctl Load	Off Peak Use	0	0	999999999	0.054

QRSR	Quarterly LV Res 1 Rate	Supply Charge	0	0	999999999	0.3902
QRSR	Quarterly LV Res 1 Rate	Peak Use	0	0	333.3	0.1461
QRSR	Quarterly LV Res 1 Rate	Peak Use	0	0	833.3	0.198
QRSR	Quarterly LV Res 1 Rate	Peak Use	0	0	1666.6	0.198
QRSR	Quarterly LV Res 1 Rate	Peak Use	0	0	999999999	0.198
QRSRI	Quarterly LV Res 1 Rate	Supply Charge	0	0	999999999	0.3902
QRSRI	Quarterly LV Res 1 Rate	Peak Use	0	0	333.3	0.1461
QRSRI	Quarterly LV Res 1 Rate	Peak Use	0	0	833.3	0.198
QRSRI	Quarterly LV Res 1 Rate	Peak Use	0	0	1666.6	0.198
QRSRI	Quarterly LV Res 1 Rate	Peak Use	0	0	999999999	0.198
QRSROPCL	Quarterly LV Res 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
QRSROPCL	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	333.3	0.1461
QRSROPCL	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.198
QRSROPCL	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	1666.6	0.198
QRSROPCL	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.198
QRSROPCL	Quarterly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
QRSROPCL	Quarterly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
QRSROPCLI	Quarterly LV Res 1 Rate & Cntl Load	Supply Charge	0	0	999999999	0.3902
QRSROPCLI	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	333.3	0.1461
QRSROPCLI	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	833.3	0.198
QRSROPCLI	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	1666.6	0.198
QRSROPCLI	Quarterly LV Res 1 Rate & Cntl Load	Peak Use	0	0	999999999	0.198
QRSROPCLI	Quarterly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	666.7	0.054
QRSROPCLI	Quarterly LV Res 1 Rate & Cntl Load	Off Peak Use	0	0	999999999	0.054
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Supply Charge	0	0	999999999	0
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Peak Use	0	0	999999999	0.0423
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Off Peak Use	0	0	999999999	0.0423
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Demand	0	70	100	20.37
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Demand	0	70	250	13.36
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Demand	0	70	1000	10.72
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Demand	0	70	999999999	8.97
VHLVSI	HV Stepped Demand (KVA) <1000kVA	Demand	0	0	999999999	5.43
VHVOI	kVA - High Voltage Obsolete	Supply Charge	0	0	999999999	0
VHVOI	kVA - High Voltage Obsolete	Peak Use	0	0	999999999	0.0373
VHVOI	kVA - High Voltage Obsolete	Off Peak Use	0	0	999999999	0.0373
VHVOI	kVA - High Voltage Obsolete	Demand	0	100	999999999	10.38
VHVOI	kVA - High Voltage Obsolete	Demand	0	0	999999999	3.23
VHVS658I	NMI 2002108658 High Voltage	Supply Charge	0	0	999999999	0
VHVS658I	NMI 2002108658 High Voltage	Peak Use	0	0	999999999	0.023278
VHVS658I	NMI 2002108658 High Voltage	Off Peak Use	0	0	999999999	0.023278
VHVS658I	NMI 2002108658 High Voltage	Demand	0	500	999999999	5.384063
VHVS658I	NMI 2002108658 High Voltage	Demand	0	0	999999999	2.509507
VHVS658I	NMI 2002108658 High Voltage	Supply Charge	0	0	999999999	0
VHVS658I	NMI 2002108658 High Voltage	Peak Use	0	0	999999999	0.0253
VHVS658I	NMI 2002108658 High Voltage	Off Peak Use	0	0	999999999	0.0253
VHVS658I	NMI 2002108658 High Voltage	Demand	0	500	999999999	5.85
VHVS658I	NMI 2002108658 High Voltage	Demand	0	0	999999999	2.73
VHVSBI	High Voltage Step Demand/Backup Feeder	Supply Charge	0	0	999999999	0
VHVSBI	High Voltage Step Demand/Backup Feeder	Peak Use	0	0	999999999	0.0373
VHVSBI	High Voltage Step Demand/Backup Feeder	Off Peak Use	0	0	999999999	0.0373

VHVSBI	High Voltage Step Demand/Backup Feeder	Demand	0	0	1000	0
VHVSBI	High Voltage Step Demand/Backup Feeder	Demand	0	0	3000	0
VHVSBI	High Voltage Step Demand/Backup Feeder	Demand	0	0	99999999	0
VHVSBI	High Voltage Step Demand/Backup Feeder	Demand	0	0	99999999	3.23
VHVSGBI	High Voltage Sportsground Demand kVa	Supply Charge	0	0	99999999	0
VHVSGBI	High Voltage Sportsground Demand kVa	Peak Use	0	0	99999999	0.0423
VHVSGBI	High Voltage Sportsground Demand kVa	Off Peak Use	0	0	99999999	0.0423
VHVSGBI	High Voltage Sportsground Demand kVa	Demand	0	70	100	20.37
VHVSGBI	High Voltage Sportsground Demand kVa	Demand	0	70	250	13.36
VHVSGBI	High Voltage Sportsground Demand kVa	Demand	0	70	1000	10.72
VHVSGBI	High Voltage Sportsground Demand kVa	Demand	0	70	99999999	8.97
VHVSGBI	High Voltage Sportsground Demand kVa	Demand	0	0	99999999	5.43
VHVSBI	High Voltage Stepped Demand (KVA)	Supply Charge	0	0	99999999	0
VHVSBI	High Voltage Stepped Demand (KVA)	Peak Use	0	0	99999999	0.0373
VHVSBI	High Voltage Stepped Demand (KVA)	Off Peak Use	0	0	99999999	0.0373
VHVSBI	High Voltage Stepped Demand (KVA)	Demand	0	1000	1000	10.38
VHVSBI	High Voltage Stepped Demand (KVA)	Demand	0	1000	3000	7.66
VHVSBI	High Voltage Stepped Demand (KVA)	Demand	0	1000	99999999	6.7
VHVSBI	High Voltage Stepped Demand (KVA)	Demand	0	0	99999999	3.23
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Supply Charge	0	0	99999999	0
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Peak Use	0	0	99999999	0.0423
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Off Peak Use	0	0	99999999	0.0423
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Demand	0	0	100	0
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Demand	0	0	250	0
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Demand	0	0	1000	0
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Demand	0	0	99999999	0
VLVSBI	Low Voltage Stepped Demand/Backup Feeder	Demand	0	0	99999999	5.43
VLVSI	Low Voltage Stepped Demand (KVA)	Supply Charge	0	0	99999999	0
VLVSI	Low Voltage Stepped Demand (KVA)	Peak Use	0	0	99999999	0.0423
VLVSI	Low Voltage Stepped Demand (KVA)	Off Peak Use	0	0	99999999	0.0423
VLVSI	Low Voltage Stepped Demand (KVA)	Demand	0	70	100	20.37
VLVSI	Low Voltage Stepped Demand (KVA)	Demand	0	70	250	13.36
VLVSI	Low Voltage Stepped Demand (KVA)	Demand	0	70	1000	10.72
VLVSI	Low Voltage Stepped Demand (KVA)	Demand	0	70	99999999	8.97
VLVSI	Low Voltage Stepped Demand (KVA)	Demand	0	0	99999999	5.43
VSGSI	Low Voltage Sportsground Demand kVa	Supply Charge	0	0	99999999	0
VSGSI	Low Voltage Sportsground Demand kVa	Peak Use	0	0	99999999	0.0423
VSGSI	Low Voltage Sportsground Demand kVa	Off Peak Use	0	0	99999999	0.0423
VSGSI	Low Voltage Sportsground Demand kVa	Demand	0	70	100	20.37
VSGSI	Low Voltage Sportsground Demand kVa	Demand	0	70	250	13.36
VSGSI	Low Voltage Sportsground Demand kVa	Demand	0	70	1000	10.72
VSGSI	Low Voltage Sportsground Demand kVa	Demand	0	70	99999999	8.97
VSGSI	Low Voltage Sportsground Demand kVa	Demand	0	0	99999999	5.43
VSTN018I	NMI SAAAAAA018 Subtransmission	Supply Charge	0	0	99999999	742
VSTN018I	NMI SAAAAAA018 Subtransmission	Peak Use	0	0	99999999	0.0034
VSTN018I	NMI SAAAAAA018 Subtransmission	Off Peak Use	0	0	99999999	0.0034
VSTN018I	NMI SAAAAAA018 Subtransmission	Demand	0	10000	99999999	7.43
VSTN018I	NMI SAAAAAA018 Subtransmission	Demand	0	0	99999999	0.98
VSTN084I	NMI SAAAAAA084 Subtransmission	Supply Charge	0	0	99999999	979
VSTN084I	NMI SAAAAAA084 Subtransmission	Supply Charge	0	0	99999999	0

VSTN084I	NMI SAAAAA084 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN084I	NMI SAAAAA084 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN084I	NMI SAAAAA084 Subtransmission	Demand	0	10000	999999999	6.87
VSTN084I	NMI SAAAAA084 Subtransmission	Demand	0	0	999999999	0.98
VSTN162I	NMI 2002257162 Subtransmission	Supply Charge	0	0	999999999	461
VSTN162I	NMI 2002257162 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN162I	NMI 2002257162 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN162I	NMI 2002257162 Subtransmission	Demand	0	5000	999999999	5.95
VSTN162I	NMI 2002257162 Subtransmission	Demand	0	0	999999999	0.98
VSTN226I	NMI 2002217226 Subtransmission	Supply Charge	0	0	999999999	347
VSTN226I	NMI 2002217226 Subtransmission	Supply Charge	0	0	999999999	0
VSTN226I	NMI 2002217226 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN226I	NMI 2002217226 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN226I	NMI 2002217226 Subtransmission	Demand	0	10000	999999999	5.97
VSTN226I	NMI 2002217226 Subtransmission	Demand	0	0	999999999	0.98
VSTN378I	NMI 2001000378 Subtransmission	Supply Charge	0	0	999999999	404
VSTN378I	NMI 2001000378 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN378I	NMI 2001000378 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN378I	NMI 2001000378 Subtransmission	Demand	0	10000	999999999	6.87
VSTN378I	NMI 2001000378 Subtransmission	Demand	0	0	999999999	0.98
VSTN502I	NMI 2002246502 Subtransmission	Supply Charge	0	0	999999999	347
VSTN502I	NMI 2002246502 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN502I	NMI 2002246502 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN502I	NMI 2002246502 Subtransmission	Demand	0	10000	999999999	5.97
VSTN502I	NMI 2002246502 Subtransmission	Demand	0	0	999999999	0.98
VSTN557I	NMI SAAAAAB557 Subtransmission	Supply Charge	0	0	999999999	1470
VSTN557I	NMI SAAAAAB557 Subtransmission	Supply Charge	0	0	999999999	0
VSTN557I	NMI SAAAAAB557 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN557I	NMI SAAAAAB557 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN557I	NMI SAAAAAB557 Subtransmission	Demand	0	10000	999999999	3.66
VSTN557I	NMI SAAAAAB557 Subtransmission	Demand	0	0	999999999	0.98
VSTN609I	NMI 2002112609 Subtransmission	Supply Charge	0	0	999999999	1709
VSTN609I	NMI 2002112609 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN609I	NMI 2002112609 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN609I	NMI 2002112609 Subtransmission	Demand	0	0	999999999	7.74
VSTN609I	NMI 2002112609 Subtransmission	Demand	0	0	999999999	0.98
VSTN788I	NMI 2002213788 Subtransmission	Supply Charge	0	0	999999999	1228
VSTN788I	NMI 2002213788 Subtransmission	Supply Charge	0	0	999999999	0
VSTN788I	NMI 2002213788 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN788I	NMI 2002213788 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN788I	NMI 2002213788 Subtransmission	Demand	0	10000	999999999	1.94
VSTN788I	NMI 2002213788 Subtransmission	Demand	0	0	999999999	0.98
VSTN796I	NMI 2002213796 Subtransmission	Supply Charge	0	0	999999999	164
VSTN796I	NMI 2002213796 Subtransmission	Supply Charge	0	0	999999999	0
VSTN796I	NMI 2002213796 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN796I	NMI 2002213796 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN796I	NMI 2002213796 Subtransmission	Demand	0	10000	999999999	5.81
VSTN796I	NMI 2002213796 Subtransmission	Demand	0	0	999999999	0.98
VSTN840I	NMI 2002216840 Subtransmission	Supply Charge	0	0	999999999	99
VSTN840I	NMI 2002216840 Subtransmission	Supply Charge	0	0	999999999	0

VSTN840I	NMI 2002216840 Subtransmission	Peak Use	0	0	999999999	0.0034
VSTN840I	NMI 2002216840 Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTN840I	NMI 2002216840 Subtransmission	Demand	0	10000	999999999	5.97
VSTN840I	NMI 2002216840 Subtransmission	Demand	0	0	999999999	0.98
VSTNB164I	NMI 2002257164 Backup Subtransmission	Supply Charge	0	0	999999999	0
VSTNB164I	NMI 2002257164 Backup Subtransmission	Peak Use	0	0	999999999	0.0034
VSTNB164I	NMI 2002257164 Backup Subtransmission	Off Peak Use	0	0	999999999	0.0034
VSTNB164I	NMI 2002257164 Backup Subtransmission	Demand	0	10000	999999999	0
VSTNB164I	NMI 2002257164 Backup Subtransmission	Demand	0	0	999999999	0.98
VSTNBI	Subtransmission Generic Back Up Feeder	Supply Charge	0	0	999999999	0
VSTNBI	Subtransmission Generic Back Up Feeder	Peak Use	0	0	999999999	0.0107
VSTNBI	Subtransmission Generic Back Up Feeder	Off Peak Use	0	0	999999999	0.0107
VSTNBI	Subtransmission Generic Back Up Feeder	Demand	0	0	999999999	0
VSTNBI	Subtransmission Generic Back Up Feeder	Demand	0	0	999999999	0.98
VSTNI	Subtransmission Generic	Supply Charge	0	0	999999999	0
VSTNI	Subtransmission Generic	Peak Use	0	0	999999999	0.0107
VSTNI	Subtransmission Generic	Off Peak Use	0	0	999999999	0.0107
VSTNI	Subtransmission Generic	Demand	0	5000	999999999	4.36
VSTNI	Subtransmission Generic	Demand	0	0	999999999	0.98
VZSI	kVA - Zone Sub-station	Supply Charge	0	0	999999999	0
VZSI	kVA - Zone Sub-station	Peak Use	0	0	999999999	0.0178
VZSI	kVA - Zone Sub-station	Off Peak Use	0	0	999999999	0.0178
VZSI	kVA - Zone Sub-station	Demand	0	5000	999999999	6.61
VZSI	kVA - Zone Sub-station	Demand	0	0	999999999	2.24
VZSN021I	NMI SAAAAAA021 Zone Sub Station	Supply Charge	0	0	999999999	494
VZSN021I	NMI SAAAAAA021 Zone Sub Station	Supply Charge	0	0	999999999	0
VZSN021I	NMI SAAAAAA021 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN021I	NMI SAAAAAA021 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN021I	NMI SAAAAAA021 Zone Sub Station	Demand	0	5000	999999999	9.72
VZSN021I	NMI SAAAAAA021 Zone Sub Station	Demand	0	0	999999999	2.24
VZSN022I	NMI SAAAAAA022 Zone Sub Station	Supply Charge	0	0	999999999	148
VZSN022I	NMI SAAAAAA022 Zone Sub Station	Supply Charge	0	0	999999999	0
VZSN022I	NMI SAAAAAA022 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN022I	NMI SAAAAAA022 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN022I	NMI SAAAAAA022 Zone Sub Station	Demand	0	5000	999999999	8.09
VZSN022I	NMI SAAAAAA022 Zone Sub Station	Demand	0	0	999999999	2.24
VZSN024I	NMI SAAAAAA024 Zone Sub Station	Supply Charge	0	0	999999999	189
VZSN024I	NMI SAAAAAA024 Zone Sub Station	Supply Charge	0	0	999999999	0
VZSN024I	NMI SAAAAAA024 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN024I	NMI SAAAAAA024 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN024I	NMI SAAAAAA024 Zone Sub Station	Demand	0	5000	999999999	8.1
VZSN024I	NMI SAAAAAA024 Zone Sub Station	Demand	0	0	999999999	2.24
VZSN026I	NMI SAAAAAA026 Zone Sub Station	Supply Charge	0	0	999999999	37
VZSN026I	NMI SAAAAAA026 Zone Sub Station	Supply Charge	0	0	999999999	0
VZSN026I	NMI SAAAAAA026 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN026I	NMI SAAAAAA026 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN026I	NMI SAAAAAA026 Zone Sub Station	Demand	0	5000	999999999	8.18
VZSN026I	NMI SAAAAAA026 Zone Sub Station	Demand	0	0	999999999	2.24
VZSN035I	NMI SAAAAAA035 Zone Sub Station	Supply Charge	0	0	999999999	155
VZSN035I	NMI SAAAAAA035 Zone Sub Station	Supply Charge	0	0	999999999	0

VZSN035I	NMI SAAAAAA035 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN035I	NMI SAAAAAA035 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN035I	NMI SAAAAAA035 Zone Sub Station	Demand	0	5000	999999999	9.65
VZSN035I	NMI SAAAAAA035 Zone Sub Station	Demand	0	0	999999999	2.24
VZSN131I	NMI 2002133131 Zone Sub Station	Supply Charge	0	0	999999999	165
VZSN131I	NMI 2002133131 Zone Sub Station	Supply Charge	0	0	999999999	0
VZSN131I	NMI 2002133131 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN131I	NMI 2002133131 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN131I	NMI 2002133131 Zone Sub Station	Demand	0	5000	999999999	8.08
VZSN131I	NMI 2002133131 Zone Sub Station	Demand	0	0	999999999	2.24
VZSN438I	NMI SAAAAAA438 Zone Sub Station	Supply Charge	0	0	999999999	84
VZSN438I	NMI SAAAAAA438 Zone Sub Station	Supply Charge	0	0	999999999	0
VZSN438I	NMI SAAAAAA438 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN438I	NMI SAAAAAA438 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN438I	NMI SAAAAAA438 Zone Sub Station	Demand	0	5000	999999999	8.12
VZSN438I	NMI SAAAAAA438 Zone Sub Station	Demand	0	0	999999999	2.24
VZSN608I	NMI 2001000608 Zone Sub Station	Supply Charge	0	0	999999999	44
VZSN608I	NMI 2001000608 Zone Sub Station	Supply Charge	0	0	999999999	0
VZSN608I	NMI 2001000608 Zone Sub Station	Peak Use	0	0	999999999	0.0105
VZSN608I	NMI 2001000608 Zone Sub Station	Off Peak Use	0	0	999999999	0.0105
VZSN608I	NMI 2001000608 Zone Sub Station	Demand	0	5000	999999999	8.13
VZSN608I	NMI 2001000608 Zone Sub Station	Demand	0	0	999999999	2.24
XGENR	PV Zero Rate - Solar Co Gen	Peak Use	0	0	999999999	0
XGENRI	PV Zero Rate - Solar Co Gen	Peak Use	0	0	999999999	0
ZGENR	Zero Rate - Solar Co Gen	Peak Use	0	0	999999999	0
ZGENRI	Zero Rate - Solar Co Gen	Peak Use	0	0	999999999	0