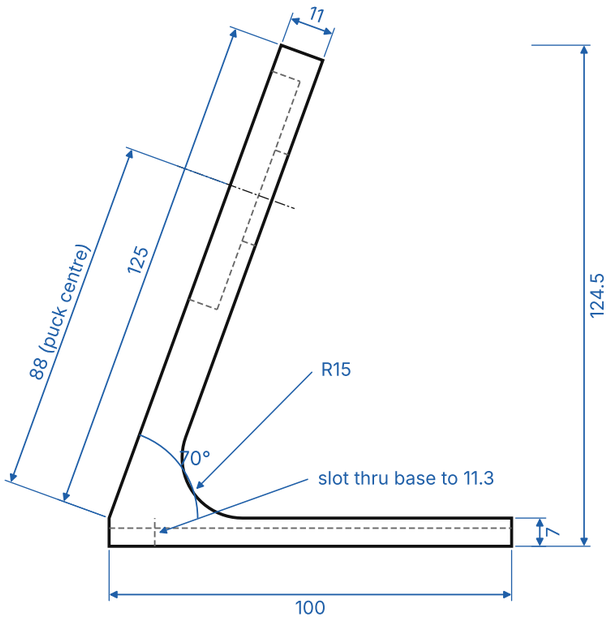

SIDE VIEW
hidden lines: pocket, push hole, cable groove

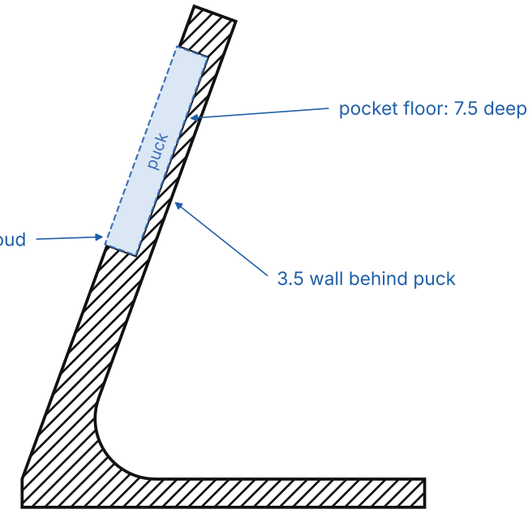

SECTION B-B (X = 15 mm)
pocket depth; puck shown dashed

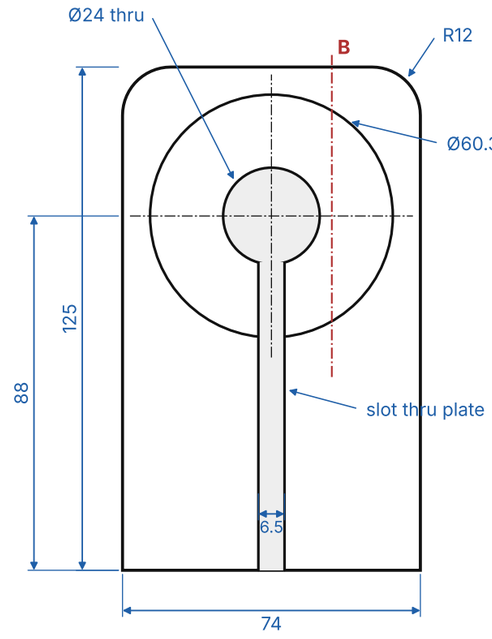

VIEW A
looking straight at the plate face

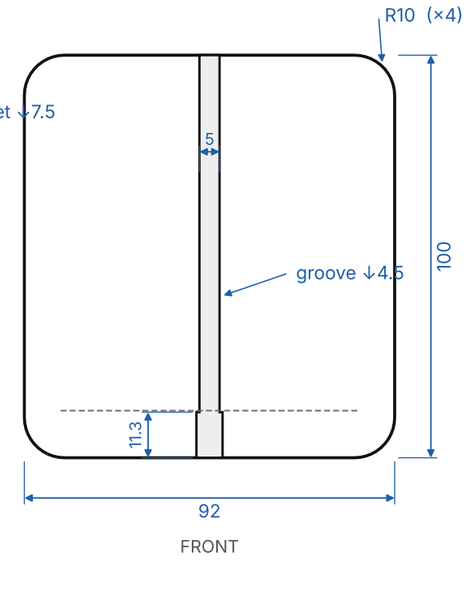

FRONT

BOTTOM VIEW
dashed: plate back at base top

PARAMETERS (mm)

Puck (Amazon Basics Qi2.2, LACC175)	Ø60 × 8.1 — measure yours
Pocket	Ø60.3 (fit +0.3) × 7.5 deep, puck 0.6 proud
Plate	74 × 125 × 11, tilt 70°, top corners R12
Puck centre	88 along slope from base top
Base	92 × 100 × 7, corners R10
Push-out hole / cable slot	Ø24 thru / 6.5 wide thru plate + base
Groove under base	5 × 4.5, open, full depth to back edge
Plate-to-base fillet	R15

NOTES

1. Print flat on the base, no supports. PLA/PETG, 0.2 mm layers, 3 walls, 15–20 % infill.
2. Cable leaving the puck edge: rotate puck so the cable drops into the slot.
   Cable leaving the puck back: pass it through the Ø24 hole, then down the slot.
3. Magnet pull can lift a loose puck: use fit 0.1–0.2 or tape on the pocket floor.
4. Overall 92 × 100 × 124.5. Phone CoG ≈ 26 behind the front edge.

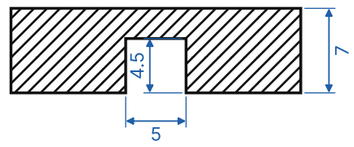

DETAIL C (3:1)
cable groove, seen from the back

MagSafe / Qi2 Phone Stand
Units mm · not to scale except Detail C ratio · ref. Printables 44465