Thermal-Aware NoC Reconfiguration for MoE Inference in 3D DRAM-Stacked Systems

Anonymous Author(s)

***Abstract*—Three-dimensional DRAM stacking provides high memory bandwidth for Mixture-of-Experts (MoE) inference, but efficiently utilizing distributed compute and memory resources remains challenging. Input-dependent expert activation and concentrated memory accesses produce uneven communication demands that change across execution stages, causing contention on shared network paths. Thermal coupling between stacked logic and memory dies further limits sustained performance. Coarse-grained bandwidth configurations offer limited flexibility in allocating connectivity to changing heavy flows. We propose traffic- and thermal-aware NoC reconfiguration for MoE inference in 3D DRAM-stacked systems. Interconnected configurable switches establish dedicated paths for selected high-volume and long-range flows, reducing competition for router forwarding resources. A prediction mechanism estimates communication demand from expert activation and memory access behavior. Based on this demand, a configuration algorithm selects compatible switch connections to maximize the traffic accommodated by dedicated paths under physical port and path-conflict constraints. Coupled thermal prediction further guides task placement and regional voltage–frequency adjustment to alleviate cross-tier hotspots while limiting execution-time overhead.**

***Index Terms*—hybrid bonding, 3D integration, mixture-of-experts, network-on-chip, reconfigurable interconnect, memory-bank contention, thermal management**

I. Introduction

The rapid growth of AI models is increasing demands for compute throughput, memory capacity, and data-movement bandwidth, motivating three-dimensional (3D) integration of heterogeneous compute and memory resources. Commercial systems such as AMD's hybrid-bonded 3D V-Cache demonstrate the maturity of this approach, while Helios applies hybrid-bonded 3D DRAM to near-memory processing for large language model (LLM) serving [1], [2].

Deploying LLM inference on such 3D systems exposes three interrelated challenges. First, uneven accesses to model parameters and KV-cache data cause DRAM-bank conflicts,causing an increase in the delay of memory access time. Second, bursty and spatially skewed communication causes network-on-chip (NoC) contention when messages compete for the same links or router outputs. The busy resources can change between mixture-of-experts (MoE) model layers and communication phases, whereas a small set of predefined topologies offers limited ways to adapt local connections. Third, spatially aligned activity in the stacked Logic and DRAM tiers creates vertically coupled thermal hotspots, increasing peak temperature and the risk of thermal throttling.

Prior work addresses these challenges through expert placement, interconnect configuration, and thermal management. HiBand combines bank-local HB-DRAM, hierarchical data movement, and a small set of reconfigurable NoC modes [3]; Sem-MoE co-schedules expert placement and token routing to increase device-local expert activations [4]; and AMBER combines offline thermal-aware mapping with online subtask interleaving and DVFS [5].

Our experiments identify three remaining bottlenecks in memory access, on-chip communication, and thermal management. Concurrent Qwen3 requests contend for shared DRAM banks, delaying memory accesses. During Qwen3 prefill, uneven traffic creates queues along shared network paths. In the thermal study, AMBER-style management reduces throughput relative to the reference without thermal control, while hotspots remain aligned across the logic and DRAM tiers. These observations motivate examining how memory accesses and NPU-to-NPU messages compete for shared resources and how activity in the stacked tiers contributes to cross-tier hotspots.

To address the above challenges, we distribute concurrent memory accesses across DRAM banks and configure dedicated NoC paths for selected flows in each MoE communication phase to reduce queueing at congested links and router outputs. We also use coupled logic–DRAM thermal predictions to guide task placement and regional voltage and frequency adjustments, while accounting for data-copy and activation-transfer costs.

The contributions of the paper are as follows:

1) We identify phase-dependent NoC congestion in MoE inference on 3D DRAM-stacked systems. Input-dependent expert activation and concentrated memory accesses create uneven communication demand, while coarse-grained NoC configurations limit the ability to redirect traffic away from congested links and router outputs. We also observe persistent cross-tier hotspots under thermal management.
2) We propose a framework that jointly optimizes NoC reconfiguration, DRAM-bank placement, and thermal-aware execution. It configures dedicated paths for predicted heavy flows under physical port and path-conflict constraints, distributes concurrent accesses across DRAM banks, and uses coupled logic–DRAM thermal predictions to guide task placement and regional DVFS. These mechanisms aim to reduce network queueing and bank contention while mitigating cross-tier hotspots.
3) Across the evaluated MoE workloads, the proposed framework reduces mean NoC queueing latency by xxx% relative to the baseline. The estimated end-to-end

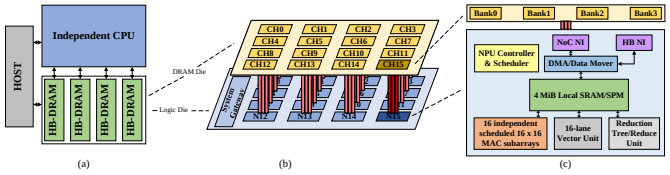


Fig. 1. Target 3D system. (a) Host and HB-DRAM organization. (b) Face-to-face integration of the 4×4 Logic-tier NPU mesh and the aligned DRAM channels. (c) Microarchitecture of an NPU–memory pair.

inference latency decreases by xxx%, and the peak stack temperature decreases by xxx °C under matched thermal conditions.

II. Motivation

A. Target System and Workloads

Figure 1 shows a 3D accelerator in which the logic and memory tiers are integrated by face-to-face hybrid bonding. Each NPU cluster in the logic tier is vertically aligned with a DRAM partition and accesses it through a local hybrid-bond link. A horizontal 4×4 mesh NoC connects the NPU clusters and carries transfers between them, including MoE dispatch and combine traffic. Local memory accesses and inter-cluster transfers therefore use distinct physical paths. The vertical alignment also couples the temperatures of the logic and DRAM tiers, so concentrated activity in one tier can heat the other.

The main MoE evaluation covers Qwen3-30B-A3B [6] and Qwen1.5-MoE-A2.7B [7] for language-model inference, mini-SWE-agent [8] with a Qwen3-30B-A3B backend for SWE-bench Lite tasks [9], and LingBot TI2V [10] for video generation. The auxiliary thermal scenario combines WHISPER [11], an ORB-SLAM3-derived SLAM workload [12], and $\pi_{0.5}$ [13].

B. Phase-Dependent Congestion in MoE Communication

Problem. HiBand adapts communication locality by switching among four topologies— Full-Local, Local-Biased, Global-Biased, and Full-Global—that repartition bandwidth according to broad communication locality [3]. MoE communication can concentrate transfers around a small set of busy NPU nodes and links. When several messages need the same link or router output, they must wait even if other parts of the network have spare capacity. As hotspot locations change, the four predefined topologies may still leave concentrated flows competing for the same links and router outputs, causing persistent queueing despite spare capacity elsewhere.

Figure 2 shows the communication latency of Qwen3-30B-A3B prefill. As input length increases from 128 to 1024 tokens per request, the queueing share of mean network round-trip latency rises from 57.2% to 88.8%, while mean zero-load latency increases by 17.3%. Zero-load latency includes serialization and traversal without competing traffic; queueing is the additional delay under concurrent traffic. Thus, queueing at shared network resources dominates the growth in communication latency as input length increases.

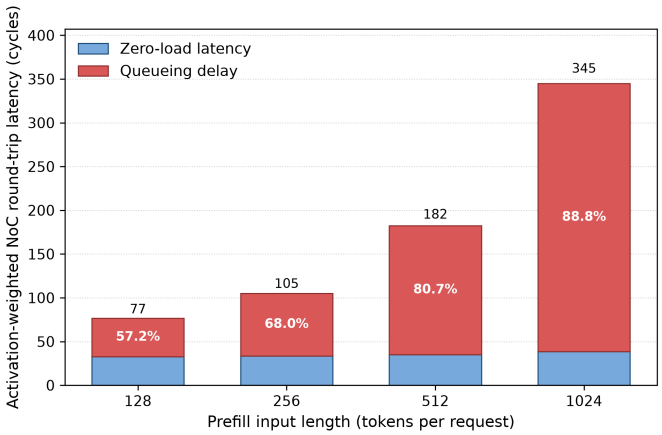


Fig. 2. Qwen3-30B-A3B prefill communication on the fixed Mesh. Each bar reports the activation-weighted mean NoC round-trip latency at one input length. Zero-load latency contains serialization and uncongested traversal; queueing is the additional delay in the concurrent replay of the same message set. From 128 to 1024 input tokens, the queueing share rises from 57.2% to 88.8%.

Root Cause. The gating network (Gate) selects a small set of experts for each token. During Dispatch, token activations are sent to the NPU nodes holding those experts; Combine returns the corresponding expert outputs. We define a flow as the messages from one source NPU to one destination NPU within a single communication phase. During Dispatch, when many tokens select the same experts, or several frequently selected experts reside on the same NPU, transfers concentrate at a small set of destinations. Flows whose routes overlap then compete for shared links and router outputs, creating queueing hotspots. Thus, hotspot formation depends on both the distribution of Gate selections and expert placement. Our controlled Qwen3 decoding test also shows that concentrated accesses can serialize requests at shared DRAM banks. Spreading those accesses across banks addresses memory-side waiting, while overlapping NoC routes still require path-level control.

Figure 3 maps these messages onto deterministic XY paths. Across MoE model layers 1, 24, and 48, the largest path-derived router demand occurs at R9, R5, and R10, respectively. This spatial concentration can force multiple flows to share a router output or link. Different concentrations can require different local connections even when their total volume and aggregate communication locality are similar. The design requirement is therefore to provide selectable local paths around the contested resources, with explicit capacity at their injection and receiving interfaces.

Opportunity: Configurable Local Connections. We place configurable switches (CSs) between neighboring NPU nodes in the same Logic tier. Each switch selects connections between four fixed corner ports. Using predicted hotspot locations, the controller configures nearby switches to redirect selected transfers around congested links and router outputs, and adjusts these connections as hotspot locations change. A selected connection takes data from an auxiliary router output and delivers it directly to the destination network interface

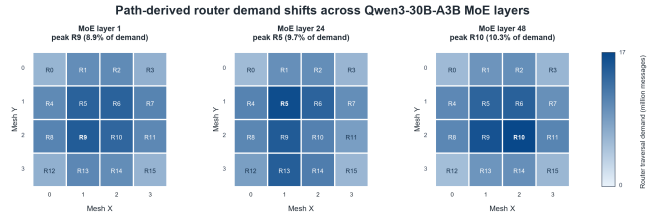


Fig. 3. Path-derived router demand under the same Qwen3 trace. Each heatmap aggregates exact source–destination messages over every router on their deterministic XY path. With one shared scale, the peak moves R9→R5→R10 across MoE layers 1, 24, and 48, exposing a time-varying spatial demand pattern.

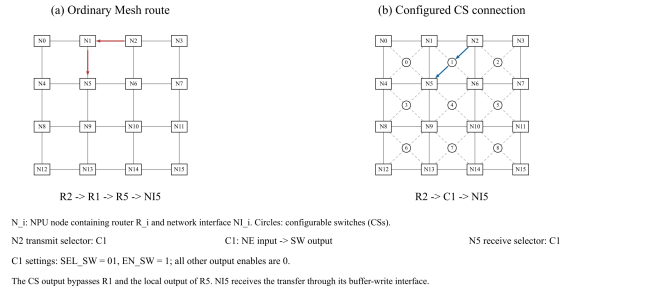


Fig. 4. Connection example for the NoC opportunity. (a) The ordinary N2-to-N5 route uses R1 and R5's local output. (b) A configured C1 connection delivers the transfer directly to NI5. The source transmit selector, CS connection, and destination receive selector are configured together.

(NI), bypassing intermediate Mesh routing and the destination router's ordinary local output along that connection. Traffic without a selected CS connection continues to use the Mesh.

Figure 4 illustrates the mechanism. The XY route from N2 to N5 traverses R2, R1, and R5. Switch C1 connects N1, N2, N5, and N6; setting its northeast input to its southwest output permits the alternative R2–C1–NI5 path. N2's transmit selector and N5's receive selector must both select C1. This connection removes that transfer from the R1 path and R5 local output and delivers the data to NI5's buffer-write interface. When other messages compete for R1's output toward R5 or R5's local output, diverting this transfer through C1 reduces the traffic using those outputs and can relieve queueing.

Concentrating activity in a small region also affects the temperature of both tiers. In our auxiliary thermal study, aligned logic and DRAM hotspots persisted under AMBER-style thermal management [5]. This motivates using coupled temperature predictions to guide task placement and regional DVFS.

III. Design Directions

A. Memory-bank Design Directions

Coaccess-aware page placement (CA) rearranges 4-KiB expert-weight pages within each DRAM partition. From the historical development request graphs, we group weight reads by DAG dependency depth within each partition. Each pair of reads to different tensors in the same group adds one to their coaccess weight. We apply that weight to page pairs with matching offsets within those tensors. Dependency depth serves as a proxy for concurrent demand.

Starting from a fixed layout, CA searches capacity-preserving page swaps to reduce the total weight of pairs assigned to the same bank, breaking ties by the sum of squared bank loads. Bank loads count profiled weight reads for the pages assigned to each bank.

The runtime maps each logical weight page to a physical frame and preserves its byte offset. CA remaps only read-only weight pages. Mutable buffers retain their existing mappings. Moving a weight page requires a source read and a destination write before the new mapping takes effect. The evaluated layout assumes resident weights, with demand paging outside the scope of this evaluation.

B. Reconfigurable Local Connections for MoE Communication

The NoC supplements the ordinary Mesh with configurable connections between nearby NPU nodes. It redirects selected transfers away from congested Mesh links and router outputs through configurable local connections that deliver data directly to the destination NI. All data wires are fixed at fabrication. Runtime control selects their input–output connections.

Physical network and switch circuit. Figure 5 separates the Mesh, the added connections, and their combined placement in one Logic tier. The sixteen NPU nodes form a 4×4 grid and are numbered from 0 to 15 in row-major order. A configurable switch (CS) is placed within each adjacent 2×2 node group, giving nine CSs. Let r and j denote the row and column indices of a 2×2 node group, respectively, where $r, j \in \{0, 1, 2\}$. The CS within that group is indexed by $c = 3r+j$ and connects nodes $4r+j$, $4r+j+1$, $4r+j+4$, and $4r + j + 5$ at its NW, NE, SW, and SE corners, respectively. NW, NE, SW, and SE denote northwest, northeast, southwest, and southeast. CSs have no direct connections to other CSs. A corner, edge, or interior node is adjacent to one, two, or four CSs, respectively.

Each corner attachment comprises two separate directed data bundles: a router auxiliary output to a CS input, and a CS output to the receiving NI. Each CS contains four 3:1 output multiplexers (MUXes). An output selects one of the other three corner inputs; selecting its own corner is excluded. Two selection bits and one enable bit per output give a 12-bit CS configuration. SEL denotes input selection and EN denotes connection enable. With output indices $o = 0, 1, 2, 3$ corresponding to NW, NE, SW, SE, output o uses selection bits $[3o + 1 : 3o]$ and enable bit $[3o + 2]$. Selection codes 00, 01, and 10 index the other corners in that same order; 11 is unused. A disabled output has a zero configuration field. The selected data and valid signal follow the same connection. The controller permits only configurations in which each input is selected by at most one enabled output.

Router and NI attachment. Figure 6 shows a generic NPU node. The router retains its four Mesh directions and local NI connection, and adds one auxiliary output. A transmit selector

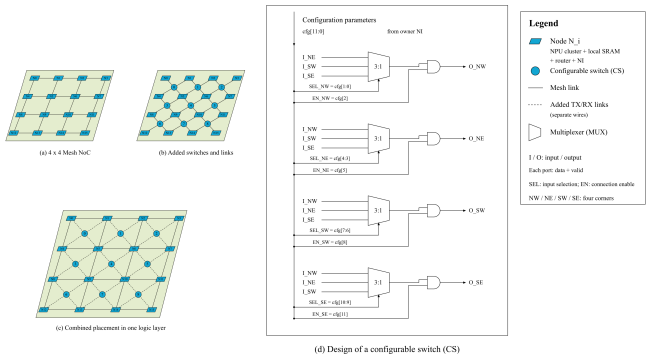


Fig. 5. Physical NoC organization. The Mesh, added corner attachments, and combined placement describe one network in the same Logic tier. Each CS contains four 3:1 MUXes with selection and enable inputs driven by the NI responsible for that CS. One drawn corner attachment represents separate transmit and receive data bundles.

sends that output to one adjacent CS. At the receiving node, one receive selector chooses one adjacent CS output for the CS receive first-in, first-out (FIFO) buffer inside the NI. The transmit and receive selections are configured independently and remain fixed until the next reconfiguration.

Ordinary traffic exits the destination router into the Mesh receive FIFO. Auxiliary traffic reaches the CS receive FIFO without traversing that router's local output. Both FIFOs feed the buffer-write interface and remain subject to its arbitration, SRAM-bank availability, and backpressure. A credit advertises one available FIFO entry. When an entry in the CS receive FIFO is freed, the NI sends a credit pulse over separate reverse-control wires. The receive selection routes the pulse to the selected CS, whose credit-return logic uses the active SEL/EN configuration to route it back to the corresponding input corner. The transmit selection then returns it to the transmitting router's auxiliary credit counter. These control wires are separate from the forward data MUXes. The transmit, CS, and receive selections remain unchanged until the old transfers complete and their credits return.

For an auxiliary transfer from source s to destination d, the controller selects a forwarding node g and CS c, where g and d are distinct corners of c. The transfer first follows the deterministic Mesh route from s to g, then uses g's auxiliary output, the configured CS connection, and d's auxiliary receive interface. When $g = s$, no intermediate Mesh link is needed. The data packet carries destination d and forwarding node g. Mesh routers forward it toward g, whose auxiliary output uses the configured CS connection.

Obtaining communication demand. Configuration uses demand that is available before the affected messages are injected. After the current Gate completes, the runtime groups token–expert pairs by source and destination NPU. For one communication phase, let $\mathcal{F}$ contain the inter-node flows with distinct source and destination NPUs, and let d_f be the actual activation bytes of flow f. Dispatch volumes follow the current Gate result and expert placement. Combine volumes follow the corresponding expert-output and return-token relationships.

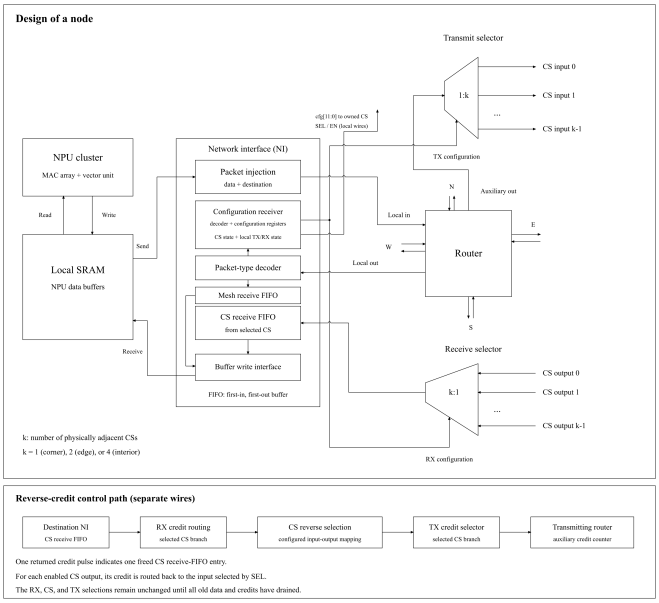


Fig. 6. Design of an NPU node. The NI contains packet classification, configuration reception and storage, separate Mesh and CS receive FIFOs, and the local buffer-write interface. Its stored controls select one auxiliary transmit branch and one receive branch, and drive its owned CS. Separate reverse-control wires return credits from the CS receive FIFO through the configured RX, CS, and TX selections to the transmitting router.

Collective traffic follows the selected tensor partition and collective algorithm, and is kept separate from these expert flows when constructing the demand descriptors.

After Gate execution, the runtime sends the controller descriptors containing the MoE model-layer index, communication phase, source NPU, destination NPU, and byte count. The controller aggregates these descriptors and selects the connection states before the phase's data injection. Aggregation, decision, and configuration time are included in the execution timeline.

Configuration problem. Let $\mathcal{N} = \{0, \ldots, 15\}$ be the NPU-node set and $\mathcal{C} = \{0, \ldots, 8\}$ the CS set. The corner indices $i, o \in \{0, 1, 2, 3\}$ correspond to NW, NE, SW, and SE, respectively. Let $v(c, i)$ be the node attached to corner i of CS c, as defined by the physical placement, and let $\mathcal{C}_n$ be the set of CSs adjacent to node n. The binary variable $y_{c,i,o}$ equals one when the connection from input i to output o of CS c is enabled. For $c \in \mathcal{C}_n$, the binary variables $x^{\mathrm{TX}}_{n,c}$ and $x^{\mathrm{RX}}_{n,c}$ equal one when node n selects CS c for auxiliary transmission and reception, respectively. These variables form configuration

$q = (y, x^{\mathrm{TX}}, x^{\mathrm{RX}})$. The physical connection constraints are

$$y_{c,i,i} = 0, \qquad \forall c, i, \tag{1}$$

$$\sum_{i} y_{c,i,o} \le 1, \qquad \forall c, o, \tag{2}$$

$$\sum_{o} y_{c,i,o} \le 1, \qquad \forall c, i, \tag{3}$$

$$\sum_{c \in \mathcal{C}_n} x^{\mathrm{TX}}_{n,c} \le 1, \qquad \forall n \in \mathcal{N}, \tag{4}$$

$$\sum_{c \in \mathcal{C}_n} x^{\mathrm{RX}}_{n,c} \le 1, \qquad \forall n \in \mathcal{N}, \tag{5}$$

$$y_{c,i,o} \le x^{\mathrm{TX}}_{v(c,i),c}, \qquad \forall c, i, o, \tag{6}$$

$$y_{c,i,o} \le x^{\mathrm{RX}}_{v(c,o),c}, \qquad \forall c, i, o. \tag{7}$$

The first three constraints exclude same-corner returns and input or output reuse within a CS. The next two enforce each node's single auxiliary transmit and receive channels across all adjacent CSs. The last two require each enabled CS connection to match the transmitting and receiving nodes' selectors.

For each flow $f \in \mathcal{F}$ from source s to destination d, let $\mathcal{P}_f$ contain its ordinary Mesh route and all candidate auxiliary routes of the form $s \to g \to c \to d$, where $g = v(c, i)$, $d = v(c, o)$, and $i \neq o$. The s-to-g segment follows the deterministic Mesh route. The binary variable $z_{f,p}$ equals one when the entire flow uses candidate route $p \in \mathcal{P}_f$. The route constraints are

$$\sum_{p \in \mathcal{P}_f} z_{f,p} = 1, \qquad \forall f \in \mathcal{F}, \tag{8}$$

$$z_{f,p} \le y_{c,i,o}, \qquad \forall f,\ p \in \mathcal{P}^{\mathrm{aux}}_f, \tag{9}$$

where $\mathcal{P}^{\mathrm{aux}}_f$ is the auxiliary-route subset of $\mathcal{P}_f$, and (c, i, o) identifies the CS connection used by route p. Thus, each flow uses exactly one route without splitting its messages across multiple paths. An auxiliary route can be selected only when its CS connection and both node selectors are enabled consistently; the ordinary Mesh route requires no CS connection. Let $\mathcal{Q}$ denote the set of all binary configuration and route-assignment pairs (q, z) satisfying these constraints.

Let $\mathcal{E}$ contain the resources used by these routes, including Mesh links, ordinary router-local outputs, auxiliary channels, CS connections, and NI buffer-write interfaces. Resource e has service capacity B_e in bytes per network cycle. Let $b_{f,p,e}$ be the bytes transmitted or written by flow f at resource e when it takes route p. Link traffic includes packet headers and flit padding, while a buffer-write interface counts the delivered activation bytes. Packetization and the fixed route determine these quantities. The aggregate demand is

$$L_e(q, z) = \sum_{f \in \mathcal{F}} \sum_{\substack{p \in \mathcal{P}_f \\ e \in p}} b_{f,p,e} z_{f,p}. \tag{10}$$

Serving L_e bytes at capacity B_e requires L_e / B_e cycles. The objective is to minimize the largest value across the resources used by the phase:

$$\min_{(q,z) \in \mathcal{Q}} \Phi(q, z), \qquad \Phi(q, z) = \max_{e \in \mathcal{E}} \frac{L_e(q, z)}{B_e}. \tag{11}$$

Algorithm 1 Demand-Based CS Connection Selection

Require: phase flows $\mathcal{F}$, byte volumes d_f, fixed attachments, current configuration q_{prev}, resource capacities B_e, iteration budget H

Ensure: feasible configuration q and flow routes z

▷ Initialize connections and flow routes.

$q \leftarrow q_{\mathrm{prev}}$; $z \leftarrow$ ordinary Mesh routes

for $t = 1$ to H **do**

▷ Retain the incumbent as this round's best.

$(q_b, z_b) \leftarrow (q, z)$

for all CSs c and distinct corner nodes g, d of c **do**

▷ Remove conflicts; restore invalid routes to Mesh.

▷ Try affected flows in descending byte volume.

$(q', z') \leftarrow$ TRIALCONNECTION$(q, z, c, g, d, \mathcal{F})$

▷ Rank by Φ, bit changes, then IDs.

if PREFER$(q', z', q_b, z_b, q_{\mathrm{prev}})$ **then**

$(q_b, z_b) \leftarrow (q', z')$

end if

end for

▷ Stop if no trial strictly reduces Φ.

if $\Phi(q_b, z_b) \ge \Phi(q, z)$ **then**

break

end if

▷ Use the best trial in the next iteration.

$(q, z) \leftarrow (q_b, z_b)$

end for

▷ Return the selected connections and routes.

return (q, z)

The shared NI write capacity is included in $\mathcal{E}$. Cycle-level evaluation measures the resulting arbitration, queueing, and backpressure.

Connection selection. Algorithm 1 starts from the current configuration and ordinary routes for the new phase. It evaluates physically adjacent pairs of forwarding and destination nodes. A trial connection disables conflicting connections that use the same transmit or receive channel, installs the new CS connection and selector states, and returns any invalidated routes to the ordinary Mesh. It then considers the affected destination's flows in descending byte volume, breaking equal volumes by source and destination IDs, and assigns a flow to the auxiliary route only if doing so reduces Φ. The trial is accepted only when its resulting Φ is lower than that of the current solution. The comparison procedure Prefer ranks trials by smaller Φ, then fewer configuration-bit changes relative to q_{prev}, then smaller CS and node IDs. A configured iteration budget H bounds host-CPU work; the search also stops when no trial improves Φ. Here t is the iteration index, (q_b, z_b) is the best solution found in the current iteration, and (q', z') is a trial configuration and route assignment.

TrialConnection performs the conflict removal and per-flow assignment described above; all trials are checked against $\mathcal{Q}$. Selected routes take effect after the configuration transition completes. Traffic with no selected auxiliary route retains the ordinary Mesh path. Configuration and transition time

are reported together with the resulting communication and application execution times.

NI-based configuration. The independent host CPU executes the allocator and sends configuration commands through the host gateway and existing Mesh. The NI of each CS's NW adjacent node controls that CS. It performs packet-type classification, target and state checks, and register updates. Both the pending and active 12-bit CS registers reside in that NI, as shown in Figure 7. The active register continuously drives the adjacent CS's selection and enable inputs over fixed local control wires. Each node's NI also stores the local transmit- and receive-selector configurations. Configuration packets use the Mesh, and the NI's active register drives the local CS control wires.

One configuration command contains 48 bits. Its 7-bit header contains the 3-bit Type and 4-bit destination-node ID. The remaining fields contain a 2-bit Opcode, 2-bit Kind, 4-bit Target ID, 16-bit Epoch, 12-bit State, and five reserved bits. Epoch is the configuration version; State contains the CS's SEL/EN settings or the node-selector setting. Type 111 identifies configuration commands; Kind 00, 01, and 10 select a CS, a node transmit selector, and a node receive selector. Opcode 00 is LOAD and 10 is COMMIT. All operation and type codes are binary. For a node selector, State[4] enables the connection and State[3:0] selects the adjacent CS ID; State[11:5] is zero. COMMIT carries zero State, and the reserved bits are zero. The header destination identifies the receiving NI, while Target ID identifies its configuration object. The command occupies the upper 48 bits of one 256-bit flit, with zero padding in the remaining 208 bits. Packet injection, router field extraction, and NI classification use this control format consistently.

LOAD updates the NI's pending state without changing active connections. Before COMMIT, the controller stops new auxiliary injection at all affected nodes and waits for old transfers to complete and their credits to return. The NI accepts COMMIT only for the matching pending epoch and copies the pending state into its active register. Auxiliary traffic resumes after all affected modules confirm the update and the local control signals have settled. Mesh traffic remains available for configuration delivery during this interval.

C. Predictive Cross-Tier Thermal Management

Our controller selects where a ready task executes and at which voltage–frequency setting. A location change redirects execution and weight reads to a compute cluster with an existing local copy of the required weights. Regional DVFS adjusts that cluster's power dissipation. The controller evaluates both decisions using the coupled Logic–DRAM thermal model before dispatch. **Decision Variables and Objective.** For task i, a candidate action is $a = (c, r)$, where c is an eligible NPU compute cluster, comprising a compute array and local SRAM. The variable r selects the cluster's frequency relative to the nominal frequency and the corresponding voltage from the supported DVFS table. The original-location plan a_0 provides a thermally safe reference. An eligible cluster's associated DRAM partition must already contain a complete copy of

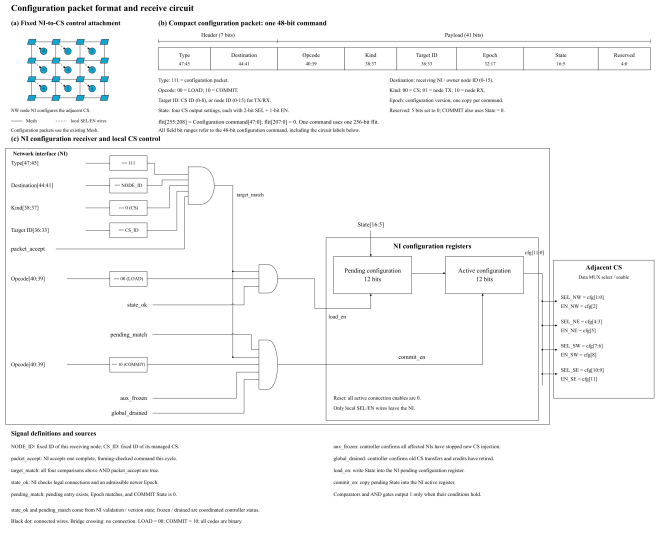


Fig. 7. NI-based configuration interface. Configuration commands travel over the Mesh to the NI responsible for the CS. Packet-field comparisons and LOAD/COMMIT conditions update the NI's pending and active registers; local SEL/EN wires connect the active state to the adjacent CS. The signal definitions identify the checks and coordinated stop/drain status used by the receive circuit.

the required read-only weights, and the location must satisfy the task's data-placement constraints. These existing copies provide the alternative data sources considered during task placement.

To compare temperature distributions across different tier floorplans, we map both tiers onto $N = 16$ common planar evaluation regions, corresponding to the compute-cluster footprints in this architecture. Let $\mathcal{H}_k^L(a)$ and $\mathcal{H}_k^D(a)$ contain the hottest $N/4$ regions in the predicted Logic and DRAM temperature maps at step k. Each set therefore contains four regions, or the hottest 25% of the evaluation regions in its tier. Their spatial overlap is the number of regions shared by the two sets divided by four. The predicted mean over a common K-step window is

$$\widehat{\overline{O}}_{25}(a) = \frac{1}{K}\sum_{k=1}^{K}\frac{|\mathcal{H}_k^L(a)\cap\mathcal{H}_k^D(a)|}{N/4}. \tag{12}$$

The controller minimizes $\widehat{\overline{O}}_{25}(a)$ over feasible candidates. Ties favor a lower positive spatial covariance between the two temperature maps, accumulated over the same window, followed by lower joint high-temperature exposure:

$$D(a) = \sum_{k=1}^{K}\sum_{j=1}^{N}[\widehat{T}_{j,k}^L(a) - T_{\text{target}}]_+[\widehat{T}_{j,k}^D(a) - T_{\text{target}}]_+\Delta t, \tag{13}$$

where $[x]_+ = \max(x, 0)$ and $T_{\text{target}} = 80°\text{C}$. Each alternative must also satisfy $D(a) \le D(a_0)$, checking absolute high-temperature exposure alongside temperature ranking.

Thermal State and Candidate Generation. The controller maintains the thermal RC state and the power contributions of already scheduled tasks. Within each evaluation region, the

Logic temperature is the maximum of the CORE and SRAM temperatures. The DRAM temperature is the maximum of the four DRAM blocks whose planar footprints cover that region. The resulting maps express the two temperature distributions in common planar coordinates.

The common scheduler selects the ready task and its reference plan. The thermal controller searches alternatives when both tiers at the original location exceed T_{target}. It checks that the required weight copies are present, prioritizes destinations outside the four hottest DRAM evaluation regions, and then ranks them by the maximum of their current Logic and DRAM temperatures. At most two alternative destinations undergo thermal evaluation. If the original location belongs to the hottest DRAM quarter, the controller evaluates ratios $r \in \{0.5, 0.75, 1.0\}$; otherwise, it retains the reference voltage–frequency setting during location selection.

Candidate Timing, Power, and Temperature. Execution time and activity come from the profile for the selected voltage–frequency setting. Input transfers use actual producer locations and the NoC resource calendar, including transfer completion and queuing delay. Computation, SRAM, DRAM, and communication activity generate the spatial power trace. A HotSpot-derived RC model [14] predicts the resulting 96-block temperature response at 1-ms intervals. Candidates share the current thermal state and include outstanding committed activities and background power. They are compared over the same prediction window, covering execution and at least 128 ms of subsequent thermal response, together with the safety lookahead.

Feasibility and Selection. Thermal safety requires the predicted temperature of every block to remain below $T_{\text{limit}} - \delta$, with $T_{\text{limit}} = 85°\text{C}$ and $\delta = 1°\text{C}$. Candidate execution must preserve DAG dependencies, valid data locations, the 32-GiB DRAM capacity, and the 4-MiB SRAM capacity per cluster. Weight-copy eligibility includes address and profile compatibility; tasks accessing writable KV state retain its required home. The existing task-level Array/DMA reservations and link bandwidth constraints remain part of scheduling.

We impose three policy budgets to contain the added execution and resource costs. First, a candidate starts no later than the reference, and its completion time satisfies

$$e(a) \le e(a_0) + \gamma d(a_0), \qquad \gamma = 0.07, \tag{14}$$

where $d(a_0)$ is the profiled execution time at the reference operating point. Second, its input flow queuing delay is bounded by the larger of the reference delay and the maximum previously observed flow delay. Third, the maximum projected per-bank read/write traffic cannot exceed the bound computed from the original full task graph. This projection combines assigned tasks with the original placement of remaining tasks.

Among feasible candidates, the controller accepts a lower predicted overlap, or a lower covariance score when overlap is tied, subject to the exposure constraint. If none qualifies, it retains the safe original-location plan. When execution must wait for a thermally safe start, previously committed activities continue and background power contributes to the temperature evolution.

Dispatch and Feedback. The selected plan commits the resource reservations and power events used during prediction. Remapping updates the execution cluster, weight-access partition, private workspace, and output location. The selected task reads the existing weight copy at its destination. Subsequent consumers obtain inputs from the actual producer location. Running tasks and writable KV state retain their locations. Resource availability and the thermal state are updated for the next decision.

TABLE I
COMMON HARDWARE AND SIMULATION SETTINGS.

Component	Configuration
Logic tier	16 NPU clusters at 1 GHz
NPU cluster	4096 MACs, 16-lane vector unit, 4 MiB SRAM
Base NoC	4×4 mesh, 256-bit links at 1 GHz
HB-DRAM	32 GiB, 16 partitions of 2 GiB each, 16 logical banks per partition
Vertical link	25.6 GB/s per NPU–memory pair
Host	Four CPU cores, PCIe 5.0, host memory xxx
Simulation	Compute, memory, and NoC models xxx
Thermal model	Ambient and initial temperatures xxx, temperature limit xxx

IV. Evaluation Results and Analysis

A. Experimental Setup

We evaluate the proposed design on a face-to-face hybrid-bonded 3D accelerator. Table I lists the common platform parameters. The evaluation uses 32 GiB of HB-DRAM. Each comparison starts from the same input and initial system state and uses the same precision, resource budget, and workload completion criteria. We account for each method's additional hardware and runtime costs separately.

Table II lists four main MoE workloads and one auxiliary thermal scenario. We freeze the input manifests, arrival order, seeds, and stopping rules before collecting performance results.

For each experimental line, we first run the complete workload under both configurations and record stage latencies and the end-to-end critical path. Subsequent paired points measure the same one or two MoE layers with identical input and routing samples. We extrapolate both arms using the same layer selection, weights, and dependency model, including non-MoE stages and control costs. Recomputing the critical path preserves overlap among compute, memory, and communication. We validate the estimates against the complete runs and report measured layer latency, estimated end-to-end latency, and estimated speedup separately. The corresponding estimation errors are xxx. All reported execution times refer to the modeled target system.

B. End-to-End Performance Comparison

The primary comparison pairs the common platform baseline B with B plus the full design. We separately compare

TABLE II
WORKLOADS, INPUT MANIFESTS, AND MEASUREMENT BOUNDARIES.

Workload	Inputs and configuration	Measurement boundary
Qwen3-30B-A3B	Prompt source and IDs xxx, input/output lengths xxx, concurrency xxx	Prefill, decode, and complete request
Qwen1.5-MoE-A2.7B	Prompt source and IDs xxx, lengths xxx, TP/PP mapping xxx	Prefill, decode, and complete request
mini-SWE-agent + Qwen3	SWE-bench Lite instance IDs and split xxx, tool and stopping rules xxx	Model calls, full agent task, and task outcome
LingBot TI2V	Text/image IDs xxx, resolution xxx, frames xxx, steps and seeds xxx	Encoding, denoising, scheduler, and VAE decoding
WHISPER + SLAM + $\pi_{0.5}$	WHISPER version xxx, SLAM and $\pi_{0.5}$ traces xxx, request schedule xxx	Joint thermal scenario, execution coverage xxx

TABLE III
CONFIGURATIONS AND SCOPE OF THE PERFORMANCE COMPARISONS.

Configuration	Comparison scope
B	Common platform baseline, frozen configuration xxx
B + full design	Paired end-to-end comparison with B
HiBand reference	External comparison, qualification pending
Other NoC candidates	Configurations and qualification results xxx

with prior methods that pass the same workload and timing checks under matched resource constraints. The HiBand reference implementation and other candidate NoCs enter this comparison after qualification. Table III records the scope of each comparison.

Figure 8 compares completion times for each main workload. For each pair, we compute the latency reduction as $1-T_{\mathrm{design}}/T_{\mathrm{ref}}$, where T_{ref} is the completion time of B or the named external comparator. We also report time to first token and time per output token for the language-model workloads. For mini-SWE-agent, we report model-call latency and task latency separately and record task outcomes. For LingBot, we report the latency of a complete generation. The measured end-to-end latencies, paired reductions, and workload-level exceptions are xxx.

C. Supporting Results and Thermal Ablation

a) Phase-dependent congestion and bank waiting.: To explain the latency differences in Figure 8, we trace matched MoE communication phases from memory requests through consumer readiness. We measure bank queueing before data becomes available, injection and router queueing, unloaded traversal, and synchronization at the slowest endpoint. We record configuration delay on the same timeline and attribute only exposed delays to the critical path. Comparing packet tails and router activity across phases tests whether a change in hotspot location translates into earlier consumer readiness. A comparison with fixed network policy and a bank-policy toggle can isolate the incremental effect of bank conflict mitigation. The paired changes in exposed waiting and packet tail latency are xxx.

b) Incremental effect of thermal management.: We compare NoC with bank conflict mitigation and thermal management against the same NoC and bank mechanisms with thermal management disabled. Both arms start with identical temperatures, inputs, and thermal constraints. We track temperatures over the complete execution timeline and account for prediction, throttling, redistribution, and recovery where they occur. We report natural and thermally stressed scenarios separately. Peak temperature, time above the threshold, and completion time are xxx.

D. Scalability and Sensitivity Analysis

We vary system scale and input scale separately. The system-scale sweep starts at 16 NPU clusters and holds workload fixed. At each scale, we report the topology, mapping, capacity, and bandwidth. The input-scale sweep fixes the platform and varies request concurrency or input size. We report absolute completion time and paired latency reduction at each point. To examine design sensitivity, we vary the local connection budget and reconfiguration interval one at a time and record completion time, packet tail latency, and exposed configuration cost. The tested ranges and observed trends are xxx.

E. Hardware Cost and Runtime Overhead

We report implementation costs for local switches, links and configuration logic, bank control, and thermal control. Table IV separates FPGA resource utilization, ASIC synthesis, and post-route results. Within each stage, baseline and enhanced implementations use the same tools and constraints. We state whether memories, physical interfaces, and cross-tier wiring are included and report module-level costs and system-level increments where available.

Table V reports algorithm execution separately from the delay of applying its decisions. For each algorithm, we measure per-call time and call count, then report the fraction of total application latency exposed on the critical path. Configuration transfer, hardware reconfiguration, and thermal migration are accounted for as separate events.




Fig. 8. End-to-end latency by workload for B, B plus the full design, and qualified external comparators. Each panel uses identical inputs and completion criteria. Labels distinguish complete-run measurements from estimates based on sampled MoE layers.



Fig. 9. Critical-path latency breakdown for matched MoE communication phases. The timeline shows bank service, data readiness, NoC injection and queueing, configuration, and consumer synchronization. Companion panels show packet tail latency and router activity using common scales across configurations.



Fig. 10. Temperature and workload progress with thermal management enabled and disabled. Both configurations use the same NoC and bank policies. Markers denote thermal triggers, throttling, and work redistribution where observed.



Fig. 11. Scalability and sensitivity. Panels show (a) system scale at fixed workload, (b) input scale at fixed system size, and (c) sensitivity to the local connection budget and reconfiguration interval. Markers indicate the default configuration and whether overall latency is measured or estimated.

TABLE IV
HARDWARE IMPLEMENTATION COST BY EVALUATION STAGE.

Stage	Conditions and reported results
FPGA prototype	Device/tool/clock xxx, LUT/FF/BRAM/DSP xxx, achieved frequency xxx
ASIC synthesis	Process/library/PVT/clock xxx, area xxx, power estimate xxx
Post-route ASIC	Extraction/PVT/activity xxx, area xxx, timing slack xxx, dynamic and leakage power xxx

TABLE V
RUNTIME OVERHEAD OF ONLINE DECISION ALGORITHMS.

Algorithm	Time/call	Calls	Exposed share
Hotspot prediction	xxx	xxx	xxx
Connection selection	xxx	xxx	xxx
Bank policy	xxx	xxx	xxx
Thermal control	xxx	xxx	xxx

V. RELATED WORKS

VI. CONCLUSION

REFERENCES

[1] J. J. Wuu, R. Agarwal, M. Ciraula, C. Dietz, B. Johnson, D. Johnson, R. Schreiber, R. Swaminathan, W. Walker, and S. Naffziger, "3D V-Cache: The implementation of a hybrid-bonded 64mb stacked cache for a 7nm x86-64 CPU," in *2022 IEEE International Solid-State Circuits Conference*, 2022, pp. 428–429.

[2] C. Li, Y. Yin, C. Xue, Z. Wang, F. Bai, Y. Guo, X. Jiang, Q. Wu, Y. Xie, and G. Sun, "Helios: Enabling dynamic KV cache management for near-memory processing via hybrid-bonding-based 3D-DRAM," in *2026 59th IEEE/ACM International Symposium on Microarchitecture (MICRO)*, 2026.

[3] H. Wang, Y. Wang, Y. Su, J. Yang, Y. Hu, and S. Yin, "HiBand: A hierarchical bandwidth-aware HB-DRAM accelerator with array-level co-execution and reconfigurable NoC for LLM inference," in *Proceedings of the 63rd ACM/IEEE Design Automation Conference*, 2026.

[4] Y. Li, Z. Zhang, Z. Wang, P. Chen, and P. Zheng, "Semantic parallelism: Redefining efficient MoE inference via model-data co-scheduling," in *International Conference on Learning Representations*, 2026. [Online]. Available: https://proceedings.iclr.cc/paper_files/paper/2026/hash/f0552f14388d95b19740dee809f5cad1-Abstract-Conference.html

[5] X. Lin, S. Jia, H. Zhu, X. Jia, S. Liu, and C. Chen, "Amber: Thermal-aware spatio-temporal scheduling for edge llm inference on 3d dram-on-npu systems," in *2026 IEEE International Conference on Artificial Intelligence Circuits and Systems (AICAS)*, 2026.

[6] A. Yang *et al.*, "Qwen3 technical report," 2025. [Online]. Available: https://arxiv.org/abs/2505.09388

[7] Qwen Team, "Qwen1.5-MoE: Matching 7b model performance with 1/3 activated parameters," 2024. [Online]. Available: https://qwenlm.github.io/blog/qwen-moe/

[8] SWE-agent Team, "mini-SWE-agent," 2025. [Online]. Available: https://github.com/SWE-agent/mini-swe-agent

[9] C. E. Jimenez, J. Yang, A. Wettig, S. Yao, K. Pei, O. Press, and K. Narasimhan, "SWE-bench: Can language models resolve real-world GitHub issues?" 2023. [Online]. Available: https://arxiv.org/abs/2310.06770

[10] S. Ma, J. Liao, X. Wang *et al.*, "Scaling mixture-of-experts video pretraining for embodied intelligence," 2026. [Online]. Available: https://arxiv.org/abs/2607.07675

[11] A. Radford, J. W. Kim, T. Xu, G. Brockman, C. McLeavey, and I. Sutskever, "Robust speech recognition via large-scale weak supervision," 2022. [Online]. Available: https://arxiv.org/abs/2212.04356

[12] C. Campos, R. Elvira, J. J. G. Rodriguez, J. M. M. Montiel, and J. D. Tardos, "ORB-SLAM3: An accurate open-source library for visual, visual-inertial and multi-map SLAM," 2020. [Online]. Available: https://arxiv.org/abs/2007.11898

[13] Physical Intelligence, K. Black, N. Brown *et al.*, "$\pi_{0.5}$: a vision-

language-action model with open-world generalization," 2025. [Online]. Available: https://arxiv.org/abs/2504.16054

[14] K. Skadron, M. R. Stan, W. Huang, S. Velusamy, K. Sankaranarayanan, and D. Tarjan, "Temperature-aware microarchitecture," in *Proceedings of the 30th Annual International Symposium on Computer Architecture*, 2003, pp. 2–13.