

AMT-ST139

SUPER TWEETER

SPECIFICATIONS:


Nominal Impedance:	8 Ω
Sensitivity:	92 dB
Resonant Freq.:	3.5 KHz
Freq. Response:	Fo-50 KHz
Nominal Power:	15 Watts
Max Power:	30 Watts
Diaphragm:	Kapton+AL
Magnet:	Neodymium




Lowest Recommend Crossover: ≥ 4.5 KHz




XY Graph 1

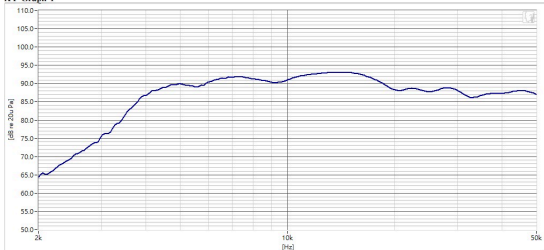


XY Graph 1

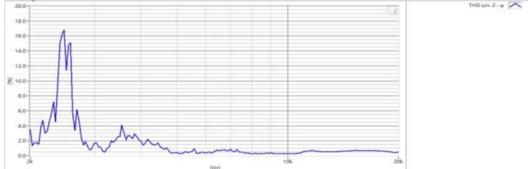

Here are the recommended adjustment guidelines for the super tweeter crossover.



Recommended capacitor and inductor values for a second-order crossover tweeter circuit			
Fc	C1 (μ F)	L1 (mH)	
1 5000 Hz	3.9 - 4	0.25 - 0.27	
2 8000 Hz	2.4 - 2.5	0.15 - 0.16	
3 12000 Hz	1.6 - 1.7	0.1 - 0.11	
4 14000 Hz	1.4 - 1.5	0.09 - 0.1	



Recommended capacitor and inductor values for a third-order crossover tweeter section				
Fc	C1 (μ F)	L1 (mH)	C2 (μ F)	
1 5000 Hz	2.7 - 2.8	0.35 - 0.36	1.9 - 2	
2 8000 Hz	1.7 - 1.8	0.22 - 0.23	1.2 - 1.3	
3 12000 Hz	1.1 - 1.2	0.14 - 0.15	0.8 - 0.9	
4 14000 Hz	1 - 1.1	0.12 - 0.13	0.7 - 0.8	