

Road Event Detector Formulations

road_events documentation

May 25, 2026

Contents

1	Scope	3
2	Signals and Units	3
3	Shared Streaming Primitives	4
3.1	Timestamp Handling	4
3.2	First-Order High-Pass Filter	4
3.3	Exponential Moving Average	4
3.4	Distance-Domain EMA	5
3.5	Interval Accumulation	5
4	Road Roughness Analyzer	5
4.1	Metric	5
4.2	Why Not Peak Acceleration	6
4.3	Rough-Road Events	6
4.4	Road-Shock Events	7
5	Speed-Bump Detector	7
5.1	Physical Signature	7
5.2	Filtered Signals	7
5.3	Extremum Extraction	8
5.4	Candidate Timing	8
5.5	Score and Confidence	8
6	Hill Detector	9
7	Reverse Detector	9
8	Harsh Acceleration and Braking	10
8.1	Velocity-Derivative Metric	10
8.2	Harsh Acceleration	10
8.3	Harsh Braking	10
9	Harsh Cornering	11
10	Default Configuration Summary	11

11 Trip Statistics	12
12 Visualizer Interpretation	13
13 Design Rationale	13

1 Scope

This document records the math and streaming algorithms implemented by the `road_events` crate. The crate detects road events from vehicle-frame motion signals produced by the simulation and visualization pipeline. The detectors are intentionally small-state and embedded-friendly: they process one sample at a time, use bounded memory, and avoid FFTs, dynamic allocation, and offline window buffering.

The detectors are not part of the EKF state estimator. They consume already estimated or referenced motion channels such as vehicle speed, vehicle pitch, gravity-compensated vertical acceleration, and vehicle-frame lateral specific force. The current event set is:

- speed bumps,
- sustained uphill and downhill intervals,
- reverse-driving intervals,
- harsh acceleration,
- harsh braking,
- harsh cornering,
- road-surface roughness and rough-road intervals,
- short vertical road shocks,
- streaming trip statistics such as distance, duration, speed extrema, elevation gain/loss, and event rates.

2 Signals and Units

Symbol	Unit	Meaning
t_k	s	Sample timestamp.
v_x	m/s	Vehicle-frame forward velocity. Positive is forward; negative is reverse.
$s = v_x $	m/s	Speed magnitude used by threshold logic.
θ	deg	Vehicle pitch angle. Positive pitch is uphill in the current detector convention.
a_z	m/s ²	Gravity-compensated vehicle-frame vertical acceleration.
$a_{z,bp}$	m/s ²	Band-passed vertical acceleration used for road roughness.
a_y	m/s ²	Vehicle-frame lateral specific force. Positive is to vehicle right.

The speed-bump detector uses pitch and vertical acceleration. Road roughness uses gravity-compensated vertical acceleration and speed. Hill detection uses pitch and speed. Reverse and harsh longitudinal detection use forward velocity. Harsh cornering uses speed and vehicle-frame lateral specific force. Trip statistics consume the same vehicle-motion stream and update running totals without storing history.

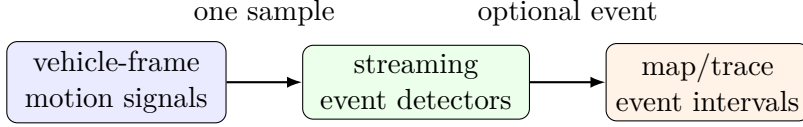


Figure 1: All event detectors run as streaming post-processors over vehicle motion signals.

3 Shared Streaming Primitives

3.1 Timestamp Handling

The implementation clamps per-sample time deltas to keep bad or repeated timestamps from creating unbounded filter updates:

$$\Delta t_k = \text{clamp}(t_k - t_{k-1}, 0, 0.2). \quad (1)$$

For high-pass and derivative paths that require a strictly positive time step, the lower bound is 10^{-3} or 10^{-4} seconds depending on the path.

3.2 First-Order High-Pass Filter

The speed-bump detector removes road grade and slow body motion with the standard discrete first-order high-pass filter:

$$\tau = \frac{1}{2\pi f_c}, \quad (2)$$

$$\alpha_k = \frac{\tau}{\tau + \Delta t_k}, \quad (3)$$

$$y_k = \alpha_k(y_{k-1} + u_k - u_{k-1}). \quad (4)$$

This is applied independently to vehicle pitch and gravity-compensated vertical acceleration.

3.3 Exponential Moving Average

The crate uses an exponential moving average (EMA) for adaptive noise floors and smoothed velocity derivatives:

$$\alpha_k = \frac{\Delta t_k}{\max(\tau, \Delta t_k) + \Delta t_k}, \quad (5)$$

$$\bar{x}_k = (1 - \alpha_k)\bar{x}_{k-1} + \alpha_k x_k. \quad (6)$$

For noise floors, the input is the absolute high-pass value:

$$\sigma_k = \text{EMA}(\sigma_{k-1}, |y_k|, \tau, \Delta t_k). \quad (7)$$

The EMA is a low-memory substitute for a sliding RMS window. It provides slow adaptation to background vibration without storing historical samples.

3.4 Distance-Domain EMA

Road roughness should compare road surface quality over distance rather than over wall-clock time. For a distance increment

$$\Delta s_k = s_k \Delta t_k, \quad (8)$$

the crate uses a first-order distance-domain EMA:

$$\alpha_k = \frac{\Delta s_k}{L + \Delta s_k}, \quad E_k = (1 - \alpha_k)E_{k-1} + \alpha_k e_k. \quad (9)$$

This is the same small-state first-order update as the time-domain EMA, but the independent variable is traveled distance. L is the effective road interval length. The default $L = 10$ m makes the estimate close to continuous: roughness rises over locally rough pavement and dissipates quickly after the vehicle returns to clean road, without requiring a rolling buffer.

3.5 Interval Accumulation

Most detectors convert an instantaneous metric m_k into an event interval using enter and exit thresholds:

$$\text{enter if } m_k \geq m_{\text{enter}}, \quad (10)$$

$$\text{stay active while } m_k \geq m_{\text{exit}}, \quad m_{\text{exit}} < m_{\text{enter}}. \quad (11)$$

During an active interval the detector accumulates:

$$T = \sum_k \Delta t_k, \quad (12)$$

$$\bar{m} = \frac{1}{T} \sum_k m_k \Delta t_k, \quad (13)$$

$$m_{\text{max}} = \max_k m_k, \quad (14)$$

$$\bar{s} = \frac{1}{T} \sum_k s_k \Delta t_k. \quad (15)$$

The interval is emitted only if $T \geq T_{\text{min}}$. A refractory time suppresses duplicate events immediately after a valid event.

4 Road Roughness Analyzer

4.1 Metric

`RoadRoughnessAnalyzer` estimates continuous road-surface roughness and also emits two event types from the same vertical-motion stream:

- rough-road intervals for sustained increases in ambient road texture,
- road-shock intervals for short isolated vertical impacts such as sharp joints, potholes, or large bump impulses.

The input is vehicle-frame, gravity-compensated vertical acceleration. The implementation first rejects grade, body attitude drift, and high-frequency sensor/structure noise:

$$a_{z,\text{hp},k} = \text{HPF}(a_{z,k}; f_c = 0.7 \text{ Hz}), \quad (16)$$

$$a_{z,\text{bp},k} = \text{LPF}(a_{z,\text{hp},k}; f_c = 10 \text{ Hz}). \quad (17)$$

Before the first ambient baseline is available, the limiter uses a conservative minimum cap. Afterwards, large isolated defects are hard-limited before they enter the roughness energy:

$$C_k = \min(1.5, \max(0.6, 3B_{k-1})), \quad \tilde{a}_{z,k} = \text{clamp}(a_{z,\text{bp},k}, -C_k, C_k). \quad (18)$$

The analyzer then tracks a local ambient vibration baseline from the robust band-passed magnitude:

$$B_k = \text{EMA}_d(B_{k-1}, |\tilde{a}_{z,k}|, L_B), \quad L_B = 20 \text{ m}. \quad (19)$$

The roughness energy sample is

$$e_k = \tilde{a}_{z,k}^2. \quad (20)$$

When $s_k \geq 2.0$ m/s, the analyzer updates the distance-domain energy estimate with $L = 10$ m:

$$E_k = (1 - \alpha_k)E_{k-1} + \alpha_k e_k, \quad \alpha_k = \frac{s_k \Delta t_k}{10 + s_k \Delta t_k}. \quad (21)$$

When speed is below the gate, filter state is kept current but roughness energy and valid roughness distance are held. This prevents stationary vibration and parking-lot maneuvering from being interpreted as road texture.

The reported roughness is

$$R_k = \sqrt{E_k}. \quad (22)$$

Initial qualitative bands are:

Class	Condition	Interpretation
Very smooth	$R < 0.15 \text{ m/s}^2$	Minimal vertical vibration.
Smooth	$0.15 \leq R < 0.25 \text{ m/s}^2$	Low vertical vibration.
Light texture	$0.25 \leq R < 0.40 \text{ m/s}^2$	Mild road texture.
Moderate	$0.40 \leq R < 0.60 \text{ m/s}^2$	Noticeable sustained texture.
Rough	$0.60 \leq R < 0.90 \text{ m/s}^2$	Sustained rough pavement.
Very rough	$0.90 \leq R < 1.20 \text{ m/s}^2$	Strong sustained vibration.
Severe	$R \geq 1.20 \text{ m/s}^2$	Extreme sustained vibration.

4.2 Why Not Peak Acceleration

Peak vertical acceleration is already used by speed-bump detection. Roughness is intended to describe a road interval, so a single bump or pothole should not dominate the estimate. The band-pass, adaptive hard limiter, speed gate, and 10 m distance-domain EMA make the metric local and streaming while keeping memory use constant.

4.3 Rough-Road Events

The continuous roughness estimate is also converted into a sparse event when there is a sustained local uptick:

$$\text{enter if } R_k \geq 0.60 \text{ m/s}^2, \quad (23)$$

$$\text{remain active while } R_k \geq 0.42 \text{ m/s}^2. \quad (24)$$

The streaming analyzer distinguishes live notification from completed interval reporting. A live notification is emitted as soon as the active interval reaches one second, so embedded or UI consumers can react promptly. The completed rough-road interval is emitted when R_k falls below the

exit threshold or when the stream is explicitly flushed. The completed interval is the one used for offline map and trace analysis because its end time, duration, mean roughness, peak roughness, mean speed, and distance are known. An eight-second refractory period prevents repeated live notifications while the same rough patch remains active.

4.4 Road-Shock Events

Road shocks use the raw band-passed magnitude before robust limiting, so isolated high-energy impacts can be reported without contaminating the ambient roughness estimate. The enter threshold is the larger of a fixed physical floor and the local baseline-scaled threshold:

$$A_{\text{shock},k} = \max\left(2.5 \text{ m/s}^2, 6B_k\right). \quad (25)$$

A shock candidate starts when $|a_{z,\text{bp},k}| \geq A_{\text{shock},k}$ and remains active until the magnitude falls below $0.45A_{\text{shock},k}$. It is emitted only if its duration is between 0.02 and 0.65 s. This separates sharp impacts from sustained rough pavement. A 0.5 s refractory period suppresses duplicate shock events from the same impulse sequence.

5 Speed-Bump Detector

5.1 Physical Signature

A road speed bump creates a short vertical impulse sequence as the front axle and rear axle traverse the bump. In gravity-compensated vehicle-frame vertical acceleration, the idealized pattern is an alternating sequence of three extrema:

$$a_{z,\text{hp}}(t_1), \quad a_{z,\text{hp}}(t_2), \quad a_{z,\text{hp}}(t_3), \quad \text{sgn}(a_1) = \text{sgn}(a_3) \neq \text{sgn}(a_2). \quad (26)$$

Pitch motion is used as corroboration rather than as the primary trigger, because pitch angle alone can also respond to braking, turning on uneven roads, or grade changes.

5.2 Filtered Signals

The detector computes:

$$\theta_{\text{hp},k} = \text{HPF}(\theta_k; f_c = 0.45 \text{ Hz}), \quad (27)$$

$$a_{\text{hp},k} = \text{HPF}(a_{z,k}; f_c = 0.70 \text{ Hz}). \quad (28)$$

Adaptive noise floors are:

$$\sigma_{\theta,k} = \text{EMA}(|\theta_{\text{hp},k}|; \tau = 6 \text{ s}), \quad (29)$$

$$\sigma_{a,k} = \text{EMA}(|a_{\text{hp},k}|; \tau = 6 \text{ s}). \quad (30)$$

The peak thresholds are:

$$A_{\text{thr}} = \max(3.5 \sigma_a, 1.5 \text{ m/s}^2), \quad (31)$$

$$\Theta_{\text{thr}} = \max(3.0 \sigma_{\theta}, 0.25^\circ). \quad (32)$$

5.3 Extremum Extraction

The vertical acceleration slope is

$$\dot{a}_{\text{hp},k} = \frac{a_{\text{hp},k} - a_{\text{hp},k-1}}{\Delta t_k}. \quad (33)$$

A local maximum is detected when $\dot{a}_{k-1} > 0$ and $\dot{a}_k \leq 0$; a local minimum is detected when $\dot{a}_{k-1} < 0$ and $\dot{a}_k \geq 0$. An extremum is kept only when its absolute vertical acceleration exceeds the physical floor 1.5 m/s^2 . The detector stores only the latest four extrema, so memory use remains constant.

For each extremum interval, the detector also stores the maximum pitch high-pass magnitude since the previous extremum:

$$\Theta_i = \max_{t \in (t_{i-1}, t_i]} |\theta_{\text{hp}}(t)|. \quad (34)$$

5.4 Candidate Timing

Each latest-three-extrema group is scored only if the polarities alternate. Let

$$D = t_3 - t_1, \quad \bar{s} = \frac{s_1 + s_2 + s_3}{3}. \quad (35)$$

The candidate must pass both absolute and speed-adaptive duration bounds:

$$D_{\min} = \max \left(0.18, 0.35 \frac{L_{\min}}{\bar{s}} \right), \quad (36)$$

$$D_{\max} = \min \left(1.8, 2.5 \frac{L_{\max}}{\bar{s}} \right), \quad (37)$$

where $L_{\min} = 1.8 \text{ m}$ and $L_{\max} = 3.6 \text{ m}$ are plausible front/rear axle spacing bounds. The speed must also satisfy $\bar{s} \geq 1.5 \text{ m/s}$.

The detector tracks the total time within the pattern for which $|a_{\text{hp}}| \geq 1.5 \text{ m/s}^2$. It requires:

$$T_{\text{active}} \geq 0.25 \text{ s}, \quad (38)$$

$$\frac{T_{\text{active}}}{D} \geq 0.25. \quad (39)$$

5.5 Score and Confidence

For extrema magnitudes $A_i = |a_i|$, pitch peaks Θ_i , and candidate duration D , the component scores are:

$$A_{\max} = \max_i A_i, \quad (40)$$

$$\Theta_{\max} = \max_i \Theta_i, \quad (41)$$

$$S_a = \text{clamp} \left(\frac{A_{\max}}{A_{\text{thr}}} - 1, 0, 1 \right), \quad (42)$$

$$S_\theta = \text{clamp} \left(\frac{\Theta_{\max}}{\Theta_{\text{thr}}} - 1, 0, 1 \right), \quad (43)$$

$$S_b = \frac{\min(A_1, A_3)}{\max(A_1, A_3, 10^{-3})}. \quad (44)$$

The spacing score favors the center of the admissible duration interval:

$$D_c = \frac{D_{\min} + D_{\max}}{2}, \quad W = \frac{\max(D_{\max} - D_{\min}, 10^{-3})}{2}, \quad (45)$$

$$S_D = \text{clamp}\left(1 - \frac{|D - D_c|}{W}, 0, 1\right). \quad (46)$$

The final pattern score is:

$$S = \text{clamp}((0.45S_a + 0.25S_D + 0.15S_b + 0.15S_\theta)S_\theta, 0, 1). \quad (47)$$

The pitch score multiplies the weighted score, so vertical acceleration alone does not emit an event.

An event is emitted when $S \geq 0.12$ and at least four seconds have elapsed since the last bump event. The UI-facing confidence is not a calibrated probability; it is normalized only after the trigger threshold is cleared:

$$c_{\text{display}} = 0.90 + 0.08 \text{ clamp}\left(\frac{S - 0.12}{1 - 0.12}, 0, 1\right). \quad (48)$$

6 Hill Detector

The hill detector identifies sustained grade from vehicle pitch. It is a piecewise-constant interval detector with sign:

$$\text{kind}(\theta) = \begin{cases} \text{uphill}, & \theta \geq 4^\circ, \\ \text{downhill}, & \theta \leq -4^\circ, \\ \emptyset, & \text{otherwise.} \end{cases} \quad (49)$$

An interval is emitted when the same signed condition remains active for at least one second. The implementation returns the event as soon as the confirmation duration is reached; it does not wait for pitch to leave the threshold band. During the confirmed interval, the detector reports:

$$T = t_{\text{end}} - t_{\text{start}}, \quad (50)$$

$$\bar{\theta} = \frac{1}{T} \int_{t_{\text{start}}}^{t_{\text{end}}} \theta(t) dt, \quad (51)$$

$$\theta_{\max} = \max_t |\theta(t)|, \quad (52)$$

$$\bar{s} = \frac{1}{T} \int_{t_{\text{start}}}^{t_{\text{end}}} \max(s(t), 0) dt. \quad (53)$$

After an interval has been emitted, the detector keeps the active state only to avoid duplicate events for the same continuous hill. If pitch changes sign or leaves the threshold band before confirmation, the candidate is discarded.

7 Reverse Detector

Reverse detection uses vehicle-frame forward velocity directly. The detector starts a candidate when:

$$v_x < -0.5 \text{ m/s}. \quad (54)$$

The candidate is confirmed only after this condition persists for 0.5 s. Once confirmed, the interval remains active while:

$$v_x < -0.2 \text{ m/s}. \quad (55)$$

This hysteresis prevents repeated short events around zero speed. The event is closed after 0.5 s above the exit threshold and emitted if its duration is at least one second.

Reported reverse speed uses positive magnitude:

$$s_{\text{rev}} = \max(-v_x, 0). \quad (56)$$

Mean and peak reverse speeds are accumulated over the confirmed interval.

8 Harsh Acceleration and Braking

8.1 Velocity-Derivative Metric

Harsh longitudinal events are based on changes in forward velocity rather than raw accelerometer samples. This makes the detector less sensitive to road vibration and IMU mounting artifacts. The raw derivative is:

$$a_{x,\text{raw},k} = \text{clamp}\left(\frac{v_{x,k} - v_{x,k-1}}{\Delta t_k}, -15, 15\right) \text{ m/s}^2. \quad (57)$$

The metric used by the interval detector is an EMA-smoothed derivative:

$$\hat{a}_{x,k} = \text{EMA}(\hat{a}_{x,k-1}, a_{x,\text{raw},k}, \tau = 0.6 \text{ s}, \Delta t_k). \quad (58)$$

The speed gate uses:

$$s_k = \max(|v_{x,k}|, |v_{x,k-1}|). \quad (59)$$

8.2 Harsh Acceleration

If $s_k < 1 \text{ m/s}$, the metric is forced to zero. Otherwise:

$$m_{\text{accel},k} = \max(\hat{a}_{x,k}, 0). \quad (60)$$

The interval thresholds are:

$$m_{\text{enter}} = 2.5 \text{ m/s}^2, \quad (61)$$

$$m_{\text{exit}} = 2.0 \text{ m/s}^2, \quad (62)$$

$$T_{\text{min}} = 0.4 \text{ s}, \quad (63)$$

$$T_{\text{refractory}} = 2.0 \text{ s}. \quad (64)$$

The emitted event reports duration, mean and peak acceleration metric, mean and peak speed, and net velocity change:

$$\Delta v_x = v_{x,\text{end}} - v_{x,\text{start}}. \quad (65)$$

8.3 Harsh Braking

Braking uses the same smoothed derivative but flips the sign:

$$m_{\text{brake},k} = \max(-\hat{a}_{x,k}, 0). \quad (66)$$

The default thresholds are:

$$m_{\text{enter}} = 3.0 \text{ m/s}^2, \quad (67)$$

$$m_{\text{exit}} = 2.4 \text{ m/s}^2, \quad (68)$$

$$T_{\text{min}} = 0.4 \text{ s}, \quad (69)$$

$$T_{\text{refractory}} = 2.0 \text{ s}. \quad (70)$$

The reported Δv_x is signed, so braking events normally have $\Delta v_x < 0$.

9 Harsh Cornering

Harsh cornering uses vehicle-frame lateral specific force as the side-load signal experienced by the passenger and tire contact patches. The input is the bias-corrected accelerometer specific force rotated into the vehicle frame:

$$a_{y,k}. \quad (71)$$

This intentionally includes road-bank effects because the detector is scoring side load, not horizontal centripetal acceleration alone.

The lateral load is first smoothed with a short EMA:

$$\bar{a}_{y,k} = \text{EMA}(\bar{a}_{y,k-1}, a_{y,k}, \tau_a = 0.15 \text{ s}, \Delta t_k). \quad (72)$$

The detector then differentiates the smoothed load and smooths the absolute jerk:

$$j_{y,k} = \text{clamp}\left(\frac{\bar{a}_{y,k} - \bar{a}_{y,k-1}}{\Delta t_k}, -80, 80\right) \text{ m/s}^3, \quad (73)$$

$$\bar{j}_{y,k} = \text{EMA}(\bar{j}_{y,k-1}, |j_{y,k}|, \tau_j = 0.20 \text{ s}, \Delta t_k). \quad (74)$$

An event can start only when both conditions have occurred:

- speed is at least 3.0 m/s,
- smoothed absolute jerk has exceeded its threshold within the last 0.50 s.

Once armed, the interval metric is:

$$m_{\text{corner},k} = |\bar{a}_{y,k}|. \quad (75)$$

The default low-level configuration has:

$$m_{\text{enter}} = 3.0 \text{ m/s}^2, \quad (76)$$

$$m_{\text{exit}} = 2.4 \text{ m/s}^2, \quad (77)$$

$$j_{\text{enter}} = 4.0 \text{ m/s}^3, \quad (78)$$

$$T_{\text{min}} = 0.5 \text{ s}, \quad (79)$$

$$T_{\text{refractory}} = 2.0 \text{ s}. \quad (80)$$

Production callers normally select a **HarshBehaviorPreset**. The default **Balanced** preset keeps harsh acceleration and braking thresholds at their low-level defaults, but raises cornering to:

$$m_{\text{enter}} = 3.4 \text{ m/s}^2, \quad (81)$$

$$m_{\text{exit}} = 2.9 \text{ m/s}^2, \quad (82)$$

$$j_{\text{enter}} = 5.0 \text{ m/s}^3. \quad (83)$$

The **Sensitive** and **Conservative** presets adjust only detector thresholds. Time constants, speed gates, minimum durations, and refractory periods remain fixed so preset changes are interpretable.

10 Default Configuration Summary

Detector	Default	Purpose
Speed bump pitch HPF	0.45 Hz	Reject grade and slow pitch.

Speed bump vertical accel HPF	0.70 Hz	Reject slow body motion.
Speed bump noise EMA	6.0 s	Adaptive vibration floor.
Speed bump minimum speed	1.5 m/s	Avoid static/creep false positives.
Speed bump duration	0.18–1.8 s	Absolute event timing.
Speed bump wheelbase bounds	1.8–3.6 m	Speed-adaptive timing.
Hill pitch threshold	4°	Sustained uphill/downhill grade.
Hill minimum duration	1.0 s	Suppress short pitch transients.
Reverse enter/exit	−0.5/ − 0.2 m/s	Hysteresis around zero speed.
Reverse minimum duration	1.0 s	Suppress brief backing corrections.
Harsh accel enter/exit	2.5/2.0 m/s ²	Longitudinal acceleration hysteresis.
Harsh brake enter/exit	3.0/2.4 m/s ²	Longitudinal deceleration hysteresis.
Harsh corner enter/exit	3.4/2.9 m/s ²	Balanced preset lateral side-load hysteresis.
Harsh corner jerk threshold	5.0 m/s ³	Balanced preset abruptness gate.

11 Trip Statistics

TripStats is a constant-memory accumulator that runs beside the event detectors. It is not an offline reducer: each call processes one **TripSample**, updates a fixed set of sums and extrema, and returns no allocation-backed history. The main integrated quantities are:

$$D = \sum_k \bar{s}_k \Delta t_k, \quad (84)$$

$$T_{\text{moving}} = \sum_k \mathbb{I}(\bar{s}_k \geq s_{\text{move}}) \Delta t_k, \quad (85)$$

$$D_{\text{rev}} = \sum_k \max(-\bar{v}_{x,k}, 0) \Delta t_k. \quad (86)$$

Here $\bar{s}_k$ and $\bar{v}_{x,k}$ are one-sample trapezoidal averages over the current interval. The trapezoid uses only the previous sample, so it remains embedded-friendly while avoiding the step-change bias from assigning a whole interval to the newest sample.

When a caller supplies a vertical position h_k in the sample stream, the accumulator computes elevation gain and loss:

$$\Delta h_k = h_k - h_{k-1}. \quad (87)$$

Positive Δh_k contributes to elevation gain and negative Δh_k contributes to elevation loss. In the simulator, $h_k = -D_{\text{GNSS}}$, where D_{GNSS} is the GNSS down coordinate in the fixed first-GNSS NED frame. The trip accumulator ignores height deltas across different **height_frame_id** values, so callers that use a local reanchored frame can avoid false elevation jumps by changing the frame identifier whenever the anchor changes.

Rolling quantities use the same EMA primitive as the detectors:

$$\bar{s}_k^{\text{roll}} = \text{EMA}(\bar{s}_{k-1}^{\text{roll}}, s_k, \tau, \Delta t_k), \quad (88)$$

$$\bar{a}_k^{\text{roll}} = \text{EMA}(\bar{a}_{k-1}^{\text{roll}}, |a_k|, \tau, \Delta t_k). \quad (89)$$

These are approximate recent-behavior summaries, not exact last- N -second windows. Exact windows would require a ring buffer; the trip accumulator intentionally avoids that memory cost.

The accumulator also records detector event counts by category. Normalized rates such as bumps per kilometer, harsh events per kilometer, and reverse seconds per kilometer are computed from the running counters and distance.

12 Visualizer Interpretation

The map markers and hover mini-plots are visualization aids. They do not feed back into the detectors. For each event, the visualizer draws a short local window around the detected interval, currently with five seconds of padding on both sides when data is available:

$$[t_{\text{start}} - 5, t_{\text{end}} + 5]. \quad (90)$$

The mini-plot shows the signal that caused the detector to trigger, for example vertical acceleration and pitch for speed bumps, roughness RMS and band-passed vertical acceleration for rough road and road shocks, longitudinal acceleration for harsh acceleration/braking, and lateral side-load for harsh cornering. Yaw rate may still be shown as a diagnostic trace, but it is not the harsh-cornering trigger metric.

13 Design Rationale

The event crate favors deterministic low-memory logic over more expressive offline methods. Windowed FFTs, matched filters, and machine-learning classifiers can be useful for richer offline analysis, but they introduce larger buffers, more tuning surface, and more deployment complexity. The current detectors instead use physically interpretable metrics:

- speed bumps: alternating high-pass vertical acceleration extrema corroborated by pitch motion,
- hills: sustained pitch sign and magnitude,
- reverse: signed vehicle-frame forward velocity with hysteresis,
- harsh acceleration/braking: smoothed velocity derivative,
- harsh cornering: jerk-gated lateral side-load from vehicle-frame specific force,
- road roughness: distance-domain RMS of robustly limited band-passed vertical acceleration,
- road shocks: short raw band-passed vertical acceleration impulses detected separately from the ambient roughness energy.

This keeps the algorithms easy to port to small embedded targets and easy to debug from the visualizer.