
Instructions

Seeed Studio XIAO SAMD21 case · snap-fit, no screws

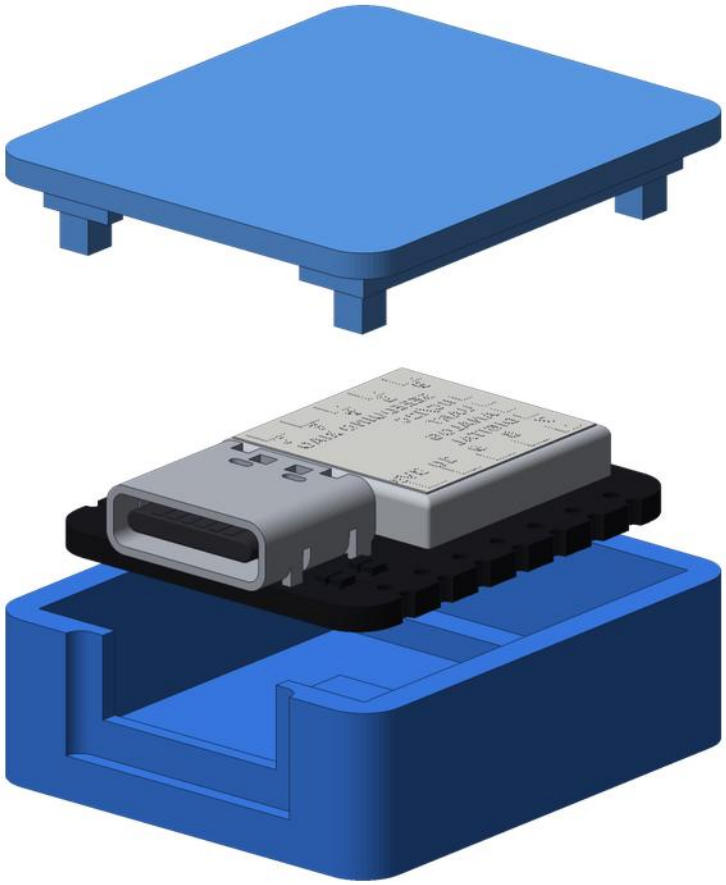

Assembly

1. Print both parts. They are already oriented: do not rotate them.
2. Skip the male headers, or solder them only if you cut floor slots.
3. Drop the board into the base from above, USB-C towards the U opening.
4. Press the lid on: the lip goes into the base and the 4 posts hold the PCB.

Dimensions

Outer size (assembled)	25.0 x 21.6 x 8.9 mm
Base	25.0 x 21.6 x 7.7 mm
Lid	25.0 x 21.6 x 4.6 mm

Print settings

Seeed Studio XIAO SAMD21 case · snap-fit, no screws

Material	PLA or PETG
Nozzle	0.4 mm
Layer height	0.2 mm (0.12-0.16 mm for a better fit)
Walls / perimeters	3
Top / bottom layers	4 / 4
Infill	20 %
Supports	None
Bed adhesion	Optional 3 mm brim on the lid

Notes

- The USB-C opening is a U open at the top: no bridges, no supports.
- With PETG, slow down the outer walls to keep the fit tolerance.
- The lid is exported flipped (top face on the bed). Keep it that way.
- Use the single 3MF to print base and lid on one plate.

If the lid does not fit

- Too tight: raise LIP_CLR from 0.15 to 0.2 in xiao_samd21_case.py.
- Too loose: lower LIP_CLR to 0.1.
- Regenerate the files with: uv run xiao_samd21_case.py

Board fit

PCB and USB-C dimensions come from the Seeeduino XIAO SAMD21 v4 3D model. Measure your board with calipers before printing.

