




Pyrotech

www.pyrotechindia.com

An ISO 9001, EMS 14001, OHSAS 18001 Company

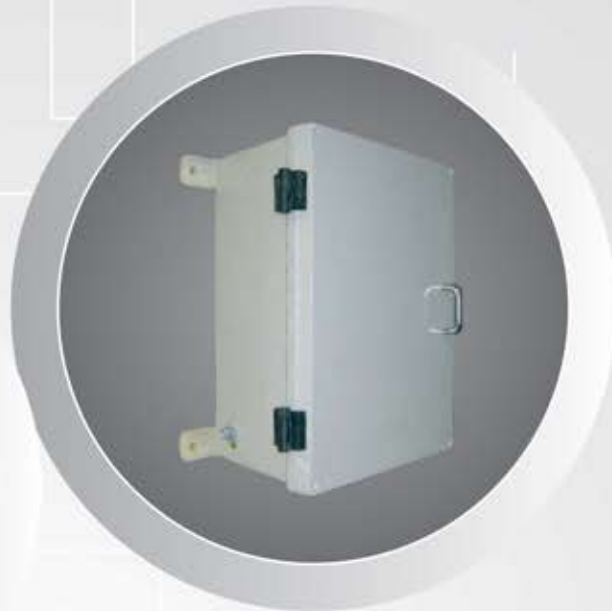

SMALL ENCLOSURES **JUNCTION BOX**

- CRCA enclosure
- SS enclosure
- FRP enclosure
- DEEP DRAWN enclosure
- ALUMINIUM DIE CAST enclosure
- FLOOR STANDING enclosure
- Accessories

CRCA Enclosures



APPLICATION




CRCA made enclosures are used for a range of applications in wide spectrum of industries. Considering the sophisticated applications. CR Sheets are required to meet high standards of inherent quality, surface finish and close tolerances on dimensions. Designed to house electrical & electronics controls, instruments & components in indoor or outdoor areas where dirt, dust, oil and water or other contaminations are present.

SALIENT FEATURES

- (1) 1.2/1.6/2mm CRCA sheet. Heavy duty also available as per request upto 3.0mm Thk.
- (2) Seams continuously welded & ground smooth.
- (3) Surface finish: Hot 7 tank pre treatment process followed by epoxy polyester based powder coating. Optionally, wet colour using epoxy and polyurethane based paint.
- (4) PU foam gasket dust tight seal and long life.
- (5) Protection class up to IP-55, IP-65.
- (6) 90-120 degree door opening.
- (7) Removable gland plate provided.
- (8) 3 point locking arrangement for big enclosures else key knock type IP lock.
- (9) Smooth blended surfaces and attractive finish complement high tech electronic equipment.
- (10) Standard Powder Coating in RAL 7032 / 7035.





CRCA Enclosures

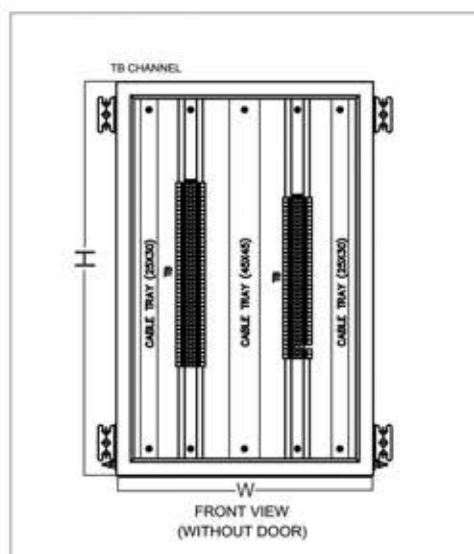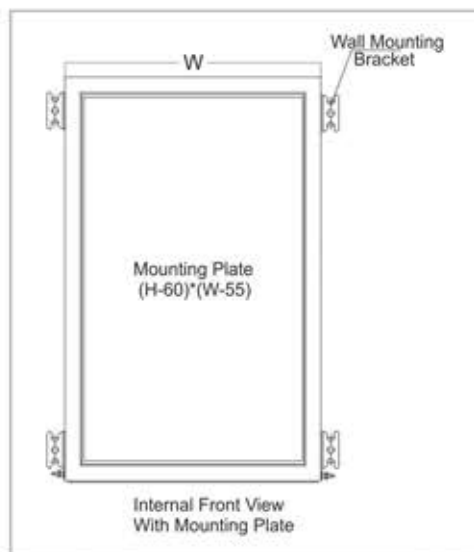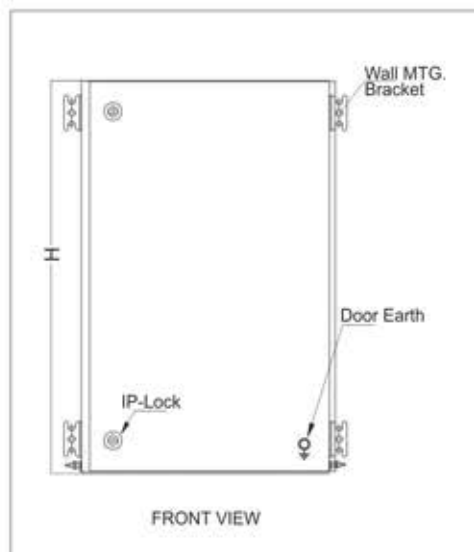

Standard Dimensions

S#	Product Part No.	Size in mm			Dimension of Mounting Plate HXW in mm	No. of C G Plate	Dimension of C G Plate DXW in mm	Usable area of C G Plate WXD in mm	No. of TB Maximum
		H	W	D					
1	080CR01	300	200	120	240X145	1	114X194	147X67	25
2	080CR02	300	200	155	240X145	1	149X194	147X102	25
3	080CR03	300	300	210	240X245	1	204X294	247X157	25
4	080CR04	300	380	155	240X325	1	149X374	327X102	25
5	080CR05	300	380	210	240X325	1	204X374	327X157	25
6	080CR06	380	380	210	320X325	1	204X374	327X157	35
7	080CR07	380	300	210	320X245	1	204X294	247X157	35
8	080CR08	380	600	210	320X545	2	204X292	247X157	70
9	080CR09	380	600	350	320X545	2	344X292	247X297	70
10	080CR10	400	300	210	340X245	1	204X294	247X157	40
11	080CR11	500	400	210	440X345	1	204X394	347X157	50
12	080CR12	500	500	210	440X445	2	204X242	197X157	100
13	080CR13	500	500	300	440X445	2	294X242	197X247	100
14	080CR14	600	380	210	540X325	1	204X374	327X157	75
15	080CR15	600	380	350	540X325	1	344X374	327X297	75
16	080CR16	600	600	210	540X545	2	204X292	247X157	150
17	080CR17	600	600	350	540X545	2	344X292	247X297	150
18	080CR18	760	600	210	700X945	2	204X292	247X157	200
19	080CR19	760	600	350	700X945	2	344X292	247X297	200
20	080CR20	760	760	210	700X945	2	204X372	327X157	300
21	080CR21	760	760	300	700X945	2	294X372	327X247	300
22	080CR22	760	1000	210	700X945	2	204X492	447X157	400
23	080CR23	760	1000	300	700X945	2	294X492	447X247	400
24	080CR24	1000	800	300	840X745	2	294X392	347X247	420
25	080CR25	1200	800	300	1140X745	2	294X392	347X247	516
26	080CR26	1200	1000	300	1140X945	2	294X492	447X247	860

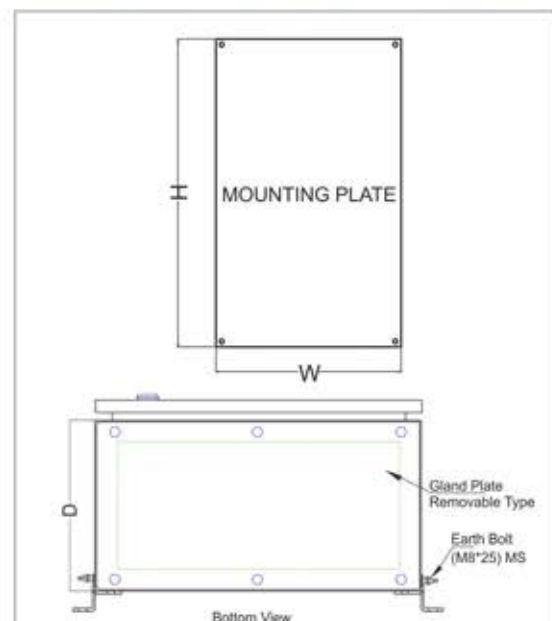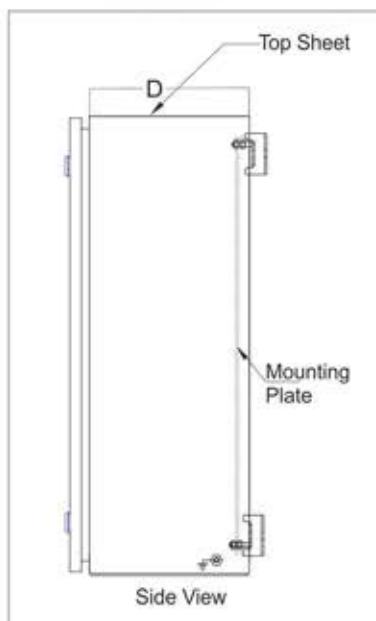

SS Enclosures








APPLICATION

Designed for use in areas which are regularly hosed down or are otherwise very wet. Suitable for outdoor use where dirt, dust, oil, water or other contaminations are present. Typically useful in environment where serious corrosion problem exist-mainly chemical and petrochemical industries and in areas where caustic elements or alkalies are present.

SALIENT FEATURES

- (1) 1.6/2mm SS 304 and SS 316 sheet.
- (2) Seams continuously welded.
- (3) Buff finish provided for high aesthetic appeal.
- (4) PU form gasket is used for dust tight seal and long life.
- (5) Protection class up to IP55, IP-65.
- (6) Stainless steel screws and clamps provided.
Grounding stud on sides.
- (7) Heavy gauge hinges for removable door.
- (8) 90-120 degree door opening.
- (9) 3 point locking arrangement for big enclosures
else key knock type IP Lock.
- (10) Full line of field installable accessories

SS Enclosures

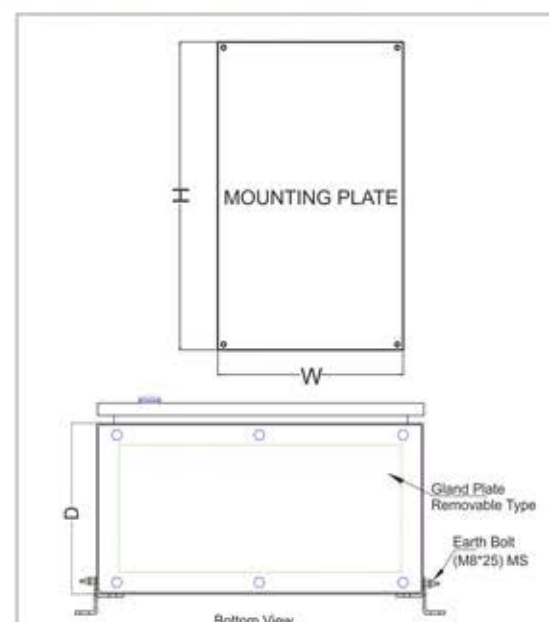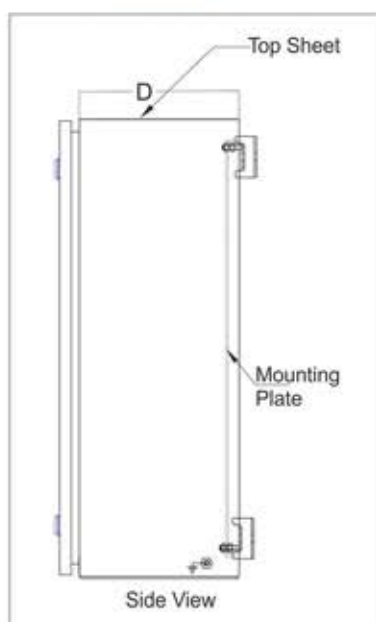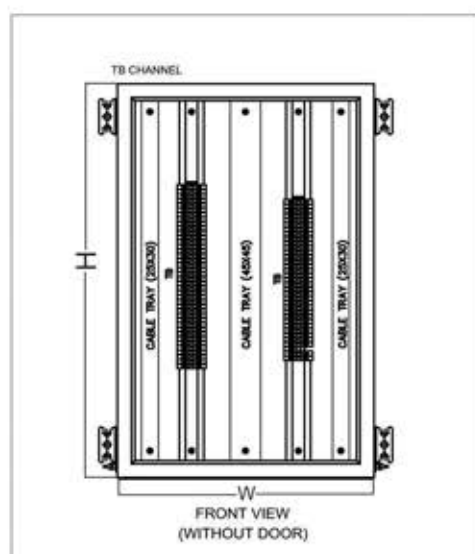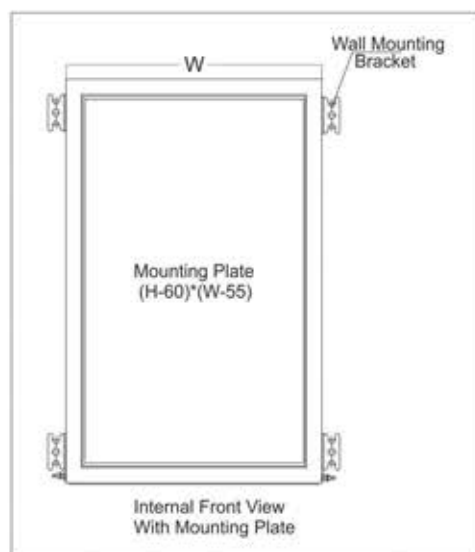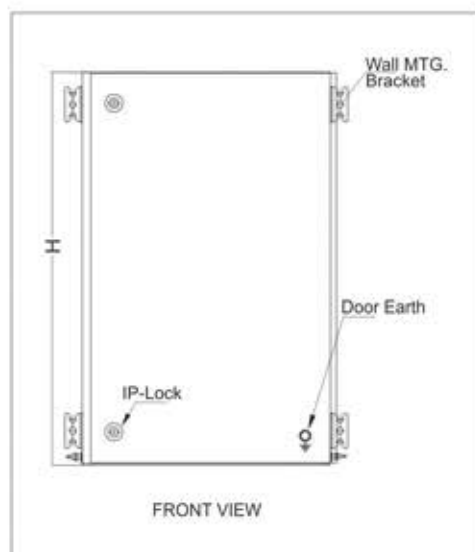

Standard Dimensions

S#	Product Part No.	Size in mm			Dimension of Mounting Plate HxW in mm	No. of C G Plate	Dimension of C G Plate DXW in mm	Usable area of C G Plate WXD in mm	No. of TB Maximum
		H	W	D					
1	080SS01	300	200	120	240X145	1	114X194	147X67	25
2	080SS02	300	200	155	240X145	1	149X194	147X102	25
3	080SS03	300	300	210	240X245	1	204X294	247X157	25
4	080SS04	300	380	155	240X325	1	149X374	327X102	25
5	080SS05	300	380	210	240X325	1	204X374	327X157	25
6	080SS06	380	380	210	320X325	1	204X374	327X157	35
7	080SS07	380	300	210	320X245	1	204X294	247X157	35
8	080SS08	380	600	210	320X545	2	204X292	247X157	70
9	080SS09	380	600	350	320X545	2	344X292	247X297	70
10	080SS10	400	300	210	340X245	1	204X294	247X157	40
11	080SS11	500	400	210	440X345	1	204X394	347X157	50
12	080SS12	500	500	210	440X445	2	204X242	197X157	100
13	080SS13	500	500	300	440X445	2	294X242	197X247	100
14	080SS14	600	380	210	540X325	1	204X374	327X157	75
15	080SS15	600	380	350	540X325	1	344X374	327X297	75
16	080SS16	600	600	210	540X545	2	204X292	247X157	150
17	080SS17	600	600	350	540X545	2	344X292	247X297	150
18	080SS18	760	600	210	700X945	2	204X292	247X157	200
19	080SS19	760	600	350	700X945	2	344X292	247X297	200
20	080SS20	760	760	210	700X945	2	204X372	327X157	300
21	080SS21	760	760	300	700X945	2	294X372	327X247	300
22	080SS22	760	1000	210	700X945	2	204X492	447X157	400
23	080SS23	760	1000	300	700X945	2	294X492	447X247	400
24	080SS24	1000	800	300	940X745	2	294X392	347X247	420
25	080SS25	1200	800	300	1140X745	2	294X392	347X247	516
26	080SS26	1200	1000	300	1140X945	2	294X492	447X247	860

FRP Enclosures

APPLICATION

Contoured body with flush cover screws provides an attractive contemporary appearance. Enclosures are designed for wet, dusty and corrosive environment. These boxes are watertight with superior mechanical and chemical resistance as they are made up of thermoplastic material reinforced with fiber glass.



SALIENT FEATURES


- (1) Around 4mm THK. FRP Hot Moulded.
- (2) Special shape of boxes enables safe operation on the terminal blocks in order to have the connecting terminals in line with the cable holes. Insulation of the boxes ensures total safety against accidental contacts with live parts.
- (3) Impact strength guaranteed even at low temperatures.
- (4) Windows can be closed by means of suitable plaques.
- (5) High quality housing made of self extinguishing material.
- (6) Fire resistance: Passes glow wire test.
- (7) High dimensional stability within the range of 0°C to 90°C.
- (8) Moulded polyurethane gasket provides oil resistant, water tight, dust tight seal.
- (9) SS handle and hinge are also provided.
- (10) Wall mounting clamp are also provided.
- (11) Standard Powder Coating in RAL 7032 / 7035.
- (12) Protection class up to IP 65.



FRP Enclosures

Standard Dimensions

S #	Product Part No.	Size in mm			
		Height	Width	Depth	TB
1	080FR01	120	100	80	10
2	080FR02	120	120	90	10
3	080FR03	160	120	85	15
4	080FR04	160	160	90	15
5	080FR05	250	200	125	25
6	080FR06	330	230	150	35
7	080FR07	410	310	175	90
8	080FR08	510	360	190	105
9	080FR09	620	435	210	180

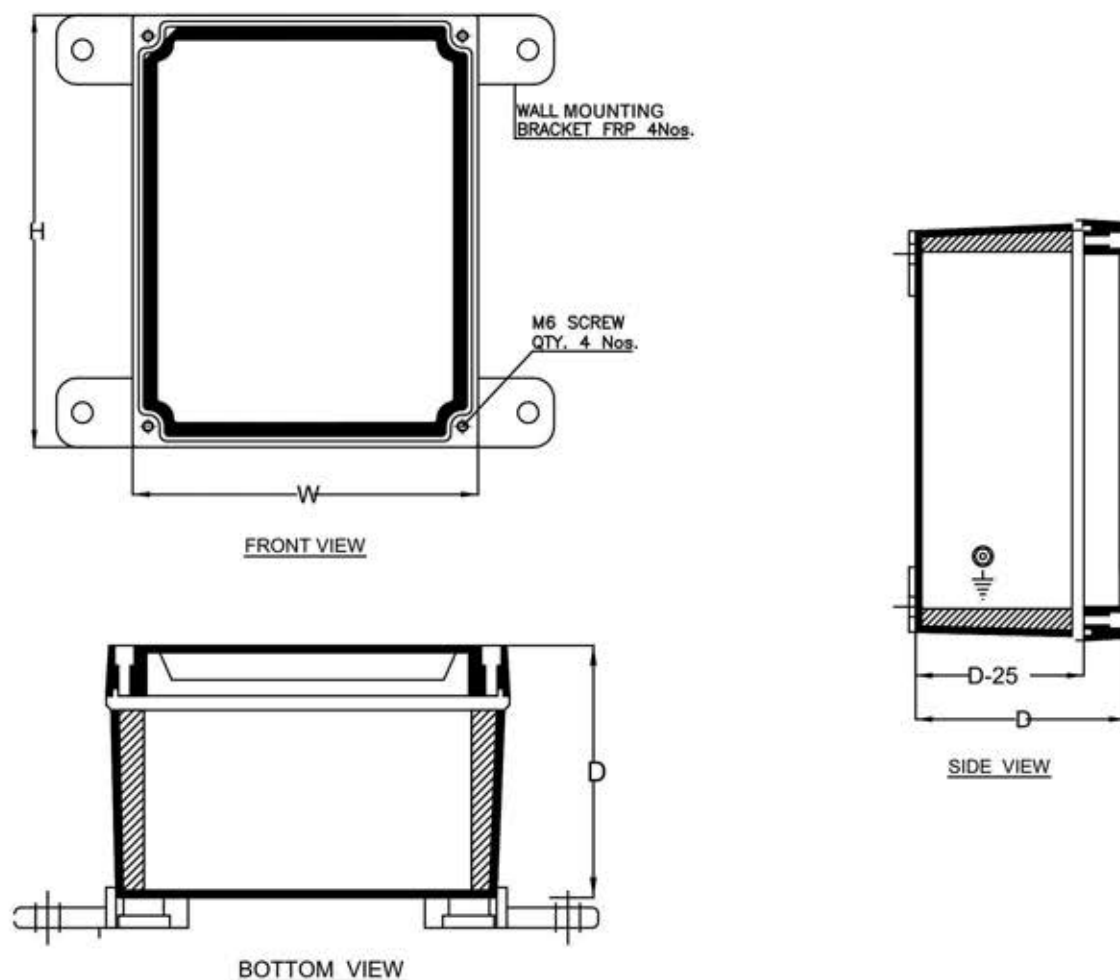

Deep Drawn Enclosures

APPLICATION





Contoured body with projected cover screws provides an attractive contemporary appearance. Enclosures are designed for wet, dust and corrosive environment. These boxes are water and dust proof with superior mechanical and chemical resistance.

SALIENT FEATURES

- (1) 1.6 mm Thick CRCA sheet.
- (2) No welding.
- (3) (a) Paint powder coating RAL 7035, RAL 9002 RAL 7032.
(b) Hot dip galvanization.
- (4) PU Foam gasket dust tight seal and long life.
- (5) Protection class up to IP-55

Standard Dimensions

S#	Product Part No.	Size in mm			
		Height	Width	Depth	TB
1	080DD01	135	135	75	8
2	080DD02	135	135	85	8
3	080DD03	175	175	95	15

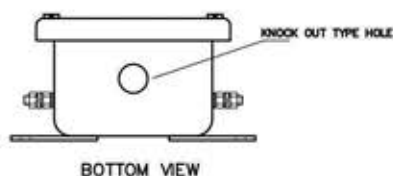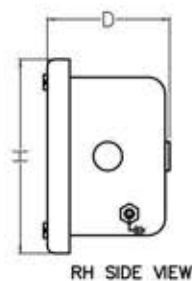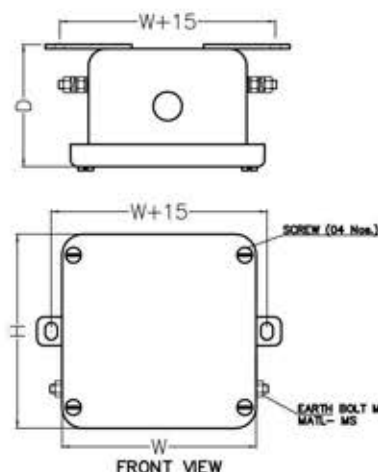

Aluminum Die Cast Enclosures

APPLICATION


Aluminum is particularly durable & well suited in areas where corrosion problem exists. Aluminum based enclosures have wide range of applications in electrical, electronic or pneumatic components in indoor & outdoor applications. Also an excellent choice for enclosures exposed to sea corrosion, solvents, petrochemicals & acids mainly sulphates & nitrates. Not suitable for alkaline applications.

SALIENT FEATURES

- (1) No welded seams or sharp corners, totally die casted.
- (2) Mounting holes provided in corners outside of gasket area.
- (3) Captive cover screws of stainless steel provided.
- (4) Holes given for equipment mounting.
- (5) Stainless steel screws & clamps assure watertight seal.
- (6) Ingress protection upto IP65.

Standard Dimensions

S.#	Product Part No.	Type	Size in mm				Mounting Holes
			H	W	D	T	
1	080AL01	W 10	155	115	90	4	4 Holes X 6.5
2	080AL02	W 12	195	140	95	4	4 Holes X 6.5
3	080AL03	W 14	195	195	100	4	4 Holes X 6.5
4	080AL04	W 16	298	226	95	4	6 Holes X 6.5
5	080AL05	W 18	305	305	105	4	6 Holes X 6.5
6	080AL06	W 20	500	500	200	4	6 Holes X 6.5

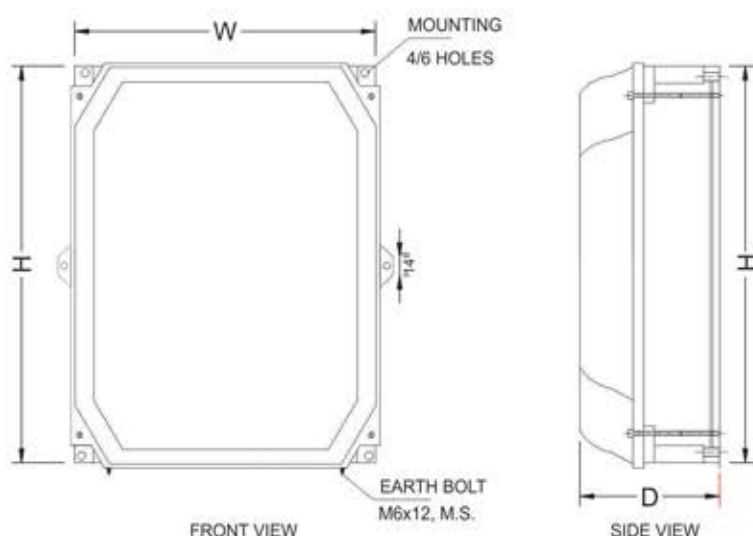


Floor Standing Enclosure

SALIENT FEATURES

- (1) Sheets and Doors made in 1.6 / 2mm thick CRCA.
- (2) Mounting Plate C-channel for component mounting.
- (3) Gland Plate with cable entry holes.
- (4) Gasket arrangement.
- (5) Lock will be provided 3 point lock / 4 point lock.
- (6) Anti-vibration Pad (15 mm thick), will be provided.
- (7) Base frame will be provided 75 mm / 100 mm.
- (8) Canopy on top for outdoor application.
- (9) Powder Coating in RAL 7032 / 7035.
- (10) Protection class upto IP-55.

Standard Dimensions

S.#	Product Part No.	Size in mm			
		H	W	D	D1
1	080FS01	1000	900	300	300
2	080FS02	1100	900	300	300
3	080FS03	1200	900	300	400
4	080FS04	1300	900	300	400
5	080FS05	1400	1000	300	400
6	080FS06	1500	1000	400	500

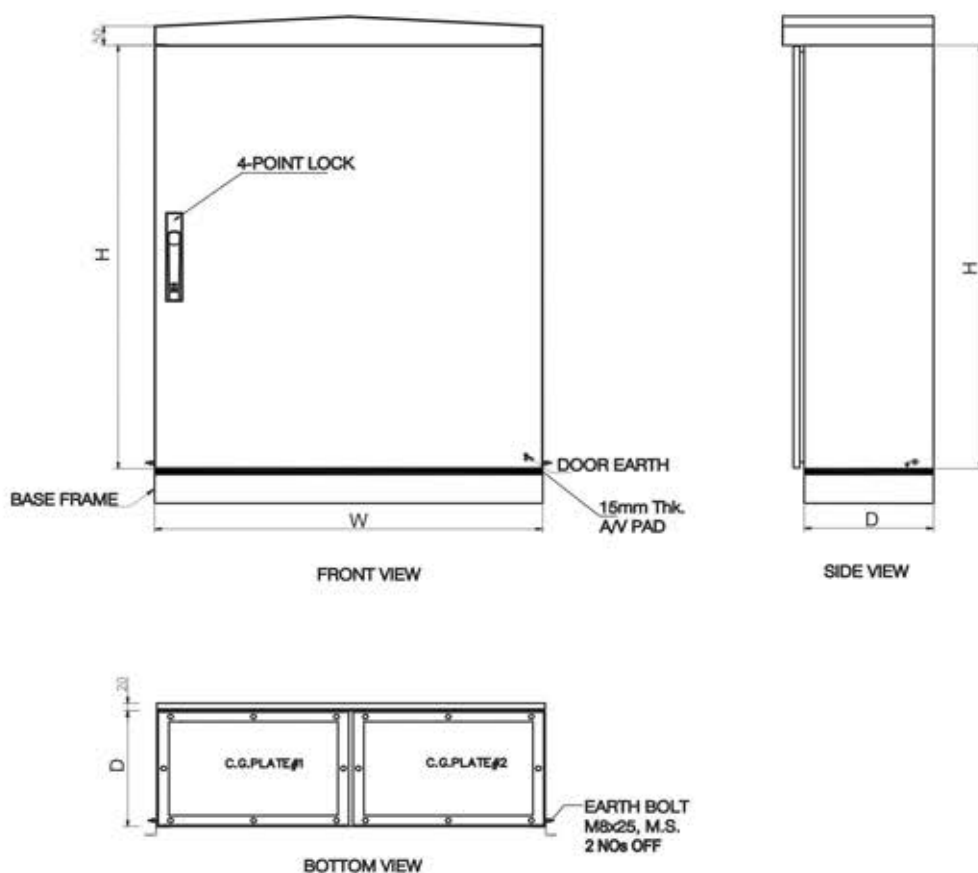

Variants

Wall Mounting Arrangement



Wall Mounting Bracket :
Surface Mounting Arrangement For
Mounting on Wall & Plain Surfaces.

Hinge



Concealed hinge provided to ensure
additional protection and safety.
Continuous hinge are also provide.

Internal Mounting



Mounting Plate :
Full Length Mounting Plate of 2mm
provided. Mounting Strips with
C-Channel.

Gasket



PU Foam Gasket are provided as
standard

Neoprene Foam Gasket
Emc Conductive Gasket
Tubular Gasket
Epdm Gasket

Cable Gland Plate



Gland Plates can be mounted on
top and other sides.

Pre drilled holes can be provide.

Knock out can be provide as
standard :

(1) Ø 16 m (2) Ø 20 mm (3) Ø 25 mm (4) Ø 26 mm

(5) Ø 30 mm (6) Ø 39 mm (7) Ø 50 mm

Locking Arrangement



IP Locking Arrangement :

Standard Locking Arrangement,
Two locks provided in standard enclosures.
Three points locks are also provided.

Shades

RAL 7035 & RAL 7032 are provided as standard

RAL 9002

RAL 2000 for Mounting Plate

IS 631

Infrastructure

Plant & Machinery

Sheet Punching
Sheet Shearing
Sheet Bending
Welding
Surface Treatment
Powder Coating

SHEET PUNCHING



CNC Turret Punch Press (2013)
(Make-Murtec, Japan)
Punching Capacity 20 Tons
Punching Accuracy 0.1 mm
Working Length 1250 X 2500 mm
Maximum Sheet Thickness 3.2 mm

SHEET PUNCHING



CNC Turret Punch Press (2013)
(Make-Amada, Japan)
Punching Capacity 20 Tons
Punching Accuracy 0.02 mm
Working Length 1250 X 2500 mm
Maximum Sheet Thickness 3.2 mm

SHEET PUNCHING



CNC Turret Punch Press (2013)
(Make-Murtec, Japan)
Punching Capacity 20 Tons
Punching Accuracy 0.1 mm
Working Length 1250 X 2500 mm
Maximum Sheet Thickness 3.2 mm

SHEET SHEARING



NC Hydraulic Shear Machine (2000)
Capacity 4 mm X 3000 mm
Work Length 4 x 1000 mm
Accuracy up to 0.5 mm
Tolerance 0.5 mm

SHEET BENDING



Amada
Capacity - 80 Ton
Accuracy - 0.1 mm
Working Length - 2600 mm

SHEET BENDING



NC Hydraulic Press Brake
Capacity 1100 KN Accuracy 1
Degree Working Length 3 X 3000 mm
Tolerance 0.5

SHEET BENDING



CIDAN Power Folder Futura Plus-25
Folding Length 2600 mm
Capacity at 400 N/sq. mm 3.5 mm
Opening Height Clamping Beam 195 mm
Motor Clamping Beam 2.2 kv
Motor Folding Beam 1.5+1.5 kv
Weight ca.4295 kg

WELDING



Tungsten Arc Welding
(GTAW) / TIG Welding
for high quality and precision Welding
Gas Metal Arc Welding
(GMAW) / MIG Welding
for high deposition rate welding

SURFACE TREATMENT



HOT 7 Tank Surface Treatment
Capacity 7000 L Provides complete surface Treatment which involves processes like Degreasing, Rinsing, Derusting, Cleaning & Rinsing, Cleaning, Activation, Phosphating, Rinsing, Passivation.

POWDER COATING



Powder Coating Booth
Fully Automatic conveyorized powder coating plant suitable for epoxy base polyester coating.

Other Products



Shelter



LIE - LIR




MCC / PCC



Mosaic Desk



Mosaic Mimic Panel



Acrylic Mimic



HT Panel



Console Desk



Junction Box



NG / LAVT Cubicle



Synchronization Panel



CT Box



Generator Control Box



Large Video Screen



Control & Relay Panels



Universal Test Bench



Networking Panel



Metering Box



Push Button Station



Control Room



Mimic Desk



Control Desk



PDB



Purge & Ex-proof



19" Racks



FRP Box



Poles

Our Product Range

- | | | | |
|---|---|--|---|
| <ul style="list-style-type: none"> • Shelter • Mosaic Desk • Console Desk • Bare Panel IP-65 • PCL Panel • Mosaic Minic Panel • Local Control Station • FRP Box | <ul style="list-style-type: none"> • LIE - LIR • Power Distribution Box • Purge & Ex-proof • Acrylic Mimic • NG / LAVT Cubicle • Generator Control Box • MCC / PCC • CT Box | <ul style="list-style-type: none"> • Synchronization Panel • HT Panel • Large Video Screen • Networking Panel • Bare Panel IP-55 • Junction Box • Control & Relay Panels • Alcosy Control Desk | <ul style="list-style-type: none"> • Metering Panel • Metering Box • Marshalling Panels • EMI/RFI Compliant Panel • Universal Test Bench • Push Button Station • 19" Racks • Control Room Interiors |
|---|---|--|---|



PYROTECH ELECTRONICS PVT. LTD. - UNIT II



SOLAR PLANT



PYROTECH ELECTRONICS PVT. LTD. - UNIT IV

Pyrotech Electronics Pvt. Ltd was established in 1976 at Udaipur, Rajasthan having more than 35 years experience in Turnkey control room interiors, Mosaic Panels & Desks, Control Panels & Desks, other Industrial Panels, Junction Boxes & Racks and more than 10 years experience of Supply, Installation & Commissioning in video wall market. We have our reach to the Power, Energy G/D/T, Oil & Gas, Metal, Transport, Defense & Cement industries etc. .



www.pyrotechindia.com

An ISO 9001, EMS 14001, OHSAS 18001 Company

PYROTECH ELECTRONICS PVT. LTD. - UNIT II

E-329, Road No. 12,
Mewar Industrial Area, Udaipur - 313 003,
Ph: +91-294-2492122/31/34, Fax: 2492130,
E-mail: pyrotech@pyrotechindia.com,
marketing@pyrotechindia.com

C-140, Sector 63,
Noida-201301 (Uttar Pradesh),
Mobile : +91-88004 88792,
E-mail : pmppl@pyrotechindia.com,
electricals@pyrotechindia.com

Regional Marketing Offices :-

- | | | |
|-------------|-------------|-----------|
| • Ahmedabad | • Bhopal | • Kolkata |
| • Baroda | • Delhi | • Mumbai |
| • Bangalore | • Hyderabad | • Chennai |