New Standard Legend for Design 2025

Prepared by Planning Head Office

Planning MyRepublic



Date : June 20th, 2025

Legend Design - Aerial Topology

Icon	Deskripsi
	OLT
	FDT 288C
	FDT 144C
	FDT 96C
	FDT 72C
	FDT 48C
	POLE 9M 4INCH
	POLE 7M 4INCH
	POLE 7M 3INCH
	POLE 7M 2.5INCH
	EXISTING POLE
	CABLE ADSS 24C/2T

Icon	Deskripsi
	CABLE ADSS 36C/3T
	CABLE ADSS 48C/4T
	CABLE ADSS 72C/6T
	CABLE ADSS 96C/8T
	CABLE ADSS 144C/12T
	CABLE ADSS 288C/24T
	FAT 48C
	FAT 32C
	FAT 24C
	FAT 16C
	FAT 8C
	JOINT CLOSURE 24C

Icon	Deskripsi
	JOINT CLOSURE 36C
	JOINT CLOSURE 48C
	JOINT CLOSURE 72C
	JOINT CLOSURE 96C
	JOINT CLOSURE 144C
	JOINT CLOSURE 288C
	SLACK CABLE
	HOMEPASS
	SLING WIRE

Planning MyRepublic

Legend Design - Underground Topology

Icon	Deskripsi
	OLT
	FDT 288C
	FDT 144C
	FDT 96C
	FDT 72C
	FDT 48C
	HANDHOLE 80x80x130
	HANDHOLE 40x40x60
	HANDHOLE 20x20x20
	CABLE ADSS 24C/2T
	CABLE ADSS 36C/3T
	CABLE ADSS 48C/4T

Icon	Deskripsi
	CABLE ADSS 72C/6T
	CABLE ADSS 96C/8T
	CABLE ADSS 144C/12T
	CABLE ADSS 288C/24T
	FAT 48C
	FAT 32C
	FAT 24C
	FAT 16C
	FAT 8C
	JOINT CLOSURE 24C
	JOINT CLOSURE 36C
	JOINT CLOSURE 48C

Icon	Deskripsi
	JOINT CLOSURE 72C
	JOINT CLOSURE 96C
	JOINT CLOSURE 144C
	JOINT CLOSURE 288C
	SLACK CABLE
	PEDESTAL HANDHOLE
	SUB DUCT 40/34
	SUB DUCT 32/28
	HOMEPASS

Planning MyRepublic

Format Penulisan Cable

Format Penulisan MF/HF/UP :


- OLT Code - Feeder/HF/MF/UPL Cable Segment (FO 24C/2T) - AE - Panjang rute cable m
- Contoh : **JKT.010.100 - MAINFEEDER CABLE SEGMENT 1 (FO 288C/24T) - UG - 5026m**

Format Penulisan Sub Feeder :

- OLT Code - FDT Code - SubFeeder Cable Line A (FO 24C/2T) - AE - Panjang rute cable m
- Contoh : **JKT.010.100 - CGN21-1.063 - SUBFEEDER CABLE (FO 72C/6T) - AE - 126m**

Format Penulisan Cluster :

- FDT Code - Cable Line A (FO 24C/2T) - AE - Panjang rute cable m
- Contoh : **CGN21-1.063 - CABLE LINE A (FO 24C/2T) - AE - 1026m**

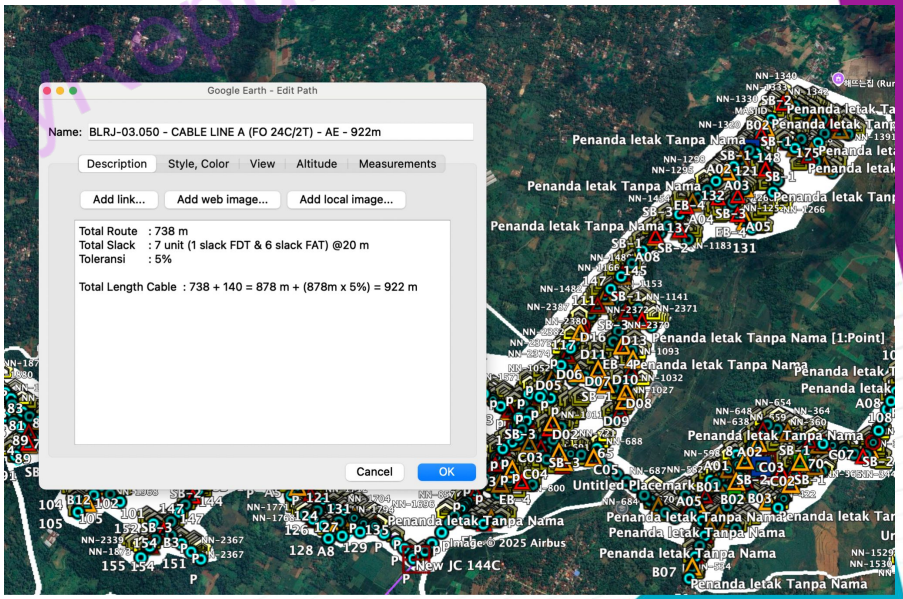

NOTES :
***) Format Penulisan Cable wajib menambahkan deskripsi slack+toleransi**

Total length cable = total panjang route kmz + slack cable pada line tersebut

Contoh Format Penulisan:
BLRJ-03.050 - CABLE LINE A (FO 24C/2T) - AE - 922m

Deskripsi :
Total Route : 738 m
Total Slack : 7 unit (1 slack FDT & 6 slack FAT) @20 m
Toleransi : 5%
Total Length Cable : 738 + 140 : 878 m + (878m x 5%) = 922 m

Planning My Republic

Format Penulisan FDT & FAT

Format Penulisan FDT:

- Akronim Cluster diikuti RW.Urutan List Cluster pada Coverage OLT tsb
- Contoh : PDGN08.075

Format Penulisan FAT :

- FDT Code.FAT Code
- Contoh : PDGN08.075.A01

Dalam 1 cluster hanya ada 1 FDT

PDGN08.075 ⇒ 1 cluster ada 1 FDT

Dalam 1 cluster terdapat 2 FDT

PDGN08-1.075 ⇒ FDT pertama

PDGN08-2.076 ⇒ FDT kedua

Planning MyRepublic

Format Penulisan Tiang

UP-MF-HF Pole

ISP	Contoh Penulisan UPLINK	Contoh Penulisan MAINFEEDER	Contoh Penulisan HUBFEEDER
Tiang MyRepublic	MR.UP.KBS.S01.P001 s/d P00+ (increment)	MR.MF.KBS.S01.P001 s/d P00+ (increment)	MR.HF.KBS.S01.GBA.P001 s/d P00+ (increment)
Tiang Linknet	EXT.LN.UP.KBS.S01.P001 s/d P00+ (increment)	EXT.LN.MF.KBS.S01.P001 s/d P00+ (increment)	EXT.LN.HF.KBS.S01.GBA.P001 s/d P00+ (increment)
Tiang MTI	EXT.MTI.UP.KBS.S01.P001 s/d P00+ (increment)	EXT.MTI.MF.KBS.S01.P001 s/d P00+ (increment)	EXT.MTI.HF.KBS.S01.GBA.P001 s/d P00+ (increment)

SF Pole

ISP	Format	Contoh Penulisan	Existing Pole	New Pole
Tiang MyRepublic	MR.Initial OLT Name.Cluster Initial.P001 s/d P00+ (Increment)	MR.KBS.GBA05.P001 s/d P00+ (Increment)	EXT. MR.KBS.GBA05.P001	MR.KBS.GBA05.P001 s/d P00+ (Increment)
Tiang Linknet	LN.Initial OLT Name.Cluster Initial.P001 s/d P00+ (Increment)	EXT.LN.KBS.GBA05.P001 s/d P00+ (Increment)		EXT.LN.KBS.GBA05.P001 s/d P00+ (Increment)
Tiang MTI	MTI.Initial OLT Name.Cluster Initial.P001 s/d P00+ (Increment)	EXT.MTI.KBS.GBA05.P001 s/d P00+ (Increment)		EXT.MTI.KBS.GBA05.P001 s/d P00+ (Increment)

CL Pole

ISP	Format	Contoh Penulisan	Existing Pole	New Pole
Tiang MyRepublic	MR.Cluster Initial.P001 s/d P00+ (Increment)	MR.GBA05.P001 s/d P00+ (Increment)	EXT. MR.GBA05.P001	MR.GBA05.P001 s/d P00+ (Increment)
Tiang Linknet	LN.Cluster Initial.P001 s/d P00+ (Increment)	EXT. LN.GBA05.P001 s/d P00+ (Increment)		EXT. LN.GBA05.P001 s/d P00+ (Increment)
Tiang MTI	MTI.Cluster Initial.P001 s/d P00+ (Increment)	EXT.MTI.GBA05.P001 s/d P00+ (Increment)		EXT.MTI.GBA05.P001 s/d P00+ (Increment)

Planning MyRepublic

Format Penulisan Identitas


Home Number Regulation

Category	Penjelasan	Contoh	Remarks
??	• Rumah/bangunan yang berhasil diidentifikasi namun tidak dapat diketahui nomor rumahnya (minim informasi). • Penulisan pada ABD harus ditambahkan sequence number (nomor urut) untuk setiap cluster yang sama.	?-01, ?-45, dst.	Not Use for NRO
NN	• Rumah/bangunan terkonfirmasi tidak memiliki nomor. Perubahan home number menjadi NN harus melalui proses Update Homepass/HEP • Penulisan pada ABD harus ditambahkan sequence number (nomor urut) untuk setiap cluster yang sama. Jika HP NN adalah hasil update dari HP ?? maka sequence number mengikuti nomor urut pada HP ?? sebelumnya.	HP lama adalah ?-31 maka HP baru yang diupdate adalah NN-31.	New Roll Out (using new Standard Homepass Non-Number)

Planning MyRepublic

Topology FTTH - MyRepublic


Jenis topology: Ring

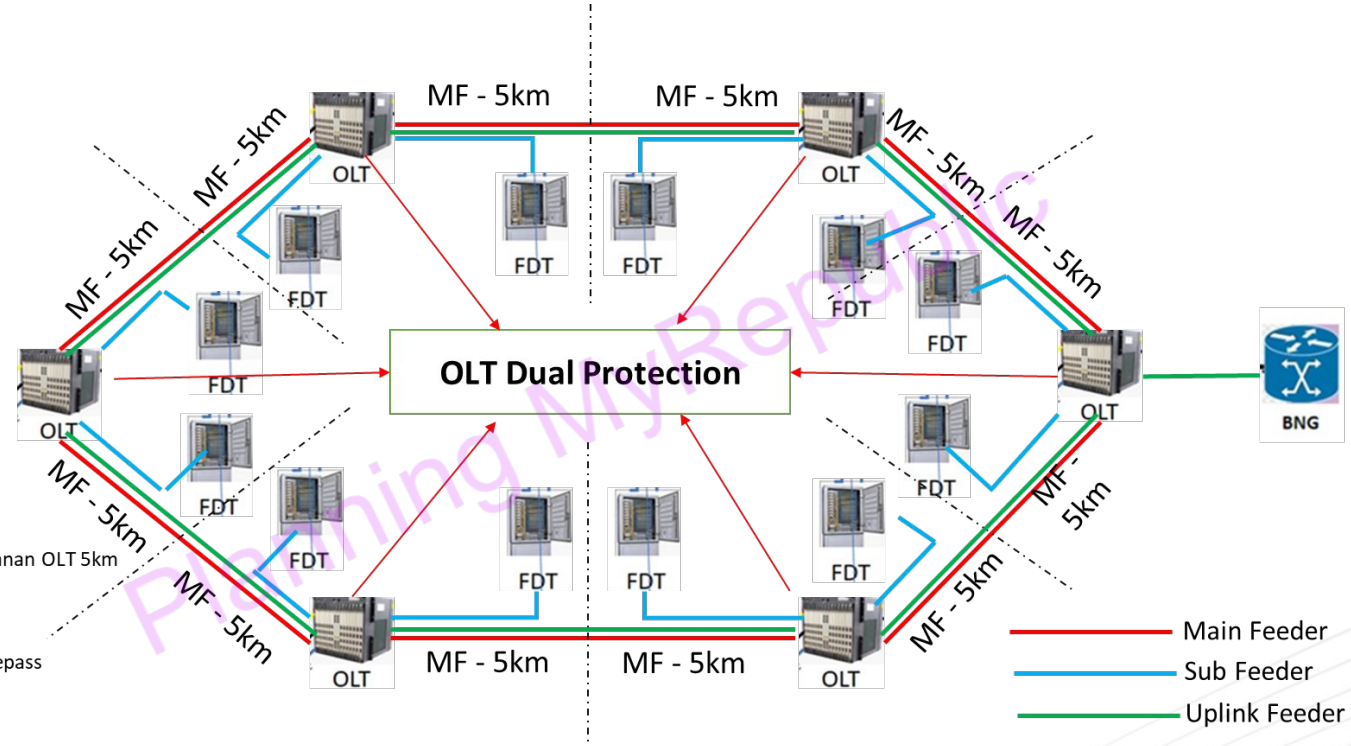

1. Topology Ring
2. Splitting Ratio 1:64
3. Jarak Max per Segment Kiri & kanan OLT 5km
4. Dual stage :
   * 1st Stage splitter 1:8 di FDT
   * 2nd Stage splitter 1:8 di FAT
4. FAT Coverage maximum 16 homepass
5. FO Feeder type :
   * FO_144c (aerial)
   * FO_288c (underground)

Planning MyRepublic

Design Splitting Scenario

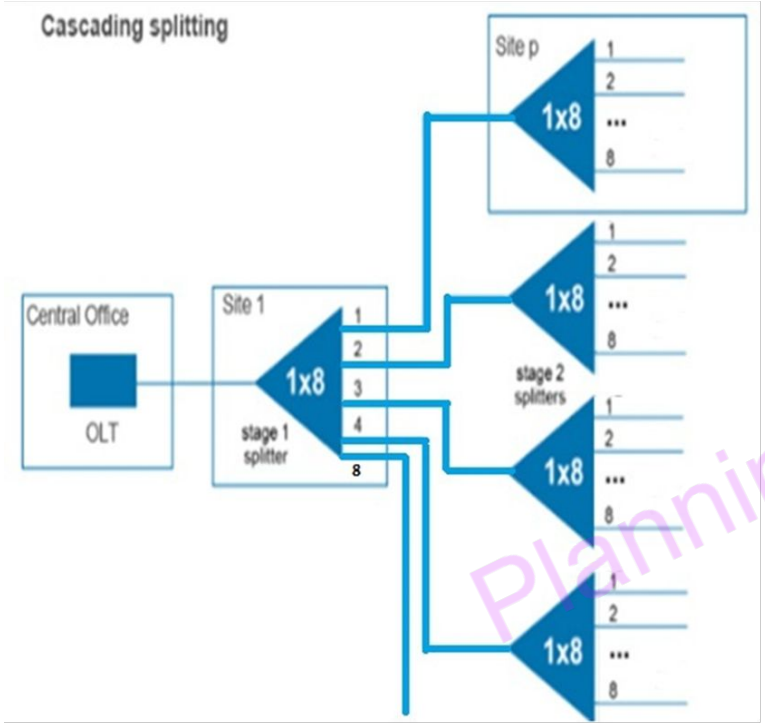

Desain menggunakan skenario cascading splitting (1:8 dan 1:8):

•Jenis penggunaan FDT ; Kapasitas FDT 48 Port (dengan 6 unit splicing & terminasi, 6 slot untuk Splitter) menghubungkan maksimum 40 FAT (asumsi 1 FAT berisi 1 splitter).

•**Kapasitas FAT max 16 port yang terdiri dari 2 slot splitter 1:8**; Satu FAT mencakup maksimum 16 HP. Kapasitas FAT bawah tanah 16 port berisi 2 slot splitter 1:8; satu penutup FAT max 16 HP.


•**Kapasitas FAT UG type 16 port berisi 2 slot splitter 1:8**; satu penutup FAT max 16 HP.

•Satu kabel distribusi mendistribusikan 2 core ke setiap FAT dan splice 100% (1 splitter = 1 core); Untuk satu FDT , kabel feeder mendistribusikan core “x” tergantung pada kebutuhan/HP aktual; (FDT 48 membutuhkan maksimum 6 core input feeder). Sambungan feeder menyediakan 100% untuk core utama berdasarkan kapasitas kabel dan sub feeder berdasarkan jumlah core yang dibutuhkan.

•Untuk bagian feeder, ada 4 jenis untuk penggunaan kabel: 288/144/96/ core, kami mengusulkan kabel 288 dan atau 144 core untuk main route dan jenis lainnya diusulkan untuk digunakan untuk sub-feeder. ……(melanjutkan)

Planning My Republic

Design Splitting Scenario

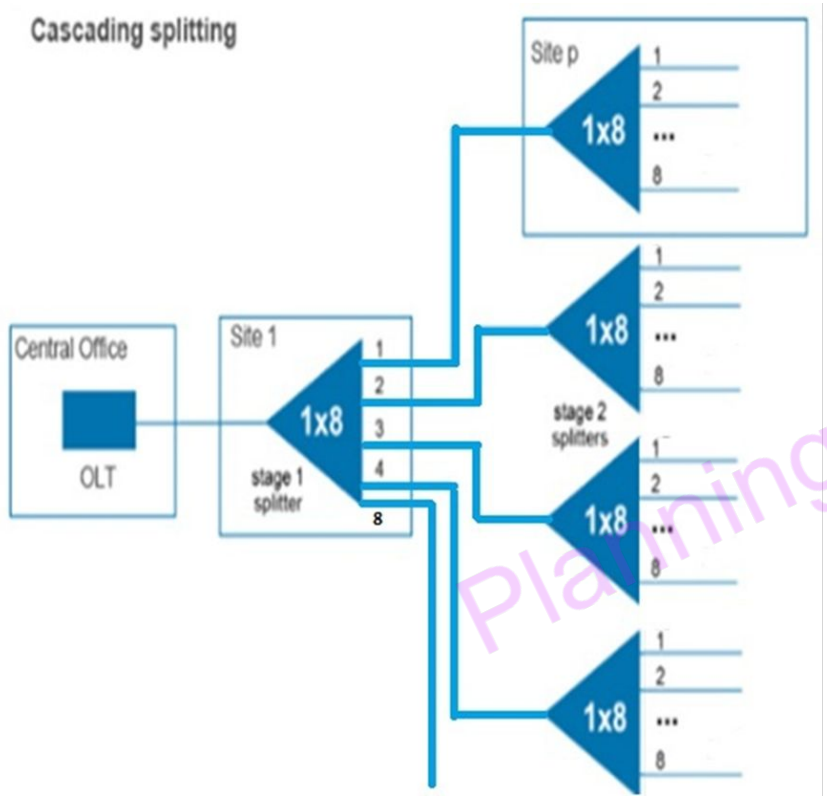

Skenario cascading splitting :

•Untuk bagian distribusi menggunakan 24/36 core, opsional 12/48 core

•2 core setiap satu tube dalam distribusi diberikan untuk monitoring / cadangan; Pada main feeder, core yang dialokasikan untuk input FDT akan menjadi dua kali dari total splitter 1:8 dan akan dialokasikan ke masing-masing FDT (bukan setiap cluster) sebagai monitoring dan cadangan (diterapkan pada feeder line baru).

•Splitter 1:8 akan menyediakan 50% dari cakupan HP kapasitas penuh, dan splitter 1:8 berikutnya akan menyediakan 1 Pcs setiap FAT dan diserahkan ke tim operasi setelah ATP dengan pelanggan selesai.

Planning MYRepublic

Design Splitting Scenario





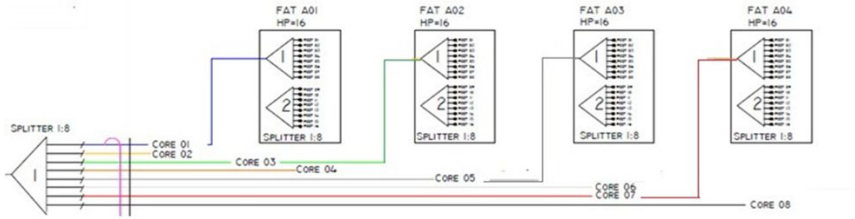


PLATE-1						PLATE-2												PLATE-3											
Port	Frcnt	Rear	Port	Front	Rear	Port	Front	Rear	Port	Front	Rear	Port	Front	Rear	Port	Front	Rear	Port	Front	Rear	Port	Front	Rear	Port	Front	Rear	Port	Front	Rear
IN1	SP1	Core-1	IN10	Monitoring		1	SP1 OUT1	A01	2	SP1 OUT2	A02	3	SP1 OUT3	A03	4	SP1 OUT4	AC4*	5	SP1 OUT5	A05	6	SP1 OUT6	A06	7	SP1 OUT7	A07	8	SP1 OUT8	A08
IN2	SP2	Core-2	IN11	Monitoring		9	SP5 OUT5	A01*	10	SP5 OUT6	A02*	11	SP5 OUT7	A03*	12	SP5 OUT8	AC4*	13	SP6 OUT1	A05*	14	SP6 OUT2	A06*	15	SP6 OUT3	A07*	16	SP6 OUT4	A08*
IN3	SP3	Core-3	IN12			17	SP2 OUT1	A09	18	SP2 OUT2	A10	19	SP2 OUT3	A11	20	SP2 OUT4	A12	21	SP2 OUT5	A13	22	SP2 OUT6	A14	23	SP2 OUT7	A15	24	SP2 OUT8	A16
IN4	SP4	Core-4	IN13			25	SP6 OUT5	A09*	26	SP6 OUT6	A10*	27	SP6 OUT7	A11*	28	SP6 OUT8	A12*	29	SP7 OUT1	A13	30	SP7 OUT2	A14*	31	SP7 OUT3	A15*	32	SP7 OUT4	A16*
IN5	SP5	Core-5	IN14			33	SP3 OUT1	A17	34	SP3 OUT2	A18	35	SP3 OUT3	A15	36	SP3 OUT4	A30	37	SP3 OUT5	A21	38	SP3 OUT6	A22	39	SP3 OUT7	A23	40	SP3 OUT8	A24
IN6	SP5*	Core-6	IN15			41	SP7 OUT5	A17*	42	SP7 OUT6	A18*	43	SP7 OUT7	A19*	44	SP7 OUT8	A20*	45	SP8 OUT1	A21*	46	SP8 OUT2	A22*	47	SP8 OUT3	A23*	48	SP8 OUT4	A24*
IN7	SP7*	Core-7	IN16			49	SP4 OUT1	A25	50	SP4 OUT2	A26	51	SP4 OUT3	A27	52	SP4 OUT4	A38	53	SP4 OUT5	A29	54	SP4 OUT6	A30	55	SP4 OUT7	A31	56	SP4 OUT8	A32
IN8	SP3*	Core-8	IN17			57	SP8 OUT5	A25*	58	SP8 OUT6	A26*	59	SP8 OUT7	A27*	60	SP8 OUT8	A28*	61	SP9 OUT1	A29*	62	SP9 OUT2	A30*	63	SP9 OUT3	A31*	64	SP9 OUT4	A32*
IN9	SP3*	Core-9	IN18			65	SP5 OUT5	A33	66	SP9 OUT5	A33*	67	SP5 OUT6	A34*	68	SP9 OUT6	A34*	69	SP5 OUT7	A35	70	SP9 OUT7	A35*	71	SP5 OUT8	A36	72	SP9 OUT8	A36*

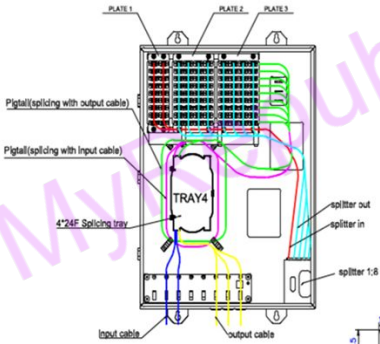





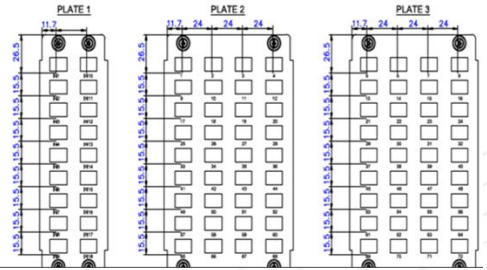

NOTE :
* = For Future Installation

•Untuk setiap FAT, Penyambungan akan menjadi 50% dari kapasitas FAT; berarti 1 core max per FAT akan menjadi splice (untuk skenario UG, splice max 1 core)

•2 core setiap satu tube dalam distribusi diberikan untuk maintenance cadangan dan monitor; dan akan terminasi pada FDT.

•Berarti hanya core (1-10), (13-22), dll, yang akan digunakan untuk distribusi ke FAT, yang lain akan berakhir di FDT saja dan sebagai cadangan. Berarti hanya core (1-10), (13-22), dll, yang akan digunakan untuk distribusi ke FAT, yang lain akan berakhir di FDT saja dan sebagai cadangan.

•Splitter 1:8 akan menyediakan 50% dari cakupan HP kapasitas penuh, dan pembagi 1:8 akan menyediakan 1 Pcs setiap FAT dan diserahkan ke tim operasional setelah ATP selesai.

Planning MyRep Public

Loss Budget Calculation & Parameters

If the OLT output level is 3dBm(minimum),the minimum ONT/ONU optical receiver Level is =3dBm-28dB=-25dBm

No	Cluster name	OLT Name	Feeder Link Loss (OLT-FDT)											
			OLT(dB)	ODF		Feeder Line No.	feeder length from OLT to FDT (Km)		Closure (dB)	FDT (dB)			sub-total loss(dB)	
			Connector	ODF Connector	ODF Splicing		1310	1490		Splitter 1:8 1st stage	Connector	Splicing	1310	1490
			0.25	0.25	0.1		0.35	0.3	0.1	10.5	0.25	0.1		
1	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000
	Cluster A		1	1	1	Line A	10	10	5	1	2	2	15.8000	15.3000

Planning MyRepublic

Cable Engineering specification.

1. Splice Loss: 0.1dB
2. Termination Loss: 0.3dB
3. Fiber loss : 0.25db/km@ 1550nm
4. Fiber loss : 0.35db/km@ 1310nm
5. Splitter Loss for 1:8 FDT = 10.5 dB
6. Splitter Loss for 1:8 FAT = 10.5 dB
7. Connector Loss (SC/APC) ≤ 0.25 dB
8. Fast Connector SC Loss ≤ 0.4 dB
9. Maximum optical link loss = 32 dB

Cable Plan Specification.

1. OTB termination: 20m slack
2. HH Feeder : 20m slack
3. HH FDT : 20m Slack
4. Pole FDT : 20m Slack
5. HH pit pedestal : 10m slack
6. FAT aerial : 20m slack;
7. Splicing point: 20m/side slack;
8. Cable drum = 4km

Civil Engineering specification.

1. OTB (ODF) - HH –FDT-HH pit-FAT--ONT
2. HH – use for Splice Joint
3. HH Pit for slack at section of distribution
4. Between splice HH – approximately 2km
5. Trench depth : 1.2m(feeder section), 30cm (distribution section)
6. Boring Rojok depth: 1.2m

Distance Standard

1. Max Distance FAT to HP 250 m
2. Max Distance Cover Material 150 m
3. >150 m is a customer responsibility

Private & Confidential - For Internal Use Only

List Material Code

Lastest Version

No	Description/Item	No Material
1	**Pengamanan & Persiapan**	
1,1	Pengamanan & Persiapan (Kesehatan dan Keselamatan Kerja)	500003800
1,2	Transportasi, Mobilisasi & demobilisasi	500003890
Sub Total Preparation		
2	**ODN, OSP, Aktivasi, Instalasi, termasuk ATP Civil Work, Integrasi, Testing & Dokumentasi**	
2,1	**ODN**	
A	FO core type SM G.652.D-ADSS (Aerial dan Underground)	
	FO core type SM G.652.D-ADSS 24 cores	200000100
	Instal FO core type SM G.652.D-ADSS 24 cores	500002050
	FO core type SM G.652.D-ADSS 36 cores	200000975
	Instal FO core type SM G.652.D-ADSS 36 cores	500002051
	FO core type SM G.652.D-ADSS 48 cores	200001038
	Instal FO core type SM G.652.D-ADSS 48 cores	500002052
	FO core type SM G.652.D-ADSS 96 cores	200001630
	Instal FO core type SM G.652.D-ADSS 96 cores	500002890
	FO core type SM G.652.D-ADSS 144 cores	200001030
	Instal FO core type SM G.652.D-ADSS 144 cores	500002088
	FO core type SM G.652.D-ADSS 288 cores	200001015
	Instal FO core type SM G.652.D-ADSS 288 cores	500002089
B	Fiber Distribution Terminal (FDT) SC/APC c/w Box, matrix terminal, Patchtray, Pigtail, label & accessories include concrete base	
	48 cores capacity pole mounted FDT	200001039
	Instal 48 cores capacity pole mounted FDT	500002053
	72 cores capacity pole mounted FDT	200001040
	Instal 72 cores capacity pole mounted FDT	500002054
	96 cores capacity pole mounted FDT	200001041
	Instal 96 cores capacity pole mounted FDT	500002055
	144 cores capacity ground mounted FDT	200001042
	Instal 144 cores capacity pole mounted FDT	500002062
	288 cores capacity ground mounted FDT	200001043
	Instal 288 cores capacity pole mounted FDT	500002073
	576 cores capacity ground mounted FDT	200001044
	Instal 576 cores capacity pole mounted FDT	500002084
C	Optical Splitter (Bracket Mount Type, SC/APC)	
	Splitter 1:4	100000191
	Splitter 1:8 (Modular)	100000826
D	Micro Splitter (PLC Type)	
	Micro Splitter 1:4	200001045
	Micro Splitter 1:8	200001046
E	Fiber Access Terminal (FAT) c/w adapter, pigtail SC/APC, label & accessories	
	Pole mounted outdoor type (16 ports type)	200001047
	Instal Pole mounted outdoor type (16 ports type) Pole	500002142
	Pedestal mounted type (16 ports type)	100000824
	Instal Ground mounted outdoor type (16 ports type)	500002097
F	Underground Pedestal SPH920 Signature Series Type include accessories &	200000165
	Instal Underground Pedestal SPH920 Signature Series Type include accesso	500002113
G	Joint Closure	
	Fiber Optic Joint Closure Type In-line 24 Core	200000182
	Fiber Optic Joint Closure Type In-line 36 Core	200001048
	Fiber Optic Joint Closure Type In-line 48 Core	200000159
	Fiber Optic Joint Closure Type In-line 96 Core	200000179
	Fiber Optic Joint Closure Type In-line 144 Core	200000186
	Fiber Optic Joint Closure Type In-line 288 Core	200000155
	Fiber Optic Joint Closure Type Dome 24 Core	200000180
	Fiber Optic Joint Closure Type Dome 36 Core	200001049
	Fiber Optic Joint Closure Type Dome 48 Core	200000164
	Fiber Optic Joint Closure Type Dome 72 Core	
	Fiber Optic Joint Closure Type Dome 96 Core	200000176
	Fiber Optic Joint Closure Type Dome 144 Core	200000158
	Fiber Optic Joint Closure Type Dome 288 Core	200000156
H	Pigtail SM SC/APC	300000098
U	Connector SC/APC	200001009
J	Splicing	500000510
	Protector Sleeve	
K	Label Cable (on pole, in Handhole)	200000290
L	Label FDT	200000273
M	Label FAT (include QR Code)	200000288
N	Label Pole	200001310
O	Label Pedestal	200000802
P	Patch Tray	200000231

Planning Material Public

List Material Code

Lastest Version

O	Label Pedestal	200000802
P	Patch Tray	200000231
Q	Bridge and River crossing	
	River crossing by self support	200001028
	River crossing by attach to existing bridge	200001011
	River crossing by 7m single pole hanging bridge	500002092
	River crossing by 9m single pole hanging bridge	500002093
	River crossing by 9m double pole hanging bridge	500002094
Sub Total ODN		
2,2	**Pekerjaan OSP termasuk ATP Civil Work**	
A	Pekerjaan Trenching berikut rekondisi Hotmix, Aspal, Makadam, Conblock, Beton Floor, Taman/rumput, Ubin	
	Pekerjaan Trenching 150cm depth	500002115
	Pekerjaan Trenching 30-80 cm depth (distribution inside cluster only)	500002116
B	Pekerjaan Boring berikut rekondisi galian pit, Hotmix, Aspal, Makadam, Conblock, Beton Floor, Taman/rumput, Ubin	
	Boring manual 150cm depth	500002117
	Boring manual 2 Sub Duct 150cm depth	500002118
	Boring manual 3 Sub Duct 150cm depth	500002119
	Boring manual PVC/HDPE 4" 150cm depth	500002120
	Boring directional jalan raya	500000879
	Boring directional jalan tol	500002121
	Boring rel kereta	200000399
	Boring Katrek 150cm Depth	500002830
C	Sub Duct / HDPE	
	Sub Duct / HDPE 32/26 warna hitam, 3 strip ungu	200000994
	Instal Sub Duct / HDPE 32/26 warna hitam, 3 strip ungu	500002144
	Socket HDPE 36/26	200000994
	Instal Socket HDPE 32/28	
	Sub Duct / HDPE 40/34 warna Ungu, 3 Strip Putih	200000510
	Instal Sub Duct / HDPE 40/34 warna Ungu, 3 Strip Putih	500002146
	Socket HDPE 40/34	200000282
	Instal Socket HDPE 40/34	500002147
D	Galvanize pipe include shock and clamp	
	Galvanize pipe (diameter 1 inch)	200000600
	Galvanize pipe (diameter 2 inch)	200001054
	Galvanize pipe (diameter 3 inch)	200000292
	Galvanize pipe (diameter 4 inch)	200000742

E	PVC AW Pipe include shock and clamp	
	PVC AW pipe (diameter 1 inch)	200001050
	PVC AW pipe (diameter 2 inch)	200001051
	PVC AW pipe (diameter 3 inch)	200001052
	PVC AW pipe (diameter 4 inch)	200001053
F	Cable Duct Installation include accessories	
	Cable Duct TC-2	200001022
	Cable Duct TC-3	200001035
	Cable Duct TC-4	200001003
	Cable Duct TC-5	200001023
	Cable Duct TC-6	200001000
	Cable Duct 10 x 5 cm	200000998
	Cable Duct 10 x 10 cm	200001016
G	Conduit, flexible dan aksesoris pipa	
	Conduit pipe 3/4 inch	200001008
	Flexible 3/4 inch	200001018
	Shock Conduit Pipe 3/4 inch	200000993
	Clamp for PVC Conduit support 3/4 inch	200001021
	Steel Clamp dia 36 mm, width 25 mm, thickness 3 mm + dynabolt	200001004
	Steel Clamp dia 40 mm, width 25 mm, thickness 3 mm + dynabolt	200001321
	PVC Double Elbow 1.25"	200000991
	PVC Double Elbow 1.5"	200000997
	Socket (D-DS) 1 inch	200001027
	Large Radius Tee (D-LT) 2 x 1 inch	200001006
	Elbow (D-DL) 1 inch	200001014
	Dop 1 inch	200000999
	Tambang pancing/Roding rope	200000267
H	Hand hole include cover, cable hanger and accessories	
	Precast Hand hole for FDT : 80 x 80 x 130 cm	200000978
	Instal Precast Hand hole for FDT : 80 x 80 x 130 cm	500002102
	Concrete Hand hole for FDT: 80 x 80 x 130 cm	200000710
	Instal Concrete Hand hole for FDT: 80 x 80 x 130 cm	500002101
	Precast Hand hole for FAT : 40 x 40 x 60 cm	200001032
	Instal Precast Hand hole for FAT : 40 x 40 x 60 cm	500002060
	Concrete Hand hole for FAT " : 40 x 40 x 60 cm	200000613
	Instal Concrete Hand hole for FAT " : 40 x 40 x 60 cm	500001316
	Precast Hand hole for pulling pit : 20x20x20 cm	200000992
	Instal Precast Hand hole for pulling pit : 20x20x20 cm	500002061
	Concrete Hand hole for pulling pit : 20x20x20 cm	200001013

Planning Ministry Republic

List Material Code

Lastest Version

	Precast Hand hole for pulling pit : 20x20x20 cm	200000992
	Instal Precast Hand hole for pulling pit : 20x20x20 cm	500002061
	Concrete Hand hole for pulling pit : 20x20x20 cm	200001013
	Instal Concrete Hand hole for pulling pit : 20x20x20 cm	500002063
	Pembuatan HH PIT 100x100x4 M Jalur KAI	
	Pemasangan Turab HH PIT dan Barikade	
	Label HH	200000977
I	Cable riser include accessories	200001034
J	Warning tape (Tulisan KABEL MY REPUBLIC)	200000181
K	Marking post (per 400 meter)	200000160
L	Cable Tray include hanger and accessories	200000310
M	Cable Ladder Tray include hanger and accessories	200000995
N	Bobok dinding per titik	500000993
O	Bobok ceiling per titik	500002067
P	Public Right of Way (ROW)/Permit Aerial	500002103
Q	Kementerian Permit - Balai Besar (Balai Nasional)	500002148
R	PU Permit	500002149
S	Landlord Permit	500002150
T	KAI Permit	500002151
U	Community Permit	500002152
V	Pengelola Tol Permit	500002153
W	Pengelola LRT	500002154
X	RT/RW Permit	500002155
Y	Pemerintah Daerah Permit	500002156

2,3	Instalasi Kabel lintas udara termasuk pondasi, bracket, aksesoris, perkuatan tiang termasuk ATP Civil Work	
A	Pengadaan Tiang 7 meter 5", STEL L-003 1996	200000187
	Pemasangan Tiang 7 meter 5", STEL L-003 1996	500002157
B	Pengadaan Tiang Tunggal 9 meter 5", STEL L-003 1996	200000169
	Pemasangan Tiang Tunggal 9 meter 5", STEL L-003 1996	500001293
C	Pengadaan Tiang 7 meter 4", STEL L-003 1996	200001183
	Pemasangan Tiang 7 meter 4", STEL L-003 1996	500002480
D	Pengadaan Tiang Tunggal 9 meter 4", STEL L-003 1996	200001181
	Pemasangan Tiang Tunggal 9 meter 4", STEL L-003 1996	500002337
E	Pengadaan Tiang 7 meter 3 inch	200001055
	Pemasangan Tiang 7 meter 3 inch	500002159
F	Perkuatan Tiang	
	Temberang (perkuatan tiang termasuk sling, anchor dan aksesories)	200000996
	Tiang sokong (tiang 9m)	200000979
	Tiang sokong (tiang 7m)	200001007
	Pengadaan & pemasangan Tiang Ganda 9 meter 5", STEL L-003 1996	500001294
G	Cable loop holder/plat strip/Cable hanger	200000185
H	Instalasi strand wire/sling messenger 6 mm	200001033
I	Pole Accessories detail	
	1. Plate belt 20mm	200000149
	2. Suspension clamp	200000148
	3. Steel hoop and rubber tape	200000188
	4. Buldog grip	200000172
	5. Clamp 8 (Clamp Gantung)	200002130
	6. Riser pipe 1,5"	200000175
	7. Galvanized steel pipe 2"	200000670
	8. Steel clamp	200000166
	10. Pole clamp single	200000145
	10. Pole clamp 2 cable installation	200000150
	11.Clamps Dead end Fittings/clamp buaya	500001103
	12. Bahan Pondasi tiang	200000690
	13. HELICAL DEAD END DIAMETER 15.7-17.0 MM	200001510
	14. Extention Arm	200001297

Planning MyRepublic

List Material Code

Lastest Version

2,4	Optical System	
A	Standard Rack include cable management and accessories	
	Standing Closed Rack 20" with Glass Panel	200001734
	Standing Closed Rack 19" with Glass Panel	200001001
	Instal Standing Closed Rack 19" with Glass Panel	500002069
	Standing Open Rack 19"	200001005
	Instal Standing Open Rack 19"	500002070
	Wall Mount Closed Rack Standard 19" with Glass Panel 12 U (450 mm Depth)	200001036
	Instal Wall Mount Closed Rack Standard 19" with Glass Panel 12 U (450 mm Depth)	500002071
B	Optical Distribution Frame(SC/APC) include fiber cable management and accessories (Indoor)	
	Optical Distribution Frame(SC/APC) - 384 ports (ODF)	200001002
	Instal Optical Distribution Frame(SC/APC) - 384 ports (ODF)	500002072
	Optical Distribution Frame(SC/APC) - 576 ports (ODF)	200001010
	Instal Optical Distribution Frame(SC/APC) - 576 ports (ODF)	500002074
	Optical Distribution Frame(SC/APC) - 720 ports (ODF)	200001020
	Instal Optical Distribution Frame(SC/APC) - 720 ports (ODF)	500002075
	Optical Distribution Frame(SC/APC) - 864 ports (ODF)	200001037
	Instal Optical Distribution Frame(SC/APC) - 864 ports (ODF)	500002076
C	Optical Distribution Frame(SC/APC) include fiber cable management and accessories, will be installed inside Active	
	Optical Distribution Frame(SC/APC) - 48 ports (ODF)	200001029
	Instal Optical Distribution Frame(SC/APC) - 48 ports (ODF)	500002077
	Optical Distribution Frame(SC/APC) - 168 ports (ODF)	200001026
	Instal Optical Distribution Frame(SC/APC) - 168 ports (ODF)	500002078
	Optical Distribution Frame(SC/APC) - 288 ports (ODF)	200000990
	Instal Optical Distribution Frame(SC/APC) - 288 ports (ODF)	500002079
	Optical Distribution Frame(SC/APC) - 576 ports (ODF)	200001019
	Instal Optical Distribution Frame(SC/APC) - 576 ports (ODF)	500002074
D	Optical Termination module include pigtail inside	
	12 core capacity	100000187
	24 core capacity	100000188
	48 core capacity	100000189
	72 core capacity	100000820
	96 core capacity	100000821
E	Patchcord SM G.657A2	
	Patchcord SM G.657A2 SC/APC - SC/UPC - 10 m	200000069
	Patchcord SM G.657A2 SC/APC - SC/UPC - 3 m	200001025
	Patchcord SM G.657A2 SC/APC - SC/APC - 10 m	200001024
	Patchcord SM G.657A2 SC/APC - SC/APC - 3 m	200000251
	Patchcord SC / UPC SC / APC 8m	200001735
	Cable Tray Wiremesh - W150xH50xL3000mm	200001430

2,5	Pekerjaan Aktivasi, Integrasi, Testing & Commissioning	
	Testing & Commissioning (Testcomm / Uji Terima) :	
a	Testcomm OTDR & OPM OLT - ODF	500002085
b	Testcomm OTDR & OPM ODF - FDT	500002106
c	Testcomm OTDR & OPM FDT - FAT	500002107
2,6	Documentation	
A	Survey & Design (Asplan)	500001519
B	As Built Drawing A1 (1 set asli + 3 set copy + soft copy), KMZ, BOQ	500002108
3	Others	
A	Project Management	500001887
4	Warehouse	
A	Warehouse	500001853
5	Extended Warranty & Maintenance (After 1 year basic Warranty & Maintenance) - (Optional)	
A	Warranty & Maintenance ODN per year	500002109
6	Tools and Test Equipment (Optional)	
A	Optical Power Meter 1310nm, 1490nm, 1550nm	500001046
B	OTDR (Optical Time Domain Reflectometer)	500001047
C	Fusion Splicer	500002110
7	Training - (Optional)	
A	FTTH Local Training	500002111
B	FTTH Training Certified by FTTH Council	500002112
8	Bank Garansi (Optional)- di DKI untuk UG saja	
A	Jaminan Pelaksanaan Perbaikan Berupa Bank Garansi	500002086
B	Jaminan Pemeliharaan Berupa Bank Garansi	500002087

Planning Republic

THANK YOU :)

Planning MyRepublic