




# Environment Logger – schematic (module level)

ESP32-S3-DevKitM-1 + BME280 + DS3231 on one I2C bus (400 kHz), 2 status LEDs, 1 button

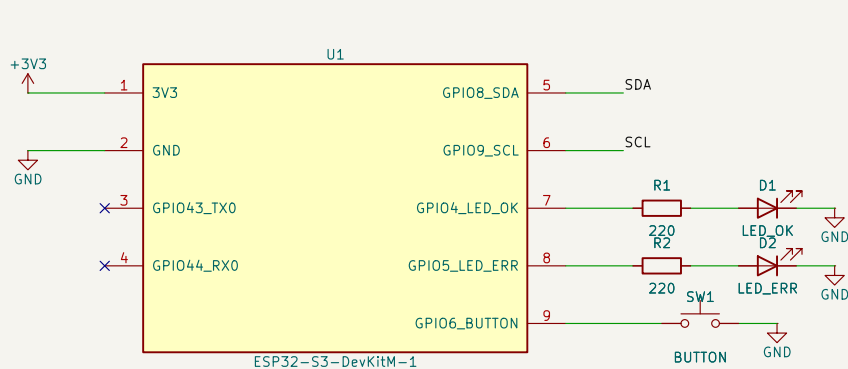

- Notes
- I2C pull-ups: no external resistors. The modules already have them (BME280: 10k per line, DS3231: 4.7k per line, about 3.2k in parallel).
  - I2C addresses: BME280 = 0x76, DS3231 = 0x68, SDA = GPIO8, SCL = GPIO9.
  - Power: 5V enters via the DevKitM-1 USB connector; the on-board regulator supplies 3V3 to both modules.
  - UART0 (GPIO43/44) is wired on the DevKitM-1 to its USB-UART bridge; the log is read through the same USB connector.
  - LED series resistors 220 ohm. Button is active low, internal pull-up is enabled in firmware.
  - DS3231 pins 32K and SQW are not used.

Sheet: /  
File: env-logger.kicad\_sch

## Title: Environment Logger

Size: A4

Date: 2026-10-03

Rev: 0.1

KiCad E.D.A. 10.0.4

Id: 1/1