






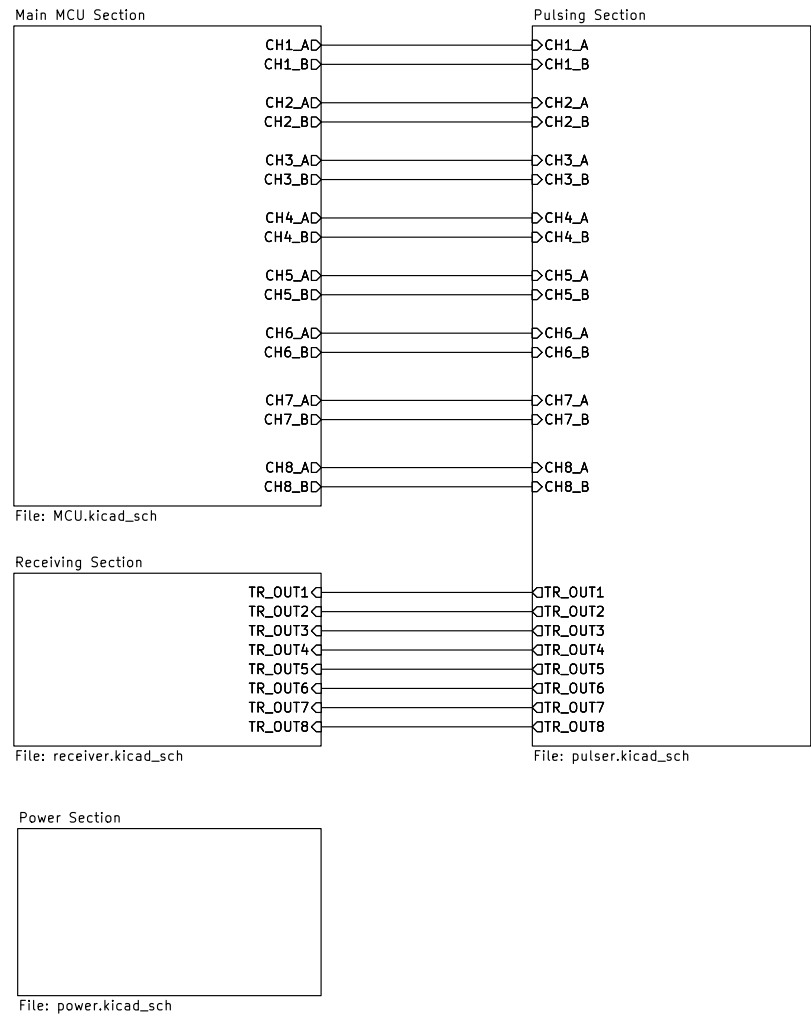




Table 3-1. Device Default Boot Modes		
BOOT MODE	GPIO24 (DEFAULT BOOT MODE SELECT Pin 1)	GPIO32 (DEFAULT BOOT MODE SELECT Pin 2)
Parallel IO	0	0
Serial boot	0	0
Flash	1	1

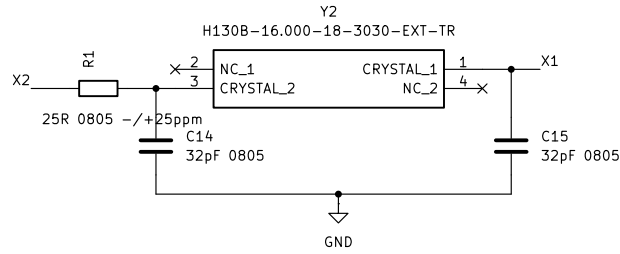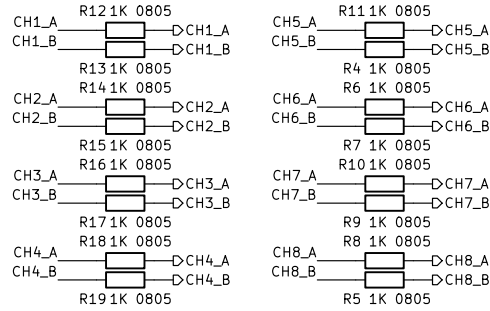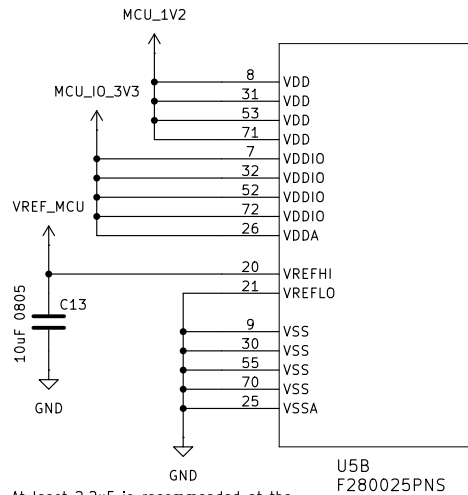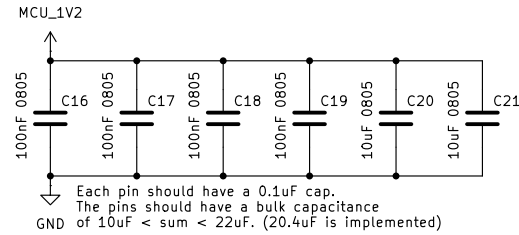

$C1 = C2 = 2(C_{load} - C_{stray}) = 2(18 - 2) = 32pF$
 The crystal is required (@ 16MHz):
 - To have a drive level of $\geq 1mW$ (a damping resistor is used)
 - Have maximum ESR of 75 Ohms (50 is used)
 - $12pF < C1 < 24pF$ (18pF is used)

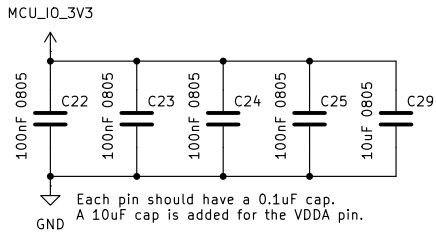


TMS, TDI & TDO should be pulled up to 3.3v through 10k resistors.
 Look into the XDS110 debugger (recommended).

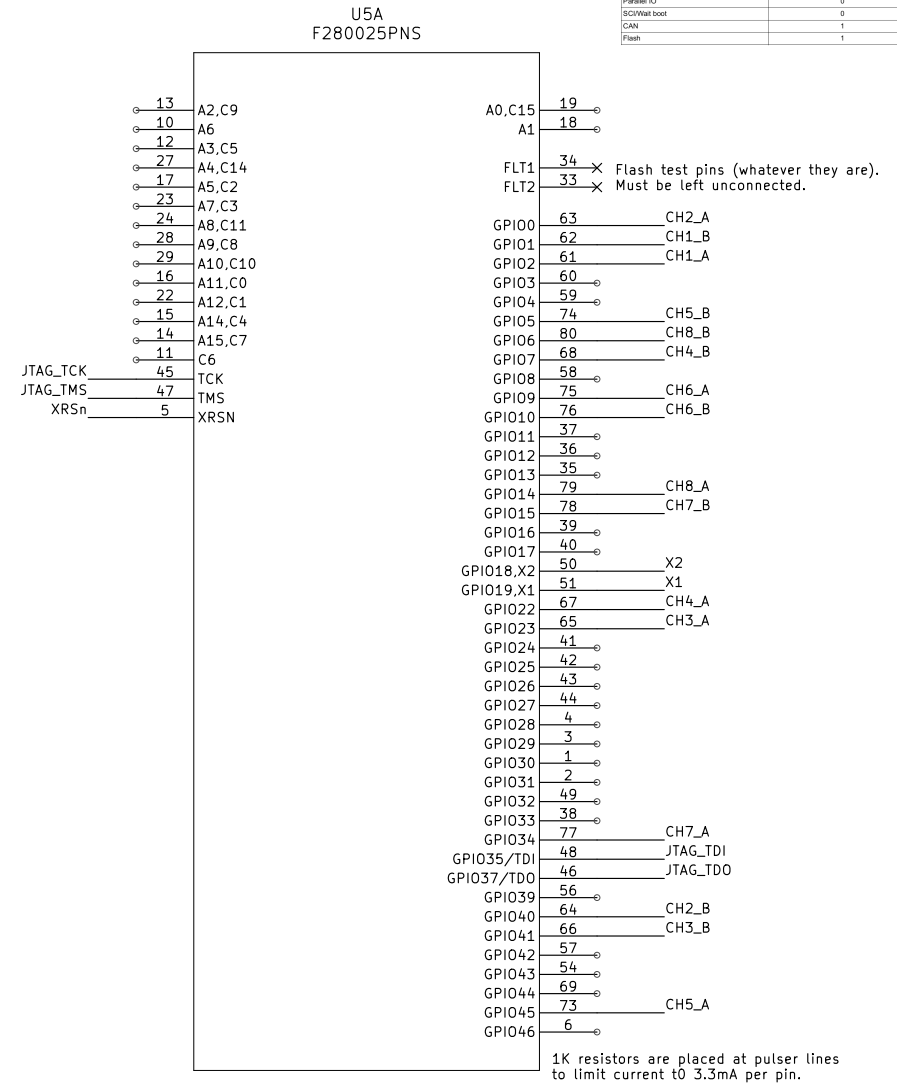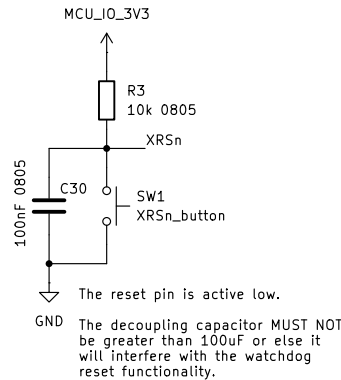

Shutdown/3-level/5-level Selection:
Three-Level Mode (MODE0 = High, MODE1 = Low,
The three-level mode is selected to be able to use 8 channels.

Table 5. Current Drive Selection


INPUTS		PULSER OUTPUT CURRENT (typ)
CC0	CC1	
0	0	2A
1	0	1.5A
0	1	1A
1	1	0.5A



Enabling/Disabling the internal floating power supplies (FPS):

requirements in most of the cases. Drive **LDO_EN** low or leave unconnected to enable the internal FPSs; drive **LDO_EN** high to disable the internal FPSs.


A triple-option solder jumper is placed to either pull-up (select external FPS) or pull-down (select internal FPS) the **LDOEN** pin.

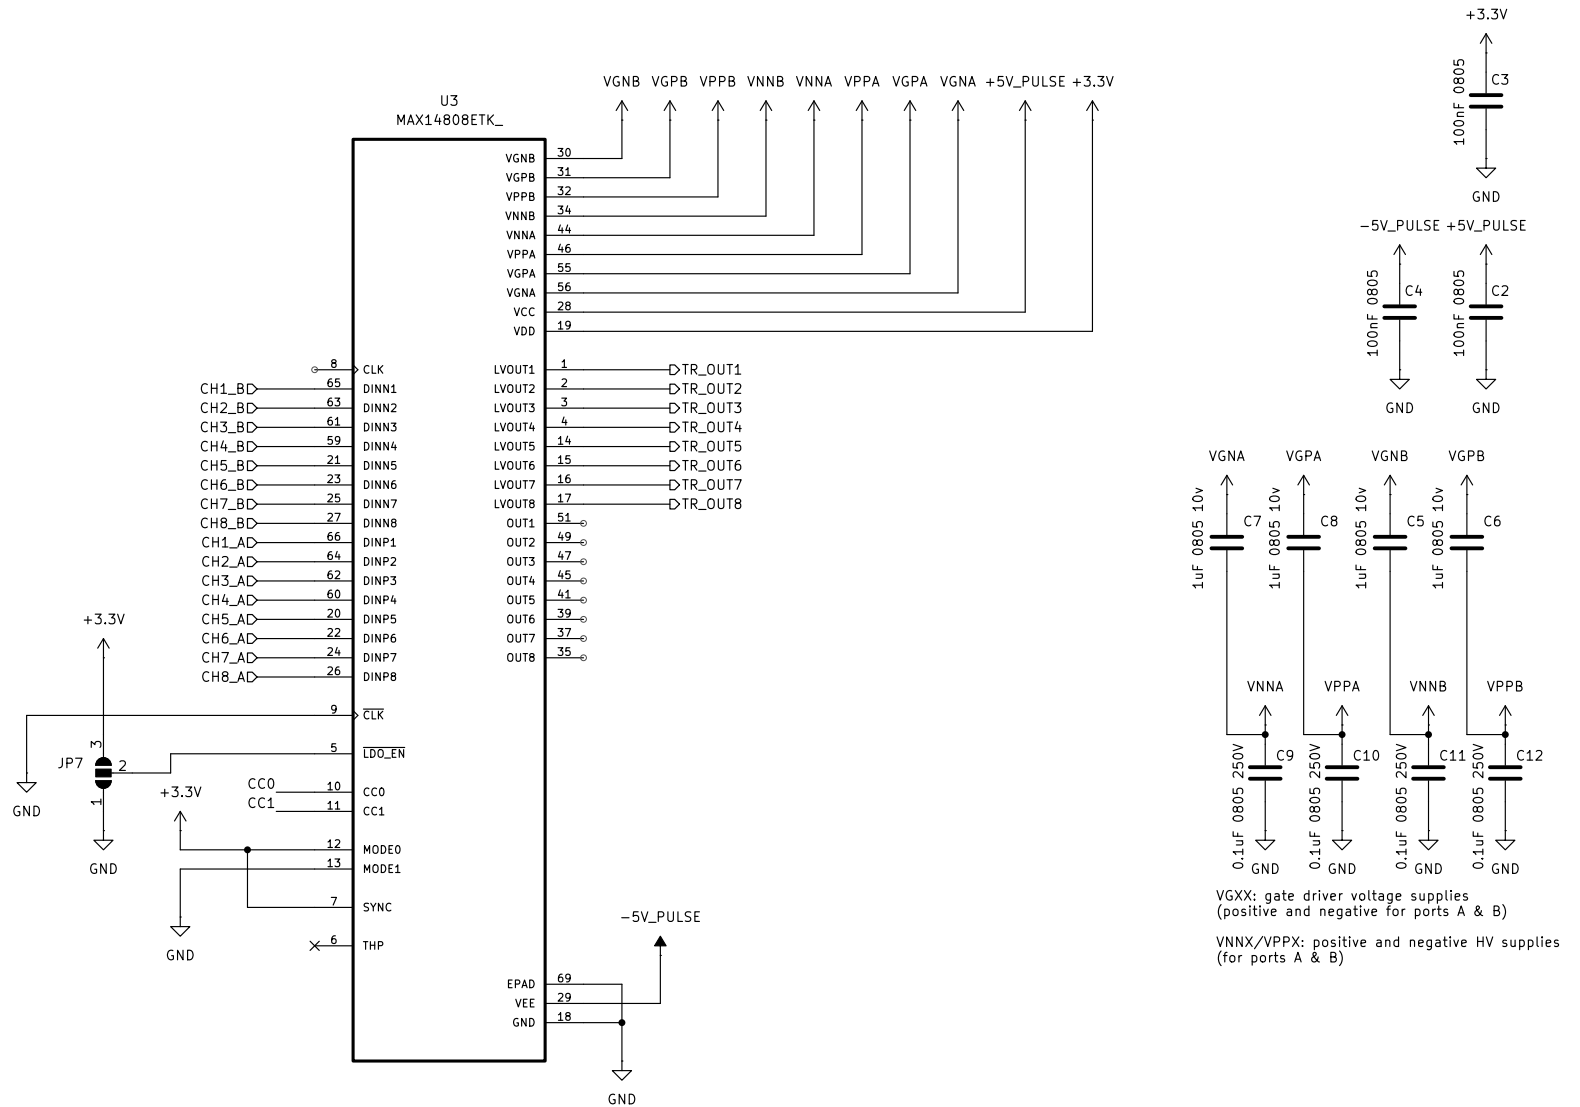


VGXX: gate driver voltage supplies (positive and negative for ports A & B)
VNNX/VPPX: positive and negative HV supplies (for ports A & B)


QTR_OUT1
QTR_OUT2
QTR_OUT3
QTR_OUT4
QTR_OUT5
QTR_OUT6
QTR_OUT7
QTR_OUT8

U4
AD8334ACPZ

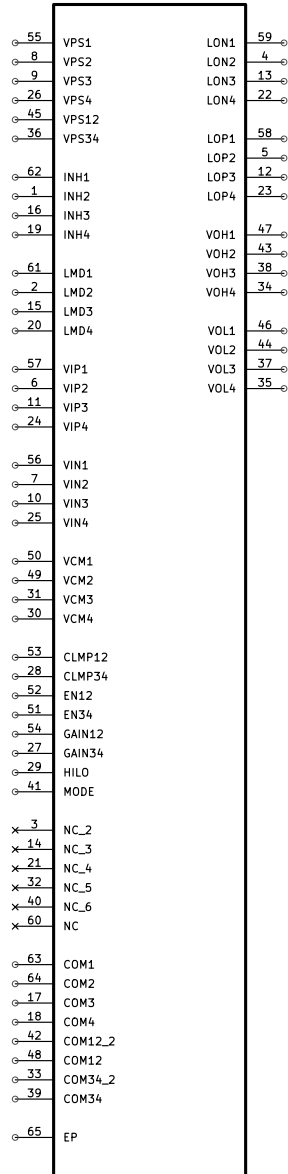

U1
AD8334ACPZ

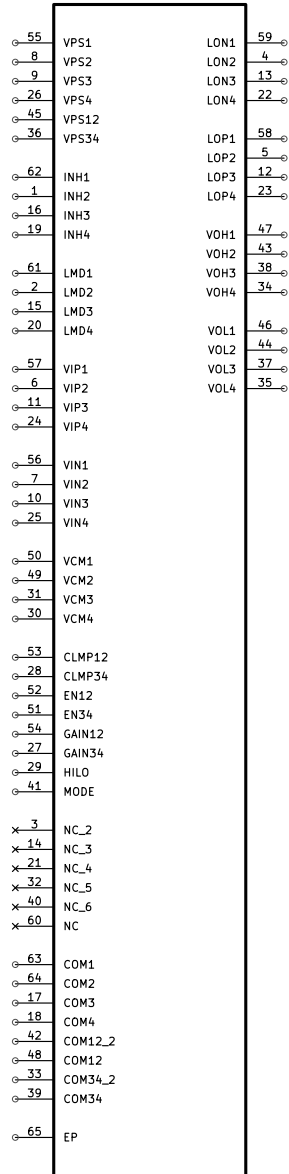

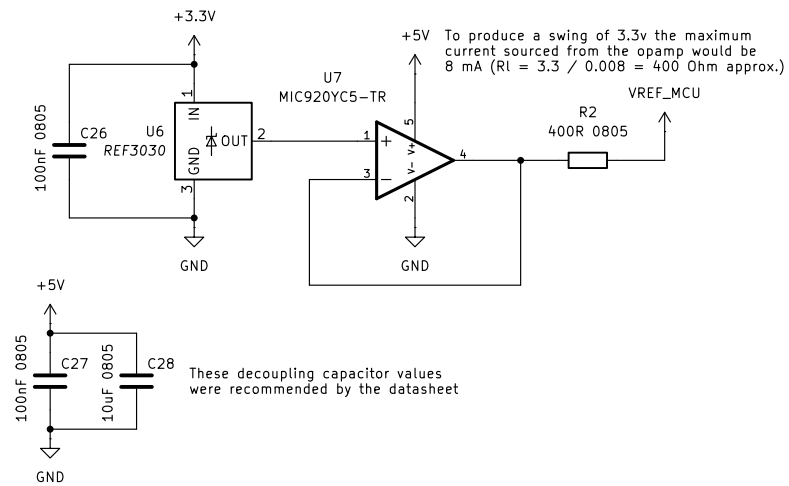

+5V
↑

VGNB VGPB VPPB VNNB VNNA VPPA VGPA VGNA +5V_PULSE +3.3V -5V_PULSE

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑