

# Compact Offset-Free Interaction-Error MPC with Applied-Torque Constraints for Physical Human–Robot Interaction

Anonymous Authors

**Abstract**—Reference-holding physical human–robot interaction requires bounded transient deviation followed by offset-free reference recovery, without retaining a static deflection under sustained load. Operational-space cancellation reduces the translational tracking error to a double integrator with a fixed transition matrix and a configuration-scheduled input map, turning physical interaction into a predictive quantity on that representation rather than a property re-derived per contact or configuration. Built on that representation, we present a compact offset-free model-predictive controller for torque-controlled manipulators that matches the reference-holding requirement under the same physical torque limits as a stiffness-and-damping-calibrated impedance baseline, using no force/torque sensor. A recursive Kalman filter estimates the persistent interaction and model mismatch directly in force coordinates, and a 30-variable quadratic program predicts the error while constraining the complete first applied joint-torque command. In a 1 kHz MuJoCo simulation of a 7-DOF Franka FR3, under a common actuator budget the sensorless controller reaches 0.042 mm repeated-step steady-state error at 113 W peak positive joint power with no torque saturation, versus 2.59 mm at 378 W and 0.45% saturated samples for a stiffness-and-damping-calibrated impedance baseline calibrated to the same closed-loop stiffness. This is about a third of the power in this task, with no force measurement, and an architecturally zero-mean offset under the stated frozen-configuration assumptions (Proposition 1). Controlled ablation attributes the offset rejection to the disturbance-augmented estimator: adding it to an otherwise identical MPC reduces steady-state error from 2.77 to 0.042 mm, consistent with the paper’s frozen-configuration offset-rejection proposition, while ideal measured-force cancellation independently confirms that constant-load rejection is not unique to predictive control.

**Index Terms**—Physical human–robot interaction, model predictive control, impedance control, disturbance estimation, torque constraints.

## I. INTRODUCTION

Impedance and admittance control provide transparent interaction behavior [1], [2]. Their objectives depend on the task: in hand guiding, force-induced displacement may be the command, whereas reference-holding and recovery require a robot to return to a desired motion after yielding to contact. A finite-stiffness impedance retains the equilibrium bias  $p - p_d = K_d^{-1} F_h$  under a sustained human force  $F_h$ . Integral action can remove this bias, but must be coordinated with actuator saturation [3], [4].

Predictive interaction control is already well established. Existing work optimizes interaction dynamics [5], combines impedance and constraint optimization [6], learns interaction models [7], estimates force online [8], or enforces passivity

and safety conditions [9], [10]. High-rate nonlinear manipulator MPC is also possible with tailored computation [11], and combining MPC with an extended-state disturbance observer has been demonstrated on hardware at millisecond rates [12]. Thus MPC, disturbance estimation, and predictive impedance are not individually new.

Two of these differ from the present formulation in model scope and sensing. Jordana *et al.* [8] embed direct force-sensor feedback in a full nonlinear whole-body MPC, estimating the discrepancy between predicted and measured contact force within that model; the present controller instead uses no force/torque sensor and estimates an unmodelled aggregate disturbance as a random walk in a reduced, configuration-independent three-dimensional force channel. Gold *et al.*’s MPIC [5] explicitly predicts robot–environment interaction force through an interaction model cascaded with low-level PD control and optimizes a motion–force trade-off through an independently weighted prediction term. The present controller instead treats the persistent interaction as an unknown aggregate input and targets zero-mean reference error under constant load through force-coordinate disturbance augmentation and an input-centered cost, achieving offset rejection with no explicit motion–force weighting:  $F_{\text{mpc}} = -\hat{d}$  is exactly cost-free at any position weight. The present contribution is therefore not online force estimation or predictive interaction control as such, but their combination into a sensorless, constant-transition offset-free interface with a proved frozen-configuration equilibrium and a first-move torque-feasibility guarantee.

Offset-free MPC commonly augments a nominal model with a constant output or input disturbance and estimates that state online [13]. The choice of disturbance coordinates is important here. An acceleration disturbance changes with the robot’s configuration through the task inertia, whereas a constant Cartesian load is approximately constant in force coordinates. We therefore place the disturbance in the same force channel as the optimizer: this choice makes the dominant term, the contact force itself, constant in these coordinates, so the random-walk estimator is asymptotically unbiased for it, while the contributions (inertial coupling, friction, model error) are absorbed as a slowly varying residual rather than individually cancelled. This also distinguishes load rejection from intent inference: the estimated vector includes contact, unmodelled dynamics, and cancellation error and cannot identify which part was generated deliberately by a person.

Placing the disturbance in the force channel is not merely an implementation choice but this paper’s central technical claim, carried through by two further mechanisms sharing that same channel: a centered input cost that makes the steady balancing input  $F_{\text{mpc}} = -\hat{d}$  exactly cost-free, avoiding a separate offset calculation, and a first-move constraint applied to the complete torque command  $\tau_{\text{base}} + J_v^\top F_{\text{mpc},0}$  rather than to the corrective force alone. Operational-space cancellation exposes the normalized translational error model these mechanisms share. Two controlled comparisons below deliberately separate credit: §V-A shows that the disturbance estimate, not receding-horizon prediction, drives offset rejection; §V-F shows that this paper’s slack-relaxed constraint embedding, not deeper prediction, drives torque-feasibility robustness. The contributions are:

- 1) a **double-integrator interaction-error representation**: operational-space cancellation reduces translational tracking error to a fixed linear system whose input matrix is scheduled only through the current task inertia, making interaction a predictive state on a shared model rather than a property re-modeled per contact or configuration;
- 2) force-domain disturbance augmentation on that representation, with a centered input cost that admits the steady balancing input  $F_{\text{mpc}} = -\hat{d}$  at no cost, validated by a non-predictive observer-impedance baseline;
- 3) a first-move applied-torque constraint on the complete torque command, and a slack relaxation of that row that, at a practically relevant tightened budget, recovers full tracking quality where the hard bound fails on 72.5% of solves; and
- 4) a controlled FR3 simulation comparison against nominal, calibrated, integral, variable-impedance, and ideal measured-force baselines, including a deliberately low-stiffness condition demonstrating transient compliance followed by offset-free recovery.

The conference version focuses on the implemented controller and its causal ablation. Longer proofs, parameter sweeps, and optional barrier/passivity extensions are not used to support the principal experimental claim.

#### A. Problem statement and evaluation questions

Given  $p_d(t)$ , joint feedback  $(q, \dot{q})$ , and a model  $(M, C, G, J)$ , the reference-holding objective is to minimize  $e = p_d - p$  while respecting the physical joint-torque box. No contact-force measurement is supplied to the proposed controller. We ask three concrete questions. First, can a 3-D disturbance state remove the sustained-load bias without changing the nominal MPC tuning? Second, does the comparison remain meaningful after matching a classical impedance controller to the MPC’s closed-loop response and enforcing the same actuator limits? Third, how does the flat disturbance prediction degrade under time-varying loads? These questions determine the ablations and metrics in Section V.

## II. INTERACTION-ERROR MODEL

Consider an  $n$ -DOF torque-controlled manipulator; the experiments use the Franka FR3 ( $n = 7$ ) [14]. Its dynamics are

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau + J^\top(q)\mathcal{F}_h, \quad (1)$$

where  $\mathcal{F}_h$  is positive when the human pushes onto the robot. Let  $J_v \in \mathbb{R}^{3 \times n}$  be the translational Jacobian and

$$\Lambda(q) = (J_v M^{-1} J_v^\top)^{-1} \quad (2)$$

the translational operational-space inertia [15]. The implementation regularizes  $\Lambda^{-1}$  by  $10^{-6}I$  and operates away from singularities.

The commanded torque separates feedforward, translation, orientation, and null-space channels:

$$\tau = \tau_{\text{ff}} + J_v^\top F_{\text{mpc}} + J_\omega^\top F_{\text{ori}} + \bar{N}^\top \tau_{\text{null}}, \quad (3)$$

where  $\bar{N}$  is the dynamically consistent projector of the full pose task [16]. Feedforward cancellation uses

$$\tau_{\text{ff}} = C\dot{q} + G + J_v^\top \Lambda \ddot{p}_d. \quad (4)$$

With  $e = p_d - p$ , the residual translation is

$$\ddot{e} = -\Lambda^{-1}(q)F_{\text{mpc}} + d_{\text{acc}}, \quad (5)$$

where  $d_{\text{acc}}$  collects the projected interaction wrench,  $-\dot{J}_v \dot{q}$ , orientation-to-translation coupling, friction, and model error. Hence this is a cancellation-plus-disturbance model, not an assumption of perfect nonlinear inversion. We use the force-equivalent disturbance  $d = -\Lambda d_{\text{acc}}$ . Only the interaction-wrench contribution to  $d$  is constant under a constant translational human force, independent of  $\Lambda(q)$ ; the remaining components of  $d_{\text{acc}}$  — the Coriolis-like coupling term, orientation-to-translation coupling, friction, and model error — are themselves configuration- and motion-dependent, so the aggregate  $d$  need not be constant even when the human force is. This is exactly why  $d$  is modeled as a random walk rather than a known constant.

For error state  $x = [e^\top, \dot{e}^\top]^\top$  and sample period  $\Delta t$ , exact zero-order-hold discretization of this frozen- $q_k$  reduced predictor (not the full nonlinear robot dynamics) gives

$$x_{k+1} = A_d x_k + B_d(q_k)(F_{\text{mpc},k} + d_k), \quad (6)$$

$$A_d = \begin{bmatrix} I & \Delta t I \\ 0 & I \end{bmatrix}, \quad B_d(q) = \begin{bmatrix} -\frac{\Delta t^2}{2} \Lambda^{-1}(q) \\ -\Delta t \Lambda^{-1}(q) \end{bmatrix}. \quad (7)$$

Because the continuous double-integrator matrix is nilpotent,  $A_d$  is exact and configuration independent; only  $B_d$  is scheduled. This constant- $A_d$  property applies to the reduced translational predictor, not to the complete robot dynamics or torque map.

## III. OFFSET-FREE RECEDING-HORIZON CONTROLLER

### A. Recursive disturbance estimator

Augment the force-equivalent disturbance as a random walk:

$$\begin{bmatrix} x_{k+1} \\ d_{k+1} \end{bmatrix} = \begin{bmatrix} A_d & B_d(q_k) \\ 0 & I \end{bmatrix} \begin{bmatrix} x_k \\ d_k \end{bmatrix} + \begin{bmatrix} B_d(q_k) \\ 0 \end{bmatrix} F_{\text{mpc},k} + \begin{bmatrix} 0 \\ w_k \end{bmatrix}. \quad (8)$$

A discrete recursive Kalman filter observes  $[e^\top, \dot{e}^\top]^\top$  from robot position and velocity feedback and propagates the  $9 \times 9$

covariance at each QP update. Its gain is recomputed rather than frozen. The random walk tracks constant and slowly varying aggregate loads; it does not infer human intent or separate human force from model error.

Let  $z = [x^\top, d^\top]^\top$ ,  $C_z = [I_6 \ 0]$ , and denote the two matrices in (8) by  $A_z(q_k)$  and  $B_z(q_k)$ . The implemented recursion is

$$\hat{z}_{k+1}^- = A_z(q_k)\hat{z}_k^+ + B_z(q_k)F_{\text{mpc},k}, \quad (9a)$$

$$P_{k+1}^- = A_z(q_k)P_k^+ A_z^\top(q_k) + Q_z, \quad (9b)$$

$$S_{k+1} = C_z P_{k+1}^- C_z^\top + R_z, \quad (9c)$$

$$L_{k+1} = P_{k+1}^- C_z^\top S_{k+1}^{-1}, \quad (9d)$$

$$\hat{z}_{k+1}^+ = \hat{z}_{k+1}^- + L_{k+1}(y_{k+1} - C_z \hat{z}_{k+1}^-), \quad (9e)$$

$$P_{k+1}^+ = (I - L_{k+1}C_z)P_{k+1}^-. \quad (9f)$$

Here  $y = [e^\top, \dot{e}^\top]^\top$ , with  $p$  from forward kinematics and  $\dot{p} = J_v \dot{q}$ . The covariance  $Q_z$  contains a disturbance random-walk block  $Q_w$ ;  $R_z$  represents the kinematic measurement channel. This filter uses no extra numerical differentiation of end-effector velocity.

For a frozen nonsingular  $B_d$ , the disturbance is observable from the measured error state because it affects  $x_{k+1}$  through  $B_d$ ; equivalently, the first two block rows of the augmented observability matrix contain  $[I_6 \ 0]$  and  $[A_d \ B_d]$ . Since  $B_d$  has column rank three away from task singularities, no nonzero disturbance direction is hidden. This establishes the structural requirement behind the estimator, but does not guarantee a particular convergence rate under noise or model mismatch.

### B. QP and applied-torque constraint

For horizon  $N = 10$ , stack  $U = [F_{\text{mpc},0}^\top, \dots, F_{\text{mpc},N-1}^\top]^\top \in \mathbb{R}^{30}$  and the predicted errors  $X$ . With  $d_N = \mathbf{1}_N \otimes \hat{d}$ , solve

$$\min_U \frac{1}{2} X^\top \bar{Q} X + \frac{1}{2} (U + d_N)^\top \bar{R} (U + d_N), \quad (10a)$$

$$\text{s.t.} \quad -F_{\text{max}} \leq F_{\text{mpc},i} \leq F_{\text{max}}, \quad i = 0:N-1, \quad (10b)$$

$$-\tau_{\text{max}} \leq \tau_{\text{base}} + J_v^\top F_{\text{mpc},0} \leq \tau_{\text{max}}, \quad (10c)$$

where  $\tau_{\text{base}} = \tau_{\text{ff}} + J_\omega^\top F_{\text{ori}} + \tilde{N}^\top \tau_{\text{null}}$ .

*Slack-relaxed variant (§V-F):* under a deliberately tightened budget, (10c) is instead relaxed to  $-\tau_{\text{max}} - s \leq \tau_{\text{base}} + J_v^\top F_{\text{mpc},0} \leq \tau_{\text{max}} + s$ ,  $s \in \mathbb{R}_{\geq 0}^7$ , penalized  $\frac{1}{2}\rho\|s\|^2$  added to (10a), extending the decision variable to  $[U; s] \in \mathbb{R}^{37}$  within the same QP. This keeps the problem always feasible (the force box (10b) alone is), trading a bounded, penalized torque-row violation for tracking; every other reported result keeps this relaxation off.

The centered effort term in (10a), rather than  $\|U\|_{\bar{R}}^2$ , makes the steady balancing input  $U = -d_N$  cost-free. Condensing yields  $H = \Gamma^\top \bar{Q} \Gamma + \bar{R}$  and  $h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N$ . The current implementation tests this identity directly to prevent an absolute-input penalty from reintroducing an  $R$ -dependent offset.

For completeness, the condensed prediction used in code is

$$X = \Phi x_k + \Gamma U + D_{\text{bar}} \hat{d}_k, \quad D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3), \quad (11)$$

where the  $j$ th block row of  $\Phi$  is  $A_d^j$  and the  $(j, i)$  block of  $\Gamma$  is  $A_d^{j-1-i} B_d$  for  $i < j$ . Thus  $x_{\text{free}} = \Phi x_k + D_{\text{bar}} \hat{d}_k$  and

$$H = \Gamma^\top \bar{Q} \Gamma + \bar{R}, \quad h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N. \quad (12)$$

Because  $\bar{R} \succ 0$ ,  $H \succ 0$  and the optimization is a strictly convex QP. The identity  $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$  is also a useful implementation check: the estimator's force must enter every prediction step through exactly the same scheduled input map as the commanded force.

### C. Relation to a realized impedance

For fixed  $q$ , inactive constraints, and  $\hat{d} = 0$ , the strictly convex QP has the unique solution

$$U^* = -H^{-1} \Gamma^\top \bar{Q} \Phi x_k. \quad (13)$$

If  $S_0 = [I_3 \ 0 \ \dots \ 0]$  selects the first input block, then  $F_{\text{mpc},0} = S_0 U^* = K_e e + K_d \dot{e}$ . The unconstrained predictive controller is therefore a configuration-dependent linear impedance whenever the symmetric parts of  $K_e$  and  $K_d$  have the stiffness and damping sign structure. Importantly,  $Q_p$  and  $Q_v$  are cost weights; they are not themselves the realized stiffness and damping. The realized gains are the finite-horizon Riccati image in (13).

This relation explains why a nominal 300 N/m impedance is not automatically a fair comparator for the tuned MPC. It also identifies what the disturbance augmentation changes. For a constant load and exact estimate, define  $v = F_{\text{mpc}} + d$ . The centered cost penalizes  $v$ , so the same feedback acts on the error while the physical command contains the equilibrium feedforward  $F_{\text{mpc}} = -d$ . In contrast, an unaugmented finite stiffness law must retain a nonzero error to produce its balancing force.

Equation (10c) constrains the complete torque that will actually be applied at the current receding-horizon step, including feedforward, orientation, and null-space terms. It does not assert horizon-wide torque feasibility. Because only the first move is applied, the nominal command satisfies the magnitude limits whenever the QP is feasible. Runtime magnitude clipping and torque-rate limiting remain final guards. If  $\tau_{\text{base}}$  alone exhausts the budget, the released benchmark returns zero correction on QP failure rather than claiming recursive feasibility.

**Proposition 1** (Frozen-configuration zero-mean offset rejection). *Fix  $q$ , assume the augmented pair in (8) is detectable, the closed loop is stable, the QP constraints remain inactive almost surely over the stationary estimation fluctuations at steady state (not only in a mean sense, so the unconstrained affine first-move law applies to essentially every realization), the estimator is asymptotically unbiased for a constant  $d$  (i.e.  $\mathbb{E}[\hat{d}_k] \rightarrow d$ ), and the unconstrained first-move position gain  $K_e$  is nonsingular. Then the mean equilibrium satisfies  $\mathbb{E}[e_\infty] = 0$  and  $\mathbb{E}[F_{\text{mpc},\infty}] = -d$ .*

*Proof.* Taking expectations of (6) at equilibrium gives  $B_d(\mathbb{E}[F_{\text{mpc},\infty}] + d) = 0$ ; away from singularities  $B_d$  has full column rank, so  $\mathbb{E}[F_{\text{mpc},\infty}] = -d$ , and the first block row then gives  $\mathbb{E}[\dot{e}_\infty] = 0$ . Because  $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$  ((11)),  $X$

depends on  $U$  only through  $V = U + d_N$ , so the cost (10a) written in  $V$  is independent of  $\hat{d}$  and the unconstrained law is exactly  $F_{\text{mpc},0} = K_e e + K_{\dot{e}} \dot{e} - \hat{d}$  for every  $\hat{d}$ , not only  $\hat{d} = 0$ . Taking expectations at equilibrium, with  $\mathbb{E}[\hat{d}_\infty] = d$  by unbiasedness,  $\mathbb{E}[F_{\text{mpc},\infty}] = K_e \mathbb{E}[e_\infty] - d$ . Equating the two expressions for  $\mathbb{E}[F_{\text{mpc},\infty}]$  gives  $K_e \mathbb{E}[e_\infty] = 0$ , hence  $\mathbb{E}[e_\infty] = 0$  since  $K_e$  is nonsingular.  $\square$

For the persistently-tuned filter implemented here ( $Q_w \succ 0$ , held constant online rather than decayed), the estimation error retains a nonzero steady-state covariance even for exactly constant  $d$ , so realized trajectories fluctuate around this mean equilibrium rather than converging to it pointwise; Section V's nonzero residual floors are consistent with that fluctuation, not a violation of the proposition.

This is a frozen-configuration result. Moving-reference performance and active constraint behavior are evaluated numerically; they are not consequences of the proposition. For time-varying  $d$ , flat horizon prediction incurs the standard bound

$$\|d_{k+i} - \hat{d}_{k|k}\| \leq e_K + L_d i \Delta t, \quad (14)$$

when  $\|d_k - \hat{d}_{k|k}\| \leq e_K$  and  $\|\dot{d}\| \leq L_d$ . Only the first move is applied and the estimate is refreshed at the next solve.

#### D. Auxiliary channels and implementation scope

Orientation uses a separate operational-space PD channel. With axis-angle error  $e_R$  extracted from  $R_d^\top R$ , it applies

$$F_{\text{ori}} = -K_{\text{rot}} e_R - D_{\text{rot}} \omega, \quad K_{\text{rot}} = 20I_3, \quad D_{\text{rot}} = 6I_3. \quad (15)$$

This channel is not dynamically decoupled from translation; the resulting cross-coupling is part of  $d_{\text{acc}}$  in (5).

For the redundant FR3 degree of freedom, define joint clearance  $\phi_i = \min(q_i - q_{\min,i}, q_{\max,i} - q_i)$ . Within the activation distance  $\delta_i = 0.1(q_{\max,i} - q_{\min,i})$ , the signed inverse-barrier gradient has magnitude

$$|g_i(q)| = k_b \left( \frac{1}{\phi_i} - \frac{1}{\delta_i} \right), \quad k_b = 50, \quad (16)$$

and points away from the nearer limit. The null-space torque is  $\tau_{\text{null}} = -k_{\text{null}}(q - q_0) + g(q) - d_{\text{null}}\dot{q}$ . Near a task boundary, the reference is additionally shifted by

$$\delta p = k_{\text{ws}}(J_v J_v^\top + \epsilon_r I)^{-1} J_v g(q), \quad \|\delta p\| \leq 0.06 \text{ m}. \quad (17)$$

The circular and waypoint comparisons disable this shift; the boundary test uses  $k_{\text{ws}} = 5 \times 10^{-4}$ .

The code also contains a one-step control-barrier projection and a translational energy-tank filter. The direct comparison scripts do not engage or log those certificates. Moreover, the tank scales only the translational predictive-force channel and excludes feedforward, orientation, and null-space power. We therefore make no certified joint-limit or full-port passivity claim for the experiments below.

The QP runs at 100 or 500 Hz and the feedforward/realization loop at 1 kHz. OSQP [17] is warm-started and its preallocated matrices are updated with the current  $B_d$ , Jacobian, and torque offset. The optimization dimension is independent of joint count, but deployment still requires the robot model, full Jacobian, joint limits, and actuator limits.

TABLE I  
PRINCIPAL CONTROLLER AND ESTIMATOR PARAMETERS

| Quantity                          | Symbol              | Value                                                  |
|-----------------------------------|---------------------|--------------------------------------------------------|
| Prediction horizon                | $N$                 | 10                                                     |
| QP period                         | $\Delta t$          | 10 ms (2 ms in C6–C7)                                  |
| Inner realization period          | —                   | 1 ms                                                   |
| Position / velocity weights       | $Q_p, Q_v$          | $2 \times 10^4 I_3, 50 I_3$                            |
| Terminal scale / effort weight    | $\gamma, R$         | 5, $10^{-6} I_3$                                       |
| Corrective-force bound            | $F_{\text{max}}$    | 150 N per axis                                         |
| FR3 joint-torque limits           | $\tau_{\text{max}}$ | [87, 87, 87, 87, 12, 12, 12] Nm                        |
| Disturbance process variance      | $Q_w$               | $10 I_3 \text{ N}^2/\text{update}$ ( $2 I_3$ in C6–C7) |
| Position / velocity obs. variance | $R_e, R_{\dot{e}}$  | $10^{-3} I_3 \text{ m}^2, 10^{-2} I_3 (\text{m/s})^2$  |
| OSQP tolerances / iteration cap   | —                   | $10^{-6} / 4000$                                       |

#### IV. REAL-TIME REALIZATION

The controller is implemented at two rates. At every 1 kHz physics step, the robot model, reference acceleration, orientation term, and null-space term are updated. At a QP tick, the same measured state is used to update the recursive filter, rebuild the scheduled prediction and affine torque row, and solve for the first task-force move. That move is held until the next QP tick. The recursive filter's predict step in (9a) uses this QP-solved force directly, not a guard-adjusted value: if a runtime guard later alters the torque actually sent to the robot, the resulting mismatch is absorbed as apparent disturbance at the next measurement update rather than fed back explicitly. Section V confirms this distinction is immaterial for the reported benchmarks, where the raw limit excess stays below the saturation threshold throughout; it would matter under sustained, deliberate guard activation.

The per-tick sequence is:

- 1) compute  $M, C, G, J_v, J_\omega, \Lambda$  and the measured error  $y_k$ ;
- 2) predict and correct  $(\hat{z}_k, P_k)$  using the QP-solved task-force correction from the previous tick;
- 3) form  $\Phi, \Gamma, D_{\text{bar}}$  from the current  $B_d(q_k)$  and construct  $(H, h)$  from (12);
- 4) add the force box and complete first-move torque row (10c), warm-start OSQP, and solve;
- 5) assemble (3) and apply the configured runtime guards to the torque command sent to the robot.

Table I records the parameters needed to reproduce the direct comparison.  $Q_w$  and  $R_e, R_{\dot{e}}$  are Kalman-gain tuning constants, not measured sensor noise; the simulated position feedback is otherwise exact, and Table IX injects its own explicit observation noise independent of this tuning. The optional workspace correction is disabled in the circular and waypoint controller comparisons and enabled only in the boundary experiment. The CBF and tank constants are intentionally omitted because those final filters do not support the headline results.

Three software checks protect the interface most likely to be implemented incorrectly. First, the condensed gradient includes  $\bar{R} d_N$ ; omitting it changes the intended input-centered cost. Second, the torque bound is applied to  $\tau_{\text{base}} + J_v^\top F_{\text{mpc},0}$ , not only to the corrective force. Third, the benchmark logs raw and applied torque separately, using a  $10^{-3}$  Nm excess

TABLE II  
PER-TICK SOLVE TIME AND DEADLINE MISSES

| Rate        | Mean<br>(ms) | p50<br>(ms) | p99<br>(ms) | Max<br>(ms)        | Deadline<br>(ms) | Misses  |
|-------------|--------------|-------------|-------------|--------------------|------------------|---------|
| 100 Hz (C5) | 0.57         | 0.54        | 0.75        | 24.15 <sup>†</sup> | 10.0             | 1/2400  |
| 500 Hz (C7) | 0.51         | 0.49        | 0.71        | 1.65               | 2.0              | 0/12000 |

threshold so numerical QP tolerances are not mislabeled as physical saturation.

Table II reports per-tick wall-clock time (Kalman step,  $\Gamma/H/h$  rebuild, warm-started OSQP solve, and torque assembly) for C5 and C7 over the same 3-cycle benchmark, on a single-threaded Python/OSQP implementation (Apple M1 Max), not a compiled real-time target.

<sup>†</sup>One-time OSQP setup cost; steady-state max is 1.04 ms (zero misses both rates). Excludes the MuJoCo dynamics query; not validated on an embedded/real-time-kernel target.

## V. SIMULATION EVALUATION

All experiments use the MuJoCo Menagerie FR3 [18], [19] at 1 kHz with joint-torque limits [87, 87, 87, 87, 12, 12, 12] Nm. A 12 cm XZ circle is traversed in 8 s while a 15 N downward step is applied for 3 s of each cycle. The MPC horizon is  $N = 10$ , the nominal impedance stiffness is 300 N/m, and all reported fair comparators use the same plant and physical torque budget.

### A. Estimator and update-rate ablation

Table III separates estimator and update-rate effects. C4 and C5 have identical horizon, weights, rate, and torque interface; only the augmented disturbance estimator differs. At 100 Hz it reduces steady-state error from 2.77 to 0.042 mm.  $Q_w$  is scaled by the QP period between the 100 Hz and 500 Hz configurations (Table I) so the continuous-time-equivalent process-noise density, not just the raw discrete value, is held constant across the rate comparison; C6/C7 use the correspondingly smaller  $Q_w = 2I_3$ . Raising the rate mainly reduces the contact transient in this protocol, while the estimator primarily removes the constant-load offset; the effects are not claimed to be orthogonal in general.

To isolate the estimator’s credit from the receding-horizon prediction’s, Table III adds a non-predictive **observer-impedance** baseline: the same Kalman estimator drives  $F = K_e e + K_d \dot{e} - \hat{d}$  with  $[K_e, K_d]$  fixed to C5’s own unconstrained first-move gain ((13), evaluated once), so no horizon is re-optimized online. It matches C5 closely (0.52 vs. 0.53 mm contact RMS, 2.44 vs. 2.58 mm peak) and lands between C4 and C5 on steady-state error, confirming that the 65.8 $\times$  headline improvement is attributable mainly to the disturbance estimate. §V-F isolates the effect of embedding and relaxing the applied-torque row under active actuation limits, by tightening the torque budget until the two mechanisms separate.

### B. Broad baseline screen

Before stiffness/damping calibration, we screen the controller against four common interaction behaviors using the nominal 300 N/m impedance setting. The admittance controller

TABLE III  
CONTROLLED MPC ABLATION, 15 N REPEATED STEP

| Controller                  | Rate<br>(Hz) | Contact RMS<br>(mm) | Peak<br>(mm) | SS error<br>(mm) |
|-----------------------------|--------------|---------------------|--------------|------------------|
| C4: DI-MPC, no estimator    | 100          | 2.20                | 2.92         | 2.77             |
| C5: DI-MPC + estimator      | 100          | 0.53                | 2.58         | <b>0.042</b>     |
| Observer: fixed gain + est. | 100          | 0.52                | <b>2.44</b>  | 0.055            |
| C6: DI-MPC, no estimator    | 500          | 0.80                | <b>1.10</b>  | 1.10             |
| C7: DI-MPC + estimator      | 500          | <b>0.32</b>         | 1.48         | <b>0.029</b>     |

TABLE IV  
BROAD SCREEN ON THE 12 CM CIRCLE AND 15 N STEP

| Controller               | Total RMS<br>(mm) | Contact RMS<br>(mm) | Peak<br>(mm) | SS error<br>(mm) |
|--------------------------|-------------------|---------------------|--------------|------------------|
| Impedance, 300 N/m       | 35.6              | 41.1                | 51.8         | 44.8             |
| Admittance, 100 N/m      | 113.9             | 174.7               | 210.5        | 186.7            |
| PI impedance             | 36.2              | 27.4                | 43.7         | 21.4             |
| Predictive variable imp. | 12.9              | 4.5                 | 7.5          | 4.8              |
| C4: DI-MPC 100 Hz        | <b>11.4</b>       | 2.2                 | 2.9          | 2.8              |
| C5: DI-MPC + est. 100 Hz | <b>11.4</b>       | 0.5                 | 2.6          | < 0.05           |
| C6: DI-MPC 500 Hz        | 12.8              | 0.8                 | <b>1.1</b>   | 1.1              |
| C7: DI-MPC + est. 500 Hz | 12.7              | <b>0.32</b>         | 1.48         | <b>0.029</b>     |

has a 100 N/m virtual spring; PI impedance adds an integral state to the nominal impedance; and predictive variable impedance uses the disturbance estimate to schedule finite stiffness without cancelling the load. Table IV reports three cycles and all controllers. It is included to show behavior across design classes, but comparisons between rows with different effective stiffness are descriptive rather than causal.

The compliant admittance response is intentional; its large displacement is not a failure for a guidance task, but it is unsuitable for the reference-holding objective studied here (representative trajectories in the journal version). The broad screen makes two mechanism-level points. The predictive variable-impedance row improves on reactive finite-stiffness controllers but retains a 4.8 mm bias because scheduling stiffness does not provide an internal model of a constant load. At fixed MPC rate and tuning, C4 versus C5 and C6 versus C7 show the repeatable estimator effect; the large admittance displacement simply reflects its 15/100 = 150 mm virtual-spring equilibrium, its chosen yielding behavior for this reference-holding task.

### C. Stiffness-and-Damping-Calibrated Fair Comparison

The nominal 300 N/m impedance is intentionally compliant, so its comparison with C4 is gain-confounded. A separate calibration estimates C4’s equilibrium stiffness as 5441 N/m, then searches stiffness scales (0.8, 1.0, 1.2) and damping ratios (0.7, 1.0, 1.3) on one cycle. It selects 5441 N/m and  $\zeta = 1.3$ . This calibration matches equilibrium stiffness and a scalar damping ratio on the calibration cycle only; it is not a full frequency-response match, and does not guarantee matched rise time, overshoot, or multiaxis coupling. A torque-aware PI baseline is tuned independently over nine integral-gain/limit pairs. We also provide the matched impedance with ideal simulated-force cancellation filtered at 50 ms; this is a favorable sensor-based comparator, not a reproduction of a particular published controller. Metrics in Table V use

TABLE V  
FAIR COMPARISON UNDER A COMMON ACTUATOR BUDGET

| Controller               | Contact RMS (mm) | SS (mm)      | Raw-limit excess (%) | Peak $P_{\text{pos}}$ (W) |
|--------------------------|------------------|--------------|----------------------|---------------------------|
| Nominal impedance        | 41.07            | 44.82        | 0                    | 22.5                      |
| Calibrated impedance     | 2.38             | 2.59         | 0.45                 | 378.2                     |
| Tuned anti-windup PI     | 27.10            | 20.38        | 0                    | 58.3                      |
| Matched imp. + force FF  | 1.40             | 1.39         | 0.45                 | 378.2                     |
| C4: DI-MPC 100 Hz        | 2.20             | 2.77         | 0                    | 113.2                     |
| C5: DI-MPC + est. 100 Hz | <b>0.53</b>      | <b>0.042</b> | 0                    | 113.1                     |

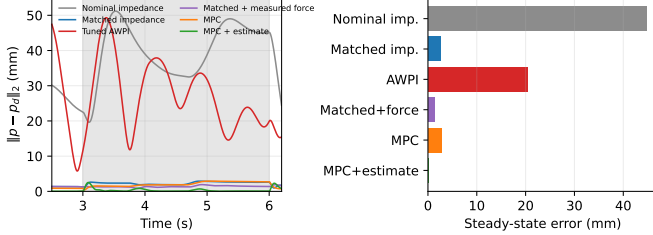


Fig. 1. Evaluation-cycle fair comparison. Stiffness/damping calibration closes the nominal impedance/C4 steady-state gap. The controlled C4–C5 pair isolates the disturbance augmentation; ideal measured-force feedforward also reduces the load-axis bias but retains the matched impedance’s saturation and power cost.

three evaluation cycles of the same periodic trajectory, not independently randomized scenarios.

The calibrated impedance and C4 have similar steady-state errors (2.59 and 2.77 mm), so the nominal impedance/C4 ratio is not an architectural result. Their resource use differs:  $P_{\text{pos}}$ , the instantaneous peak of  $\sum_i \max(\tau_i \dot{q}_i, 0)$  over the trial, reaches 378.2 W for the matched impedance, which also exceeds a physical torque limit in 0.45% of samples, compared with 113.2 W and no thresholded saturation for C4. The integrated positive joint energy over the same window is much closer (124.1 vs. 103.0 J), so the peak-power gap reflects a sharper transient during contact onset rather than a proportionally larger total energy cost. C4 and C5 each complete 2400 QP solves without failure; their maximum raw limit excesses are below  $2 \times 10^{-5}$  Nm, beneath the  $10^{-3}$  Nm saturation threshold. Adding the estimator reduces steady-state error by 65.8 $\times$  without increasing peak positive joint power. Ideal measured-force cancellation confirms that constant-load rejection is not unique to MPC; C5’s distinction in this test is achieving 0.042 mm without a force measurement.

#### D. Low-stiffness transient compliance and recovery

Every comparison above realizes a high closed-loop stiffness (5441 N/m calibrated, or C4/C5’s own Riccati-image gain), so peak deflection is only a few mm: closer to a stiff trajectory tracker with a disturbance observer than to a controller that visibly yields to contact. We test the architecture’s other end of the design space with a deliberately low prescribed stiffness  $K_d = 100$  N/m (matching the admittance baseline’s virtual-spring stiffness), realized through a cost-shaped QP variant that directly penalizes deviation from the prescribed law’s own rollout ( $H = \bar{R}$ ,  $h = -\bar{R}U_{\text{imp}}$ ): unlike (13)’s general Riccati image, which reports whatever gain the LQ

TABLE VI  
LOW-STIFFNESS (100 N/M) YIELD-THEN-RECOVER

| Controller     | Peak (mm)   | Settle < 2 mm (s) | SS (mm)     | Peak power (W) |
|----------------|-------------|-------------------|-------------|----------------|
| No estimator   | 114.2       | never             | 113.2       | 5.7            |
| With estimator | <b>12.9</b> | <b>2.67</b>       | <b>1.16</b> | 11.0           |

cost happens to realize, this shaping makes the unconstrained minimizer exactly  $F_{\text{mpc}} = K_d e + D_d \dot{e} - \hat{d}$  for any chosen  $K_d, D_d$ , with and without the  $-\hat{d}$  term.  $D_d = 2\zeta\sqrt{K_d}$  assumes a unit effective mass;  $\Lambda^{-1}$  is generally anisotropic, so  $\zeta = 1$  is only nominal critical damping and is visibly underdamped here (a small sweep selects  $\zeta = 3$  for clean settling).

Without the estimator, the response approaches (not fully, since the reference moves while the push is one-directional) the static equilibrium  $F_h/K_d \approx 150$  mm and never drops below the 2 mm tolerance: a permanent offset. With the estimator, the same stiffness visibly yields — a genuine 12.9 mm transient, an order of magnitude more compliant than C4/C5’s few-mm response — then recovers to 1.16 mm within 2.67 s: transient compliance followed by offset-free recovery, not only disturbance rejection around a stiff equilibrium. Peak positive joint power stays low in both cases (5.7 and 11.0 W).

#### E. Loss of corrective authority

If the force box  $F_{\text{max}}$  is instead tightened toward zero, the QP loses its entire corrective authority and the commanded translation channel degrades to feedforward-only cancellation. An optional fixed-backbone architecture (C8:  $F_{\text{bb}} = K_{\text{bb}}e + D_{\text{bb}}\dot{e}$  commanded outside the QP, which then shapes only an additive bounded correction, with the full command  $F_{\text{bb}} + F_{\text{mpc}}$  in the torque-feasibility row) recovers 5.5–7.7 $\times$  lower contact RMS than the default realization once  $F_{\text{max}} \leq 5$  N, at the cost of a fixed, always-on restoring stiffness; offset-free control itself still requires the additive correction, which vanishes at the limiting case  $F_{\text{max}} = 0$  (full parameter sweep in the journal version).

#### F. Active torque-constraint stress test

Every benchmark above keeps  $F_{\text{max}} = 150$  N as the binding limit; the applied-torque row (10c) never saturates there (raw excess  $< 2 \times 10^{-5}$  Nm, §V-C). We test what (10c) costs and buys by tightening  $\tau_{\text{max}}$  directly via a multiplicative scale  $s$  and comparing four otherwise-identical 100 Hz controllers: **C5** (the row embedded per (10c)), **Unconstrained** (the row omitted; the plant still clips physically per (3), so this tests whether the QP’s own optimum matters, not whether the robot ever exceeds  $\tau_{\text{max}}$ ), **Observer** (Table III’s fixed-gain baseline under the same tightened budget), and **Soft** (the slack-relaxed row above,  $\rho = 1$ , selected by a small sweep). A third, more severe scale was excluded: there, Soft’s own slack diverges to non-physical magnitudes alongside severe tracking loss, not graceful degradation.

At the paper’s operating point (scale 1.0) all four are near-indistinguishable in contact RMS; Soft draws on at most 0.35 Nm of slack, active on 0.3% of solves, confirming (10c) costs essentially nothing when it almost never binds.

TABLE VII  
TORQUE-BUDGET SWEEP: CONTACT RMS (MM) / QP FAILURES (%)

| $\tau_{\max}$ scale | 1.0              | 0.32             |
|---------------------|------------------|------------------|
| C5                  | 0.53 / 0%        | 550.5 / 72.5%    |
| Unconstrained       | <b>0.53</b> / 0% | 0.53 / 0%        |
| Observer            | 0.52 / 0%        | 0.51 / 0%        |
| Soft                | 0.53 / 0%        | <b>0.52</b> / 0% |

Tightening the budget separates them. At scale 0.32, the hard constraint’s documented zero-correction fallback (§III-C) applies on 72.5% of C5’s solves — 1740/1741 of those reported by the solver as genuinely primal infeasible, not a numerical or iteration-limit artifact — degrading tracking to 550 mm. Soft recovers essentially all of this performance (0.52 mm, matching Unconstrained) by drawing on genuinely nonzero slack: up to 10.55 Nm, RMS 0.65 Nm, active on 42% of solves — Soft does exceed the tightened test row it relaxes, so the raw command is not held within that synthetic budget. What it respects instead is the robot’s actual, full-scale hardware limit: Soft never triggers the plant’s physical clip at scale 0.32 (0% clipped samples), whereas Unconstrained’s raw command does, by up to 5.2 Nm on 0.05% of samples — at every scale, since Unconstrained never consults  $\tau_{\max}$ . This is the constraint’s positive case, stated precisely: relaxing (10c) trades a bounded, quantified overshoot of the synthetic test budget for a solution that, unlike Unconstrained’s, never needs the plant’s clip to stay within the robot’s real limit, while matching Unconstrained’s tracking and avoiding the hard row’s all-or-nothing failure. Extending this to more severe budgets with a single fixed  $\rho$  is future work.

#### G. Waypoint generalization

A second task checks whether the conclusion is specific to a periodic circle. The end effector visits three waypoints forming a triangle. At each waypoint, a 15 N push in a different direction begins 0.8 s after arrival and lasts 2 s; the robot must then dwell within 35 mm of the target for 1 s. All controllers reach all three waypoints (stiff impedance and predictive variable impedance included), repeating the controlled estimator ablation: at 100 Hz, contact RMS falls from 2.2 to 0.6 mm when the disturbance state is enabled (C4→C5); at 500 Hz the estimator continues to reduce contact RMS (0.8 to 0.37 mm, C6→C7) but, under the rate-proportional  $Q_w$  scaling of Table I, no longer has the lowest peak error: C6’s 1.0 mm undercuts C7’s 1.42 mm, mirroring the same pattern in Table IV; full per-controller table in the journal version.

The predictive variable-impedance comparator is the same scheduler as §V-B (in-house, family of [20], [21]); its 5.0 mm result again reflects a load-dependent offset from adapting a finite stiffness rather than cancelling the load.

The moving-reference behavior is also checked on four circle planes (XZ sagittal, XY horizontal, YZ frontal, tilted XZ-to-XY) without plane-specific retuning: C5 remains below 0.35 mm free-space RMS on every plane, versus 16–25 mm for nominal impedance (the same stiffness confound noted above), showing directional consistency of the scheduled operational-

TABLE VIII  
SUSTAINED-FORCE SWEEP: STEADY-STATE / PEAK ERROR (MM)

| Applied load (N)        | 5     | 10    | 15    | 20    | 25    |
|-------------------------|-------|-------|-------|-------|-------|
| Nominal impedance, SS   | 26.9  | 33.7  | 45.0  | 58.5  | 73.1  |
| Nominal impedance, peak | 28.4  | 37.0  | 51.2  | 70.1  | 88.9  |
| C7, SS                  | 0.024 | 0.023 | 0.023 | 0.023 | 0.023 |
| C7, peak                | 0.57  | 0.96  | 1.46  | 1.96  | 2.45  |

space model rather than a performance ratio (full per-plane table in the journal version).

#### H. Time-varying interaction and horizon validity

The random-walk model predicts  $d$  as constant over the short horizon; we test that approximation at a static target under  $F_z = -12 \sin(2\pi ft)$  N for  $f \in \{0, 0.1, 0.2, 0.4, 0.8\}$  Hz, reconstructing the aggregate ground-truth disturbance from the simulator dynamics and applied correction. Both  $e_K$  and  $L_d$  in (14) are estimated empirically from this same logged trajectory (RMS current-estimate error and the maximum observed disturbance rate, respectively), so what follows checks the bound’s internal arithmetic against its own inputs, not an a priori bound validated against unseen data. Across all five rates, the measured  $N$ -step prediction error stays below the bound of (14), and contact tracking degrades gracefully with disturbance rate, from 0.08 mm at  $f = 0$  to 1.04 mm at  $f = 0.8$  Hz (full per-rate table in the journal version). This experiment checks the finite-horizon arithmetic for the simulator protocol; it is not a robustness bound for unmodelled contact, delay, or hardware sensing.

#### I. Force magnitude and shape

The circular experiment is repeated with sustained loads from 5 to 25 N to check the operating range of the offset claim (Table VIII). For C7, steady-state deflection remains approximately 0.023 mm throughout the tested unsaturated range, whereas first-contact peak error increases from 0.57 to 2.45 mm. The estimator cancels a constant force after convergence, but it cannot cancel an unseen step at its first sample; this separates steady-state offset rejection from transient compliance. The near-constant  $\approx 0.023$  mm SS value is consistent with Proposition 1’s load-independent mean-equilibrium prediction, reflecting a numerical/ estimator-fluctuation floor rather than a residual scaling with the applied force.

At 15 N, changing the force profile from a step to a linear ramp lowers C7 contact RMS from 0.32 to 0.19 mm and peak error from 1.46 to 0.57 mm; a 1 Hz sinusoid raises contact RMS to 0.87 mm with a comparable 1.30 mm peak, agreeing with §V-H: smoother onset reduces the unobserved transient, while a persistent time-varying load exposes the estimator’s bandwidth limit. These results characterize the tested unsaturated range; they do not extend to amplitudes that engage the force box or joint-torque limits.

#### J. Robustness checks

A 20 cm boundary circle deliberately exercising the soft null-space barrier and workspace projection (not the final CBF) confirms empirical avoidance under the stated trajectory:

TABLE IX  
C5 ROBUSTNESS CHECKS (100 Hz QP)

|                               |      |                |                |                |
|-------------------------------|------|----------------|----------------|----------------|
| Position noise $1\sigma$ (mm) | 0    | 1              | 2              | 5              |
| 10N-step SS error (mm)        | 0.08 | $0.19 \pm .03$ | $0.37 \pm .04$ | $0.89 \pm .07$ |

nominal impedance crosses the chosen 5% fractional joint margin (0.049), C5 maintains 0.083 at both 100 and 30 Hz. Not a forward-invariant safety certificate; figure deferred to the journal version.

Five-seed average, end-effector position noise only (velocity, delay, force-sensor noise absent): numerical tolerance over the tested range, not a robust-stability guarantee. A separate controller-inertia-mismatch sweep (0–30% error, feedforward model only, plant unchanged) confirms the Kalman estimator keeps free-circle RMSE nearly flat across the sweep (0.24 to 0.23 mm); disabling it is 3–4 $\times$  worse at each mismatch level (0.94 vs. 0.24 mm at 0%, 0.73 vs. 0.23 mm at 30%); full table in the journal version.

## VI. DISCUSSION AND CONCLUSION

The proposed interface separates a behavior-coordinate request from its robot-specific torque realization. Operational-space cancellation gives a constant- $A_d$  error predictor; force-domain augmentation aligns the estimate, horizon model, and balancing input; and the affine first-move constraint acts on the complete applied torque. The C4–C5 ablation attributes a 65.8 $\times$  steady-state improvement to disturbance augmentation under identical MPC tuning. Stiffness/damping calibration also shows that much of the nominal impedance-versus-MPC gap is simply stiffness, while ideal force cancellation confirms that offset rejection is not unique to predictive control. At 500 Hz, disturbance augmentation improves contact RMS and steady-state offset but increases the first-contact peak relative to C6 (Table III): the disturbance estimate rises quickly after the step and briefly overcorrects before settling, so estimator bandwidth must be tuned jointly with the desired transient compliance rather than treated as a free improvement.

**Scope.** This paper establishes only the fixed-base translational reference-holding case of the fixed- $A_d$ , force-coordinate representation introduced above, with the configuration- and motion-dependent remainder of  $d$  left to the random-walk estimator rather than modeled in closed form (Section II); transfer to other embodiments and contact regimes remains future work.

The evidence remains limited to torque-controlled FR3 simulation. The predictor lumps human force and model error, assumes accurate position and velocity feedback, and provides a frozen-configuration offset result. The boundary test is not a CBF certificate, and the optional energy tank does not establish full-port passivity. By design, the observer-impedance comparison confirms that the estimator alone accounts for the reported offset-rejection improvement under nominal actuation headroom, not receding-horizon prediction; §V-F instead credits torque-feasibility robustness to the slack-relaxed constraint embedding, tested on the same receding-horizon policy whose hard-bounded torque row fails – matching unconstrained track-

ing without exceeding the hardware limit, at the cost of a bounded overshoot of the test budget itself; an adaptive penalty weight is future work. Hardware evaluation should compare against a canonical predictive interaction controller under shared tuning while logging force estimates, applied torque, solver status, safety-filter slack, and energy state.

## REFERENCES

- [1] N. Hogan, “Impedance control: An approach to manipulation—Parts I–III,” *ASME J. Dyn. Syst. Meas. Control*, vol. 107, no. 1, pp. 1–24, 1985.
- [2] S. Chiaverini, B. Siciliano, and L. Villani, “A survey of robot interaction control schemes with experimental comparison,” *IEEE/ASME Trans. Mechatronics*, vol. 4, no. 3, pp. 273–285, 1999.
- [3] Y.-Y. Cao, Z. Lin, and D. G. Ward, “Anti-windup design of output tracking systems subject to actuator saturation and constant disturbances,” *Automatica*, vol. 40, no. 7, pp. 1221–1228, Jul. 2004.
- [4] —, “An antiwindup approach to enlarging domain of attraction for linear systems subject to actuator saturation,” *IEEE Trans. Autom. Control*, vol. 47, no. 1, pp. 140–145, Jan. 2002.
- [5] T. Gold, A. Völz, and K. Graichen, “Model predictive interaction control for robotic manipulation tasks,” *IEEE Trans. Robot.*, vol. 39, no. 1, pp. 76–89, 2023.
- [6] Y. Chen, C. Li, T. Teng, X. Wu, D. Xu, Y.-H. Liu, and F. Chen, “Unified model predictive interaction control integrating impedance matching and constraint optimization,” in *Proc. IEEE Int. Conf. Control Autom. (ICCA)*, 2025, pp. 372–378.
- [7] K. Haninger, C. Hegeler, and L. Peternel, “Model predictive impedance control with Gaussian processes for human and environment interaction,” *Robotics and Autonomous Systems*, vol. 165, p. 104431, 2023.
- [8] A. Jordana, S. Kleff, J. Carpentier, N. Mansard, and L. Righetti, “Force feedback model-predictive control via online estimation,” in *Proc. IEEE ICRA*, 2024, pp. 11 503–11 509.
- [9] R. Cao, L. Cheng, and H. Li, “Passive model-predictive impedance control for safe physical human–robot interaction,” *IEEE Trans. Cogn. Dev. Syst.*, vol. 16, no. 2, pp. 426–435, 2024.
- [10] J. Matschek, J. Bethge, and R. Findeisen, “Safe machine-learning-supported model predictive force and motion control in robotics,” *IEEE Trans. Control Syst. Technol.*, vol. 31, no. 6, pp. 2380–2392, 2023.
- [11] S. Kleff, A. Meduri, R. Budhiraja, N. Mansard, and L. Righetti, “High-frequency nonlinear model predictive control of a manipulator,” in *Proc. IEEE ICRA*, 2021.
- [12] G. Wang, Z. Lin, F. Min, D. Li, and N. Liu, “Ensuring safe physical HRI: Integrated MPC and ADRC for interaction control,” *Actuators*, vol. 14, no. 12, p. 608, 2025.
- [13] G. Pannocchia and J. B. Rawlings, “Disturbance models for offset-free model-predictive control,” *AIChE Journal*, vol. 49, no. 2, pp. 426–437, 2003.
- [14] Franka Robotics GmbH, “Franka research 3 (FR3) technical documentation,” 2023, <https://frankaemika.github.io/docs>.
- [15] O. Khatib, “A unified approach for motion and force control of robot manipulators: The operational space formulation,” *IEEE J. Robot. Autom.*, vol. 3, no. 1, pp. 43–53, 1987.
- [16] L. Sentis and O. Khatib, “Synthesis of whole-body behaviors through hierarchical control of behavioral primitives,” *Int. J. Humanoid Robotics*, vol. 2, no. 4, pp. 505–518, 2005.
- [17] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, “OSQP: An operator splitting solver for quadratic programs,” *Math. Program. Comput.*, vol. 12, no. 4, pp. 637–672, 2020.
- [18] Google DeepMind, “MuJoCo menagerie: A collection of physics-based simulation models,” GitHub, 2022, [https://github.com/google-deepmind/mujoco\\_menagerie](https://github.com/google-deepmind/mujoco_menagerie).
- [19] E. Todorov, T. Erez, and Y. Tassa, “MuJoCo: A physics engine for model-based control,” in *Proc. IEEE/RSS JROS*, 2012, pp. 5026–5033.
- [20] J. Xue, W. Liang, Y. Wu, and T. H. Lee, “Model predictive variable impedance control towards safe robotic interaction in unknown disturbance-rich environments,” *Robotics and Autonomous Systems*, vol. 189, p. 104961, 2025.
- [21] L. Roveda, N. Iannacci, F. Vicentini, N. Pedrocchi, F. Braghin, and L. M. Tosatti, “Optimal impedance via model predictive control for robot-aided rehabilitation,” *Control Eng. Practice*, vol. 83, pp. 11–23, 2019.