

CONTACT US
Nextion Editor Guide

Instruction Set

Datasheets >

Intelligent Series >

Enhanced Series >

Basic Series >

NX3224T024

NX3224T028

NX4024T032

NX4832T035

NX4827T043

NX8048T050

NX8048T070

Policies >

FAQs

NX3224T024


Overview

Nextion

Models

Specifications

Electronic

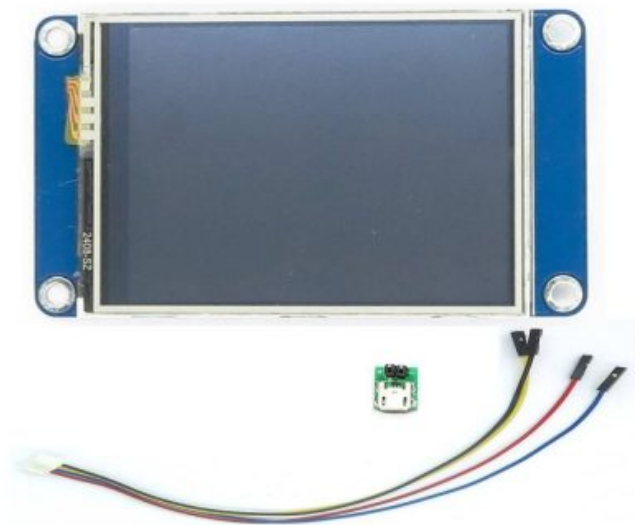

Characteristics

Working Environment & Reliability Parameter

Interfaces Performance

Memory Features

Product Dimensions

Overview

Nextion is a seamless Human Machine Interface (HMI) solution that provides a control and visualisation interface between a human and a process, machine, application or appliance. Nextion is mainly applied to IoT or consumer electronics field. It is the best solution to replace the traditional LCD and LED Nixie tube. With the Nextion Editor software (Official Download), users are able to create and design their own interfaces for Nextion display.

Package includes: Nextion Display, connecting wire, a power supply test board.

Go Shopping: NX3224T024 (IM150416002)





Blurred screen? Flashing? You may be suffering from power shortages. Power off at the first possible moment. No more repeated attempts to damage your Nextion model.


A small connector is included in the package. Please try to power Nextion with your phone charger through the connector to check if Nextion works well.

A high quality usb cable is required.



Nextion Models

| | |
|----------------|--|
| Nextion Type | Basic Series |
| Nextion Models | NX3224T024_011N (N: No touch) |
| | NX3224T024_011R (R: Resistive touchscreen) |

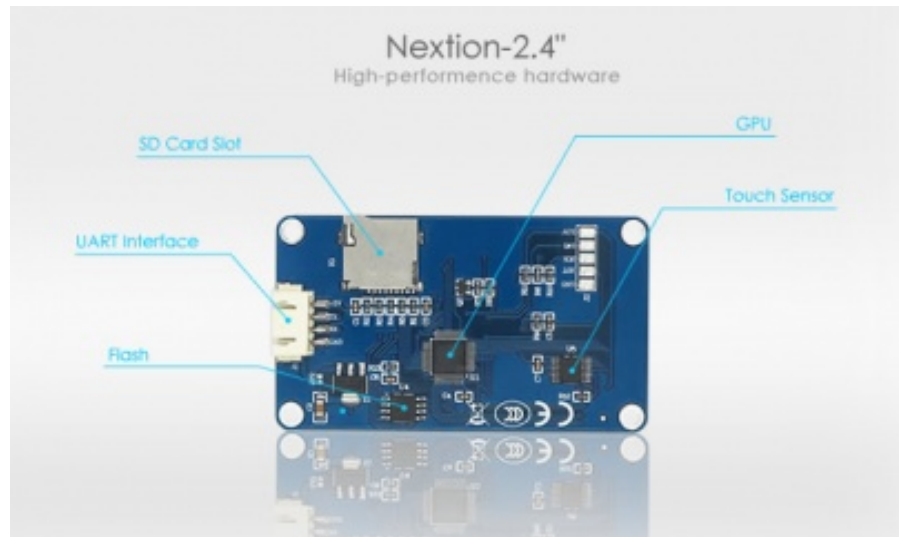

Specifications

| | Data | Description |
|-------|------------------|----------------------|
| Color | 64K 65536 colors | 16 bit 565, 5R-6G-5B |





| | | | |
|------------------------------------|------------------------------|--|--|
| | | | |
| Visual Area (V.A.) | 48.96mm(L)×36.72mm(W) | | |
| Resolution | 320×240 pixel | Also can be set as 240×320 | |
| Touch type | Resistive | | |
| Touches | > 1 million | | |
| Backlight | LED | | |
| Backlight lifetime (Average) | >30,000 Hours | | |
| Brightness | 200nit (NX3224T024_011N) | 0% to 100%, the interval of adjustment is 1% | |
| | 180 nit (NX3224T024_011R) | 0% to 100%, the interval of adjustment is 1% | |
| Weight | 20g (NX3224T024_011N) | | |
| | 25.8g (NX3224T024_011R) | | |

Electronic Characteristics

| | Test Conditions | Min | Typical | Max | Unit |
|----------------------|-----------------------------------|------|---------|-----|------|
| Operating Voltage | | 4.75 | 5 | 7 | V |
| Operating Current | VCC=+5V, Brightness is 100% | – | 90 | – | mA |



| | Test Conditions | Min | Typical | Max | Unit |
|---------------------|------------------|-----|---------|-----|------|
| Working Temperature | 5V, Humidity 60% | -20 | 25 | 70 | °C |
| Storage Temperature | | -30 | 25 | 85 | °C |
| Working Humidity | 25°C | 10% | 60% | 90% | RH |

Interfaces Performance

| | Test Conditions | Min | Typical | Max | Unit |
|----------------------|-----------------|------|---------|--------|------|
| Serial Port Baudrate | Standard | 2400 | 9600 | 115200 | bps |
| Output High Voltage | IOH=-1mA | 3.0 | 3.2 | | V |
| Output Low Voltage | IOL=1mA | | 0.1 | 0.2 | V |
| Input High Voltage | | 2.0 | 3.3 | 5.0 | V |
| Input Low Voltage | | -0.7 | 0.0 | 1.3 | V |
| Serial Port Mode | TTL | | | | |
| Serial Port | 4Pin_2.54mm | | | | |

[HOME](#)[PRODUCT](#)[DOWNLOAD](#)[DOCUMENT](#)[SUPPORT](#)[COMMUNITY](#)[BLOG](#)[CONTACT US](#)

* microSD card socket is exclusively used to upgrade Nextion firmware / HMI design

Memory Features

| Memory Type | Test Conditions | Min | Typical | Max | Unit |
|--------------|------------------------|-----|---------|------|------|
| FLASH Memory | Store fonts and images | | | 4 | MB |
| RAM Memory | Store variables | | | 3584 | BYTE |

Product Dimensions

2.4"_Nextion_Dimension

Product Certificates

CE-EMC, RoHS

DOWNLOAD AND DOCUMENT

[Contact us](#)[Where to Buy](#)[FAQs](#)[Nextion Editor](#)[Editor Guide](#)[Instruction Set](#)[Product Datasheets](#)[Library](#)