




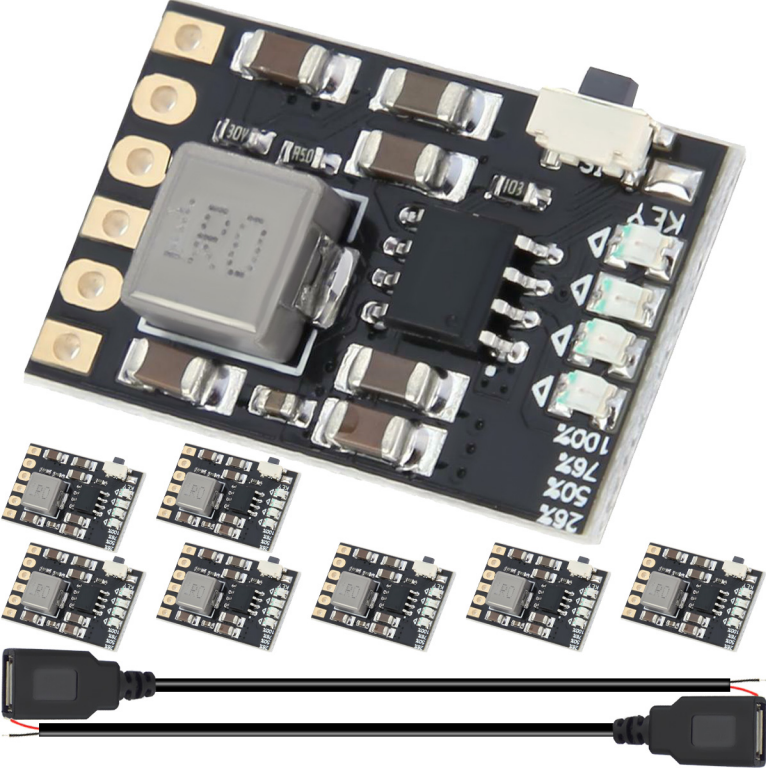


PRODUCT PARAMETERS

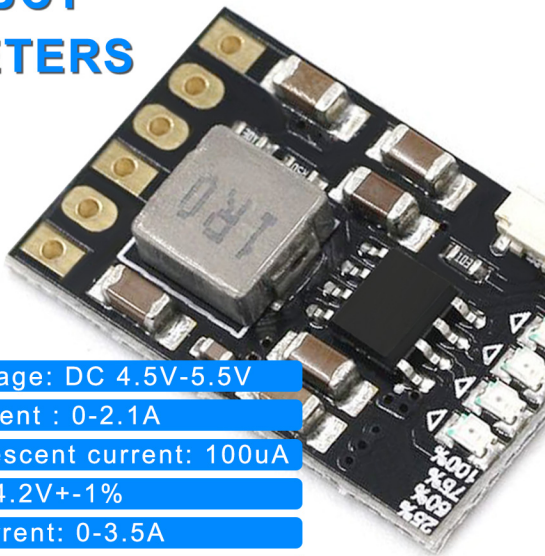


- Charging voltage: DC 4.5V-5.5V
- Charging current : 0-2.1A
- Charging quiescent current: 100uA
- Full voltage: 4.2V+-1%
- Discharge current: 0-3.5A
- Discharge quiescent current: 50uA
- Discharge efficiency: up to 96%
- Output voltage: 5V
- Output current: 0-2.1A

PIN DESCRIPTION

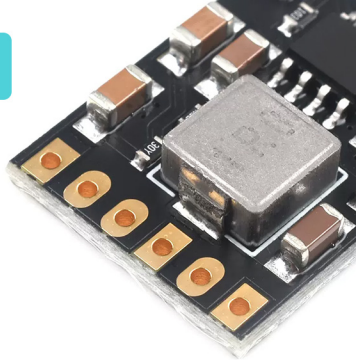


1. VIN: Charge Port Positive Input + DC4.5V-5.5V(Recommended 5V) — 1
2. GND: Charger Negative Input - — 2
3. GND: Lithium Battery - — 3
4. BAT: Lithium Battery + — 4
5. GND: Output Negative Output - — 5
6. VOUT: Output Positive Output + — 6
7. KEY: Output Enable Trigger Port (Low Pulse Trigger)



WIRING DIAGRAM


1. Integrated charging and discharging

POWER TIPS

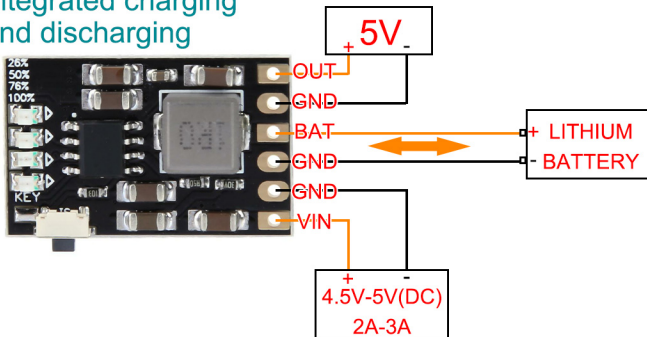



2. Discharge only

POWER TIPS

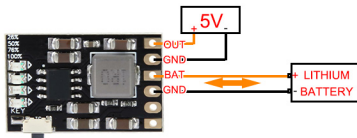

3. Charging only

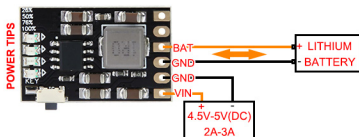

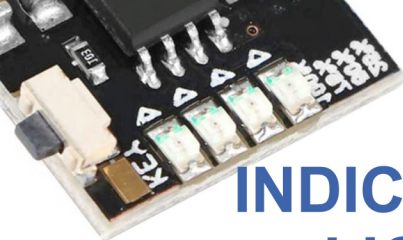

INDICATOR LIGHT


THE DISCHARGE

Electricity C(%)	D1	D2	D3	D4
$C \geq 75\%$	light up	light up	light up	light up
$50\% \leq C < 75\%$	light up	light up	light up	lights off
$25\% \leq C < 50\%$	light up	light up	lights off	lights off
$3\% \leq C < 36\%$	light up	lights off	lights off	lights off
$0\% < C < 3\%$	1.5Hz flickering	lights off	lights off	lights off

CHARGE

Electricity C(%)	D1	D2	D3	D4
full charge	light up	light up	light up	light up
$75\% \leq C$	light up	light up	light up	1.5Hz flickering
$50\% \leq C < 75\%$	light up	light up	1.5Hz flickering	lights off
$25\% \leq C < 50\%$	light up	1.5Hz flickering	lights off	lights off
$C < 25\%$	1.5Hz flickering	lights off	lights off	lights off

SIZE

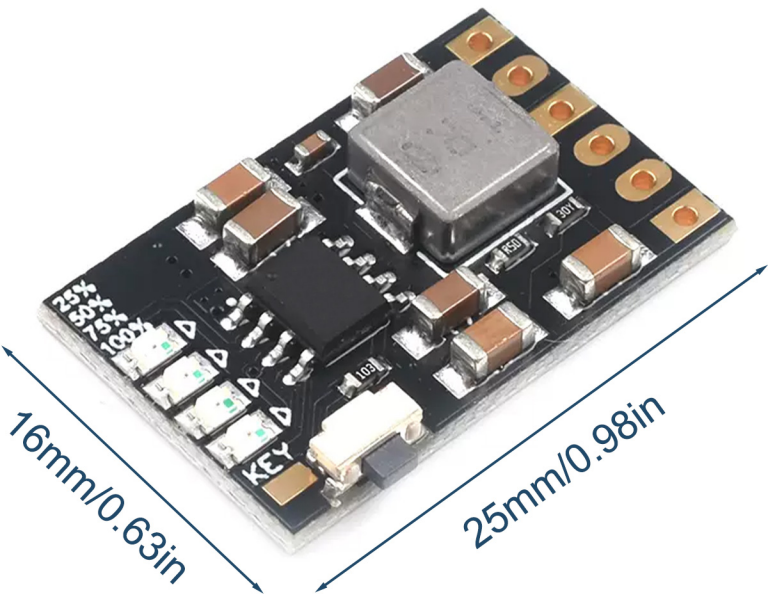

APPLICATION



Car charging transformation, driving recorder power supply, mobile power supply/charging treasure, mobile phone, tablet computer and other portable devices.