WARNING NAMEPLATE DETAIL

S–L CONTROLS, DWG D32384–01
VOLTAGE: 480VAC, 60HZ, THREE PHASE
AMPS: 17

MAXIMUM PUMP HORSEPOWER: 10

SHORT CIRCUIT CURRENT: 5kA SYMMETRICAL, 480V MAXIMUM

ENCLOSURE RATING: UL TYPE 4X

CAUTION: MULTIPLE POWER SOURCES ARE PROVIDED FROM FIELD TERMINALS. EACH SOURCE SHOULD BE DISCONNECTED FOR SERVICING.

WARNING: TO MAINTAIN OVERCURRENT, SHORT CIRCUIT, AND GROUND FAULT PROTECTION, THE MANUFACTURER'S INSTRUCTIONS FOR SELECTING CURRENT ELEMENTS MUST BE FOLLOWED

NAMEPLATES SIZED AS REQUIRED


NAME PLATE LEGEND TABLE

ITEM	QTY	DESCRIPTION
1	2	SPMP–(01,02) / RVSS PANEL
2	2	HAND / OFF / AUTO
3	2	PUMP / RUNNING
4	2	PUMP / STOPPED
5	2	PUMP / FAULT
6	2	HIGH / TEMP
7	2	FAULT / RESET
8	2	SEAL / LEAK
9	2	ELAPSED TIME METER
10	2	FU0315, FU0315A: MERSEN ATQR8/10 0.8A FU0315B: MERSEN ATMR2 2A
11	2	FU0404: MERSEN MI5HF25V0.1/100 0.1A
12	2	FU0304,FU0304A,FU0305,FU0305A: MERSEN ATMR1/2 0.5A


NOTES:
ALL PLATES SHALL BE ENGRAVED ON WHITE BACKGROUND WITH BLACK CHARACTERS. LETTER HEIGHT SHOULD BE MINIMUM 1/4"

WIRING:
1) □ – INDICATES CABINET TERMINAL BLOCK
2) DASHED LINES INDICATE WIRING REMOTE TO CONTROL PANEL.
3) PROVIDE 20% SPARE TERMINALS
4) UL APPROVED NO. TO BE PROVIDED AT TIME OF MANUFACTURING
5) ELECTRICAL CONNECTION TORQUES:
   TERMINAL: 12 INCH POUNDS
   CIRCUIT BREAKER: 45 INCH POUNDS

DRAWING IS TYP. FOR SPMP–01 AND SPMP–02 RVSS PANELS

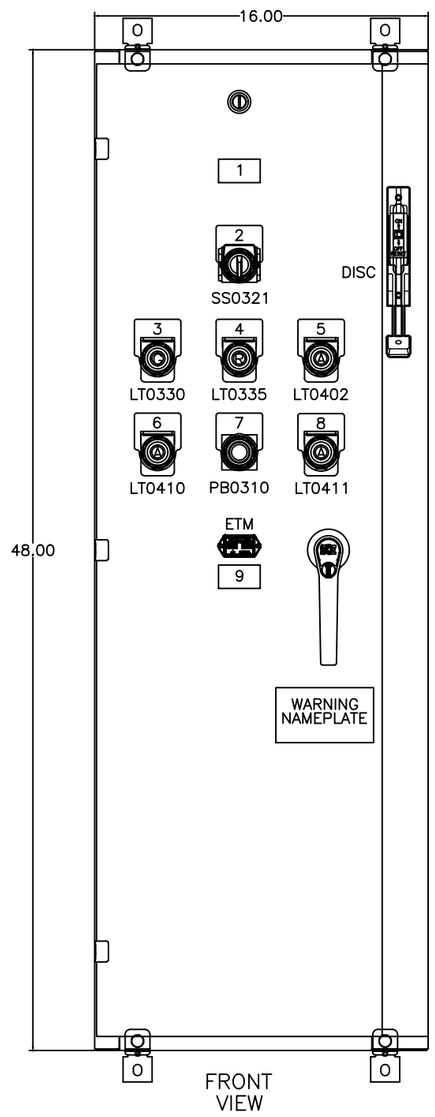

FRONT VIEW

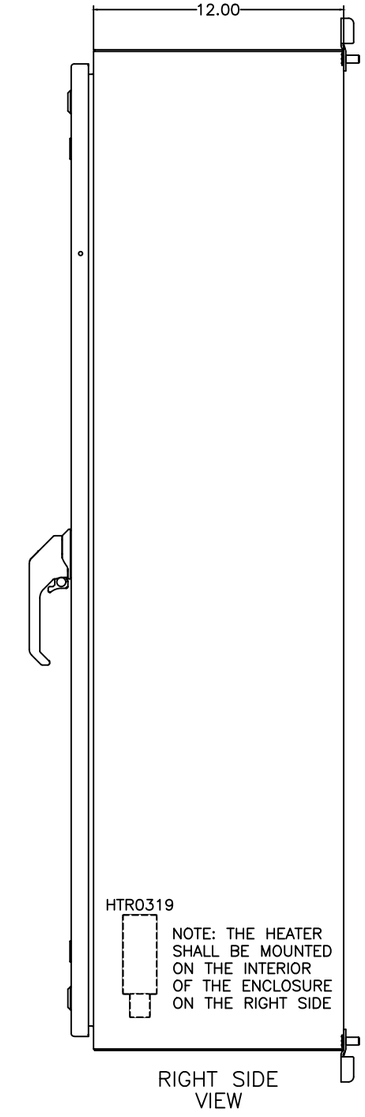

RIGHT SIDE VIEW

PANEL WIRING

AREA	VOLTAGE	NOUN NAME	ID	GAGE	COLOR	TYPE
POWER	480VAC 3PH	A PHASE	(L1), (1L1), (H1)	12	BROWN	MTW
POWER	480VAC 3PH	B PHASE	(L2), (1L2), (H2)	12	ORANGE	MTW
POWER	480VAC 3PH	C PHASE	(L3), (1L3)	12	YELLOW	MTW
INTERNAL	120VAC	HOT	(1), (1A), (X1)	14	BLACK	MTW
INTERNAL	120VAC	NEUTRAL	(N)	14	WHITE	MTW
CONTROL	120VAC	HOT	VARIOUS	16	RED	MTW
CONTROL	120VAC	NEUTRAL	N	16	WHITE	MTW


TOLERANCES
DECIMAL
FRACTIONAL
ANGULAR

REVISIONS		
NO.	DATE	BY
1		
2		
3		
4		
5		
6		

POMONKEY PUMP STATION IMPROVEMENTS
SPMP–01/02 RVSS PANEL EXTERNAL LAYOUT

S-L CONTROLS

DRAWN BY ZBB	SCALE NONE	MATERIAL
CHK'D MN	DATE 10–15–2026	DRAWING NUMBER D32384–01
TRACED	APP'D	

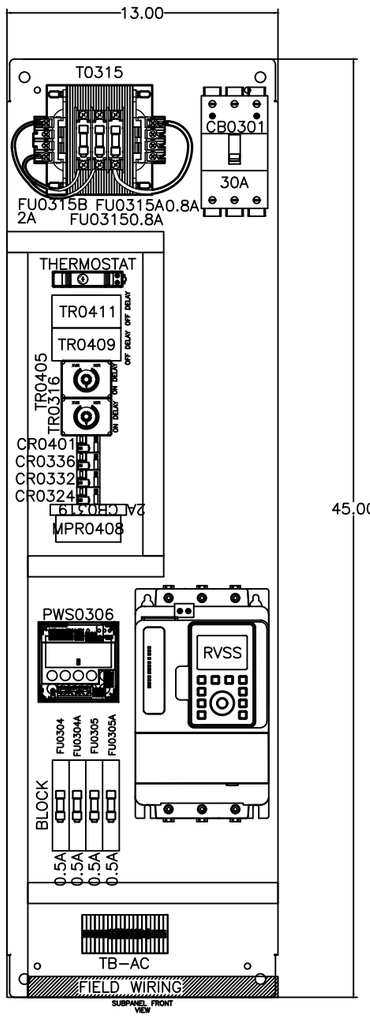

TAGS	QTY	CATALOG	DESCRIPTION	MANUFACTURER
ENC	1	SCE–48XEL1612SSLP	WALL MOUNT ENCLOSURE – NEMA 4X	SCE
ENC	1	SCE–48P16	ENCLOSURE BACKPANEL	SCE
ENC	1	SCE–ELMFK4SS6–OS	STAINLESS STEEL WALL MOUNT FOOT KIT	SCE
DISC	1	9422A2	FLANGE MOUNTED DISCONNECT HANDLE – NEMA 4X	SQUARE D
DISC	1	9422CSB30	CABLE OPERATED DISCONNECT MECHANISM	SQUARE D
ETM	1	722–0001	ELAPSED TIME METER	TRUMETER
ETM	1	5003–010	GASKET, RECTANGULAR, 2–HOLE	TRUMETER
LT0330	1	9001SKT38LGG31	PTT LIGHT, 120VAC LED, GREEN	SCHNEIDER ELECTRIC
LT0335	1	9001SKT38LRR31	PTT LIGHT, 120VAC LED, RED	SCHNEIDER ELECTRIC
LT0402, LT0410, LT0411	3	9001SKT38LYA31	PTT LIGHT, 120VAC LED, AMBER	SCHNEIDER ELECTRIC
PB0310	1	9001SKR1B	PUSHBUTTON, BLACK	SCHNEIDER ELECTRIC
PB0310	1	9001KA2	1 NO CONTACT	SCHNEIDER ELECTRIC
PB0310	2	9001KA3	1 NC CONTACT	SCHNEIDER ELECTRIC
SS0321	1	9001SKS43BH2	3 POSITION SWITCH, BLACK	SCHNEIDER ELECTRIC
T0315	1	9070TF150D1	CPT–480/120V, 150VA	SQUARE D
CB0301	1	BDL36030	MAIN CIRCUIT BREAKER, 30A	SQUARE D
CB0319	1	9926251002	CIRCUIT BREAKER, 120VAC, 2A	WEIDMULLER
CR0324, CR0332, CR0336, CR0401	4	RXM2AB2F7	MINIATURE RELAY, 120VAC, 8 BLADE	SCHNEIDER ELECTRIC
CR0324, CR0332, CR0336, CR0401	4	RXZE2M114	RELAY SOCKET, 120VAC, 8 BLADE, DIN	SCHNEIDER ELECTRIC
FU0315B	1	ATMR2	FUSE, FAST ACTING, 2A	MERSEN
FU0315, FU0315A	2	ATQR8/10	FUSE, TIME DELAY, 0.8A	MERSEN
FU0304, FU0304A, FU0305, FU0305A	4	ATMR1/2	FUSE, FAST ACTING, 0.5A	MERSEN
FU0408	1	GGM6/10	FAST BLOW FUSE, 0.6A	MERSEN
FU0408	1	3046100	FUSE TERMINAL BLOCK, 120VAC	PHOENIX CONTACT
BLOCK	1	30324R	CLASS CC FUSE BLOCK, 4 POLES	MERSEN
RVSS	1	ATS490D17Y	REDUCED VOLTAGE SOFT STARTER	SCHNEIDER ELECTRIC
PWS0306	1	48250501	MODBUS POWER METER	SOCOMEC
PWS0306	1	48290230	DIN RAIL MOUNTING KIT	SOCOMEC
PWS0306	3	48290555	SPLIT CORE TR–10 SENSOR, 25–63A	SOCOMEC
PWS0306	1	48290584	RJ12 CONNECTION CABLE, 3 COUNT	SOCOMEC
TR0316, TR0405	2	9050JCK13V20	TIMING RELAY, 0–60 SEC, 120VAC, 8 PIN OCTAL, DPDT	SQUARE D
TR0316, TR0405	2	8501NR51	RELAY SOCKET, 120VAC, 8 PIN OCTAL, DIN	SQUARE D
TR0409, TR0411	2	RPM32F7	RELAY, 120VAC, 11 BLADE, SP3T	SQUARE D
TR0409, TR0411	2	RPZF3	RELAY SOCKET, 120VAC, 11 BLADE, DIN	SQUARE D
TR0409, TR0411	2	RUW101MW	MULTIFUNCTION TIMING RELAY MODULE	SQUARE D
MPR0408	1	14–407129	PUMP MONITORING RELAY	FLYGT
HTR0319	1	SCE–TSH50	ENCLOSURE HEATER	SCE
THERMOSTAT	1	7T.81.0.000.2403	ENCLOSURE HEATER THERMOSTAT, NC	FINDER
TB–AC	20	3044076	UNIVERSAL TERMINAL BLOCK – UT 2,5	PHOENIX CONTACT
TB–AC	A/R	D–UT 2,5 / 10	TERMINAL END BARRIER	PHOENIX CONTACT
TB–AC	A/R	UT 2,5–PE	GROUNDING TERMINAL BLOCK	PHOENIX CONTACT
TB–AC	A/R	E/NS 35 N	TERMINAL ANCHOR	PHOENIX CONTACT

TOLERANCES	REVISIONS		
	NO.	DATE	BY
DECIMAL	1		
	2		
FRACTIONAL	3		
	4		
ANGULAR	5		
	6		

POMONKEY PUMP STATION IMPROVEMENTS
SPMP–01/02 RVSS PANEL INTERNAL LAYOUT

S+I CONTROLS

DRAWN BY ZBB	SCALE NONE	MATERIAL
CH'K'D MN	DATE 10–15–2026	DRAWING NUMBER D32384–02
TRACED	APP'D	

480VAC, 3 PHASE
FROM PANELBOARD H

CB0301
30A
L1
L2
L3
1/L1
3/L2
5/L3
RVSS
N
to 0304
GND
0318 0318
from 0318
A1
1 1
from 0336
R1A
R2A
1 1
from 0330
R3A
0309B
CR0324
11 12
0324
PUMP START
RELAY
STOP
0309A
CR0324 0310
41 44
0324
PUMP START
RELAY
RUN
FAULT RESET
PUSHBUTTON
PB0310
0404,0408
0311
DI3
DI4
+24V
1L1
1L2
1L3
2/T1
4/T2
6/T3
12HP
MTR0302
SEWAGE PUMP
16.0 FLA
1L1 1L2 1L3
to 0311 to 0312 to 0313
N
from 0304
FU0304
0.5A
0304
FU0304A
0.5A
0304A
FU0305
0.5A
0305
FU0305A
0.5A
0305A
N N
A2
from 0318
0336 0336
R1C
from 0336
R2C
0330 0330
R3C
from 0330
V1 V2 V3 VN
PWS0306
0307
V1
SUPPLY
SOCOMEC DIRIS A-40 POWER METER
0308
VN
SUPPLY
L
N
1L1 1L1
from 0301
I01
1L2 1L2
from 0301
I02
1L3 1L3
from 0301
I03
POWER
CONSUMPTION
PULSED OUTPUT
11 13
0313 0313A
TBD TBD
POWER CONSUMPTION
PULSED OUTPUT (KW)
TO PLC/RTU CONTROL PANEL
TBD
FU0315
0.5A
H1
TO315
H2
FU0315A
0.5A
FU0315B
2A
X1
X1 X2
480/120VAC
150VA
N
1A
TR0316
2 7
ON DELAY
POWER ON RELAY
ON DELAY, 0-60 SECONDS
SETTING: 15 SECONDS (PUMP 1), 30 SECONDS (PUMP 2)
NO 0317
NC
TR0316
0316
POWER ON RELAY
ON DELAY, 0-60 SECONDS
SETTING: 15 SECONDS (PUMP 1), 30 SECONDS (PUMP 2)
0318 0318
to 0305
N
to 0305
CB0319
2A
0319
THERMOSTAT
0319A
HTR0319
50W
to 0320
0318
to 0320
N
1
from 0319
N
from 0319
SS0321
OFF
HAND AUTO
1 2
00X
3 4
0321
0321 TBD CRLL1
TB-AC
0322
0322 TBD
0322 TBD MIR-01
0323
0323 TBD
CR0401 0324
41 42
0401
PUMP FAULT
RELAY
CR0324
A1 A2
PUMP START
RELAY
NO 0310
NC 0309
0321 TBD
0321 TBD
0327A TBD CRS1
0327A
0327A TBD MON-01
TB-AC
0328C
0328C TBD
TB-AC
0328B
0328B TBD
1
to 0308
0330
to 0308
0330
LT0330
L1 L2
C
PUMP RUNNING
LIGHT
ETM
ELAPSED TIME
METER
CR0332
A1 A2
PUMP RUNNING
RELAY
NO 0334
NC 0335
0333A
0333A TBD
TB-AC
CR0332
11 14
0332
PUMP RUNNING
RELAY
0334A
0334A TBD
CR0332
41 42
0332
PUMP RUNNING
RELAY
0335
LT0335
L1 L2
C
PUMP STOPPED
LIGHT
1
to 0306
0336
to 0306
0336
CR0336
A1 A2
RVSS PUMP FAULT
RELAY
NO 0338,0439
NC
0337A
0337A TBD
TB-AC
CR0336
11 14
0336
RVSS PUMP FAULT
RELAY
0338A
0338A TBD
to 0439
1
to 0439
N

LOW LOW LEVEL INTERLOCK
FROM SECONDARY CONTROL PANEL
TBD

BYPASS RUN STATUS SIGNAL
FROM PLC/RTU CONTROL PANEL
TBD

PUMP 1
SECONDARY RUN COMMAND
FROM SECONDARY CONTROL PANEL
TBD

SEWAGE PUMP
RUN COMMAND
FROM PLC/RTU CONTROL PANEL
TBD

SEWAGE PUMP
IN AUTO MODE
TO PLC/RTU CONTROL PANEL
TBD

SEWAGE PUMP
RUNNING SIGNAL
TO PLC/RTU CONTROL PANEL
TBD


SEWAGE PUMP
FAULT SIGNAL
TO PLC/RTU CONTROL PANEL
TBD

TOLERANCES	REVISIONS		
	NO.	DATE	BY
DECIMAL	1		
	2		
FRACTIONAL	3		
	4		
ANGULAR	5		
	6		

POMONKEY PUMP STATION IMPROVEMENTS
SPMP-01/02 RVSS PANEL 480/120VAC WIRING DIAGRAM

S4 CONTROLS

DRAWN BY ZBB	SCALE NONE	MATERIAL
CHK'D MN	DATE 10-15-2026	DRAWING NUMBER D32384-03
TRACED	APP'D	

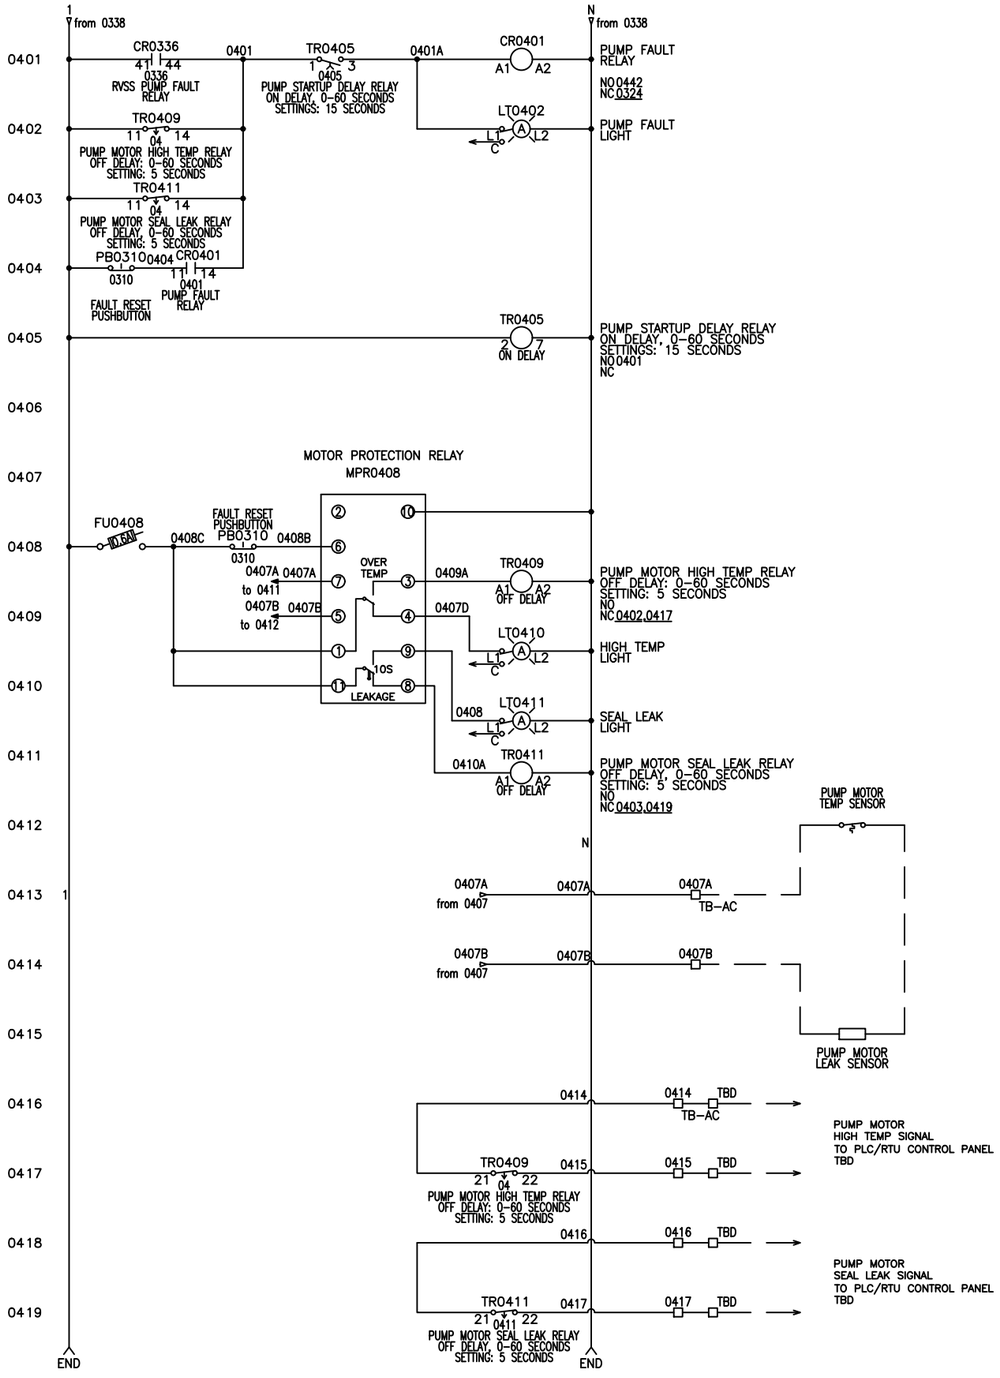

TOLERANCES	REVISIONS			POMONKEY PUMP STATION IMPROVEMENTS	
	NO.	DATE	BY	SPMP-01/02 RVSS PANEL 120VAC WIRING DIAGRAM	
DECIMAL	1			S-1 CONTROLS	
	2				
FRACTIONAL	3			DRAWN BY ZBB	SCALE NONE
	4			CH'K'D MN	DATE 10-15-2026
ANGULAR	5			TRACED	APP'D
	6			MATERIAL	DRAWING NUMBER D32384-04