



Upgrading the ZeroNoise Fury to a new firmware version




Scan for full product
instructions

Short guide for firmware update

- When a new firmware is released for bug fixing and general improvements of the product, this simple procedure can be followed to upgrade the Fury
- What you will need to perform the required steps:
 - A PC and a USB-A to USB-C cable

Intercom Unit

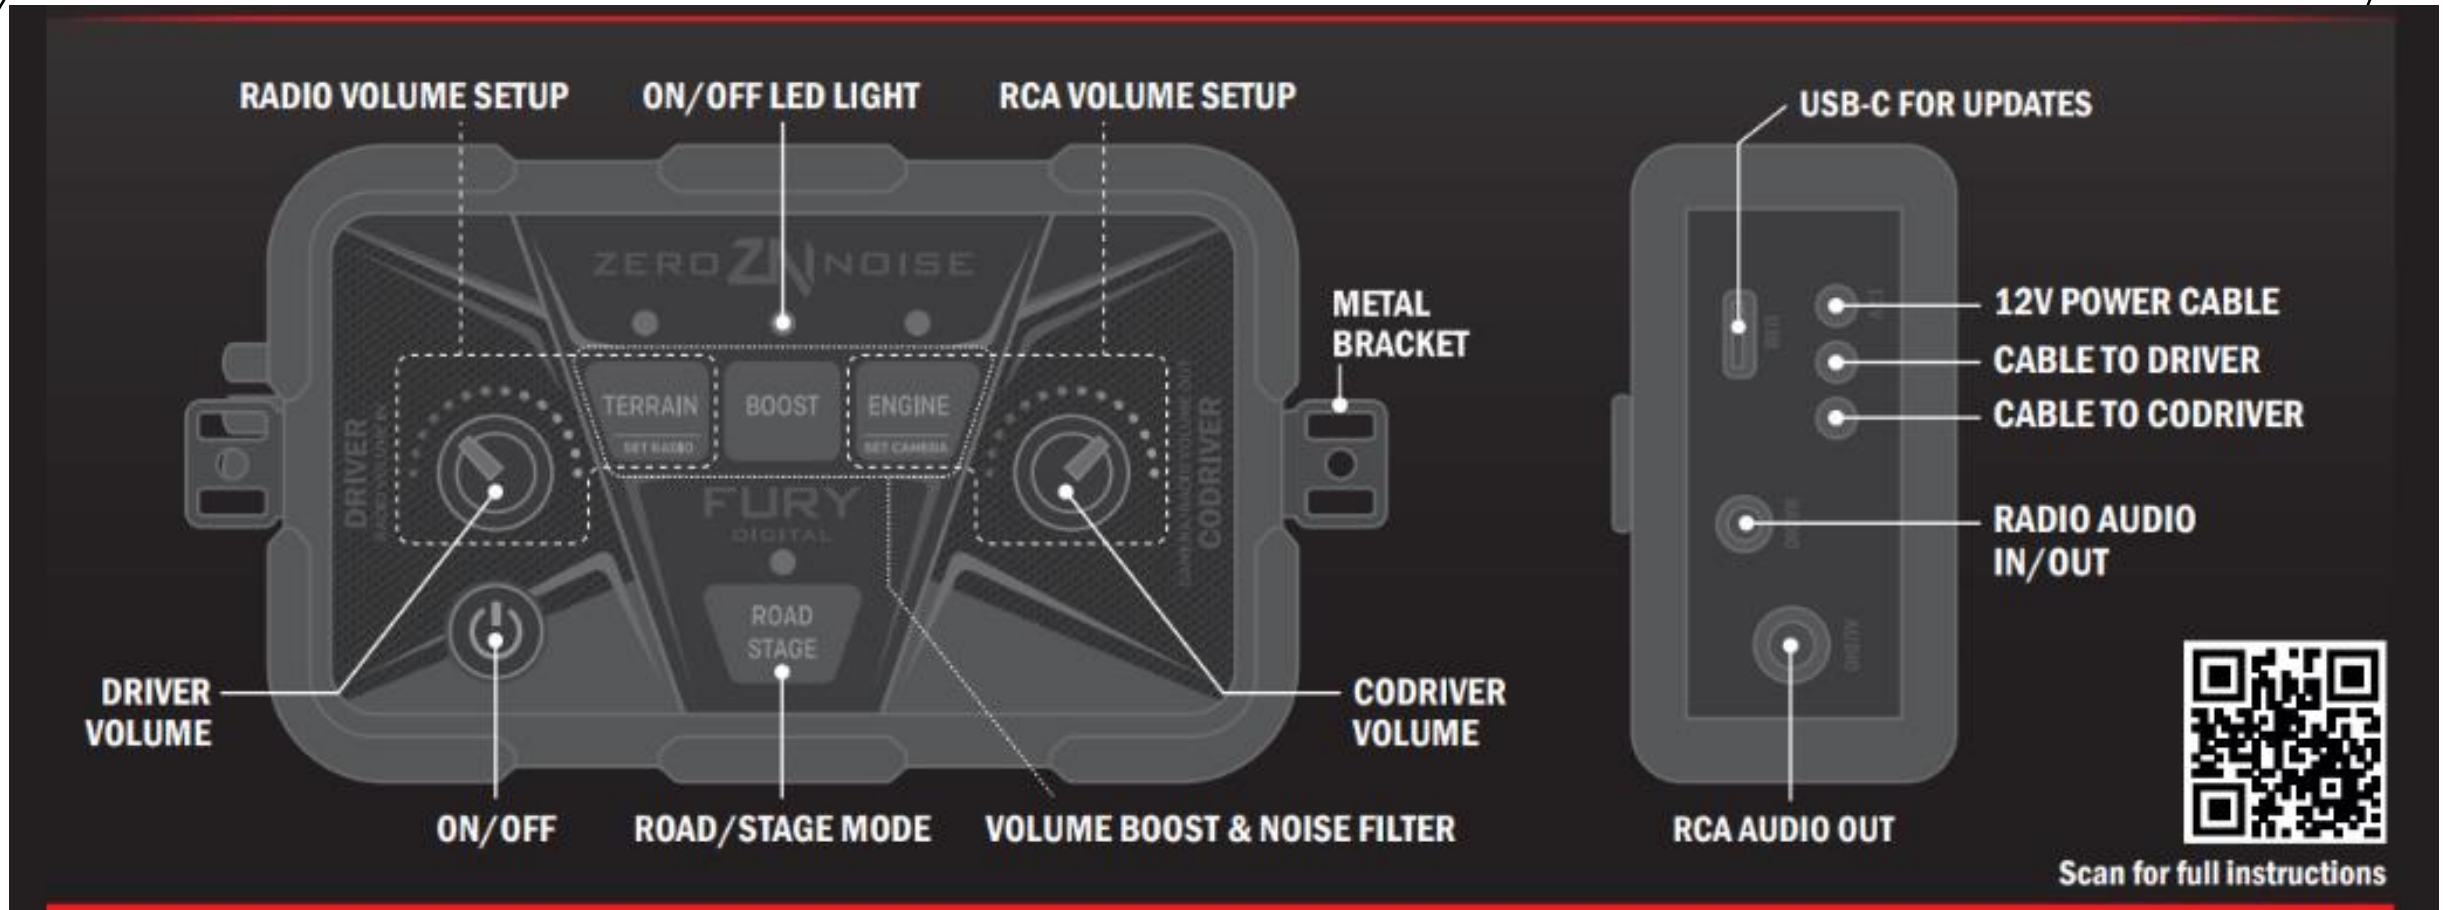

Intercom Unit

- Connect the unit to your computer using the USB-C port on the left side of the intercom
- Turn on the unit
- Quickly press 5 times the ON/OFF button positioned on the bottom left front part of the unit, all LEDs will turn off

Intercom Unit

- Your computer should now recognize the intercom as an external memory device named RPI-RP2
- Now you can simply copy and paste (or drag and drop) the firmware file into the RPI-RP2 device
 - ***Firmware file for intercom:*** FURY_v4.0.1_RELEASE.uf2
- After the firmware upload is successful, you can disconnect the intercom from the computer and reboot it