

1. Description


1.1. Project

Project Name	STM32F103C8x
Board Name	STM32F103C8x
Generated with:	STM32CubeMX 4.26.0
Date	07/18/2018

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

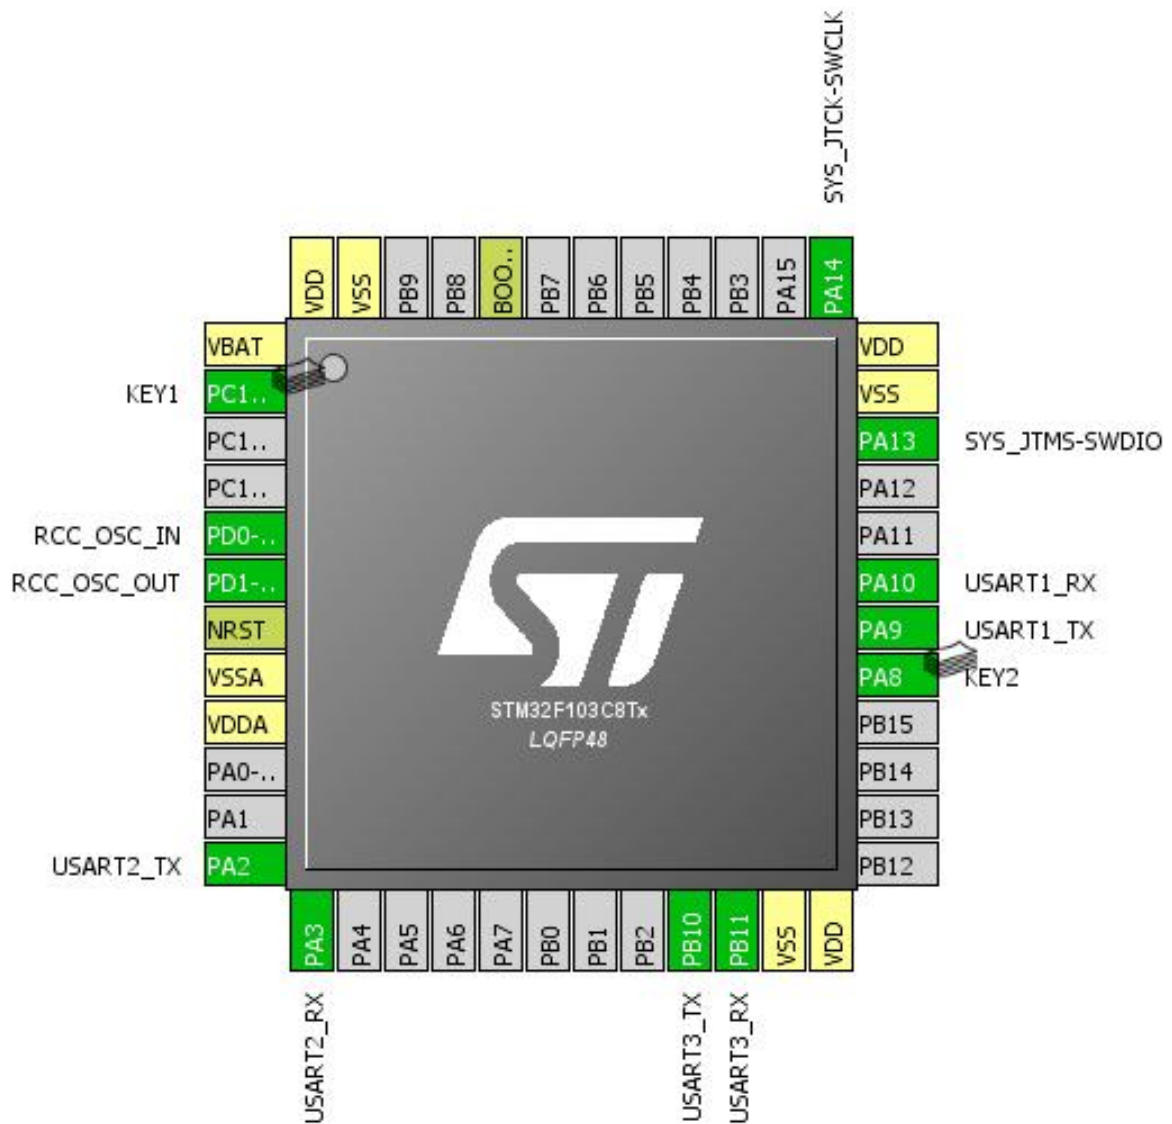

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Input	KEY1
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
12	PA2	I/O	USART2_TX	
13	PA3	I/O	USART2_RX	
21	PB10	I/O	USART3_TX	
22	PB11	I/O	USART3_RX	
23	VSS	Power		
24	VDD	Power		
29	PA8 *	I/O	GPIO_Input	KEY2
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.2. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.3. TIM2

Clock Source : Internal Clock

5.3.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	7200-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	10-1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

5.4. USART1

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.5. USART2

Mode: Asynchronous

5.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.6. USART3

Mode: Asynchronous

5.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
----------------	----------------------

Over Sampling

16 Samples

5.7. FATFS

mode: User-defined

5.7.1. Set Defines:

Version:

FATFS version R0.11

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Multilingual Latin 1 (OEM)
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
NORTC_YEAR (Year for timestamp)	2015
NORTC_MON (Month for timestamp)	6
NORTC_MDAY (Day for timestamp)	4
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000

SYNC_t (O/S sync object)	osSemaphoreId
FS_LOCK (Number of files opened simultaneously)	2

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	High *	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	n/a	
USART3	PB10	USART3_TX	Alternate Function Push Pull	n/a	High *	
	PB11	USART3_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PC13-TAMPER-RTC	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	KEY1
	PA8	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	KEY2

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
TIM2 global interrupt	true	1	0
USART2 global interrupt	true	0	0
USART3 global interrupt	true	2	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART1 global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	STM32F103C8x
Project Folder	C:\Users\PC\Desktop\MCU_STM32F103C8x_source
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

9. Software Pack Report