

This document provides additional assistance with wiring your Extron IP Link Pro Control Processor to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific IP Link Pro Control Processor or the documentation supplied by the manufacturer of the controlled device.

For more information on using Global Scriptor Modules, refer to the "[Guide to Using Scriptor Modules](#)" document.

Device Specifications

Device Type: Matrix Switcher
Manufacturer: Extron
Firmware Version: 2.01.0003-b003
Model(s): DTP CrossPoint 108 4K, DTP CrossPoint 108 4K IPCP SA,
DTP CrossPoint 108 4K IPCP MA 70, DTP CrossPoint 86 4K,
DTP CrossPoint 86 4K IPCP SA, DTP CrossPoint 86 4K IPCP MA 70

Tested on the Following Software and Firmware Versions

IP Link Pro Control Processor Firmware	Global Scriptor Version
3.12.0000-b001	2.8.0

Version History

Module Version	Date	Notes
1_10_0_0	3/1/2021	Extron Certified. DTP CrossPoint 108 4K. Added commands: <ul style="list-style-type: none">MatrixINameCommandMatrixINameStatusOutputTieStatusNameRefreshMatrixINames Updated Ethernet communication to support SSH.
1_9_5_1	8/14/2019	Fixed Verbose 3 mode setting issues.
1_9_5_0	4/08/2019	Fixed Test Pattern command and pin diagram.
1_8_4_1	3/28/2018	Fixed status for RefreshMatrix command.

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

1_8_4_0	2/16/2018	Renamed InputSignalStatus states to 'Active' and 'Not Active'.
1_8_0_0	12/21/2017	Added Global Video Mute, HDCPInputStatus and RefreshMatrix. Renamed InputSignal to InputSignalStatus, GlobalPresetRecall to PresetRecall, HDCPAuthorization to HDCPInputAuthorization, OutputHDCPAuthorization to HDCPOutputAuthorization, and OutputHDCPStatus to HDCPOutputStatus. Updated InputTieStatus and OutputTieStatus
1_7_0_2	12/11/2017	Fixed OutputTieStatus and InputTieStatus argument error.
1_7_0_1	11/20/2017	Fixed issues with the function call OutputTieStatus and InputTieStatus.
1_7_0_0	11/20/2017	Added DSP Configurator Labels. Renamed DTP Crosspoint models to DTP CrossPoint. Updated command names to match the DSP Configurator for the following commands: AmpOutput1Attenuation, AmpOutput1Mute, AnalogOutputAttenuation, AnalogOutputMute, DTPOutputAttenuation, DTPOutputMute, HDMIOutputLevel, HDMIOutputMute, InputSignalStatus, InputHDCPAuthorization, MixPointGain, and MixPointMute. Updated command qualifiers for commands: OutputAudioSelect, MixpointGain, and InputAudioSwitchMode. Added commands: AmplifierPostmixerTrim, ExpansionGain, ExpansionMute, OutputPostmixerTrim, PrematrixTrim, InputGain, InputMute, Temperature, and PhantomPower.
1_6_0_1	10/27/2017	Added Update functionality to OutputTieStatus and InputTiesStatus.
1_6_0_0	9/7/2017	Renamed commands to match software: AmpOutput1LevelSA to AmpOutput1AttenuationSA, AmpOutput1LevelMA to AmpOutput1AttenuationMA, AnalogOutputLevel to AnalogOutputAttenuation, DTPOutputLevel to DTPOutputAttenuation, PreMixerGain to MicPreMixerGain, PreMixMute to MicPreMixerMute, PostMatrixLevel to PostMatrixGain. Renamed Input and Output qualifier states for commands MixPointGain and MixPointMute.
1_5_0_0	8/16/2017	Fixed OutputAudioSelect command.
1_3_1_0	10/28/2016	Added EDID Assignment, Input Format, and Output HDCP Status. Fixed GroupMute, LogoAvailability and LogoKeySetting status. Fixed states of Output Resolution.
1_1_1_0	8/9/2016	Added Microphone Signal Status and updated module.
1_1_0_1	2/26/2016	Fixed update issue.

Global Scripter Module Communication Sheet

1_1_0_0	2/11/2016	Initial Version.
---------	-----------	------------------

Module Notes

- Unidirectional variable must be set to 'True' if status is not required. Default value is 'False'.
Example: `InterfaceName.Unidirectional = 'True'`
- connectionCounter variable must be set to the number of queries that will be sent to the device before displaying 'Disconnected' if no response is received. Default value is 15.
Example: `InterfaceName.connectionCounter = 5`
- If login credentials are required, devicePassword and deviceUsername must be set accordingly.
deviceUsername default value is admin respectively.
Example: `InterfaceName.deviceUsername = 'extron'`

Supported Classes and Examples

SerialClass

```
InterfaceName = ModuleName.SerialClass(ProcessorName, 'COM1', Model='DTP CrossPoint 108 4K')
```

SerialOverEthernetClass

```
InterfaceName = ModuleName.SerialOverEthernetClass('192.168.254.254', 2001, Model='DTP  
CrossPoint 108 4K')
```

SSHClass


#Password Required

```
InterfaceName = ModuleName.SSHClass('192.168.254.254', 22023, Credentials=('admin', 'extron'),  
Model='DTP CrossPoint 108 4K')
```

#No Password Required

```
InterfaceName = ModuleName.SSHClass('192.168.254.254', 22023, Credentials=('admin', ''),  
Model='DTP CrossPoint 108 4K')
```

DTP CrossPoint 86 4K:

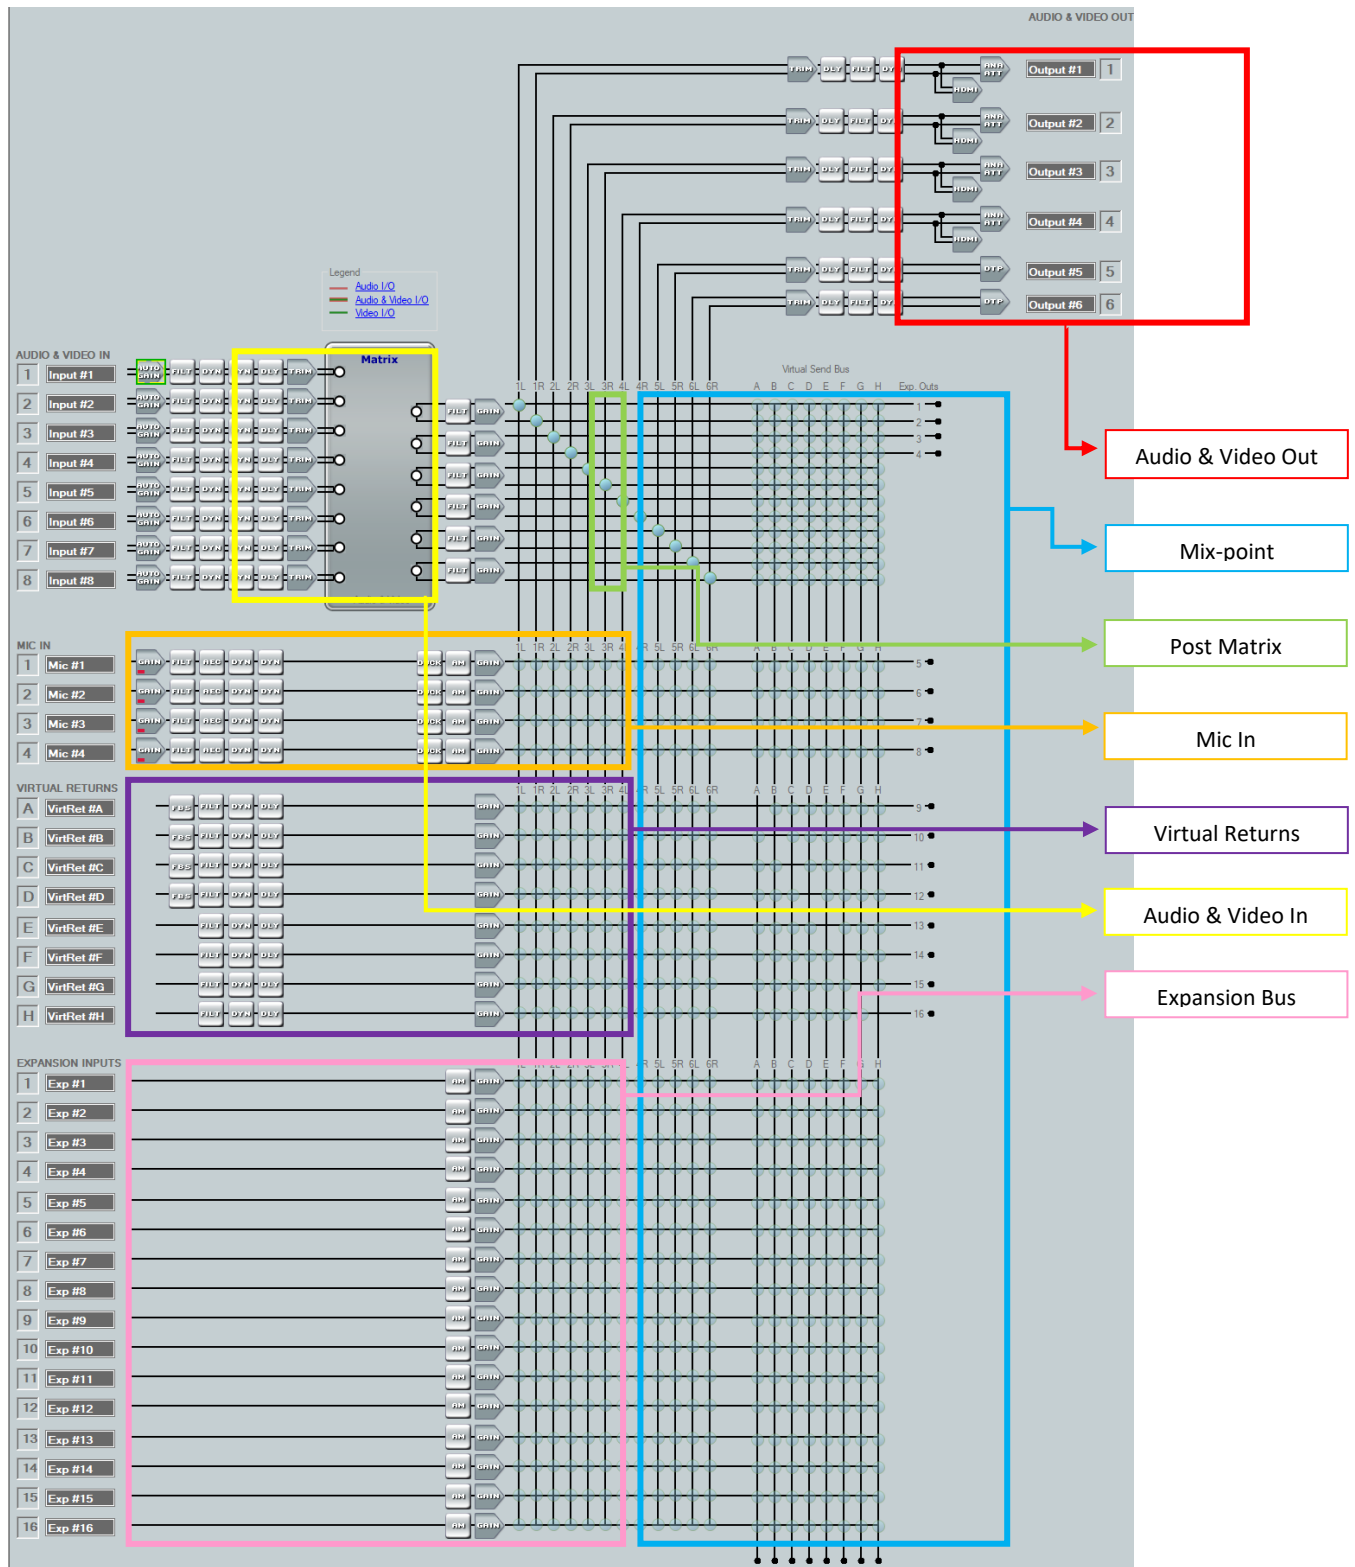


Extron DSP Configurator Labels:


- Audio & Video In

Global Scriptor Module Communication Sheet


Revision: 3/1/2021

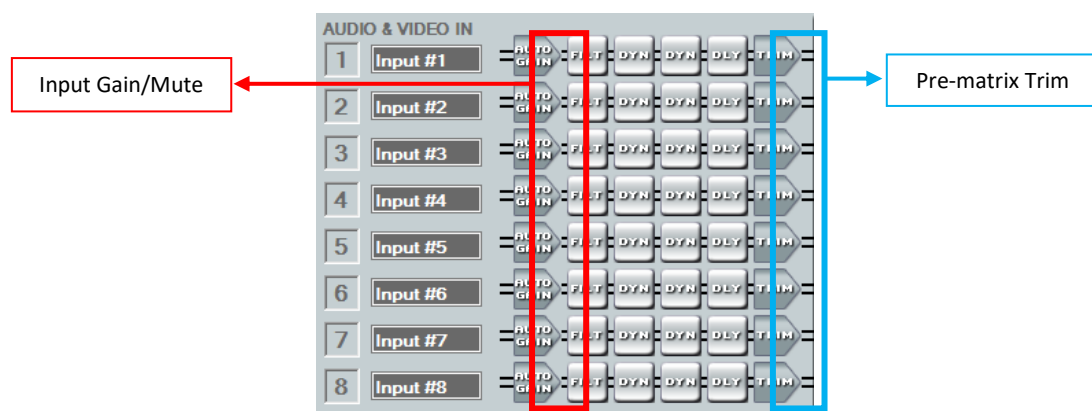


- Audio & Video Out

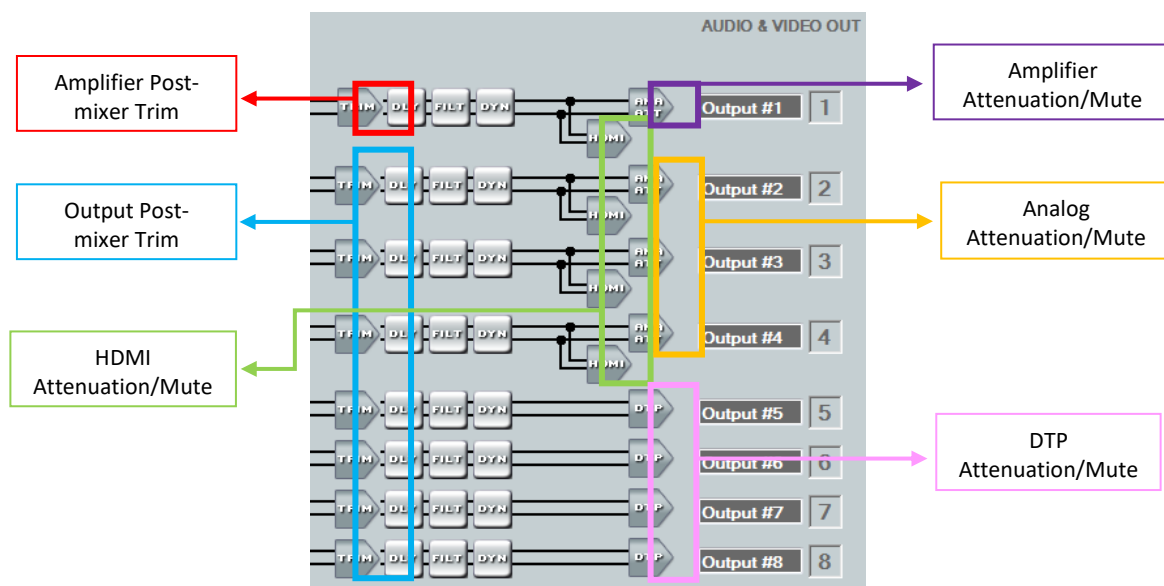


- Mix-point

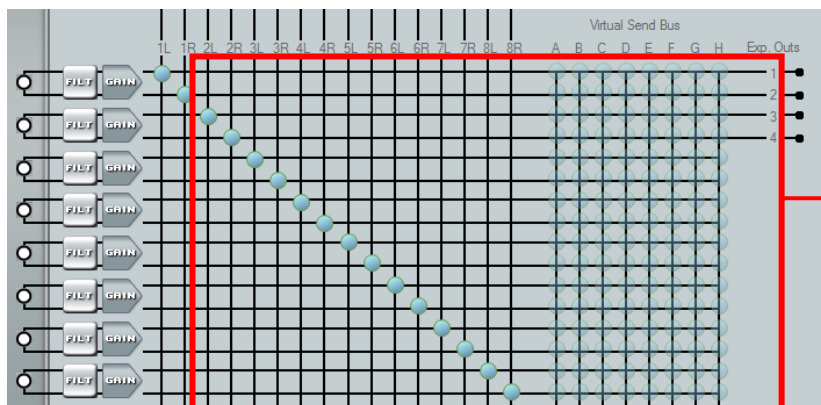


- Post Matrix

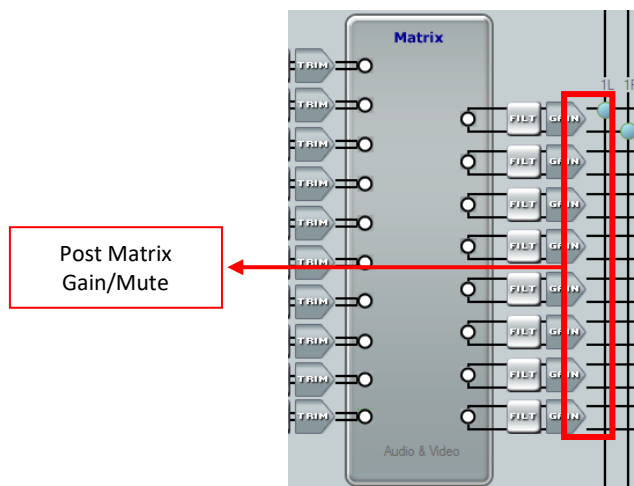


- Mic In

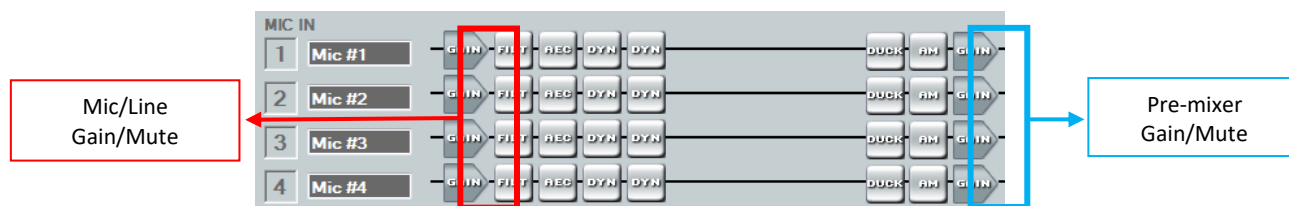

- Virtual Return Gain

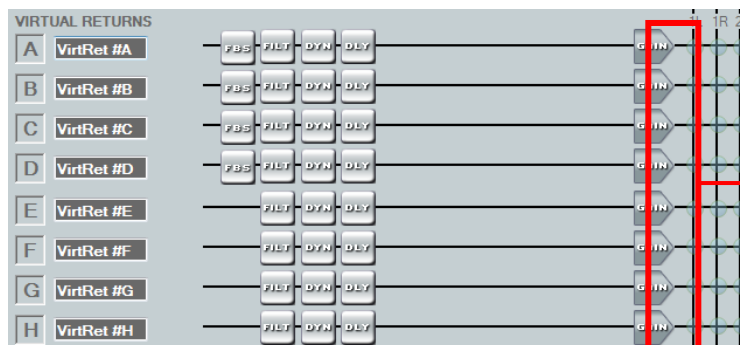

- Expansion Inputs

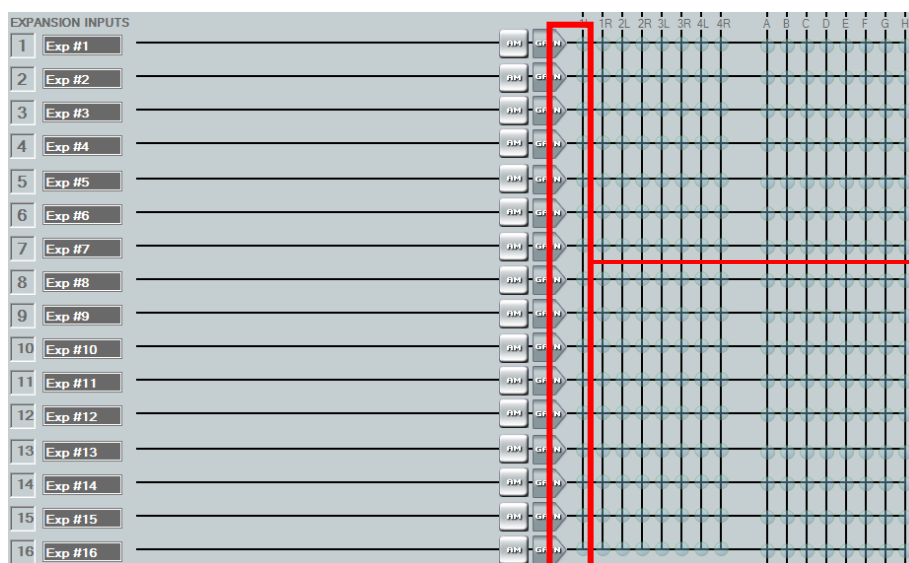

Matrix IO Name Commands:

- Matrix IO Name Command
 - Sets the name of an input/output.
 - The Type command parameter specifies either for Input or Output.
- Matrix IO Name Status
 - Displays the name of an input/output.
 - For the names to initially populate, use the “Refresh Matrix IO Names” command.
- Output Tie Status Name
 - Displays the input name of a matrix tie.
 - For the names to initially populate, use the “Refresh Matrix IO Names” command.
- Refresh Matrix IO Names
 - Updates the input/output names shown for “Matrix IO Name Status” and “Output Tie Status Name”.

Control Commands

Format with Qualifier:

```
InterfaceName.Set(Command, Value, {'Qualifier Key': 'Qualifier Value'})
```

Format without Qualifier:

```
InterfaceName.Set(Command, Value)
```

Command AmplifierAttenuationMA ¹	Value -100 to 0 in steps of 0.1	
# AmplifierAttenuationMA example InterfaceName.Set('AmplifierAttenuationMA', 0)		
Command AmplifierAttenuationSA ²	Value -100 to 0 in steps of 0.1	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierAttenuationSA example InterfaceName.Set('AmplifierAttenuationSA', 0, {'L/R': 'Left'})		
Command AmplifierMuteMA ¹	Value 'On'	Value 'Off'
# AmplifierMuteMA example InterfaceName.Set('AmplifierMuteMA', 'On')		
Command AmplifierMuteSA ²	Value 'On'	Value 'Off'
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierMuteSA example InterfaceName.Set('AmplifierMuteSA', 'On', {'L/R': 'Left'})		
Command AmplifierPostmixerTrim	Value -12 to 12 in steps of 0.1	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierPostmixerTrim example InterfaceName.Set('AmplifierPostmixerTrim', 12, {'L/R': 'Left'})		
Command AnalogAttenuation	Value -100 to 0 in steps of 0.1	
Qualifier Key 'Output'	Qualifier Value '1' – '4'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AnalogAttenuation example InterfaceName.Set('AnalogAttenuation', 0, {'Output': '1', 'L/R': 'Left'})		
Command AnalogMute	Value 'On'	Value 'Off'
Qualifier Key 'Output'	Qualifier Value '1' – '4'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'

# AnalogMute example InterfaceName.Set('AnalogMute', 'On', {'Output': '1', 'L/R': 'Left'})			
Command AspectRatio	Value 'Fill'	Value 'Follow'	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
# AspectRatio example InterfaceName.Set('AspectRatio', 'Fill', {'Input': '1'})			
Command AutoImage	Value None		
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# AutoImage example InterfaceName.Set('AutoImage', None, {'Output': '3'})			
Command DTPAttenuation	Value -100 to 0 in steps of 0.1		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
Qualifier Key 'Output' ⁵	Qualifier Value '5' – '8'	Qualifier Value '5' – '6'	
# DTPAttenuation example InterfaceName.Set('DTPAttenuation', 0, {'L/R': 'Left', 'Output': '5'})			
Command DTPMute	Value 'On'	Value 'Off'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
Qualifier Key 'Output' ⁵	Qualifier Value '5' – '8'	Qualifier Value '5' – '6'	
# DTPMute example InterfaceName.Set('DTPMute', 'On', {'L/R': 'Left', 'Output': '5'})			
Command ExecutiveMode	Value 'Mode 1'	Value 'Mode 2'	Value 'Off'
# ExecutiveMode example InterfaceName.Set('ExecutiveMode', 'Mode 1')			
Command ExpansionPremixerGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value '1' – '16'		
# ExpansionPremixerGain example InterfaceName.Set('ExpansionPremixerGain', 12, {'Input': '1'})			
Command ExpansionPremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '16'		
# ExpansionPremixerMute example InterfaceName.Set('ExpansionPremixerMute', 'On', {'Input': '1'})			
Command Freeze	Value 'On'	Value 'Off'	

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# Freeze example InterfaceName.Set('Freeze', 'On', {'Output': '3'})			
Command GlobalVideoMute	Value 'Video'	Value 'Video & Sync'	Value 'Off'
# GlobalVideoMute example InterfaceName.Set('GlobalVideoMute', 'Video')			
Command GroupMicLineInputGain	Value -18 to 80 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMicLineInputGain example InterfaceName.Set('GroupMicLineInputGain', 80, {'Group': '1'})			
Command GroupMixpoint	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMixpoint example InterfaceName.Set('GroupMixpoint', 12, {'Group': '1'})			
Command GroupMute	Value 'On'	Value 'Off'	
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMute example InterfaceName.Set('GroupMute', 'On', {'Group': '1'})			
Command GroupOutputAttenuation	Value -100 to 0 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupOutputAttenuation example InterfaceName.Set('GroupOutputAttenuation', 0, {'Group': '1'})			
Command GroupPostmixerTrim	Value -12 to 12 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupPostmixerTrim example InterfaceName.Set('GroupPostmixerTrim', 12, {'Group': '1'})			
Command GroupPrematrixTrim	Value -12 to 12 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupPrematrixTrim example InterfaceName.Set('GroupPrematrixTrim', 12, {'Group': '1'})			
Command GroupPremixerGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		

# GroupPremixerGain example InterfaceName.Set('GroupPremixerGain', 12, {'Group': '1'})			
Command HDCPInputAuthorization	Value 'On'	Value 'Off'	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
# HDCPInputAuthorization example InterfaceName.Set('HDCPInputAuthorization', 'On', {'Input': '1'})			
Command HDCPOutputAuthorization	Value 'On'	Value 'Auto'	
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8' '4A' ⁸ '5B'	Qualifier Value '3A' ⁸ '4B' ⁸ '6A'	Qualifier Value '3B' ⁸ '5A' '6B'
# HDCPOutputAuthorization example InterfaceName.Set('HDCPOutputAuthorization', 'On', {'Output': '1'})			
Command HDMIAttenuation	Value -100 to 0 in steps of 0.1		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# HDMIAttenuation example InterfaceName.Set('HDMIAttenuation', 0, {'Output': '1', 'L/R': 'Left'})			
Command HDMIMute	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# HDMIMute example InterfaceName.Set('HDMIMute', 'On', {'Output': '1', 'L/R': 'Left'})			
Command InputAudioSwitchMode	Value 'Auto'	Value 'Digital'	Value 'Analog'
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
# InputAudioSwitchMode example InterfaceName.Set('InputAudioSwitchMode', 'Auto', {'Input': '1'})			
Command InputGain	Value -18 to 24 in steps of 0.1		
Qualifier Key 'Format'	Qualifier Value 'Analog'	Qualifier Value 'Digital'	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# InputGain example			

Global Scripter Module
Communication Sheet

Revision: 3/1/2021

InterfaceName.Set('InputGain', 24, {'Format': 'Analog', 'Input': '1', 'L/R': 'Left'})			
Command InputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# InputMute example InterfaceName.Set('InputMute', 'On', {'Input': '1', 'L/R': 'Left'})			
Command Logo	Value '1'	Value '2'	Value '3'
	'4'	'5'	'6'
	'7'	'8'	'9'
	'10'	'11'	'12'
	'13'	'14'	'15'
	'16'	'Off'	
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# Logo example InterfaceName.Set('Logo', '1', {'Output': '3'})			
Command LogoAssignment	Value 'String'		
Qualifier Key 'Logo'	Qualifier Value '1' – '16'		
# LogoAssignment example InterfaceName.Set('LogoAssignment', 'String', {'Logo': '1'})			
Command LogoKeySetting	Value 'Disabled'	Value 'Transparency'	Value 'RGB Key'
	'Level Key'	'Alpha Key'	
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'		
# LogoKeySetting example InterfaceName.Set('LogoKeySetting', 'Disabled', {'Output': '1'})			
Command MatrixIONameCommand	Value None		
Qualifier Key 'Type'	Qualifier Value 'Input'	Qualifier Value 'Output'	
Qualifier Key Number'	Qualifier Value '1' – '10'		
Qualifier Key Name'	Qualifier Value 'String' (16 characters max)		
# MatrixIONameCommand example InterfaceName.Set('MatrixIONameCommand', None, {'Type': 'Input', 'Number': 'String', 'String': 'String'})			
Command MatrixTieCommand	Value None		
Qualifier Key	Qualifier Value		

Global Scripter Module Communication Sheet

Revision: 3/1/2021

'Input' ⁷	'0' – '10'		
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'	Qualifier Value 'All'	
Qualifier Key 'Tie Type'	Qualifier Value 'Audio'	Qualifier Value 'Audio/Video'	Qualifier Value 'Video'
# MatrixTieCommand example InterfaceName.Set('MatrixTieCommand', 'String', {'Input': '0', 'Output': '1', 'Tie Type': 'Audio'})			
Command MicLineGain	Value -18 to 80 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicLineGain example InterfaceName.Set('MicLineGain', 80, {'Input': '1'})			
Command MicLineMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicLineMute example InterfaceName.Set('MicLineMute', 'On', {'Input': '1'})			
Command MixpointGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value 'Output 1 Left'	Qualifier Value 'Output 1 Right'	Qualifier Value 'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Output 5 Left'
	'Output 5 Right'	'Output 6 Left'	'Output 6 Right'
	'Output 7 Left' ⁹	'Output 7 Right' ⁹	'Output 8 Left' ⁹
	'Output 8 Right' ⁹	'Mic 1'	'Mic 2'
	'Mic 3'	'Mic 4'	'V. Return A'
	'V. Return B'	'V. Return C'	'V. Return D'
	'V. Return E'	'V. Return F'	'V. Return G'
	'V. Return H'	'Exp. 1'	'Exp. 2'
	'Exp. 3'	'Exp. 4'	'Exp. 5'
	'Exp. 6' ⁹	'Exp. 7' ⁹	'Exp. 8' ⁹
	'Exp. 9' ⁹	'Exp. 10'	'Exp. 11'
	'Exp. 12'	'Exp. 13'	'Exp. 14'
	'Exp. 15'	'Exp. 16'	
Qualifier Key 'Output'	Qualifier Value 'Output 1 Left'	Qualifier Value 'Output 1 Right'	Qualifier Value 'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Output 5 Left'
	'Output 5 Right'	'Output 6 Left'	'Output 6 Right'
	'Output 7 Left' ⁹	'Output 7 Right' ⁹	'Output 8 Left' ⁹

Global Scripter Module Communication Sheet

Revision: 3/1/2021

	'Output 8 Right'	'V. Send A'	'V. Send B'
	'V. Send C'	'V. Send D'	'V. Send E'
	'V. Send F'	'V. Send G'	'V. Send H'
# MixpointGain example InterfaceName.Set('MixpointGain', 12, {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'})			
Command MixpointMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value 'Output 1 Left' 'Output 2 Right' 'Output 4 Left' 'Output 5 Right' 'Output 7 Left' ⁹ 'Output 8 Right' ⁹ 'Mic 3' 'V. Return B' 'V. Return E' 'V. Return H' 'Exp. 3' 'Exp. 6' ⁹ 'Exp. 9' ⁹ 'Exp. 12' 'Exp. 15'	Qualifier Value 'Output 1 Right' 'Output 3 Left' 'Output 4 Right' 'Output 6 Left' 'Output 7 Right' ⁹ 'Mic 1' 'Mic 4' 'V. Return C' 'V. Return F' 'Exp. 1' 'Exp. 4' 'Exp. 7' ⁹ 'Exp. 10' 'Exp. 13' 'Exp. 16'	Qualifier Value 'Output 2 Left' 'Output 3 Right' 'Output 5 Left' 'Output 6 Right' 'Output 8 Left' ⁹ 'Mic 2' 'V. Return A' 'V. Return D' 'V. Return G' 'Exp. 2' 'Exp. 5' 'Exp. 8' ⁹ 'Exp. 11' 'Exp. 14'
Qualifier Key 'Output'	Qualifier Value 'Output 1 Left' 'Output 2 Right' 'Output 4 Left' 'Output 5 Right' 'Output 7 Left' ⁹ 'Output 8 Right' 'V. Send C' 'V. Send F'	Qualifier Value 'Output 1 Right' 'Output 3 Left' 'Output 4 Right' 'Output 6 Left' 'Output 7 Right' ⁹ 'V. Send A' 'V. Send D' 'V. Send G'	Qualifier Value 'Output 2 Left' 'Output 3 Right' 'Output 5 Left' 'Output 6 Right' 'Output 8 Left' ⁹ 'V. Send B' 'V. Send E' 'V. Send H'
# MixpointMute example InterfaceName.Set('MixpointMute', 'On', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'})			
Command OutputAudioSelect	Value 'Original HDMI'	Value 'Embedded Audio'	Value 'No Audio'
Qualifier Key 'Output'⁶	Qualifier Value '1' – '8'		
# OutputAudioSelect example InterfaceName.Set('OutputAudioSelect', 'Original HDMI', {'Output': '1'})			
Command OutputPostmixerTrim	Value -12 to 12 in steps of 0.1		
Qualifier Key	Qualifier Value	Qualifier Value	

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

'L/R'	'Left' 'Right'		
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '4'		
# OutputPostmixerTrim example InterfaceName.Set('OutputPostmixerTrim', 12, {'L/R': 'Left', 'Output': '1'})			
Command OutputResolution	Value '640x480 (60Hz)' '1280x800 (60Hz)' '1366x768 (60Hz)' '1600x900 (60Hz)' '1920x1200 (60Hz)' '576p (50Hz)' '720p (25Hz)' '720p (50Hz)' '1080i (50Hz)' '1080p (23.98Hz)' '1080p (29.97Hz)' '1080p (59.94Hz)' '2048x1080 2K (24Hz)' '2048x1080 2K (30Hz)' '2048x1080 2K (60Hz)' '1920x2160 (25Hz)' '1920x2160 (50Hz)' '1920x2400 (30Hz)' '2048x1536 (60Hz)' '2048x2160 (25Hz)' '2048x2160 (50Hz)' '2048x2400 (30Hz)' '2560x1600 (60Hz)' '3840x2160 (25Hz)' '3840x2400 (30Hz)' '4096x2160 (24Hz)' '4096x2160 (30Hz)'	Value '800x600 (60Hz)' '1280x1024 (60Hz)' '1440x900 (60Hz)' '1680x1050 (60Hz)' '480p (59.94Hz)' '720p (23.98Hz)' '720p (29.97Hz)' '720p (59.94Hz)' '1080i (59.94Hz)' '1080p (24Hz)' '1080p (30Hz)' '1080p (60Hz)' '2048x1080 2K (25Hz)' '2048x1080 2K (50Hz)' '1920x2160 (23.98Hz)' '1920x2160 (29.97Hz)' '1920x2160 (59.94Hz)' '1920x2400 (60Hz)' '2048x2160 (23.98Hz)' '2048x2160 (29.97Hz)' '2048x2160 (59.94Hz)' '2560x1080 (60Hz)' '3840x2160 (23.98Hz)' '3840x2160 (29.97Hz)' '3840x2400 (60Hz)' '4096x2160 (25Hz)' '1280x768 (60Hz)'	Value '1024x768 (60Hz)' '1360x768 (60Hz)' '1400x1050 (60Hz)' '1600x1200 (60Hz)' '480p (60Hz)' '720p (24Hz)' '720p (30Hz)' '720p (60Hz)' '1080i (60Hz)' '1080p (25Hz)' '1080p (50Hz)' '2048x1080 2K (23.98Hz)' '2048x1080 2K (29.97Hz)' '2048x1080 2K (59.94Hz)' '1920x2160 (24Hz)' '1920x2160 (30Hz)' '1920x2160 (60Hz)' '2048x1200 (60Hz)' '2048x2160 (24Hz)' '2048x2160 (30Hz)' '2048x2160 (60Hz)' '2560x1440 (60Hz)' '3840x2160 (24Hz)' '3840x2160 (30Hz)' '4096x2160 (23.98Hz)' '4096x2160 (29.97Hz)'
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# OutputResolution example InterfaceName.Set('OutputResolution', '640x480 (60Hz)', {'Output': '3'})			
Command PhantomPower	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# PhantomPower example InterfaceName.Set('PhantomPower', 'On', {'Input': '1'})			

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Command PostMatrixGain	Value -100 to 12 in steps of 0.1	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'	
# PostMatrixGain example InterfaceName.Set('PostMatrixGain', 12, {'L/R': 'Left', 'Output': '1'})		
Command PostMatrixMute	Value 'On'	Value 'Off'
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'	
# PostMatrixMute example InterfaceName.Set('PostMatrixMute', 'On', {'L/R': 'Left', 'Output': '1'})		
Command PrematrixTrim	Value -12 to 12 in steps of 0.1	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# PrematrixTrim example InterfaceName.Set('PrematrixTrim', 12, {'Input': '1', 'L/R': 'Left'})		
Command PremixerGain	Value -100 to 12 in steps of 0.1	
Qualifier Key 'Input'	Qualifier Value '1' – '4'	
# PremixerGain example InterfaceName.Set('PremixerGain', 12, {'Input': '1'})		
Command PremixerMute	Value 'On'	Value 'Off'
Qualifier Key 'Input'	Qualifier Value '1' – '4'	
# PremixerMute example InterfaceName.Set('PremixerMute', 'On', {'Input': '1'})		
Command PresetRecall	Value '1' – '32'	
# PresetRecall example InterfaceName.Set('PresetRecall', '1')		
Command RefreshMatrix	Value None	
# RefreshMatrix example InterfaceName.Set('RefreshMatrix', None)		
Command ScalerPresetRecall	Value '13' – '128'	
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'	

# ScalerPresetRecall example InterfaceName.Set('ScalerPresetRecall', '13', {'Output': '3'})			
Command ScalerPresetSave	Value '68' – '128'		
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# ScalerPresetSave example InterfaceName.Set('ScalerPresetSave', '68', {'Output': '3'})			
Command TestPattern	Value 'Off' 'Crosshatch' 'Blue Mode'	Value 'Crop' 'Color Bars'	Value 'Alternating Pixels' 'Grayscale'
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# TestPattern example InterfaceName.Set('TestPattern', 'Off', {'Output': '3'})			
Command VideoMute	Value 'Video'	Value 'Video & Sync'	Value 'Off'
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8' '4A' '5A' '6B'	Qualifier Value '3A' '4B' '5B'	Qualifier Value '3B' 'All' '6A'
# VideoMute example InterfaceName.Set('VideoMute', 'Video', {'Output': '1'})			
Command VirtualReturnGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value 'A' 'D' 'G'	Qualifier Value 'B' 'E' 'H'	Qualifier Value 'C' 'F'
# VirtualReturnGain example InterfaceName.Set('VirtualReturnGain', 12, {'Input': 'A'})			
Command VirtualReturnMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value 'A' 'D' 'G'	Qualifier Value 'B' 'E' 'H'	Qualifier Value 'C' 'F'
# VirtualReturnMute example InterfaceName.Set('VirtualReturnMute', 'On', {'Input': 'A'})			

¹ Only available on MA Models.

² Only available on SA Models.

³ Valid inputs for 86 models are '1' – '8' and valid inputs for 108 models are '1'-'10'.

⁴ Valid outputs for 86 models are '3' – '6' and valid outputs for 108 models are '5' – '8'.

⁵ Valid outputs for 86 models are '5' – '6' and valid outputs for 108 models are '5' – '8'.

⁶ Valid outputs for 86 models are '1' – '6' and valid outputs for 108 models are '1' – '8'.

⁷ Valid inputs for 86 models are '0' – '8' and valid inputs for 108 models are '0' – '10'.

⁸ Only available for 86 models.

⁹ Only available for 108 models.

Status Available

For all commands except for HDCPInputStatus, HDCPOutputStatus, InputFormat, InputSignalStatus, MicrophoneSignalStatus, and Temperature Update should be called only once since the command's status will be updated automatically as the device's status changes. ConnectionStatus does not support the Update function. ConnectionStatus is triggered by the device providing a successful response to other Update function calls.

Format with Qualifier:

```
InterfaceName.Update(Command, {'Qualifier Key': 'Qualifier Value'})
Value = InterfaceName.ReadStatus(Command, {'Qualifier Key': 'Qualifier Value'})
InterfaceName.SubscribeStatus(Command, {'Qualifier Key': 'Qualifier Value'},
```

```
FeedbackHandler)
```

FeedbackHandler will be called only when the specified qualifier gets a new status.

Format without Qualifier:

```
InterfaceName.Update(Command)
Value = InterfaceName.ReadStatus(Command)
InterfaceName.SubscribeStatus(Command, None, FeedbackHandler)
FeedbackHandler will be called when any qualifier gets a new status.
```

Command AmplifierAttenuationMA ¹	Value -100 to 0 in steps of 0.1	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierAttenuationMA examples InterfaceName.Update('AmplifierAttenuationMA', {'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AmplifierAttenuationMA', {'L/R': 'Left'}) InterfaceName.SubscribeStatus('AmplifierAttenuationMA', None, FeedbackHandler)		
Command AmplifierAttenuationSA ²	Value -100 to 0 in steps of 0.1	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierAttenuationSA examples InterfaceName.Update('AmplifierAttenuationSA', {'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AmplifierAttenuationSA', {'L/R': 'Left'}) InterfaceName.SubscribeStatus('AmplifierAttenuationSA', None, FeedbackHandler)		
Command AmplifierMuteMA ¹	Value 'On'	Value 'Off'
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierMuteMA examples InterfaceName.Update('AmplifierMuteMA', {'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AmplifierMuteMA', {'L/R': 'Left'}) InterfaceName.SubscribeStatus('AmplifierMuteMA', None, FeedbackHandler)		
Command AmplifierMuteSA ²	Value 'On'	Value 'Off'
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierMuteSA examples InterfaceName.Update('AmplifierMuteSA', {'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AmplifierMuteSA', {'L/R': 'Left'})		

InterfaceName.SubscribeStatus('AmplifierMuteSA', None, FeedbackHandler)		
Command AmplifierPostmixerTrim	Value -12 to 12 in steps of 0.1	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AmplifierPostmixerTrim examples InterfaceName.Update('AmplifierPostmixerTrim', {'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AmplifierPostmixerTrim', {'L/R': 'Left'}) InterfaceName.SubscribeStatus('AmplifierPostmixerTrim', None, FeedbackHandler)		
Command AnalogAttenuation	Value -100 to 0 in steps of 0.1	
Qualifier Key 'Output'	Qualifier Value '1' – '4'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AnalogAttenuation examples InterfaceName.Update('AnalogAttenuation', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AnalogAttenuation', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('AnalogAttenuation', None, FeedbackHandler)		
Command AnalogMute	Value 'On'	Value 'Off'
Qualifier Key 'Output'	Qualifier Value '1' – '4'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
# AnalogMute examples InterfaceName.Update('AnalogMute', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AnalogMute', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('AnalogMute', None, FeedbackHandler)		
Command AspectRatio	Value 'Fill'	Value 'Follow'
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'	
# AspectRatio examples InterfaceName.Update('AspectRatio', {'Input': '1'}) Value = InterfaceName.ReadStatus('AspectRatio', {'Input': '1'}) InterfaceName.SubscribeStatus('AspectRatio', None, FeedbackHandler)		
Command ConnectionStatus	Value 'Connected'	Value 'Disconnected'
# ConnectionStatus examples Value = InterfaceName.ReadStatus('ConnectionStatus') InterfaceName.SubscribeStatus('ConnectionStatus', None, FeedbackHandler)		
Command DTPAttenuation	Value -100 to 0 in steps of 0.1	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'
Qualifier Key 'Output' ⁵	Qualifier Value '5' – '8'	
# DTPAttenuation examples InterfaceName.Update('DTPAttenuation', {'L/R': 'Left', 'Output': '5'})		

Global Scriptor Module
Communication Sheet

Revision: 3/1/2021

Value = InterfaceName.ReadStatus('DTPAttenuation', {'L/R': 'Left', 'Output': '5'}) InterfaceName.SubscribeStatus('DTPAttenuation', None, FeedbackHandler)			
Command DTPMute	Value 'On'	Value 'Off'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
Qualifier Key 'Output' ⁵	Qualifier Value '5' – '8'		
# DTPMute examples InterfaceName.Update('DTPMute', {'L/R': 'Left', 'Output': '5'}) Value = InterfaceName.ReadStatus('DTPMute', {'L/R': 'Left', 'Output': '5'}) InterfaceName.SubscribeStatus('DTPMute', None, FeedbackHandler)			
Command EDIDAssignment	Value 'Output 1' 'Output 3B' 'Output 5' '1024x768 @ 60Hz' '1280x768 @ 50Hz' '1280x800 @ 60Hz' '1360x768 @ 50Hz' '1366x768 @ 60Hz' '1440x900 @ 50Hz' '1600x900 @ 60Hz' '1680x1050 @ 50Hz' '1920x1080 @ 60Hz' '2048x1080 @ 50Hz' '576p 2_Ch Audio @ 50Hz' '720p Multi_Ch Audio @ 50Hz' '1080i 2_Ch Audio @ 60Hz' '1080p 2_Ch Audio @ 50Hz' '1080p Multi_Ch Audio @ 60Hz' 'User Assigned 1' 'User Assigned 4' 'User Assigned 7' 'Output 4' 'Output 6A' 'Output 8'	Value 'Output 2' 'Output 4A' 'Output 6' '1280x720 @ 50Hz' '1280x768 @ 60Hz' '1280x1024 @ 50Hz' '1360x768 @ 60Hz' '1400x1050 @ 50Hz' '1440x900 @ 60Hz' '1600x1200 @ 50Hz' '1680x1050 @ 60Hz' '1920x1200 @ 50Hz' '2048x1080 @ 60Hz' '720p 2_Ch Audio @ 50Hz' '720p Multi_Ch Audio @ 60Hz' '1080i Multi_Ch Audio @ 50Hz' '1080p 2_Ch Audio @ 60Hz' '3840x2160 2_Ch Audio @ 30Hz' 'User Assigned 2' 'User Assigned 5' 'User Assigned 8' 'Output 5A' 'Output 6B' 'User Assigned 9'	Value 'Output 3A' 'Output 4B' '1024x768 @ 50Hz' '1280x720 @ 60Hz' '1280x800 @ 50Hz' '1280x1024 @ 60Hz' '1366x768 @ 50Hz' '1400x1050 @ 60Hz' '1600x900 @ 50Hz' '1600x1200 @ 60Hz' '1920x1080 @ 50Hz' '1920x1200 @ 60Hz' '480p 2_Ch Audio @ 60Hz' '720p 2_Ch Audio @ 60Hz' '1080i 2_Ch Audio @ 50Hz' '1080i Multi_Ch Audio @ 60Hz' '1080p Multi_Ch Audio @ 50Hz' '3840x2160 Multi_Ch Audio @ 30Hz' 'User Assigned 3' 'User Assigned 6' 'Output 3' 'Output 5B' 'Output 7' 'User Assigned 10'
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
# EDIDAssignment examples			

Global Scripter Module Communication Sheet

Revision: 3/1/2021

InterfaceName.Update('EDIDAssignment', {'Input': '1'}) Value = InterfaceName.ReadStatus('EDIDAssignment', {'Input': '1'}) InterfaceName.SubscribeStatus('EDIDAssignment', None, FeedbackHandler)			
Command ExecutiveMode	Value 'Mode 1'	Value 'Mode 2'	Value 'Off'
# ExecutiveMode examples InterfaceName.Update('ExecutiveMode') Value = InterfaceName.ReadStatus('ExecutiveMode') InterfaceName.SubscribeStatus('ExecutiveMode', None, FeedbackHandler)			
Command ExpansionPremixerGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value '1' – '16'		
# ExpansionPremixerGain examples InterfaceName.Update('ExpansionPremixerGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('ExpansionPremixerGain', {'Input': '1'}) InterfaceName.SubscribeStatus('ExpansionPremixerGain', None, FeedbackHandler)			
Command ExpansionPremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '16'		
# ExpansionPremixerMute examples InterfaceName.Update('ExpansionPremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('ExpansionPremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('ExpansionPremixerMute', None, FeedbackHandler)			
Command Freeze ⁴	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '3' – '8'		
# Freeze examples InterfaceName.Update('Freeze', {'Output': '3'}) Value = InterfaceName.ReadStatus('Freeze', {'Output': '3'}) InterfaceName.SubscribeStatus('Freeze', None, FeedbackHandler)			
Command GroupMicLineInputGain	Value -18 to 80 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMicLineInputGain examples InterfaceName.Update('GroupMicLineInputGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMicLineInputGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMicLineInputGain', None, FeedbackHandler)			
Command GroupMixpoint	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMixpoint examples InterfaceName.Update('GroupMixpoint', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMixpoint', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMixpoint', None, FeedbackHandler)			
Command GroupMute	Value 'On'	Value 'Off'	

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupMute examples InterfaceName.Update('GroupMute', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMute', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMute', None, FeedbackHandler)	
Command GroupOutputAttenuation	Value -100 to 0 in steps of 0.1
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupOutputAttenuation examples InterfaceName.Update('GroupOutputAttenuation', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupOutputAttenuation', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupOutputAttenuation', None, FeedbackHandler)	
Command GroupPostmixerTrim	Value -12 to 12 in steps of 0.1
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupPostmixerTrim examples InterfaceName.Update('GroupPostmixerTrim', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPostmixerTrim', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPostmixerTrim', None, FeedbackHandler)	
Command GroupPrematrixTrim	Value -12 to 12 in steps of 0.1
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupPrematrixTrim examples InterfaceName.Update('GroupPrematrixTrim', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPrematrixTrim', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPrematrixTrim', None, FeedbackHandler)	
Command GroupPremixerGain	Value -100 to 12 in steps of 0.1
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupPremixerGain examples InterfaceName.Update('GroupPremixerGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPremixerGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPremixerGain', None, FeedbackHandler)	
Command HDCPInputAuthorization	Value 'On' 'Off'
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'
# HDCPInputAuthorization examples InterfaceName.Update('HDCPInputAuthorization', {'Input': '1'}) Value = InterfaceName.ReadStatus('HDCPInputAuthorization', {'Input': '1'}) InterfaceName.SubscribeStatus('HDCPInputAuthorization', None, FeedbackHandler)	
Command HDCPInputStatus	Value 'No Source Connected' Value 'No HDCP Content' Value 'HDCP Content'
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'
# HDCPInputStatus examples	

Global Scripter Module Communication Sheet

Revision: 3/1/2021

<pre>InterfaceName.Update('HDCPInputStatus', {'Input': '1'}) Value = InterfaceName.ReadStatus('HDCPInputStatus', {'Input': '1'}) InterfaceName.SubscribeStatus('HDCPInputStatus', None, FeedbackHandler)</pre>			
Command HDCPOutputAuthorization	Value 'On'	Value 'Auto'	
Qualifier Key 'Output' ⁴	Qualifier Value '1' – '8' '4A' '5B'	Qualifier Value '3A' '4B' '6A'	Qualifier Value '3B' '5A' '6B'
<pre># HDCPOutputAuthorization examples InterfaceName.Update('HDCPOutputAuthorization', {'Output': '1'}) Value = InterfaceName.ReadStatus('HDCPOutputAuthorization', {'Output': '1'}) InterfaceName.SubscribeStatus('HDCPOutputAuthorization', None, FeedbackHandler)</pre>			
Command HDCPOutputStatus	Value 'No monitor connected' 'Monitor connected, currently encrypted'	Value 'Monitor connected, HDCP not supported'	Value 'Monitor connected, not encrypted'
Qualifier Key 'Output' ⁴	Qualifier Value '1' – '8' '4A' '5B'	Qualifier Value '3A' '4B' '6A'	Qualifier Value '3B' '5A' '6B'
<pre># HDCPOutputStatus examples InterfaceName.Update('HDCPOutputStatus', {'Output': '1'}) Value = InterfaceName.ReadStatus('HDCPOutputStatus', {'Output': '1'}) InterfaceName.SubscribeStatus('HDCPOutputStatus', None, FeedbackHandler)</pre>			
Command HDMIAttenuation	Value -100 to 0 in steps of 0.1		
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
<pre># HDMIAttenuation examples InterfaceName.Update('HDMIAttenuation', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('HDMIAttenuation', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('HDMIAttenuation', None, FeedbackHandler)</pre>			
Command HDMIMute	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
<pre># HDMIMute examples InterfaceName.Update('HDMIMute', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('HDMIMute', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('HDMIMute', None, FeedbackHandler)</pre>			
Command InputAudioSwitchMode	Value 'Auto'	Value 'Digital'	Value 'Analog'
Qualifier Key	Qualifier Value		

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

'Input' ³	'1' – '10'		
# InputAudioSwitchMode examples InterfaceName.Update('InputAudioSwitchMode', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputAudioSwitchMode', {'Input': '1'}) InterfaceName.SubscribeStatus('InputAudioSwitchMode', None, FeedbackHandler)			
Command InputFormat	Value 'No signal detected' 'HDMI RGB 444 Limited' 'HDMI YUV 422 Full'	Value 'DVI RGB 444' 'HDMI YUV 444 Full' 'HDMI YUV 422 Limited'	Value 'HDMI RGB 444 Full' 'HDMI YUV 444 Limited'
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
# InputFormat examples InterfaceName.Update('InputFormat', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputFormat', {'Input': '1'}) InterfaceName.SubscribeStatus('InputFormat', None, FeedbackHandler)			
Command InputGain	Value -18 to 24 in steps of 0.1		
Qualifier Key 'Format'	Qualifier Value 'Analog'	Qualifier Value 'Digital'	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# InputGain examples InterfaceName.Update('InputGain', {'Format': 'Analog', 'Input': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('InputGain', {'Format': 'Analog', 'Input': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('InputGain', None, FeedbackHandler)			
Command InputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# InputMute examples InterfaceName.Update('InputMute', {'Input': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('InputMute', {'Input': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('InputMute', None, FeedbackHandler)			
Command InputSignalStatus	Value 'Active'	Value 'Not Active'	
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
# InputSignalStatus examples InterfaceName.Update('InputSignalStatus', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputSignalStatus', {'Input': '1'}) InterfaceName.SubscribeStatus('InputSignalStatus', None, FeedbackHandler)			
Command InputTieStatus ¹⁰	Value 'Video' 'Untied'	Value 'Audio'	Value 'Audio/Video'
Qualifier Key	Qualifier Value		

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

'Input' ³	'1' – '10'		
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'		
# InputTieStatus examples InterfaceName.Update('InputTieStatus') Value = InterfaceName.ReadStatus('InputTieStatus', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('InputTieStatus', None, FeedbackHandler)			
Command Logo	Value '1' – '16'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '3' – '8'		
# Logo examples InterfaceName.Update('Logo', {'Output': '3'}) Value = InterfaceName.ReadStatus('Logo', {'Output': '3'}) InterfaceName.SubscribeStatus('Logo', None, FeedbackHandler)			
Command LogoAvailability	Value 'Saved'	Value 'Empty'	
Qualifier Key 'Logo' ⁴	Qualifier Value '1' – '16'		
# LogoAvailability examples InterfaceName.Update('LogoAvailability', {'Logo': '1'}) Value = InterfaceName.ReadStatus('LogoAvailability', {'Logo': '1'}) InterfaceName.SubscribeStatus('LogoAvailability', None, FeedbackHandler)			
Command LogoKeySetting	Value 'Disabled' 'Level Key'	Value 'Transparency' 'Alpha Key'	Value 'RGB Key'
Qualifier Key 'Output' ⁴	Qualifier Value '1' – '8'		
# LogoKeySetting examples InterfaceName.Update('LogoKeySetting', {'Output': '1'}) Value = InterfaceName.ReadStatus('LogoKeySetting', {'Output': '1'}) InterfaceName.SubscribeStatus('LogoKeySetting', None, FeedbackHandler)			
Command MatrixIONameStatus	Value 'String'		
Qualifier Key 'Number'	Qualifier Value '1' – '10'		
Qualifier Key 'Type'	Qualifier Value 'Input'	Qualifier Value 'Output'	
# MatrixIONameStatus example Value = InterfaceName.ReadStatus('MatrixIONameStatus', {'Number': '1', 'Type': 'Input'}) InterfaceName.SubscribeStatus('MatrixIONameStatus', None, FeedbackHandler)			
Command MicLineGain	Value -18 to 80 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicLineGain examples InterfaceName.Update('MicLineGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('MicLineGain', {'Input': '1'}) InterfaceName.SubscribeStatus('MicLineGain', None, FeedbackHandler)			
Command MicLineMute	Value 'On'	Value 'Off'	

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicLineMute examples InterfaceName.Update('MicLineMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('MicLineMute', {'Input': '1'}) InterfaceName.SubscribeStatus('MicLineMute', None, FeedbackHandler)			
Command MicrophoneSignalStatus	Value -150 – 0		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicrophoneSignalStatus examples InterfaceName.Update('MicrophoneSignalStatus', {'Input': '1'}) Value = InterfaceName.ReadStatus('MicrophoneSignalStatus', {'Input': '1'}) InterfaceName.SubscribeStatus('MicrophoneSignalStatus', None, FeedbackHandler)			
Command MixpointGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value	Qualifier Value	Qualifier Value
	'Output 1 Left'	'Output 1 Right'	'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Output 5 Left'
	'Output 5 Right'	'Output 6 Left'	'Output 6 Right'
	'Output 7 Left' ⁹	'Output 7 Right' ⁹	'Output 8 Left' ⁹
	'Output 8 Right' ⁹	'Mic 1'	'Mic 2'
	'Mic 3'	'Mic 4'	'V. Return A'
	'V. Return B'	'V. Return C'	'V. Return D'
	'V. Return E'	'V. Return F'	'V. Return G'
	'V. Return H'	'Exp. 1'	'Exp. 2'
	'Exp. 3'	'Exp. 4'	'Exp. 5'
	'Exp. 6' ⁹	'Exp. 7' ⁹	'Exp. 8' ⁹
	'Exp. 9' ⁹	'Exp. 10'	'Exp. 11'
	'Exp. 12'	'Exp. 13'	'Exp. 14'
'Exp. 15'	'Exp. 16'		
Qualifier Key 'Output'	Qualifier Value	Qualifier Value	Qualifier Value
	'Output 1 Left'	'Output 1 Right'	'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Output 5 Left'
	'Output 5 Right'	'Output 6 Left'	'Output 6 Right'
	'Output 7 Left' ⁹	'Output 7 Right' ⁹	'Output 8 Left' ⁹
	'Output 8 Right'	'V. Send A'	'V. Send B'
	'V. Send C'	'V. Send D'	'V. Send E'
'V. Send F'	'V. Send G'	'V. Send H'	
# MixpointGain examples InterfaceName.Update('MixpointGain', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) Value = InterfaceName.ReadStatus('MixpointGain', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) InterfaceName.SubscribeStatus('MixpointGain', None, FeedbackHandler)			

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Command	Value	Value	Value
MixpointMute	'On'	'Off'	
Qualifier Key 'Input'	Qualifier Value 'Output 1 Left' 'Output 2 Right' 'Output 4 Left' 'Output 5 Right' 'Output 7 Left' ⁹ 'Output 8 Right' ⁹ 'Mic 3' 'V. Return B' 'V. Return E' 'V. Return H' 'Exp. 3' 'Exp. 6' ⁹ 'Exp. 9' ⁹ 'Exp. 12' 'Exp. 15'	Qualifier Value 'Output 1 Right' 'Output 3 Left' 'Output 4 Right' 'Output 6 Left' 'Output 7 Right' ⁹ 'Mic 1' 'Mic 4' 'V. Return C' 'V. Return F' 'Exp. 1' 'Exp. 4' 'Exp. 7' ⁹ 'Exp. 10' 'Exp. 13' 'Exp. 16'	Qualifier Value 'Output 2 Left' 'Output 3 Right' 'Output 5 Left' 'Output 6 Right' 'Output 8 Left' ⁹ 'Mic 2' 'V. Return A' 'V. Return D' 'V. Return G' 'Exp. 2' 'Exp. 5' 'Exp. 8' ⁹ 'Exp. 11' 'Exp. 14'
Qualifier Key 'Output'	Qualifier Value 'Output 1 Left' 'Output 2 Right' 'Output 4 Left' 'Output 5 Right' 'Output 7 Left' ⁹ 'Output 8 Right' 'V. Send C' 'V. Send F'	Qualifier Value 'Output 1 Right' 'Output 3 Left' 'Output 4 Right' 'Output 6 Left' 'Output 7 Right' ⁹ 'V. Send A' 'V. Send D' 'V. Send G'	Qualifier Value 'Output 2 Left' 'Output 3 Right' 'Output 5 Left' 'Output 6 Right' 'Output 8 Left' ⁹ 'V. Send B' 'V. Send E' 'V. Send H'
# MixpointMute examples InterfaceName.Update('MixpointMute', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) Value = InterfaceName.ReadStatus('MixpointMute', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) InterfaceName.SubscribeStatus('MixpointMute', None, FeedbackHandler)			
Command	Value	Value	Value
OutputAudioSelect	'Original HDMI'	'Embedded Audio'	'No Audio'
Qualifier Key 'Output'⁶	Qualifier Value '1' – '8'		
# OutputAudioSelect examples InterfaceName.Update('OutputAudioSelect', {'Output': '1'}) Value = InterfaceName.ReadStatus('OutputAudioSelect', {'Output': '1'}) InterfaceName.SubscribeStatus('OutputAudioSelect', None, FeedbackHandler)			
Command	Value		
OutputPostmixerTrim	-12 to 12 in steps of 0.1		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
Qualifier Key	Qualifier Value		

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

'Output' ⁶	'1' – '8'		
# OutputPostmixerTrim examples InterfaceName.Update('OutputPostmixerTrim', {'L/R': 'Left', 'Output': '1'}) Value = InterfaceName.ReadStatus('OutputPostmixerTrim', {'L/R': 'Left', 'Output': '1'}) InterfaceName.SubscribeStatus('OutputPostmixerTrim', None, FeedbackHandler)			
Command OutputResolution	Value '640x480 (60Hz)' '1280x800 (60Hz)' '1366x768 (60Hz)' '1600x900 (60Hz)' '1920x1200 (60Hz)' '576p (50Hz)' '720p (25Hz)' '720p (50Hz)' '1080i (50Hz)' '1080p (23.98Hz)' '1080p (29.97Hz)' '1080p (59.94Hz)' '2048x1080 2K (24Hz)' '2048x1080 2K (30Hz)' '2048x1080 2K (60Hz)' '1920x2160 (25Hz)' '1920x2160 (50Hz)' '1920x2400 (30Hz)' '2048x1536 (60Hz)' '2048x2160 (25Hz)' '2048x2160 (50Hz)' '2048x2400 (30Hz)' '2560x1600 (60Hz)' '3840x2160 (25Hz)' '3840x2400 (30Hz)' '4096x2160 (24Hz)' '4096x2160 (30Hz)'	Value '800x600 (60Hz)' '1280x1024 (60Hz)' '1440x900 (60Hz)' '1680x1050 (60Hz)' '480p (59.94Hz)' '720p (23.98Hz)' '720p (29.97Hz)' '720p (59.94Hz)' '1080i (59.94Hz)' '1080p (24Hz)' '1080p (30Hz)' '1080p (60Hz)' '2048x1080 2K (23.98Hz)' '2048x1080 2K (25Hz)' '2048x1080 2K (50Hz)' '1920x2160 (23.98Hz)' '1920x2160 (29.97Hz)' '1920x2160 (59.94Hz)' '1920x2400 (60Hz)' '2048x2160 (23.98Hz)' '2048x2160 (29.97Hz)' '2048x2160 (59.94Hz)' '2560x1080 (60Hz)' '3840x2160 (23.98Hz)' '3840x2160 (29.97Hz)' '3840x2400 (60Hz)' '4096x2160 (25Hz)' '1280x768 (60Hz)'	Value '1024x768 (60Hz)' '1360x768 (60Hz)' '1400x1050 (60Hz)' '1600x1200 (60Hz)' '480p (60Hz)' '720p (24Hz)' '720p (30Hz)' '720p (60Hz)' '1080i (60Hz)' '1080p (25Hz)' '1080p (50Hz)' '2048x1080 2K (23.98Hz)' '2048x1080 2K (29.97Hz)' '2048x1080 2K (59.94Hz)' '1920x2160 (24Hz)' '1920x2160 (30Hz)' '1920x2160 (60Hz)' '2048x1200 (60Hz)' '2048x2160 (24Hz)' '2048x2160 (30Hz)' '2048x2160 (60Hz)' '2560x1440 (60Hz)' '3840x2160 (24Hz)' '3840x2160 (30Hz)' '4096x2160 (23.98Hz)' '4096x2160 (29.97Hz)'
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# OutputResolution examples InterfaceName.Update('OutputResolution', {'Output': '3'}) Value = InterfaceName.ReadStatus('OutputResolution', {'Output': '3'}) InterfaceName.SubscribeStatus('OutputResolution', None, FeedbackHandler)			
Command OutputTieStatus ¹⁰	Value '1' – '10'		
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value

Global Scripter Module Communication Sheet

Revision: 3/1/2021

'Tie Type'	'Audio'	'Video'	'Audio/Video'
# OutputTieStatus examples InterfaceName.Update('OutputTieStatus') Value = InterfaceName.ReadStatus('OutputTieStatus', {'Output': '1', 'Tie Type': 'Audio'}) InterfaceName.SubscribeStatus('OutputTieStatus', None, FeedbackHandler)			
Command PhantomPower	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# PhantomPower examples InterfaceName.Update('PhantomPower', {'Input': '1'}) Value = InterfaceName.ReadStatus('PhantomPower', {'Input': '1'}) InterfaceName.SubscribeStatus('PhantomPower', None, FeedbackHandler)			
Command PostMatrixGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'		
# PostMatrixGain examples InterfaceName.Update('PostMatrixGain', {'L/R': 'Left', 'Output': '1'}) Value = InterfaceName.ReadStatus('PostMatrixGain', {'L/R': 'Left', 'Output': '1'}) InterfaceName.SubscribeStatus('PostMatrixGain', None, FeedbackHandler)			
Command PostMatrixMute	Value 'On'	Value 'Off'	
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
Qualifier Key 'Output' ⁶	Qualifier Value '1' – '8'		
# PostMatrixMute examples InterfaceName.Update('PostMatrixMute', {'L/R': 'Left', 'Output': '1'}) Value = InterfaceName.ReadStatus('PostMatrixMute', {'L/R': 'Left', 'Output': '1'}) InterfaceName.SubscribeStatus('PostMatrixMute', None, FeedbackHandler)			
Command PrematrixTrim	Value -12 to 12 in steps of 0.1		
Qualifier Key 'Input' ³	Qualifier Value '1' – '10'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# PrematrixTrim examples InterfaceName.Update('PrematrixTrim', {'Input': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('PrematrixTrim', {'Input': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('PrematrixTrim', None, FeedbackHandler)			
Command PremixerGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# PremixerGain examples InterfaceName.Update('PremixerGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerGain', {'Input': '1'})			

Global Scripter Module Communication Sheet

Revision: 3/1/2021

InterfaceName.SubscribeStatus('PremixerGain', None, FeedbackHandler)			
Command PremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# PremixerMute examples InterfaceName.Update('PremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('PremixerMute', None, FeedbackHandler)			
Command Temperature	Value 0 – 100		
# Temperature examples InterfaceName.Update('Temperature') Value = InterfaceName.ReadStatus('Temperature') InterfaceName.SubscribeStatus('Temperature', None, FeedbackHandler)			
Command TestPattern	Value 'Off'	Value 'Crop'	Value 'Alternating Pixels'
	'Crosshatch'	'Color Bars'	'Grayscale'
	'Blue Mode'		
Qualifier Key 'Output' ⁴	Qualifier Value '3' – '8'		
# TestPattern examples InterfaceName.Update('TestPattern', {'Output': '3'}) Value = InterfaceName.ReadStatus('TestPattern', {'Output': '3'}) InterfaceName.SubscribeStatus('TestPattern', None, FeedbackHandler)			
Command VideoMute	Value 'Video'	Value 'Video & Sync'	Value 'Off'
Qualifier Key 'Output'	Qualifier Value '1' – '8'	Qualifier Value '3A' ⁸	Qualifier Value '3B' ⁸
	'4A' ⁸	'4B' ⁸	'All'
	'5A' ⁸	'5B' ⁸	'6A'
	'6B'		
# VideoMute examples InterfaceName.Update('VideoMute', {'Output': '1'}) Value = InterfaceName.ReadStatus('VideoMute', {'Output': '1'}) InterfaceName.SubscribeStatus('VideoMute', None, FeedbackHandler)			
Command VirtualReturnGain	Value -100 to 12 in steps of 0.1		
Qualifier Key 'Input'	Qualifier Value 'A'	Qualifier Value 'B'	Qualifier Value 'C'
	'D'	'E'	'F'
	'G'	'H'	
# VirtualReturnGain examples InterfaceName.Update('VirtualReturnGain', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnGain', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnGain', None, FeedbackHandler)			
Command VirtualReturnMute	Value 'On'	Value 'Off'	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value

Global Scriptor Module Communication Sheet

'Input'	'A'	'B'	'C'
	'D'	'E'	'F'
	'G'	'H'	
<pre># VirtualReturnMute examples InterfaceName.Update('VirtualReturnMute', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnMute', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnMute', None, FeedbackHandler)</pre>			

¹ Only available on MA Models.

² Only available on SA Models.

³ Valid inputs for 86 models are '1' – '8' and valid inputs for 108 models are '1' - '10'.

⁴ Valid outputs for 86 models are '3' – '6' and valid outputs for 108 models are '5' – '8'.

⁵ Valid outputs for 86 models are '5' – '6' and valid outputs for 108 models are '5' – '8'.

⁶ Valid outputs for 86 models are '1' – '6' and valid outputs for 108 models are '1' – '8'.

⁷ Valid inputs for 86 models are '0' – '8' and valid inputs for 108 models are '0' – '10'.

⁸ Only available for 86 models.

⁹ Only available for 108 models.

¹⁰ Command does not require any qualifier. An Update call of this command will update all OutputTiesStatus and InputTieStatus. The module has logic to prevent this command to be sent out within 5 seconds.

Cable and Adapter Requirements

Captive Screw to Captive Screw

Notes for the Device

Serial communication

Port Type: RS-232

Baud Rate: 9600


Data Bits: 8

Parity: None


Stop Bits: One

Flow Control: None

Pin Assignments Diagram



Signal	Main Cable	Signal
TxD		TxD
RxD		RxD
GND		GND



Network communication

When configuring the Ethernet module, be sure device settings match those of the Global Scriptor ethernet interface.

Port Type: Ethernet (SSH)

Default Port: 22023

Logon Credentials Supported: Yes

Default Username: admin

Default Password:

Multi-Connection Yes

Capabilities:

Port Changeability: Yes

Ethernet Module Configuration Description

Please refer to user manual for settings and changes to the network communication

Notes for the Device

Appendix A. Set Commands

Amplifier Attenuation 0	WG60016*0AU\x0D
Amplifier Attenuation 0 L/R Left	WG60016*0AU\x0D
Amplifier Attenuation 0 L/R Right	WG60017*0AU\x0D
Amplifier Attenuation -100	WG60016*-1000AU\x0D
Amplifier Attenuation -100 L/R Left	WG60016*-1000AU\x0D
Amplifier Attenuation -100 L/R Right	WG60017*-1000AU\x0D
Amplifier Mute Off	WM60016*0AU\x0D
Amplifier Mute Off L/R Left	WM60016*0AU\x0D
Amplifier Mute Off L/R Right	WM60017*0AU\x0D
Amplifier Mute On	WM60016*1AU\x0D
Amplifier Mute On L/R Left	WM60016*1AU\x0D
Amplifier Mute On L/R Right	WM60017*1AU\x0D
Amplifier Post-mixer Trim 12 L/R Left	WG60116*120AU\x0D
Amplifier Post-mixer Trim -12 L/R Left	WG60116*-120AU\x0D
Amplifier Post-mixer Trim 12 L/R Right	WG60117*120AU\x0D
Amplifier Post-mixer Trim -12 L/R Right	WG60117*-120AU\x0D
Analog Attenuation 0 Output 1 L/R Left	WG60000*0AU\x0D
Analog Attenuation 0 Output 1 L/R Right	WG60001*0AU\x0D
Analog Attenuation 0 Output 4 L/R Left	WG60006*0AU\x0D
Analog Attenuation 0 Output 4 L/R Right	WG60007*0AU\x0D
Analog Attenuation -100 Output 1 L/R Left	WG60000*-1000AU\x0D
Analog Attenuation -100 Output 1 L/R Right	WG60001*-1000AU\x0D
Analog Attenuation -100 Output 4 L/R Left	WG60006*-1000AU\x0D
Analog Attenuation -100 Output 4 L/R Right	WG60007*-1000AU\x0D
Analog Mute Off Output 1 L/R Left	WM60000*0AU\x0D
Analog Mute Off Output 1 L/R Right	WM60001*0AU\x0D
Analog Mute Off Output 4 L/R Left	WM60006*0AU\x0D
Analog Mute Off Output 4 L/R Right	WM60007*0AU\x0D
Analog Mute On Output 1 L/R Left	WM60000*1AU\x0D
Analog Mute On Output 1 L/R Right	WM60001*1AU\x0D
Analog Mute On Output 4 L/R Left	WM60006*1AU\x0D
Analog Mute On Output 4 L/R Right	WM60007*1AU\x0D
Aspect Ratio Fill Input 1	w1*1ASPR\x0D\x0A
Aspect Ratio Fill Input 10	w10*1ASPR\x0D\x0A
Aspect Ratio Fill Input 8	w8*1ASPR\x0D\x0A
Aspect Ratio Follow Input 1	w1*2ASPR\x0D\x0A
Aspect Ratio Follow Input 10	w10*2ASPR\x0D\x0A
Aspect Ratio Follow Input 8	w8*2ASPR\x0D\x0A
Auto Image None Output 3	3*A
Auto Image None Output 5	5*A
Auto Image None Output 6	6*A
Auto Image None Output 8	8*A

Global Scripter Module Communication Sheet

Revision: 3/1/2021

DTP Attenuation 0 Output 5 L/R Left	WG60008*0AU\x0D
DTP Attenuation 0 Output 5 L/R Right	WG60009*0AU\x0D
DTP Attenuation 0 Output 6 L/R Left	WG60010*0AU\x0D
DTP Attenuation 0 Output 6 L/R Right	WG60011*0AU\x0D
DTP Attenuation 0 Output 8 L/R Left	WG60014*0AU\x0D
DTP Attenuation 0 Output 8 L/R Right	WG60015*0AU\x0D
DTP Attenuation -100 Output 5 L/R Left	WG60008*-1000AU\x0D
DTP Attenuation -100 Output 5 L/R Right	WG60009*-1000AU\x0D
DTP Attenuation -100 Output 6 L/R Left	WG60010*-1000AU\x0D
DTP Attenuation -100 Output 6 L/R Right	WG60011*-1000AU\x0D
DTP Attenuation -100 Output 8 L/R Left	WG60014*-1000AU\x0D
DTP Attenuation -100 Output 8 L/R Right	WG60015*-1000AU\x0D
DTP Mute Off Output 5 L/R Left	WM60008*0AU\x0D
DTP Mute Off Output 5 L/R Right	WM60009*0AU\x0D
DTP Mute Off Output 6 L/R Left	WM60010*0AU\x0D
DTP Mute Off Output 6 L/R Right	WM60011*0AU\x0D
DTP Mute Off Output 8 L/R Left	WM60014*0AU\x0D
DTP Mute Off Output 8 L/R Right	WM60015*0AU\x0D
DTP Mute On Output 5 L/R Left	WM60008*1AU\x0D
DTP Mute On Output 5 L/R Right	WM60009*1AU\x0D
DTP Mute On Output 6 L/R Left	WM60010*1AU\x0D
DTP Mute On Output 6 L/R Right	WM60011*1AU\x0D
DTP Mute On Output 8 L/R Left	WM60014*1AU\x0D
DTP Mute On Output 8 L/R Right	WM60015*1AU\x0D
Executive Mode Mode 1	1X
Executive Mode Mode 2	2X
Executive Mode Off	0X
Expansion Pre-mixer Gain -100 Input 1	wG50200*-1000AU\x0D
Expansion Pre-mixer Gain -100 Input 16	wG50215*-1000AU\x0D
Expansion Pre-mixer Gain 12 Input 1	wG50200*00120AU\x0D
Expansion Pre-mixer Gain 12 Input 16	wG50215*00120AU\x0D
Expansion Pre-mixer Mute Off Input 1	wM50200*0AU\x0D
Expansion Pre-mixer Mute Off Input 16	wM50215*0AU\x0D
Expansion Pre-mixer Mute On Input 1	wM50200*1AU\x0D
Expansion Pre-mixer Mute On Input 16	wM50215*1AU\x0D
Freeze Off Output 3	3*0F
Freeze Off Output 5	5*0F
Freeze Off Output 6	6*0F
Freeze Off Output 8	8*0F
Freeze On Output 3	3*1F
Freeze On Output 5	5*1F
Freeze On Output 6	6*1F
Freeze On Output 8	8*1F
Global Video Mute Off	0*B

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Global Video Mute Video	1*B
Global Video Mute Video & Sync	2*B
Group Mic/Line Input Gain -18 Group 1	WD1*-180GRPM\x0D
Group Mic/Line Input Gain -18 Group 32	WD32*-180GRPM\x0D
Group Mic/Line Input Gain 80 Group 1	WD1*800GRPM\x0D
Group Mic/Line Input Gain 80 Group 32	WD32*800GRPM\x0D
Group Mix-point -100 Group 1	WD1*-1000GRPM\x0D
Group Mix-point -100 Group 32	WD32*-1000GRPM\x0D
Group Mix-point 12 Group 1	WD1*120GRPM\x0D
Group Mix-point 12 Group 32	WD32*120GRPM\x0D
Group Mute Off Group 1	WD1*0GRPM\x0D
Group Mute Off Group 32	WD32*0GRPM\x0D
Group Mute On Group 1	WD1*1GRPM\x0D
Group Mute On Group 32	WD32*1GRPM\x0D
Group Output Attenuation 0 Group 1	WD1*0GRPM\x0D
Group Output Attenuation 0 Group 32	WD32*0GRPM\x0D
Group Output Attenuation -100 Group 1	WD1*-1000GRPM\x0D
Group Output Attenuation -100 Group 32	WD32*-1000GRPM\x0D
Group Post-mixer Trim 12 Group 1	WD1*120GRPM\x0D
Group Post-mixer Trim -12 Group 1	WD1*-120GRPM\x0D
Group Post-mixer Trim 12 Group 32	WD32*120GRPM\x0D
Group Post-mixer Trim -12 Group 32	WD32*-120GRPM\x0D
Group Pre-matrix Trim 12 Group 1	WD1*120GRPM\x0D
Group Pre-matrix Trim -12 Group 1	WD1*-120GRPM\x0D
Group Pre-matrix Trim 12 Group 32	WD32*120GRPM\x0D
Group Pre-matrix Trim -12 Group 32	WD32*-120GRPM\x0D
Group Pre-mixer Gain -100 Group 1	WD1*-1000GRPM\x0D
Group Pre-mixer Gain -100 Group 32	WD32*-1000GRPM\x0D
Group Pre-mixer Gain 12 Group 1	WD1*120GRPM\x0D
Group Pre-mixer Gain 12 Group 32	WD32*120GRPM\x0D
HDCP Input Authorization Off Input 1	wE1*0HDCP\x0D\x0A
HDCP Input Authorization Off Input 10	wE10*0HDCP\x0D\x0A
HDCP Input Authorization Off Input 8	wE8*0HDCP\x0D\x0A
HDCP Input Authorization On Input 1	wE1*1HDCP\x0D\x0A
HDCP Input Authorization On Input 10	wE10*1HDCP\x0D\x0A
HDCP Input Authorization On Input 8	wE8*1HDCP\x0D\x0A
HDCP Output Authorization Auto Output 1	wS1*0HDCP\x0D\x0A
HDCP Output Authorization Auto Output 2	wS2*0HDCP\x0D\x0A
HDCP Output Authorization Auto Output 4	wS4*0HDCP\x0D\x0A
HDCP Output Authorization Auto Output 5A	wS5A*0HDCP\x0D\x0A
HDCP Output Authorization Auto Output 5B	wS5B*0HDCP\x0D\x0A
HDCP Output Authorization Auto Output 6A	wS6A*0HDCP\x0D\x0A
HDCP Output Authorization Auto Output 6B	wS6B*0HDCP\x0D\x0A
HDCP Output Authorization Auto Output 7	wS7*0HDCP\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

HDCP Output Authorization Auto Output 8	WS8*0HDCP\x0D\x0A
HDCP Output Authorization On Output 1	WS1*1HDCP\x0D\x0A
HDCP Output Authorization On Output 2	WS2*1HDCP\x0D\x0A
HDCP Output Authorization On Output 4	WS4*1HDCP\x0D\x0A
HDCP Output Authorization On Output 5A	WS5A*1HDCP\x0D\x0A
HDCP Output Authorization On Output 5B	WS5B*1HDCP\x0D\x0A
HDCP Output Authorization On Output 6A	WS6A*1HDCP\x0D\x0A
HDCP Output Authorization On Output 6B	WS6B*1HDCP\x0D\x0A
HDCP Output Authorization On Output 7	WS7*1HDCP\x0D\x0A
HDCP Output Authorization On Output 8	WS8*1HDCP\x0D\x0A
HDMI Attenuation 0 Output 1 L/R Left	WG60200*0AU\x0D
HDMI Attenuation 0 Output 1 L/R Right	WG60201*0AU\x0D
HDMI Attenuation 0 Output 4 L/R Left	WG60206*0AU\x0D
HDMI Attenuation 0 Output 4 L/R Right	WG60207*0AU\x0D
HDMI Attenuation -100 Output 1 L/R Left	WG60200*-1000AU\x0D
HDMI Attenuation -100 Output 1 L/R Right	WG60201*-1000AU\x0D
HDMI Attenuation -100 Output 4 L/R Left	WG60206*-1000AU\x0D
HDMI Attenuation -100 Output 4 L/R Right	WG60207*-1000AU\x0D
HDMI Mute Off Output 1 L/R Left	WM60200*0AU\x0D
HDMI Mute Off Output 1 L/R Right	WM60201*0AU\x0D
HDMI Mute Off Output 4 L/R Left	WM60206*0AU\x0D
HDMI Mute Off Output 4 L/R Right	WM60207*0AU\x0D
HDMI Mute On Output 1 L/R Left	WM60200*1AU\x0D
HDMI Mute On Output 1 L/R Right	WM60201*1AU\x0D
HDMI Mute On Output 4 L/R Left	WM60206*1AU\x0D
HDMI Mute On Output 4 L/R Right	WM60207*1AU\x0D
Input Audio Switch Mode Analog Input 1	wI1*2AFMT\x0D\x0A
Input Audio Switch Mode Analog Input 10	wI10*2AFMT\x0D\x0A
Input Audio Switch Mode Analog Input 8	wI8*2AFMT\x0D\x0A
Input Audio Switch Mode Auto Input 1	wI1*0AFMT\x0D\x0A
Input Audio Switch Mode Auto Input 10	wI10*0AFMT\x0D\x0A
Input Audio Switch Mode Auto Input 8	wI8*0AFMT\x0D\x0A
Input Audio Switch Mode Digital Input 1	wI1*1AFMT\x0D\x0A
Input Audio Switch Mode Digital Input 10	wI10*1AFMT\x0D\x0A
Input Audio Switch Mode Digital Input 8	wI8*1AFMT\x0D\x0A
Input Gain -18 Format Analog L/R Left Input 1	WG30000*-0180AU\x0D
Input Gain -18 Format Analog L/R Left Input 8	WG30014*-0180AU\x0D
Input Gain -18 Format Analog L/R Right Input 1	WG30001*-0180AU\x0D
Input Gain -18 Format Analog L/R Right Input 8	WG30015*-0180AU\x0D
Input Gain -18 Format Digital L/R Left Input 1	WH30000*-0180AU\x0D
Input Gain -18 Format Digital L/R Left Input 8	WH30014*-0180AU\x0D
Input Gain -18 Format Digital L/R Right Input 1	WH30001*-0180AU\x0D
Input Gain -18 Format Digital L/R Right Input 8	WH30015*-0180AU\x0D
Input Gain -18 Input 1 Format Analog L/R Left	WG30000*-0180AU\x0D

Global Scripser Module Communication Sheet

Revision: 3/1/2021

Input Gain -18 Input 1 Format Analog L/R Right	wG30001*-0180AU\x0D
Input Gain -18 Input 1 Format Digital L/R Left	wH30000*-0180AU\x0D
Input Gain -18 Input 1 Format Digital L/R Right	wH30001*-0180AU\x0D
Input Gain -18 Input 10 Format Analog L/R Left	wG30018*-0180AU\x0D
Input Gain -18 Input 10 Format Analog L/R Right	wG30019*-0180AU\x0D
Input Gain -18 Input 10 Format Digital L/R Left	wH30018*-0180AU\x0D
Input Gain -18 Input 10 Format Digital L/R Right	wH30019*-0180AU\x0D
Input Gain 24 Format Analog L/R Left Input 1	wG30000*00240AU\x0D
Input Gain 24 Format Analog L/R Left Input 8	wG30014*00240AU\x0D
Input Gain 24 Format Analog L/R Right Input 1	wG30001*00240AU\x0D
Input Gain 24 Format Analog L/R Right Input 8	wG30015*00240AU\x0D
Input Gain 24 Format Digital L/R Left Input 1	wH30000*00240AU\x0D
Input Gain 24 Format Digital L/R Left Input 8	wH30014*00240AU\x0D
Input Gain 24 Format Digital L/R Right Input 1	wH30001*00240AU\x0D
Input Gain 24 Format Digital L/R Right Input 8	wH30015*00240AU\x0D
Input Gain 24 Input 1 Format Analog L/R Left	wG30000*00240AU\x0D
Input Gain 24 Input 1 Format Analog L/R Right	wG30001*00240AU\x0D
Input Gain 24 Input 1 Format Digital L/R Left	wH30000*00240AU\x0D
Input Gain 24 Input 1 Format Digital L/R Right	wH30001*00240AU\x0D
Input Gain 24 Input 10 Format Analog L/R Left	wG30018*00240AU\x0D
Input Gain 24 Input 10 Format Analog L/R Right	wG30019*00240AU\x0D
Input Gain 24 Input 10 Format Digital L/R Left	wH30018*00240AU\x0D
Input Gain 24 Input 10 Format Digital L/R Right	wH30019*00240AU\x0D
Input Mute Off Input 1 L/R Left	wM30000*0AU\x0D
Input Mute Off Input 1 L/R Right	wM30001*0AU\x0D
Input Mute Off Input 10 L/R Left	wM30018*0AU\x0D
Input Mute Off Input 10 L/R Right	wM30019*0AU\x0D
Input Mute Off L/R Left Input 1	wM30000*0AU\x0D
Input Mute Off L/R Left Input 8	wM30014*0AU\x0D
Input Mute Off L/R Right Input 1	wM30001*0AU\x0D
Input Mute Off L/R Right Input 8	wM30015*0AU\x0D
Input Mute On Input 1 L/R Left	wM30000*1AU\x0D
Input Mute On Input 1 L/R Right	wM30001*1AU\x0D
Input Mute On Input 10 L/R Left	wM30018*1AU\x0D
Input Mute On Input 10 L/R Right	wM30019*1AU\x0D
Input Mute On L/R Left Input 1	wM30000*1AU\x0D
Input Mute On L/R Left Input 8	wM30014*1AU\x0D
Input Mute On L/R Right Input 1	wM30001*1AU\x0D
Input Mute On L/R Right Input 8	wM30015*1AU\x0D
Logo 1 Output 3	wE3*1LOGO\x0D
Logo 1 Output 5	wE5*1LOGO\x0D
Logo 1 Output 6	wE6*1LOGO\x0D
Logo 1 Output 8	wE8*1LOGO\x0D
Logo 16 Output 3	wE3*16LOGO\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Logo 16 Output 5	wE5*16LOGO\x0D
Logo 16 Output 6	wE6*16LOGO\x0D
Logo 16 Output 8	wE8*16LOGO\x0D
Logo Assignment testString Logo 1	wA1,testStringLOGO\x0D\x0A
Logo Assignment testString Logo 16	wA16,testStringLOGO\x0D\x0A
Logo Key Setting Alpha Key Output 1	w1*4VKEF\x0D\x0A
Logo Key Setting Alpha Key Output 6	w6*4VKEF\x0D\x0A
Logo Key Setting Alpha Key Output 8	w8*4VKEF\x0D\x0A
Logo Key Setting Disabled Output 1	w1*0VKEF\x0D\x0A
Logo Key Setting Disabled Output 6	w6*0VKEF\x0D\x0A
Logo Key Setting Disabled Output 8	w8*0VKEF\x0D\x0A
Logo Key Setting Level Key Output 1	w1*3VKEF\x0D\x0A
Logo Key Setting Level Key Output 6	w6*3VKEF\x0D\x0A
Logo Key Setting Level Key Output 8	w8*3VKEF\x0D\x0A
Logo Key Setting RGB Key Output 1	w1*2VKEF\x0D\x0A
Logo Key Setting RGB Key Output 6	w6*2VKEF\x0D\x0A
Logo Key Setting RGB Key Output 8	w8*2VKEF\x0D\x0A
Logo Key Setting Transparency Output 1	w1*1VKEF\x0D\x0A
Logo Key Setting Transparency Output 6	w6*1VKEF\x0D\x0A
Logo Key Setting Transparency Output 8	w8*1VKEF\x0D\x0A
Logo Off Output 3	wE3*0LOGO\x0D
Logo Off Output 5	wE5*0LOGO\x0D
Logo Off Output 6	wE6*0LOGO\x0D
Logo Off Output 8	wE8*0LOGO\x0D
Matrix Tie Command None Input 0 Output 1 Tie Type Audio	0*1\$\x0D\x0A
Matrix Tie Command None Input 0 Output 1 Tie Type Audio/Video	0*1!\x0D\x0A
Matrix Tie Command None Input 0 Output 1 Tie Type Video	0*1%\x0D\x0A
Matrix Tie Command None Input 0 Output 6 Tie Type Audio	0*6\$\x0D\x0A
Matrix Tie Command None Input 0 Output 6 Tie Type Audio/Video	0*6!\x0D\x0A
Matrix Tie Command None Input 0 Output 6 Tie Type Video	0*6%\x0D\x0A
Matrix Tie Command None Input 0 Output 8 Tie Type Audio	0*8\$\x0D\x0A
Matrix Tie Command None Input 0 Output 8 Tie Type Audio/Video	0*8!\x0D\x0A
Matrix Tie Command None Input 0 Output 8 Tie Type Video	0*8%\x0D\x0A
Matrix Tie Command None Input 0 Output All Tie Type Audio	0*\$\x0D\x0A
Matrix Tie Command None Input 0 Output All Tie Type Audio/Video	0*!\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Matrix Tie Command None Input 0 Output All Tie Type Video	0*%\x0D\x0A
Matrix Tie Command None Input 10 Output 1 Tie Type Audio	10*1\$\x0D\x0A
Matrix Tie Command None Input 10 Output 1 Tie Type Audio/Video	10*1!\x0D\x0A
Matrix Tie Command None Input 10 Output 1 Tie Type Video	10*1%\x0D\x0A
Matrix Tie Command None Input 10 Output 8 Tie Type Audio	10*8\$\x0D\x0A
Matrix Tie Command None Input 10 Output 8 Tie Type Audio/Video	10*8!\x0D\x0A
Matrix Tie Command None Input 10 Output 8 Tie Type Video	10*8%\x0D\x0A
Matrix Tie Command None Input 10 Output All Tie Type Audio	10*\$\x0D\x0A
Matrix Tie Command None Input 10 Output All Tie Type Audio/Video	10*!\x0D\x0A
Matrix Tie Command None Input 10 Output All Tie Type Video	10*%\x0D\x0A
Matrix Tie Command None Input 8 Output 1 Tie Type Audio	8*1\$\x0D\x0A
Matrix Tie Command None Input 8 Output 1 Tie Type Audio/Video	8*1!\x0D\x0A
Matrix Tie Command None Input 8 Output 1 Tie Type Video	8*1%\x0D\x0A
Matrix Tie Command None Input 8 Output 6 Tie Type Audio	8*6\$\x0D\x0A
Matrix Tie Command None Input 8 Output 6 Tie Type Audio/Video	8*6!\x0D\x0A
Matrix Tie Command None Input 8 Output 6 Tie Type Video	8*6%\x0D\x0A
Matrix Tie Command None Input 8 Output All Tie Type Audio	8*\$\x0D\x0A
Matrix Tie Command None Input 8 Output All Tie Type Audio/Video	8*!\x0D\x0A
Matrix Tie Command None Input 8 Output All Tie Type Video	8*%\x0D\x0A
Mic/Line Gain -18 Input 1	wG40000*-0180AU\x0D\x0A
Mic/Line Gain -18 Input 4	wG40003*-0180AU\x0D\x0A
Mic/Line Gain 80 Input 1	wG40000*00800AU\x0D\x0A
Mic/Line Gain 80 Input 4	wG40003*00800AU\x0D\x0A
Mic/Line Mute Off Input 1	wM40000*0AU\x0D
Mic/Line Mute Off Input 4	wM40003*0AU\x0D
Mic/Line Mute On Input 1	wM40000*1AU\x0D
Mic/Line Mute On Input 4	wM40003*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain -100 Input Output 1 Left Output Output 1 Left	WG20000*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 1 Right	WG20001*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 2 Left	WG20002*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 2 Right	WG20003*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 3 Left	WG20004*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 3 Right	WG20005*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 4 Left	WG20006*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 4 Right	WG20007*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 5 Left	WG20008*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 5 Right	WG20009*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 6 Left	WG20010*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 6 Right	WG20011*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 7 Left	WG20012*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 7 Right	WG20013*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 8 Left	WG20014*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Left Output Output 8 Right	WG20015*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 1 Left	WG20100*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 1 Right	WG20101*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 2 Left	WG20102*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 2 Right	WG20103*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 3 Left	WG20104*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 3 Right	WG20105*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 4 Left	WG20106*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output	WG20107*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 4 Right	
Mix-point Gain -100 Input Output 1 Right Output Output 5 Left	WG20108*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 5 Right	WG20109*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 6 Left	WG20110*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 6 Right	WG20111*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 7 Left	WG20112*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 7 Right	WG20113*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 8 Left	WG20114*-1000AU\x0D
Mix-point Gain -100 Input Output 1 Right Output Output 8 Right	WG20115*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 1 Left	WG20200*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 1 Right	WG20201*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 2 Left	WG20202*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 2 Right	WG20203*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 3 Left	WG20204*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 3 Right	WG20205*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 4 Left	WG20206*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 4 Right	WG20207*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 5 Left	WG20208*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 5 Right	WG20209*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 6 Left	WG20210*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 6 Right	WG20211*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 7 Left	WG20212*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 7 Right	WG20213*-1000AU\x0D
Mix-point Gain -100 Input Output 2 Left Output Output 8 Left	WG20214*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain -100 Input Output 2 Left Output Output 8 Right	WG20215*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 1 Left	WG20300*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 1 Right	WG20301*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 2 Left	WG20302*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 2 Right	WG20303*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 3 Left	WG20304*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 3 Right	WG20305*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 4 Left	WG20306*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 4 Right	WG20307*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 5 Left	WG20308*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 5 Right	WG20309*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 6 Left	WG20310*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 6 Right	WG20311*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 7 Left	WG20312*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 7 Right	WG20313*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 8 Left	WG20314*-1000AU\X0D
Mix-point Gain -100 Input Output 2 Right Output Output 8 Right	WG20315*-1000AU\X0D
Mix-point Gain -100 Input Output 3 Left Output Output 1 Left	WG20400*-1000AU\X0D
Mix-point Gain -100 Input Output 3 Left Output Output 1 Right	WG20401*-1000AU\X0D
Mix-point Gain -100 Input Output 3 Left Output Output 2 Left	WG20402*-1000AU\X0D
Mix-point Gain -100 Input Output 3 Left Output Output 2 Right	WG20403*-1000AU\X0D
Mix-point Gain -100 Input Output 3 Left Output Output 3 Left	WG20404*-1000AU\X0D
Mix-point Gain -100 Input Output 3 Left Output Output 3 Right	WG20405*-1000AU\X0D
Mix-point Gain -100 Input Output 3 Left Output	WG20406*-1000AU\X0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 4 Left	
Mix-point Gain -100 Input Output 3 Left Output Output 4 Right	WG20407*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 5 Left	WG20408*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 5 Right	WG20409*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 6 Left	WG20410*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 6 Right	WG20411*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 7 Left	WG20412*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 7 Right	WG20413*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 8 Left	WG20414*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Left Output Output 8 Right	WG20415*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 1 Left	WG20500*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 1 Right	WG20501*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 2 Left	WG20502*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 2 Right	WG20503*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 3 Left	WG20504*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 3 Right	WG20505*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 4 Left	WG20506*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 4 Right	WG20507*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 5 Left	WG20508*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 5 Right	WG20509*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 6 Left	WG20510*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 6 Right	WG20511*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 7 Left	WG20512*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 7 Right	WG20513*-1000AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain -100 Input Output 3 Right Output Output 8 Left	WG20514*-1000AU\x0D
Mix-point Gain -100 Input Output 3 Right Output Output 8 Right	WG20515*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 1 Left	WG20600*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 1 Right	WG20601*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 2 Left	WG20602*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 2 Right	WG20603*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 3 Left	WG20604*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 3 Right	WG20605*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 4 Left	WG20606*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 4 Right	WG20607*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 5 Left	WG20608*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 5 Right	WG20609*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 6 Left	WG20610*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 6 Right	WG20611*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 7 Left	WG20612*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 7 Right	WG20613*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 8 Left	WG20614*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Left Output Output 8 Right	WG20615*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 1 Left	WG20700*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 1 Right	WG20701*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 2 Left	WG20702*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 2 Right	WG20703*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 3 Left	WG20704*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output	WG20705*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 3 Right	
Mix-point Gain -100 Input Output 4 Right Output Output 4 Left	WG20706*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 4 Right	WG20707*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 5 Left	WG20708*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 5 Right	WG20709*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 6 Left	WG20710*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 6 Right	WG20711*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 7 Left	WG20712*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 7 Right	WG20713*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 8 Left	WG20714*-1000AU\x0D
Mix-point Gain -100 Input Output 4 Right Output Output 8 Right	WG20715*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 1 Left	WG20800*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 1 Right	WG20801*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 2 Left	WG20802*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 2 Right	WG20803*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 3 Left	WG20804*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 3 Right	WG20805*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 4 Left	WG20806*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 4 Right	WG20807*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 5 Left	WG20808*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 5 Right	WG20809*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 6 Left	WG20810*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 6 Right	WG20811*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 7 Left	WG20812*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain -100 Input Output 5 Left Output Output 7 Right	WG20813*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 8 Left	WG20814*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Left Output Output 8 Right	WG20815*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 1 Left	WG20900*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 1 Right	WG20901*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 2 Left	WG20902*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 2 Right	WG20903*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 3 Left	WG20904*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 3 Right	WG20905*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 4 Left	WG20906*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 4 Right	WG20907*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 5 Left	WG20908*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 5 Right	WG20909*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 6 Left	WG20910*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 6 Right	WG20911*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 7 Left	WG20912*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 7 Right	WG20913*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 8 Left	WG20914*-1000AU\x0D
Mix-point Gain -100 Input Output 5 Right Output Output 8 Right	WG20915*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 1 Left	WG21000*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 1 Right	WG21001*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 2 Left	WG21002*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 2 Right	WG21003*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output	WG21004*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 3 Left	
Mix-point Gain -100 Input Output 6 Left Output Output 3 Right	WG21005*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 4 Left	WG21006*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 4 Right	WG21007*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 5 Left	WG21008*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 5 Right	WG21009*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 6 Left	WG21010*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 6 Right	WG21011*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 7 Left	WG21012*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 7 Right	WG21013*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 8 Left	WG21014*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Left Output Output 8 Right	WG21015*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 1 Left	WG21100*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 1 Right	WG21101*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 2 Left	WG21102*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 2 Right	WG21103*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 3 Left	WG21104*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 3 Right	WG21105*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 4 Left	WG21106*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 4 Right	WG21107*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 5 Left	WG21108*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 5 Right	WG21109*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 6 Left	WG21110*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 6 Right	WG21111*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain -100 Input Output 6 Right Output Output 7 Left	WG21112*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 7 Right	WG21113*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 8 Left	WG21114*-1000AU\x0D
Mix-point Gain -100 Input Output 6 Right Output Output 8 Right	WG21115*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 1 Left	WG21200*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 1 Right	WG21201*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 2 Left	WG21202*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 2 Right	WG21203*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 3 Left	WG21204*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 3 Right	WG21205*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 4 Left	WG21206*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 4 Right	WG21207*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 5 Left	WG21208*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 5 Right	WG21209*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 6 Left	WG21210*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 6 Right	WG21211*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 7 Left	WG21212*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 7 Right	WG21213*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 8 Left	WG21214*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Left Output Output 8 Right	WG21215*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 1 Left	WG21300*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 1 Right	WG21301*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 2 Left	WG21302*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output	WG21303*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 2 Right	
Mix-point Gain -100 Input Output 7 Right Output Output 3 Left	WG21304*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 3 Right	WG21305*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 4 Left	WG21306*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 4 Right	WG21307*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 5 Left	WG21308*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 5 Right	WG21309*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 6 Left	WG21310*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 6 Right	WG21311*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 7 Left	WG21312*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 7 Right	WG21313*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 8 Left	WG21314*-1000AU\x0D
Mix-point Gain -100 Input Output 7 Right Output Output 8 Right	WG21315*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 1 Left	WG21400*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 1 Right	WG21401*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 2 Left	WG21402*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 2 Right	WG21403*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 3 Left	WG21404*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 3 Right	WG21405*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 4 Left	WG21406*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 4 Right	WG21407*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 5 Left	WG21408*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 5 Right	WG21409*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 6 Left	WG21410*-1000AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain -100 Input Output 8 Left Output Output 6 Right	WG21411*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 7 Left	WG21412*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 7 Right	WG21413*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 8 Left	WG21414*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Left Output Output 8 Right	WG21415*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 1 Left	WG21500*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 1 Right	WG21501*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 2 Left	WG21502*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 2 Right	WG21503*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 3 Left	WG21504*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 3 Right	WG21505*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 4 Left	WG21506*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 4 Right	WG21507*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 5 Left	WG21508*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 5 Right	WG21509*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 6 Left	WG21510*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 6 Right	WG21511*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 7 Left	WG21512*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 7 Right	WG21513*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 8 Left	WG21514*-1000AU\x0D
Mix-point Gain -100 Input Output 8 Right Output Output 8 Right	WG21515*-1000AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 1 Left	WG20000*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 1 Right	WG20001*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output	WG20002*120AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output 2 Left	
Mix-point Gain 12 Input Output 1 Left Output Output 2 Right	WG20003*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 3 Left	WG20004*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 3 Right	WG20005*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 4 Left	WG20006*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 4 Right	WG20007*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 5 Left	WG20008*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 5 Right	WG20009*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 6 Left	WG20010*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 6 Right	WG20011*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 7 Left	WG20012*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 7 Right	WG20013*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 8 Left	WG20014*120AU\x0D
Mix-point Gain 12 Input Output 1 Left Output Output 8 Right	WG20015*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 1 Left	WG20100*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 1 Right	WG20101*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 2 Left	WG20102*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 2 Right	WG20103*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 3 Left	WG20104*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 3 Right	WG20105*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 4 Left	WG20106*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 4 Right	WG20107*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 5 Left	WG20108*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 5 Right	WG20109*120AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain 12 Input Output 1 Right Output Output 6 Left	WG20110*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 6 Right	WG20111*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 7 Left	WG20112*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 7 Right	WG20113*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 8 Left	WG20114*120AU\x0D
Mix-point Gain 12 Input Output 1 Right Output Output 8 Right	WG20115*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 1 Left	WG20200*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 1 Right	WG20201*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 2 Left	WG20202*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 2 Right	WG20203*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 3 Left	WG20204*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 3 Right	WG20205*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 4 Left	WG20206*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 4 Right	WG20207*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 5 Left	WG20208*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 5 Right	WG20209*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 6 Left	WG20210*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 6 Right	WG20211*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 7 Left	WG20212*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 7 Right	WG20213*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 8 Left	WG20214*120AU\x0D
Mix-point Gain 12 Input Output 2 Left Output Output 8 Right	WG20215*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 1 Left	WG20300*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output	WG20301*120AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output 1 Right	
Mix-point Gain 12 Input Output 2 Right Output Output 2 Left	WG20302*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 2 Right	WG20303*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 3 Left	WG20304*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 3 Right	WG20305*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 4 Left	WG20306*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 4 Right	WG20307*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 5 Left	WG20308*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 5 Right	WG20309*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 6 Left	WG20310*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 6 Right	WG20311*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 7 Left	WG20312*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 7 Right	WG20313*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 8 Left	WG20314*120AU\x0D
Mix-point Gain 12 Input Output 2 Right Output Output 8 Right	WG20315*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 1 Left	WG20400*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 1 Right	WG20401*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 2 Left	WG20402*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 2 Right	WG20403*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 3 Left	WG20404*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 3 Right	WG20405*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 4 Left	WG20406*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 4 Right	WG20407*120AU\x0D
Mix-point Gain 12 Input Output 3 Left Output Output 5 Left	WG20408*120AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain 12 Input Output 3 Left Output Output 5 Right	WG20409*120AU\X0D
Mix-point Gain 12 Input Output 3 Left Output Output 6 Left	WG20410*120AU\X0D
Mix-point Gain 12 Input Output 3 Left Output Output 6 Right	WG20411*120AU\X0D
Mix-point Gain 12 Input Output 3 Left Output Output 7 Left	WG20412*120AU\X0D
Mix-point Gain 12 Input Output 3 Left Output Output 7 Right	WG20413*120AU\X0D
Mix-point Gain 12 Input Output 3 Left Output Output 8 Left	WG20414*120AU\X0D
Mix-point Gain 12 Input Output 3 Left Output Output 8 Right	WG20415*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 1 Left	WG20500*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 1 Right	WG20501*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 2 Left	WG20502*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 2 Right	WG20503*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 3 Left	WG20504*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 3 Right	WG20505*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 4 Left	WG20506*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 4 Right	WG20507*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 5 Left	WG20508*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 5 Right	WG20509*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 6 Left	WG20510*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 6 Right	WG20511*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 7 Left	WG20512*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 7 Right	WG20513*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 8 Left	WG20514*120AU\X0D
Mix-point Gain 12 Input Output 3 Right Output Output 8 Right	WG20515*120AU\X0D
Mix-point Gain 12 Input Output 4 Left Output	WG20600*120AU\X0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output 1 Left	
Mix-point Gain 12 Input Output 4 Left Output Output 1 Right	WG20601*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 2 Left	WG20602*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 2 Right	WG20603*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 3 Left	WG20604*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 3 Right	WG20605*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 4 Left	WG20606*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 4 Right	WG20607*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 5 Left	WG20608*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 5 Right	WG20609*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 6 Left	WG20610*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 6 Right	WG20611*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 7 Left	WG20612*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 7 Right	WG20613*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 8 Left	WG20614*120AU\x0D
Mix-point Gain 12 Input Output 4 Left Output Output 8 Right	WG20615*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 1 Left	WG20700*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 1 Right	WG20701*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 2 Left	WG20702*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 2 Right	WG20703*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 3 Left	WG20704*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 3 Right	WG20705*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 4 Left	WG20706*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 4 Right	WG20707*120AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain 12 Input Output 4 Right Output Output 5 Left	WG20708*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 5 Right	WG20709*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 6 Left	WG20710*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 6 Right	WG20711*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 7 Left	WG20712*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 7 Right	WG20713*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 8 Left	WG20714*120AU\x0D
Mix-point Gain 12 Input Output 4 Right Output Output 8 Right	WG20715*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 1 Left	WG20800*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 1 Right	WG20801*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 2 Left	WG20802*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 2 Right	WG20803*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 3 Left	WG20804*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 3 Right	WG20805*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 4 Left	WG20806*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 4 Right	WG20807*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 5 Left	WG20808*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 5 Right	WG20809*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 6 Left	WG20810*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 6 Right	WG20811*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 7 Left	WG20812*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 7 Right	WG20813*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output Output 8 Left	WG20814*120AU\x0D
Mix-point Gain 12 Input Output 5 Left Output	WG20815*120AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 8 Right	
Mix-point Gain 12 Input Output 5 Right Output Output 1 Left	WG20900*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 1 Right	WG20901*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 2 Left	WG20902*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 2 Right	WG20903*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 3 Left	WG20904*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 3 Right	WG20905*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 4 Left	WG20906*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 4 Right	WG20907*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 5 Left	WG20908*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 5 Right	WG20909*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 6 Left	WG20910*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 6 Right	WG20911*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 7 Left	WG20912*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 7 Right	WG20913*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 8 Left	WG20914*120AU\x0D
Mix-point Gain 12 Input Output 5 Right Output Output 8 Right	WG20915*120AU\x0D
Mix-point Gain 12 Input Output 6 Left Output Output 1 Left	WG21000*120AU\x0D
Mix-point Gain 12 Input Output 6 Left Output Output 1 Right	WG21001*120AU\x0D
Mix-point Gain 12 Input Output 6 Left Output Output 2 Left	WG21002*120AU\x0D
Mix-point Gain 12 Input Output 6 Left Output Output 2 Right	WG21003*120AU\x0D
Mix-point Gain 12 Input Output 6 Left Output Output 3 Left	WG21004*120AU\x0D
Mix-point Gain 12 Input Output 6 Left Output Output 3 Right	WG21005*120AU\x0D
Mix-point Gain 12 Input Output 6 Left Output Output 4 Left	WG21006*120AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain 12 Input Output 6 Left Output Output 4 Right	WG21007*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 5 Left	WG21008*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 5 Right	WG21009*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 6 Left	WG21010*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 6 Right	WG21011*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 7 Left	WG21012*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 7 Right	WG21013*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 8 Left	WG21014*120AU\X0D
Mix-point Gain 12 Input Output 6 Left Output Output 8 Right	WG21015*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 1 Left	WG21100*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 1 Right	WG21101*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 2 Left	WG21102*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 2 Right	WG21103*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 3 Left	WG21104*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 3 Right	WG21105*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 4 Left	WG21106*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 4 Right	WG21107*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 5 Left	WG21108*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 5 Right	WG21109*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 6 Left	WG21110*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 6 Right	WG21111*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 7 Left	WG21112*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output Output 7 Right	WG21113*120AU\X0D
Mix-point Gain 12 Input Output 6 Right Output	WG21114*120AU\X0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 8 Left	
Mix-point Gain 12 Input Output 6 Right Output Output 8 Right	WG21115*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 1 Left	WG21200*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 1 Right	WG21201*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 2 Left	WG21202*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 2 Right	WG21203*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 3 Left	WG21204*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 3 Right	WG21205*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 4 Left	WG21206*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 4 Right	WG21207*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 5 Left	WG21208*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 5 Right	WG21209*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 6 Left	WG21210*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 6 Right	WG21211*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 7 Left	WG21212*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 7 Right	WG21213*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 8 Left	WG21214*120AU\x0D
Mix-point Gain 12 Input Output 7 Left Output Output 8 Right	WG21215*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 1 Left	WG21300*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 1 Right	WG21301*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 2 Left	WG21302*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 2 Right	WG21303*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 3 Left	WG21304*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 3 Right	WG21305*120AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain 12 Input Output 7 Right Output Output 4 Left	WG21306*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 4 Right	WG21307*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 5 Left	WG21308*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 5 Right	WG21309*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 6 Left	WG21310*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 6 Right	WG21311*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 7 Left	WG21312*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 7 Right	WG21313*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 8 Left	WG21314*120AU\x0D
Mix-point Gain 12 Input Output 7 Right Output Output 8 Right	WG21315*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 1 Left	WG21400*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 1 Right	WG21401*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 2 Left	WG21402*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 2 Right	WG21403*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 3 Left	WG21404*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 3 Right	WG21405*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 4 Left	WG21406*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 4 Right	WG21407*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 5 Left	WG21408*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 5 Right	WG21409*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 6 Left	WG21410*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 6 Right	WG21411*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 7 Left	WG21412*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output	WG21413*120AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 7 Right	
Mix-point Gain 12 Input Output 8 Left Output Output 8 Left	WG21414*120AU\x0D
Mix-point Gain 12 Input Output 8 Left Output Output 8 Right	WG21415*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 1 Left	WG21500*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 1 Right	WG21501*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 2 Left	WG21502*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 2 Right	WG21503*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 3 Left	WG21504*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 3 Right	WG21505*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 4 Left	WG21506*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 4 Right	WG21507*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 5 Left	WG21508*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 5 Right	WG21509*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 6 Left	WG21510*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 6 Right	WG21511*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 7 Left	WG21512*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 7 Right	WG21513*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 8 Left	WG21514*120AU\x0D
Mix-point Gain 12 Input Output 8 Right Output Output 8 Right	WG21515*120AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 1 Left	WM22800*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 1 Right	WM22801*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 2 Left	WM22802*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 2 Right	WM22803*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 3 Left	WM22804*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 1 Output Output 3 Right	WM22805*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 4 Left	WM22806*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 4 Right	WM22807*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 5 Left	WM22808*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 5 Right	WM22809*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 6 Left	WM22810*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 6 Right	WM22811*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 7 Left	WM22812*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 7 Right	WM22813*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 8 Left	WM22814*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 8 Right	WM22815*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send A	WM22816*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send B	WM22817*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send C	WM22818*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send D	WM22819*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send E	WM22820*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send F	WM22821*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send G	WM22822*0AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send H	WM22823*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 1 Left	WM23700*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 1 Right	WM23701*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 2 Left	WM23702*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 2 Right	WM23703*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 3 Left	WM23704*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 3 Right	WM23705*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 4 Left	WM23706*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 4 Right	WM23707*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 10 Output Output 5 Left	WM23708*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 5 Right	WM23709*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 6 Left	WM23710*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 6 Right	WM23711*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 7 Left	WM23712*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 7 Right	WM23713*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 8 Left	WM23714*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output Output 8 Right	WM23715*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send A	WM23716*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send B	WM23717*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send C	WM23718*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send D	WM23719*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send E	WM23720*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send F	WM23721*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send G	WM23722*0AU\x0D
Mix-point Mute Off Input Exp. 10 Output V. Send H	WM23723*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 1 Left	WM23800*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 1 Right	WM23801*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 2 Left	WM23802*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 2 Right	WM23803*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 3 Left	WM23804*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 3 Right	WM23805*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 4 Left	WM23806*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 4 Right	WM23807*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 5 Left	WM23808*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 5 Right	WM23809*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 6 Left	WM23810*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 11 Output Output 6 Right	WM23811*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 7 Left	WM23812*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 7 Right	WM23813*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 8 Left	WM23814*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output Output 8 Right	WM23815*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send A	WM23816*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send B	WM23817*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send C	WM23818*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send D	WM23819*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send E	WM23820*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send F	WM23821*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send G	WM23822*0AU\x0D
Mix-point Mute Off Input Exp. 11 Output V. Send H	WM23823*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 1 Left	WM23900*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 1 Right	WM23901*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 2 Left	WM23902*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 2 Right	WM23903*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 3 Left	WM23904*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 3 Right	WM23905*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 4 Left	WM23906*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 4 Right	WM23907*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 5 Left	WM23908*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 5 Right	WM23909*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 6 Left	WM23910*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 6 Right	WM23911*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 7 Left	WM23912*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 7 Right	WM23913*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 12 Output Output 8 Left	WM23914*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output Output 8 Right	WM23915*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send A	WM23916*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send B	WM23917*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send C	WM23918*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send D	WM23919*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send E	WM23920*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send F	WM23921*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send G	WM23922*0AU\x0D
Mix-point Mute Off Input Exp. 12 Output V. Send H	WM23923*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 1 Left	WM24000*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 1 Right	WM24001*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 2 Left	WM24002*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 2 Right	WM24003*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 3 Left	WM24004*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 3 Right	WM24005*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 4 Left	WM24006*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 4 Right	WM24007*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 5 Left	WM24008*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 5 Right	WM24009*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 6 Left	WM24010*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 6 Right	WM24011*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 7 Left	WM24012*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 7 Right	WM24013*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 8 Left	WM24014*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output Output 8 Right	WM24015*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output V. Send A	WM24016*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output V. Send B	WM24017*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 13 Output V. Send C	WM24018*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output V. Send D	WM24019*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output V. Send E	WM24020*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output V. Send F	WM24021*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output V. Send G	WM24022*0AU\x0D
Mix-point Mute Off Input Exp. 13 Output V. Send H	WM24023*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 1 Left	WM24100*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 1 Right	WM24101*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 2 Left	WM24102*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 2 Right	WM24103*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 3 Left	WM24104*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 3 Right	WM24105*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 4 Left	WM24106*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 4 Right	WM24107*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 5 Left	WM24108*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 5 Right	WM24109*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 6 Left	WM24110*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 6 Right	WM24111*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 7 Left	WM24112*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 7 Right	WM24113*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 8 Left	WM24114*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output Output 8 Right	WM24115*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send A	WM24116*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send B	WM24117*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send C	WM24118*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send D	WM24119*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send E	WM24120*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send F	WM24121*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send G	WM24122*0AU\x0D
Mix-point Mute Off Input Exp. 14 Output V. Send H	WM24123*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 15 Output Output 1 Left	WM24200*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 1 Right	WM24201*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 2 Left	WM24202*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 2 Right	WM24203*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 3 Left	WM24204*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 3 Right	WM24205*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 4 Left	WM24206*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 4 Right	WM24207*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 5 Left	WM24208*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 5 Right	WM24209*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 6 Left	WM24210*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 6 Right	WM24211*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 7 Left	WM24212*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 7 Right	WM24213*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 8 Left	WM24214*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output Output 8 Right	WM24215*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send A	WM24216*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send B	WM24217*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send C	WM24218*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send D	WM24219*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send E	WM24220*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send F	WM24221*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send G	WM24222*0AU\x0D
Mix-point Mute Off Input Exp. 15 Output V. Send H	WM24223*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 1 Left	WM24300*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 1 Right	WM24301*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 2 Left	WM24302*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 16 Output Output 2 Right	WM24303*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 3 Left	WM24304*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 3 Right	WM24305*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 4 Left	WM24306*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 4 Right	WM24307*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 5 Left	WM24308*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 5 Right	WM24309*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 6 Left	WM24310*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 6 Right	WM24311*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 7 Left	WM24312*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 7 Right	WM24313*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 8 Left	WM24314*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output Output 8 Right	WM24315*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send A	WM24316*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send B	WM24317*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send C	WM24318*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send D	WM24319*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send E	WM24320*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send F	WM24321*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send G	WM24322*0AU\x0D
Mix-point Mute Off Input Exp. 16 Output V. Send H	WM24323*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 1 Left	WM22900*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 1 Right	WM22901*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 2 Left	WM22902*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 2 Right	WM22903*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 3 Left	WM22904*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 3 Right	WM22905*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 2 Output Output 4 Left	WM22906*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 4 Right	WM22907*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 5 Left	WM22908*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 5 Right	WM22909*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 6 Left	WM22910*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 6 Right	WM22911*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 7 Left	WM22912*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 7 Right	WM22913*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 8 Left	WM22914*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 8 Right	WM22915*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send A	WM22916*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send B	WM22917*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send C	WM22918*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send D	WM22919*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send E	WM22920*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send F	WM22921*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send G	WM22922*0AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send H	WM22923*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 1 Left	WM23000*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 1 Right	WM23001*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 2 Left	WM23002*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 2 Right	WM23003*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 3 Left	WM23004*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 3 Right	WM23005*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 4 Left	WM23006*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 4 Right	WM23007*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 5 Left	WM23008*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 3 Output Output 5 Right	WM23009*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 6 Left	WM23010*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 6 Right	WM23011*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 7 Left	WM23012*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 7 Right	WM23013*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 8 Left	WM23014*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 8 Right	WM23015*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send A	WM23016*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send B	WM23017*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send C	WM23018*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send D	WM23019*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send E	WM23020*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send F	WM23021*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send G	WM23022*0AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send H	WM23023*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 1 Left	WM23100*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 1 Right	WM23101*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 2 Left	WM23102*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 2 Right	WM23103*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 3 Left	WM23104*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 3 Right	WM23105*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 4 Left	WM23106*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 4 Right	WM23107*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 5 Left	WM23108*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 5 Right	WM23109*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 6 Left	WM23110*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 6 Right	WM23111*0AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 4 Output Output 7 Left	WM23112*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 7 Right	WM23113*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 8 Left	WM23114*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 8 Right	WM23115*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send A	WM23116*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send B	WM23117*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send C	WM23118*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send D	WM23119*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send E	WM23120*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send F	WM23121*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send G	WM23122*0AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send H	WM23123*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 1 Left	WM23200*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 1 Right	WM23201*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 2 Left	WM23202*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 2 Right	WM23203*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 3 Left	WM23204*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 3 Right	WM23205*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 4 Left	WM23206*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 4 Right	WM23207*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 5 Left	WM23208*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 5 Right	WM23209*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 6 Left	WM23210*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 6 Right	WM23211*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 7 Left	WM23212*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 7 Right	WM23213*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 8 Left	WM23214*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 5 Output Output 8 Right	WM23215*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send A	WM23216*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send B	WM23217*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send C	WM23218*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send D	WM23219*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send E	WM23220*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send F	WM23221*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send G	WM23222*0AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send H	WM23223*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 1 Left	WM23300*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 1 Right	WM23301*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 2 Left	WM23302*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 2 Right	WM23303*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 3 Left	WM23304*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 3 Right	WM23305*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 4 Left	WM23306*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 4 Right	WM23307*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 5 Left	WM23308*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 5 Right	WM23309*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 6 Left	WM23310*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 6 Right	WM23311*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 7 Left	WM23312*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 7 Right	WM23313*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 8 Left	WM23314*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 8 Right	WM23315*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send A	WM23316*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send B	WM23317*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send C	WM23318*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send D	WM23319*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 6 Output V. Send E	WM23320*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send F	WM23321*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send G	WM23322*0AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send H	WM23323*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 1 Left	WM23400*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 1 Right	WM23401*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 2 Left	WM23402*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 2 Right	WM23403*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 3 Left	WM23404*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 3 Right	WM23405*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 4 Left	WM23406*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 4 Right	WM23407*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 5 Left	WM23408*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 5 Right	WM23409*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 6 Left	WM23410*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 6 Right	WM23411*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 7 Left	WM23412*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 7 Right	WM23413*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 8 Left	WM23414*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 8 Right	WM23415*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send A	WM23416*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send B	WM23417*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send C	WM23418*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send D	WM23419*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send E	WM23420*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send F	WM23421*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send G	WM23422*0AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send H	WM23423*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 1 Left	WM23500*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 8 Output Output 1 Right	WM23501*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 2 Left	WM23502*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 2 Right	WM23503*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 3 Left	WM23504*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 3 Right	WM23505*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 4 Left	WM23506*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 4 Right	WM23507*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 5 Left	WM23508*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 5 Right	WM23509*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 6 Left	WM23510*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 6 Right	WM23511*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 7 Left	WM23512*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 7 Right	WM23513*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 8 Left	WM23514*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 8 Right	WM23515*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send A	WM23516*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send B	WM23517*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send C	WM23518*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send D	WM23519*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send E	WM23520*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send F	WM23521*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send G	WM23522*0AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send H	WM23523*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 1 Left	WM23600*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 1 Right	WM23601*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 2 Left	WM23602*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 2 Right	WM23603*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Exp. 9 Output Output 3 Left	WM23604*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 3 Right	WM23605*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 4 Left	WM23606*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 4 Right	WM23607*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 5 Left	WM23608*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 5 Right	WM23609*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 6 Left	WM23610*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 6 Right	WM23611*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 7 Left	WM23612*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 7 Right	WM23613*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 8 Left	WM23614*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output Output 8 Right	WM23615*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send A	WM23616*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send B	WM23617*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send C	WM23618*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send D	WM23619*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send E	WM23620*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send F	WM23621*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send G	WM23622*0AU\x0D
Mix-point Mute Off Input Exp. 9 Output V. Send H	WM23623*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 1 Left	WM21600*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 1 Right	WM21601*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 2 Left	WM21602*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 2 Right	WM21603*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 3 Left	WM21604*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 3 Right	WM21605*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 4 Left	WM21606*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 4 Right	WM21607*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 5 Left	WM21608*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 5	WM21609*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Right	
Mix-point Mute Off Input Mic 1 Output Output 6 Left	WM21610*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 6 Right	WM21611*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 7 Left	WM21612*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 7 Right	WM21613*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 8 Left	WM21614*0AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 8 Right	WM21615*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send A	WM21616*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send B	WM21617*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send C	WM21618*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send D	WM21619*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send E	WM21620*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send F	WM21621*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send G	WM21622*0AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send H	WM21623*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 1 Left	WM21700*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 1 Right	WM21701*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 2 Left	WM21702*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 2 Right	WM21703*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 3 Left	WM21704*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 3 Right	WM21705*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 4 Left	WM21706*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 4 Right	WM21707*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 5 Left	WM21708*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 5 Right	WM21709*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 6 Left	WM21710*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 6 Right	WM21711*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 7 Left	WM21712*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 7 Right	WM21713*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 8 Left	WM21714*0AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 8 Right	WM21715*0AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send A	WM21716*0AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send B	WM21717*0AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send C	WM21718*0AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send D	WM21719*0AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Mic 2 Output V. Send E	WM21720*0AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send F	WM21721*0AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send G	WM21722*0AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send H	WM21723*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 1 Left	WM21800*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 1 Right	WM21801*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 2 Left	WM21802*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 2 Right	WM21803*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 3 Left	WM21804*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 3 Right	WM21805*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 4 Left	WM21806*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 4 Right	WM21807*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 5 Left	WM21808*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 5 Right	WM21809*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 6 Left	WM21810*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 6 Right	WM21811*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 7 Left	WM21812*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 7 Right	WM21813*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 8 Left	WM21814*0AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 8 Right	WM21815*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send A	WM21816*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send B	WM21817*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send C	WM21818*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send D	WM21819*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send E	WM21820*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send F	WM21821*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send G	WM21822*0AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send H	WM21823*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 1 Left	WM21900*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 1 Right	WM21901*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 2 Left	WM21902*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 2 Right	WM21903*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 3 Left	WM21904*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 3 Right	WM21905*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 4 Left	WM21906*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Mic 4 Output Output 4 Right	WM21907*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 5 Left	WM21908*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 5 Right	WM21909*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 6 Left	WM21910*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 6 Right	WM21911*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 7 Left	WM21912*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 7 Right	WM21913*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 8 Left	WM21914*0AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 8 Right	WM21915*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send A	WM21916*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send B	WM21917*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send C	WM21918*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send D	WM21919*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send E	WM21920*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send F	WM21921*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send G	WM21922*0AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send H	WM21923*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 1 Left	WM20000*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 1 Right	WM20001*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 2 Left	WM20002*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 2 Right	WM20003*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 3 Left	WM20004*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 3 Right	WM20005*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 4 Left	WM20006*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 4 Right	WM20007*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 5 Left	WM20008*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 5 Right	WM20009*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 6 Left	WM20010*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 6 Right	WM20011*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 1 Left Output Output 7 Left	WM20012*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 7 Right	WM20013*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 8 Left	WM20014*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 8 Right	WM20015*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send A	WM20016*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send B	WM20017*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send C	WM20018*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send D	WM20019*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send E	WM20020*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send F	WM20021*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send G	WM20022*0AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send H	WM20023*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 1 Left	WM20100*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 1 Right	WM20101*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 2 Left	WM20102*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 2 Right	WM20103*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 3 Left	WM20104*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 3 Right	WM20105*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 4 Left	WM20106*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 4 Right	WM20107*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 5 Left	WM20108*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 5 Right	WM20109*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 6 Left	WM20110*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output	WM20111*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 6 Right	
Mix-point Mute Off Input Output 1 Right Output Output 7 Left	WM20112*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 7 Right	WM20113*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 8 Left	WM20114*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 8 Right	WM20115*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send A	WM20116*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send B	WM20117*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send C	WM20118*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send D	WM20119*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send E	WM20120*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send F	WM20121*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send G	WM20122*0AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send H	WM20123*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 1 Left	WM20200*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 1 Right	WM20201*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 2 Left	WM20202*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 2 Right	WM20203*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 3 Left	WM20204*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 3 Right	WM20205*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 4 Left	WM20206*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 4 Right	WM20207*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 5 Left	WM20208*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 5 Right	WM20209*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 6 Left	WM20210*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 2 Left Output Output 6 Right	WM20211*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 7 Left	WM20212*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 7 Right	WM20213*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 8 Left	WM20214*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 8 Right	WM20215*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send A	WM20216*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send B	WM20217*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send C	WM20218*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send D	WM20219*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send E	WM20220*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send F	WM20221*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send G	WM20222*0AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send H	WM20223*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 1 Left	WM20300*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 1 Right	WM20301*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 2 Left	WM20302*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 2 Right	WM20303*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 3 Left	WM20304*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 3 Right	WM20305*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 4 Left	WM20306*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 4 Right	WM20307*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 5 Left	WM20308*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 5 Right	WM20309*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output	WM20310*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 6 Left	
Mix-point Mute Off Input Output 2 Right Output Output 6 Right	WM20311*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 7 Left	WM20312*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 7 Right	WM20313*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 8 Left	WM20314*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 8 Right	WM20315*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send A	WM20316*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send B	WM20317*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send C	WM20318*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send D	WM20319*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send E	WM20320*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send F	WM20321*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send G	WM20322*0AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send H	WM20323*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 1 Left	WM20400*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 1 Right	WM20401*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 2 Left	WM20402*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 2 Right	WM20403*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 3 Left	WM20404*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 3 Right	WM20405*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 4 Left	WM20406*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 4 Right	WM20407*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 5 Left	WM20408*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 5 Right	WM20409*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 3 Left Output Output 6 Left	WM20410*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 6 Right	WM20411*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 7 Left	WM20412*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 7 Right	WM20413*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 8 Left	WM20414*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 8 Right	WM20415*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send A	WM20416*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send B	WM20417*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send C	WM20418*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send D	WM20419*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send E	WM20420*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send F	WM20421*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send G	WM20422*0AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send H	WM20423*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 1 Left	WM20500*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 1 Right	WM20501*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 2 Left	WM20502*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 2 Right	WM20503*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 3 Left	WM20504*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 3 Right	WM20505*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 4 Left	WM20506*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 4 Right	WM20507*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 5 Left	WM20508*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output	WM20509*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 5 Right	
Mix-point Mute Off Input Output 3 Right Output Output 6 Left	WM20510*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 6 Right	WM20511*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 7 Left	WM20512*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 7 Right	WM20513*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 8 Left	WM20514*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 8 Right	WM20515*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send A	WM20516*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send B	WM20517*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send C	WM20518*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send D	WM20519*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send E	WM20520*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send F	WM20521*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send G	WM20522*0AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send H	WM20523*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 1 Left	WM20600*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 1 Right	WM20601*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 2 Left	WM20602*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 2 Right	WM20603*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 3 Left	WM20604*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 3 Right	WM20605*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 4 Left	WM20606*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 4 Right	WM20607*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 5 Left	WM20608*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 4 Left Output Output 5 Right	WM20609*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 6 Left	WM20610*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 6 Right	WM20611*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 7 Left	WM20612*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 7 Right	WM20613*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 8 Left	WM20614*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 8 Right	WM20615*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send A	WM20616*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send B	WM20617*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send C	WM20618*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send D	WM20619*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send E	WM20620*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send F	WM20621*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send G	WM20622*0AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send H	WM20623*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 1 Left	WM20700*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 1 Right	WM20701*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 2 Left	WM20702*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 2 Right	WM20703*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 3 Left	WM20704*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 3 Right	WM20705*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 4 Left	WM20706*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 4 Right	WM20707*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output	WM20708*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 5 Left	
Mix-point Mute Off Input Output 4 Right Output Output 5 Right	WM20709*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 6 Left	WM20710*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 6 Right	WM20711*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 7 Left	WM20712*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 7 Right	WM20713*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 8 Left	WM20714*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 8 Right	WM20715*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send A	WM20716*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send B	WM20717*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send C	WM20718*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send D	WM20719*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send E	WM20720*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send F	WM20721*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send G	WM20722*0AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send H	WM20723*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 1 Left	WM20800*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 1 Right	WM20801*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 2 Left	WM20802*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 2 Right	WM20803*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 3 Left	WM20804*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 3 Right	WM20805*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 4 Left	WM20806*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 4 Right	WM20807*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 5 Left Output Output 5 Left	WM20808*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 5 Right	WM20809*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 6 Left	WM20810*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 6 Right	WM20811*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 7 Left	WM20812*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 7 Right	WM20813*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 8 Left	WM20814*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output Output 8 Right	WM20815*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send A	WM20816*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send B	WM20817*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send C	WM20818*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send D	WM20819*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send E	WM20820*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send F	WM20821*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send G	WM20822*0AU\x0D
Mix-point Mute Off Input Output 5 Left Output V. Send H	WM20823*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 1 Left	WM20900*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 1 Right	WM20901*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 2 Left	WM20902*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 2 Right	WM20903*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 3 Left	WM20904*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 3 Right	WM20905*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 4 Left	WM20906*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output	WM20907*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 4 Right	
Mix-point Mute Off Input Output 5 Right Output Output 5 Left	WM20908*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 5 Right	WM20909*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 6 Left	WM20910*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 6 Right	WM20911*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 7 Left	WM20912*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 7 Right	WM20913*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 8 Left	WM20914*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output Output 8 Right	WM20915*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send A	WM20916*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send B	WM20917*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send C	WM20918*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send D	WM20919*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send E	WM20920*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send F	WM20921*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send G	WM20922*0AU\x0D
Mix-point Mute Off Input Output 5 Right Output V. Send H	WM20923*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 1 Left	WM21000*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 1 Right	WM21001*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 2 Left	WM21002*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 2 Right	WM21003*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 3 Left	WM21004*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 3 Right	WM21005*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 4 Left	WM21006*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 6 Left Output Output 4 Right	WM21007*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 5 Left	WM21008*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 5 Right	WM21009*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 6 Left	WM21010*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 6 Right	WM21011*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 7 Left	WM21012*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 7 Right	WM21013*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 8 Left	WM21014*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output Output 8 Right	WM21015*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send A	WM21016*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send B	WM21017*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send C	WM21018*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send D	WM21019*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send E	WM21020*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send F	WM21021*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send G	WM21022*0AU\x0D
Mix-point Mute Off Input Output 6 Left Output V. Send H	WM21023*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 1 Left	WM21100*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 1 Right	WM21101*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 2 Left	WM21102*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 2 Right	WM21103*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 3 Left	WM21104*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 3 Right	WM21105*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output	WM21106*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 4 Left	
Mix-point Mute Off Input Output 6 Right Output Output 4 Right	WM21107*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 5 Left	WM21108*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 5 Right	WM21109*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 6 Left	WM21110*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 6 Right	WM21111*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 7 Left	WM21112*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 7 Right	WM21113*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 8 Left	WM21114*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output Output 8 Right	WM21115*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send A	WM21116*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send B	WM21117*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send C	WM21118*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send D	WM21119*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send E	WM21120*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send F	WM21121*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send G	WM21122*0AU\x0D
Mix-point Mute Off Input Output 6 Right Output V. Send H	WM21123*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 1 Left	WM21200*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 1 Right	WM21201*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 2 Left	WM21202*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 2 Right	WM21203*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 3 Left	WM21204*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 3 Right	WM21205*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 7 Left Output Output 4 Left	WM21206*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 4 Right	WM21207*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 5 Left	WM21208*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 5 Right	WM21209*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 6 Left	WM21210*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 6 Right	WM21211*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 7 Left	WM21212*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 7 Right	WM21213*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 8 Left	WM21214*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output Output 8 Right	WM21215*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send A	WM21216*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send B	WM21217*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send C	WM21218*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send D	WM21219*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send E	WM21220*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send F	WM21221*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send G	WM21222*0AU\x0D
Mix-point Mute Off Input Output 7 Left Output V. Send H	WM21223*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 1 Left	WM21300*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 1 Right	WM21301*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 2 Left	WM21302*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 2 Right	WM21303*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 3 Left	WM21304*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output	WM21305*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 3 Right	
Mix-point Mute Off Input Output 7 Right Output Output 4 Left	WM21306*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 4 Right	WM21307*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 5 Left	WM21308*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 5 Right	WM21309*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 6 Left	WM21310*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 6 Right	WM21311*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 7 Left	WM21312*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 7 Right	WM21313*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 8 Left	WM21314*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output Output 8 Right	WM21315*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send A	WM21316*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send B	WM21317*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send C	WM21318*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send D	WM21319*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send E	WM21320*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send F	WM21321*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send G	WM21322*0AU\x0D
Mix-point Mute Off Input Output 7 Right Output V. Send H	WM21323*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 1 Left	WM21400*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 1 Right	WM21401*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 2 Left	WM21402*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 2 Right	WM21403*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 3 Left	WM21404*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input Output 8 Left Output Output 3 Right	WM21405*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 4 Left	WM21406*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 4 Right	WM21407*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 5 Left	WM21408*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 5 Right	WM21409*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 6 Left	WM21410*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 6 Right	WM21411*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 7 Left	WM21412*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 7 Right	WM21413*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 8 Left	WM21414*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output Output 8 Right	WM21415*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send A	WM21416*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send B	WM21417*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send C	WM21418*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send D	WM21419*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send E	WM21420*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send F	WM21421*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send G	WM21422*0AU\x0D
Mix-point Mute Off Input Output 8 Left Output V. Send H	WM21423*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 1 Left	WM21500*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 1 Right	WM21501*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 2 Left	WM21502*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 2 Right	WM21503*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output	WM21504*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 3 Left	
Mix-point Mute Off Input Output 8 Right Output Output 3 Right	WM21505*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 4 Left	WM21506*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 4 Right	WM21507*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 5 Left	WM21508*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 5 Right	WM21509*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 6 Left	WM21510*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 6 Right	WM21511*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 7 Left	WM21512*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 7 Right	WM21513*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 8 Left	WM21514*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output Output 8 Right	WM21515*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send A	WM21516*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send B	WM21517*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send C	WM21518*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send D	WM21519*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send E	WM21520*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send F	WM21521*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send G	WM21522*0AU\x0D
Mix-point Mute Off Input Output 8 Right Output V. Send H	WM21523*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 1 Left	WM22000*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 1 Right	WM22001*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 2 Left	WM22002*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 2 Right	WM22003*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input V. Return A Output Output 3 Left	WM22004*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 3 Right	WM22005*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 4 Left	WM22006*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 4 Right	WM22007*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 5 Left	WM22008*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 5 Right	WM22009*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 6 Left	WM22010*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 6 Right	WM22011*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 7 Left	WM22012*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 7 Right	WM22013*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 8 Left	WM22014*0AU\x0D
Mix-point Mute Off Input V. Return A Output Output 8 Right	WM22015*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send A	WM22016*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send B	WM22017*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send C	WM22018*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send D	WM22019*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send E	WM22020*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send F	WM22021*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send G	WM22022*0AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send H	WM22023*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 1 Left	WM22100*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 1 Right	WM22101*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 2 Left	WM22102*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output	WM22103*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

2 Right	
Mix-point Mute Off Input V. Return B Output Output 3 Left	WM22104*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 3 Right	WM22105*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 4 Left	WM22106*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 4 Right	WM22107*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 5 Left	WM22108*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 5 Right	WM22109*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 6 Left	WM22110*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 6 Right	WM22111*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 7 Left	WM22112*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 7 Right	WM22113*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 8 Left	WM22114*0AU\x0D
Mix-point Mute Off Input V. Return B Output Output 8 Right	WM22115*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send A	WM22116*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send B	WM22117*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send C	WM22118*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send D	WM22119*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send E	WM22120*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send F	WM22121*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send G	WM22122*0AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send H	WM22123*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 1 Left	WM22200*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 1 Right	WM22201*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 2 Left	WM22202*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input V. Return C Output Output 2 Right	WM22203*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 3 Left	WM22204*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 3 Right	WM22205*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 4 Left	WM22206*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 4 Right	WM22207*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 5 Left	WM22208*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 5 Right	WM22209*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 6 Left	WM22210*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 6 Right	WM22211*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 7 Left	WM22212*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 7 Right	WM22213*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 8 Left	WM22214*0AU\x0D
Mix-point Mute Off Input V. Return C Output Output 8 Right	WM22215*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send A	WM22216*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send B	WM22217*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send C	WM22218*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send D	WM22219*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send E	WM22220*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send F	WM22221*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send G	WM22222*0AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send H	WM22223*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 1 Left	WM22300*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 1 Right	WM22301*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output	WM22302*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

2 Left	
Mix-point Mute Off Input V. Return D Output Output 2 Right	WM22303*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 3 Left	WM22304*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 3 Right	WM22305*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 4 Left	WM22306*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 4 Right	WM22307*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 5 Left	WM22308*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 5 Right	WM22309*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 6 Left	WM22310*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 6 Right	WM22311*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 7 Left	WM22312*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 7 Right	WM22313*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 8 Left	WM22314*0AU\x0D
Mix-point Mute Off Input V. Return D Output Output 8 Right	WM22315*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send A	WM22316*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send B	WM22317*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send C	WM22318*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send D	WM22319*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send E	WM22320*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send F	WM22321*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send G	WM22322*0AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send H	WM22323*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 1 Left	WM22400*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 1 Right	WM22401*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input V. Return E Output Output 2 Left	WM22402*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 2 Right	WM22403*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 3 Left	WM22404*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 3 Right	WM22405*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 4 Left	WM22406*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 4 Right	WM22407*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 5 Left	WM22408*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 5 Right	WM22409*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 6 Left	WM22410*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 6 Right	WM22411*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 7 Left	WM22412*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 7 Right	WM22413*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 8 Left	WM22414*0AU\x0D
Mix-point Mute Off Input V. Return E Output Output 8 Right	WM22415*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send A	WM22416*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send B	WM22417*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send C	WM22418*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send D	WM22419*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send E	WM22420*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send F	WM22421*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send G	WM22422*0AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send H	WM22423*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 1 Left	WM22500*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output	WM22501*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

1 Right	
Mix-point Mute Off Input V. Return F Output Output 2 Left	WM22502*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 2 Right	WM22503*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 3 Left	WM22504*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 3 Right	WM22505*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 4 Left	WM22506*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 4 Right	WM22507*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 5 Left	WM22508*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 5 Right	WM22509*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 6 Left	WM22510*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 6 Right	WM22511*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 7 Left	WM22512*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 7 Right	WM22513*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 8 Left	WM22514*0AU\x0D
Mix-point Mute Off Input V. Return F Output Output 8 Right	WM22515*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send A	WM22516*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send B	WM22517*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send C	WM22518*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send D	WM22519*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send E	WM22520*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send F	WM22521*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send G	WM22522*0AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send H	WM22523*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 1 Left	WM22600*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Off Input V. Return G Output Output 1 Right	WM22601*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 2 Left	WM22602*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 2 Right	WM22603*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 3 Left	WM22604*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 3 Right	WM22605*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 4 Left	WM22606*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 4 Right	WM22607*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 5 Left	WM22608*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 5 Right	WM22609*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 6 Left	WM22610*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 6 Right	WM22611*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 7 Left	WM22612*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 7 Right	WM22613*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 8 Left	WM22614*0AU\x0D
Mix-point Mute Off Input V. Return G Output Output 8 Right	WM22615*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send A	WM22616*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send B	WM22617*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send C	WM22618*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send D	WM22619*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send E	WM22620*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send F	WM22621*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send G	WM22622*0AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send H	WM22623*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output	WM22700*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

1 Left	
Mix-point Mute Off Input V. Return H Output Output 1 Right	WM22701*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 2 Left	WM22702*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 2 Right	WM22703*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 3 Left	WM22704*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 3 Right	WM22705*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 4 Left	WM22706*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 4 Right	WM22707*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 5 Left	WM22708*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 5 Right	WM22709*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 6 Left	WM22710*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 6 Right	WM22711*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 7 Left	WM22712*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 7 Right	WM22713*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 8 Left	WM22714*0AU\x0D
Mix-point Mute Off Input V. Return H Output Output 8 Right	WM22715*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send A	WM22716*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send B	WM22717*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send C	WM22718*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send D	WM22719*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send E	WM22720*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send F	WM22721*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send G	WM22722*0AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send H	WM22723*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 1 Output Output 1 Left	WM22800*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 1 Right	WM22801*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 2 Left	WM22802*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 2 Right	WM22803*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 3 Left	WM22804*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 3 Right	WM22805*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 4 Left	WM22806*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 4 Right	WM22807*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 5 Left	WM22808*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 5 Right	WM22809*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 6 Left	WM22810*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 6 Right	WM22811*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 7 Left	WM22812*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 7 Right	WM22813*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 8 Left	WM22814*1AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 8 Right	WM22815*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send A	WM22816*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send B	WM22817*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send C	WM22818*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send D	WM22819*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send E	WM22820*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send F	WM22821*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send G	WM22822*1AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send H	WM22823*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 1 Left	WM23700*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 1 Right	WM23701*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 2 Left	WM23702*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 10 Output Output 2 Right	WM23703*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 3 Left	WM23704*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 3 Right	WM23705*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 4 Left	WM23706*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 4 Right	WM23707*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 5 Left	WM23708*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 5 Right	WM23709*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 6 Left	WM23710*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 6 Right	WM23711*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 7 Left	WM23712*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 7 Right	WM23713*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 8 Left	WM23714*1AU\x0D
Mix-point Mute On Input Exp. 10 Output Output 8 Right	WM23715*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send A	WM23716*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send B	WM23717*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send C	WM23718*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send D	WM23719*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send E	WM23720*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send F	WM23721*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send G	WM23722*1AU\x0D
Mix-point Mute On Input Exp. 10 Output V. Send H	WM23723*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 1 Left	WM23800*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 1 Right	WM23801*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 2 Left	WM23802*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 2 Right	WM23803*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 3 Left	WM23804*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 3 Right	WM23805*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 11 Output Output 4 Left	WM23806*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 4 Right	WM23807*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 5 Left	WM23808*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 5 Right	WM23809*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 6 Left	WM23810*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 6 Right	WM23811*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 7 Left	WM23812*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 7 Right	WM23813*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 8 Left	WM23814*1AU\x0D
Mix-point Mute On Input Exp. 11 Output Output 8 Right	WM23815*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send A	WM23816*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send B	WM23817*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send C	WM23818*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send D	WM23819*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send E	WM23820*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send F	WM23821*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send G	WM23822*1AU\x0D
Mix-point Mute On Input Exp. 11 Output V. Send H	WM23823*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 1 Left	WM23900*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 1 Right	WM23901*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 2 Left	WM23902*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 2 Right	WM23903*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 3 Left	WM23904*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 3 Right	WM23905*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 4 Left	WM23906*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 4 Right	WM23907*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 5 Left	WM23908*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 12 Output Output 5 Right	WM23909*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 6 Left	WM23910*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 6 Right	WM23911*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 7 Left	WM23912*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 7 Right	WM23913*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 8 Left	WM23914*1AU\x0D
Mix-point Mute On Input Exp. 12 Output Output 8 Right	WM23915*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send A	WM23916*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send B	WM23917*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send C	WM23918*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send D	WM23919*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send E	WM23920*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send F	WM23921*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send G	WM23922*1AU\x0D
Mix-point Mute On Input Exp. 12 Output V. Send H	WM23923*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 1 Left	WM24000*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 1 Right	WM24001*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 2 Left	WM24002*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 2 Right	WM24003*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 3 Left	WM24004*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 3 Right	WM24005*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 4 Left	WM24006*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 4 Right	WM24007*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 5 Left	WM24008*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 5 Right	WM24009*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 6 Left	WM24010*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 6 Right	WM24011*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 13 Output Output 7 Left	WM24012*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 7 Right	WM24013*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 8 Left	WM24014*1AU\x0D
Mix-point Mute On Input Exp. 13 Output Output 8 Right	WM24015*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send A	WM24016*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send B	WM24017*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send C	WM24018*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send D	WM24019*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send E	WM24020*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send F	WM24021*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send G	WM24022*1AU\x0D
Mix-point Mute On Input Exp. 13 Output V. Send H	WM24023*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 1 Left	WM24100*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 1 Right	WM24101*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 2 Left	WM24102*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 2 Right	WM24103*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 3 Left	WM24104*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 3 Right	WM24105*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 4 Left	WM24106*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 4 Right	WM24107*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 5 Left	WM24108*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 5 Right	WM24109*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 6 Left	WM24110*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 6 Right	WM24111*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 7 Left	WM24112*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 7 Right	WM24113*1AU\x0D
Mix-point Mute On Input Exp. 14 Output Output 8 Left	WM24114*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 14 Output Output 8 Right	WM24115*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send A	WM24116*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send B	WM24117*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send C	WM24118*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send D	WM24119*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send E	WM24120*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send F	WM24121*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send G	WM24122*1AU\x0D
Mix-point Mute On Input Exp. 14 Output V. Send H	WM24123*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 1 Left	WM24200*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 1 Right	WM24201*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 2 Left	WM24202*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 2 Right	WM24203*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 3 Left	WM24204*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 3 Right	WM24205*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 4 Left	WM24206*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 4 Right	WM24207*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 5 Left	WM24208*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 5 Right	WM24209*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 6 Left	WM24210*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 6 Right	WM24211*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 7 Left	WM24212*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 7 Right	WM24213*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 8 Left	WM24214*1AU\x0D
Mix-point Mute On Input Exp. 15 Output Output 8 Right	WM24215*1AU\x0D
Mix-point Mute On Input Exp. 15 Output V. Send A	WM24216*1AU\x0D
Mix-point Mute On Input Exp. 15 Output V. Send B	WM24217*1AU\x0D
Mix-point Mute On Input Exp. 15 Output V. Send C	WM24218*1AU\x0D
Mix-point Mute On Input Exp. 15 Output V. Send D	WM24219*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 15 Output V. Send E	WM24220*1AU\x0D
Mix-point Mute On Input Exp. 15 Output V. Send F	WM24221*1AU\x0D
Mix-point Mute On Input Exp. 15 Output V. Send G	WM24222*1AU\x0D
Mix-point Mute On Input Exp. 15 Output V. Send H	WM24223*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 1 Left	WM24300*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 1 Right	WM24301*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 2 Left	WM24302*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 2 Right	WM24303*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 3 Left	WM24304*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 3 Right	WM24305*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 4 Left	WM24306*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 4 Right	WM24307*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 5 Left	WM24308*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 5 Right	WM24309*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 6 Left	WM24310*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 6 Right	WM24311*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 7 Left	WM24312*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 7 Right	WM24313*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 8 Left	WM24314*1AU\x0D
Mix-point Mute On Input Exp. 16 Output Output 8 Right	WM24315*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send A	WM24316*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send B	WM24317*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send C	WM24318*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send D	WM24319*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send E	WM24320*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send F	WM24321*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send G	WM24322*1AU\x0D
Mix-point Mute On Input Exp. 16 Output V. Send H	WM24323*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 1 Left	WM22900*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 2 Output Output 1 Right	WM22901*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 2 Left	WM22902*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 2 Right	WM22903*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 3 Left	WM22904*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 3 Right	WM22905*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 4 Left	WM22906*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 4 Right	WM22907*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 5 Left	WM22908*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 5 Right	WM22909*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 6 Left	WM22910*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 6 Right	WM22911*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 7 Left	WM22912*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 7 Right	WM22913*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 8 Left	WM22914*1AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 8 Right	WM22915*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send A	WM22916*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send B	WM22917*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send C	WM22918*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send D	WM22919*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send E	WM22920*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send F	WM22921*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send G	WM22922*1AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send H	WM22923*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 1 Left	WM23000*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 1 Right	WM23001*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 2 Left	WM23002*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 2 Right	WM23003*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 3 Output Output 3 Left	WM23004*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 3 Right	WM23005*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 4 Left	WM23006*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 4 Right	WM23007*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 5 Left	WM23008*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 5 Right	WM23009*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 6 Left	WM23010*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 6 Right	WM23011*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 7 Left	WM23012*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 7 Right	WM23013*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 8 Left	WM23014*1AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 8 Right	WM23015*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send A	WM23016*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send B	WM23017*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send C	WM23018*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send D	WM23019*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send E	WM23020*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send F	WM23021*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send G	WM23022*1AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send H	WM23023*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 1 Left	WM23100*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 1 Right	WM23101*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 2 Left	WM23102*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 2 Right	WM23103*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 3 Left	WM23104*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 3 Right	WM23105*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 4 Left	WM23106*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 4 Output Output 4 Right	WM23107*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 5 Left	WM23108*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 5 Right	WM23109*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 6 Left	WM23110*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 6 Right	WM23111*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 7 Left	WM23112*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 7 Right	WM23113*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 8 Left	WM23114*1AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 8 Right	WM23115*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send A	WM23116*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send B	WM23117*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send C	WM23118*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send D	WM23119*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send E	WM23120*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send F	WM23121*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send G	WM23122*1AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send H	WM23123*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 1 Left	WM23200*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 1 Right	WM23201*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 2 Left	WM23202*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 2 Right	WM23203*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 3 Left	WM23204*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 3 Right	WM23205*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 4 Left	WM23206*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 4 Right	WM23207*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 5 Left	WM23208*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 5 Right	WM23209*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 5 Output Output 6 Left	WM23210*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 6 Right	WM23211*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 7 Left	WM23212*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 7 Right	WM23213*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 8 Left	WM23214*1AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 8 Right	WM23215*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send A	WM23216*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send B	WM23217*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send C	WM23218*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send D	WM23219*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send E	WM23220*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send F	WM23221*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send G	WM23222*1AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send H	WM23223*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 1 Left	WM23300*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 1 Right	WM23301*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 2 Left	WM23302*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 2 Right	WM23303*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 3 Left	WM23304*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 3 Right	WM23305*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 4 Left	WM23306*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 4 Right	WM23307*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 5 Left	WM23308*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 5 Right	WM23309*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 6 Left	WM23310*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 6 Right	WM23311*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 7 Left	WM23312*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 6 Output Output 7 Right	WM23313*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 8 Left	WM23314*1AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 8 Right	WM23315*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send A	WM23316*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send B	WM23317*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send C	WM23318*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send D	WM23319*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send E	WM23320*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send F	WM23321*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send G	WM23322*1AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send H	WM23323*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 1 Left	WM23400*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 1 Right	WM23401*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 2 Left	WM23402*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 2 Right	WM23403*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 3 Left	WM23404*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 3 Right	WM23405*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 4 Left	WM23406*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 4 Right	WM23407*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 5 Left	WM23408*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 5 Right	WM23409*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 6 Left	WM23410*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 6 Right	WM23411*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 7 Left	WM23412*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 7 Right	WM23413*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 8 Left	WM23414*1AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 8 Right	WM23415*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 7 Output V. Send A	WM23416*1AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send B	WM23417*1AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send C	WM23418*1AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send D	WM23419*1AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send E	WM23420*1AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send F	WM23421*1AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send G	WM23422*1AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send H	WM23423*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 1 Left	WM23500*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 1 Right	WM23501*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 2 Left	WM23502*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 2 Right	WM23503*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 3 Left	WM23504*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 3 Right	WM23505*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 4 Left	WM23506*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 4 Right	WM23507*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 5 Left	WM23508*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 5 Right	WM23509*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 6 Left	WM23510*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 6 Right	WM23511*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 7 Left	WM23512*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 7 Right	WM23513*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 8 Left	WM23514*1AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 8 Right	WM23515*1AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send A	WM23516*1AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send B	WM23517*1AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send C	WM23518*1AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send D	WM23519*1AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send E	WM23520*1AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send F	WM23521*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Exp. 8 Output V. Send G	WM23522*1AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send H	WM23523*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 1 Left	WM23600*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 1 Right	WM23601*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 2 Left	WM23602*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 2 Right	WM23603*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 3 Left	WM23604*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 3 Right	WM23605*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 4 Left	WM23606*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 4 Right	WM23607*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 5 Left	WM23608*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 5 Right	WM23609*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 6 Left	WM23610*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 6 Right	WM23611*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 7 Left	WM23612*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 7 Right	WM23613*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 8 Left	WM23614*1AU\x0D
Mix-point Mute On Input Exp. 9 Output Output 8 Right	WM23615*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send A	WM23616*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send B	WM23617*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send C	WM23618*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send D	WM23619*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send E	WM23620*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send F	WM23621*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send G	WM23622*1AU\x0D
Mix-point Mute On Input Exp. 9 Output V. Send H	WM23623*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 1 Left	WM21600*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 1 Right	WM21601*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 2 Left	WM21602*1AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Mic 1 Output Output 2 Right	WM21603*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 3 Left	WM21604*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 3 Right	WM21605*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 4 Left	WM21606*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 4 Right	WM21607*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 5 Left	WM21608*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 5 Right	WM21609*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 6 Left	WM21610*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 6 Right	WM21611*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 7 Left	WM21612*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 7 Right	WM21613*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 8 Left	WM21614*1AU\x0D
Mix-point Mute On Input Mic 1 Output Output 8 Right	WM21615*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send A	WM21616*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send B	WM21617*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send C	WM21618*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send D	WM21619*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send E	WM21620*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send F	WM21621*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send G	WM21622*1AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send H	WM21623*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 1 Left	WM21700*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 1 Right	WM21701*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 2 Left	WM21702*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 2 Right	WM21703*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 3 Left	WM21704*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 3 Right	WM21705*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 4 Left	WM21706*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 4 Right	WM21707*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 5 Left	WM21708*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 5 Right	WM21709*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 6 Left	WM21710*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 6 Right	WM21711*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Mic 2 Output Output 7 Left	WM21712*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 7 Right	WM21713*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 8 Left	WM21714*1AU\x0D
Mix-point Mute On Input Mic 2 Output Output 8 Right	WM21715*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send A	WM21716*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send B	WM21717*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send C	WM21718*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send D	WM21719*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send E	WM21720*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send F	WM21721*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send G	WM21722*1AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send H	WM21723*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 1 Left	WM21800*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 1 Right	WM21801*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 2 Left	WM21802*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 2 Right	WM21803*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 3 Left	WM21804*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 3 Right	WM21805*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 4 Left	WM21806*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 4 Right	WM21807*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 5 Left	WM21808*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 5 Right	WM21809*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 6 Left	WM21810*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 6 Right	WM21811*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 7 Left	WM21812*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 7 Right	WM21813*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 8 Left	WM21814*1AU\x0D
Mix-point Mute On Input Mic 3 Output Output 8 Right	WM21815*1AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send A	WM21816*1AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send B	WM21817*1AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send C	WM21818*1AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send D	WM21819*1AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send E	WM21820*1AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send F	WM21821*1AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send G	WM21822*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Mic 3 Output V. Send H	WM21823*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 1 Left	WM21900*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 1 Right	WM21901*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 2 Left	WM21902*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 2 Right	WM21903*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 3 Left	WM21904*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 3 Right	WM21905*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 4 Left	WM21906*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 4 Right	WM21907*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 5 Left	WM21908*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 5 Right	WM21909*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 6 Left	WM21910*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 6 Right	WM21911*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 7 Left	WM21912*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 7 Right	WM21913*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 8 Left	WM21914*1AU\x0D
Mix-point Mute On Input Mic 4 Output Output 8 Right	WM21915*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send A	WM21916*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send B	WM21917*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send C	WM21918*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send D	WM21919*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send E	WM21920*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send F	WM21921*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send G	WM21922*1AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send H	WM21923*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 1 Left	WM20000*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 1 Right	WM20001*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 2 Left	WM20002*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 2 Right	WM20003*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 3 Left	WM20004*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 3 Right	WM20005*1AU\x0D
Mix-point Mute On Input Output 1 Left Output	WM20006*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 4 Left	
Mix-point Mute On Input Output 1 Left Output Output 4 Right	WM20007*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 5 Left	WM20008*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 5 Right	WM20009*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 6 Left	WM20010*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 6 Right	WM20011*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 7 Left	WM20012*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 7 Right	WM20013*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 8 Left	WM20014*1AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 8 Right	WM20015*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send A	WM20016*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send B	WM20017*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send C	WM20018*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send D	WM20019*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send E	WM20020*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send F	WM20021*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send G	WM20022*1AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send H	WM20023*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 1 Left	WM20100*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 1 Right	WM20101*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 2 Left	WM20102*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 2 Right	WM20103*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 3 Left	WM20104*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 3 Right	WM20105*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 1 Right Output Output 4 Left	WM20106*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 4 Right	WM20107*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 5 Left	WM20108*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 5 Right	WM20109*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 6 Left	WM20110*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 6 Right	WM20111*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 7 Left	WM20112*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 7 Right	WM20113*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 8 Left	WM20114*1AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 8 Right	WM20115*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send A	WM20116*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send B	WM20117*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send C	WM20118*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send D	WM20119*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send E	WM20120*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send F	WM20121*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send G	WM20122*1AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send H	WM20123*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 1 Left	WM20200*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 1 Right	WM20201*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 2 Left	WM20202*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 2 Right	WM20203*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 3 Left	WM20204*1AU\x0D
Mix-point Mute On Input Output 2 Left Output	WM20205*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 3 Right	
Mix-point Mute On Input Output 2 Left Output Output 4 Left	WM20206*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 4 Right	WM20207*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 5 Left	WM20208*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 5 Right	WM20209*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 6 Left	WM20210*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 6 Right	WM20211*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 7 Left	WM20212*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 7 Right	WM20213*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 8 Left	WM20214*1AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 8 Right	WM20215*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send A	WM20216*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send B	WM20217*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send C	WM20218*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send D	WM20219*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send E	WM20220*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send F	WM20221*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send G	WM20222*1AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send H	WM20223*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 1 Left	WM20300*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 1 Right	WM20301*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 2 Left	WM20302*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 2 Right	WM20303*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 3 Left	WM20304*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 2 Right Output Output 3 Right	WM20305*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 4 Left	WM20306*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 4 Right	WM20307*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 5 Left	WM20308*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 5 Right	WM20309*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 6 Left	WM20310*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 6 Right	WM20311*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 7 Left	WM20312*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 7 Right	WM20313*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 8 Left	WM20314*1AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 8 Right	WM20315*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send A	WM20316*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send B	WM20317*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send C	WM20318*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send D	WM20319*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send E	WM20320*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send F	WM20321*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send G	WM20322*1AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send H	WM20323*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 1 Left	WM20400*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 1 Right	WM20401*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 2 Left	WM20402*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 2 Right	WM20403*1AU\x0D
Mix-point Mute On Input Output 3 Left Output	WM20404*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 3 Left	
Mix-point Mute On Input Output 3 Left Output Output 3 Right	WM20405*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 4 Left	WM20406*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 4 Right	WM20407*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 5 Left	WM20408*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 5 Right	WM20409*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 6 Left	WM20410*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 6 Right	WM20411*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 7 Left	WM20412*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 7 Right	WM20413*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 8 Left	WM20414*1AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 8 Right	WM20415*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send A	WM20416*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send B	WM20417*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send C	WM20418*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send D	WM20419*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send E	WM20420*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send F	WM20421*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send G	WM20422*1AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send H	WM20423*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 1 Left	WM20500*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 1 Right	WM20501*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 2 Left	WM20502*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 2 Right	WM20503*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 3 Right Output Output 3 Left	WM20504*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 3 Right	WM20505*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 4 Left	WM20506*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 4 Right	WM20507*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 5 Left	WM20508*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 5 Right	WM20509*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 6 Left	WM20510*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 6 Right	WM20511*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 7 Left	WM20512*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 7 Right	WM20513*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 8 Left	WM20514*1AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 8 Right	WM20515*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send A	WM20516*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send B	WM20517*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send C	WM20518*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send D	WM20519*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send E	WM20520*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send F	WM20521*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send G	WM20522*1AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send H	WM20523*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 1 Left	WM20600*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 1 Right	WM20601*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 2 Left	WM20602*1AU\x0D
Mix-point Mute On Input Output 4 Left Output	WM20603*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 2 Right	
Mix-point Mute On Input Output 4 Left Output Output 3 Left	WM20604*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 3 Right	WM20605*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 4 Left	WM20606*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 4 Right	WM20607*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 5 Left	WM20608*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 5 Right	WM20609*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 6 Left	WM20610*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 6 Right	WM20611*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 7 Left	WM20612*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 7 Right	WM20613*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 8 Left	WM20614*1AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 8 Right	WM20615*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send A	WM20616*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send B	WM20617*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send C	WM20618*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send D	WM20619*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send E	WM20620*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send F	WM20621*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send G	WM20622*1AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send H	WM20623*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 1 Left	WM20700*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 1 Right	WM20701*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 2 Left	WM20702*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 4 Right Output Output 2 Right	WM20703*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 3 Left	WM20704*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 3 Right	WM20705*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 4 Left	WM20706*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 4 Right	WM20707*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 5 Left	WM20708*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 5 Right	WM20709*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 6 Left	WM20710*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 6 Right	WM20711*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 7 Left	WM20712*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 7 Right	WM20713*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 8 Left	WM20714*1AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 8 Right	WM20715*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send A	WM20716*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send B	WM20717*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send C	WM20718*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send D	WM20719*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send E	WM20720*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send F	WM20721*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send G	WM20722*1AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send H	WM20723*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 1 Left	WM20800*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 1 Right	WM20801*1AU\x0D
Mix-point Mute On Input Output 5 Left Output	WM20802*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 2 Left	
Mix-point Mute On Input Output 5 Left Output Output 2 Right	WM20803*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 3 Left	WM20804*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 3 Right	WM20805*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 4 Left	WM20806*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 4 Right	WM20807*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 5 Left	WM20808*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 5 Right	WM20809*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 6 Left	WM20810*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 6 Right	WM20811*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 7 Left	WM20812*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 7 Right	WM20813*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 8 Left	WM20814*1AU\x0D
Mix-point Mute On Input Output 5 Left Output Output 8 Right	WM20815*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send A	WM20816*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send B	WM20817*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send C	WM20818*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send D	WM20819*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send E	WM20820*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send F	WM20821*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send G	WM20822*1AU\x0D
Mix-point Mute On Input Output 5 Left Output V. Send H	WM20823*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 1 Left	WM20900*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 1 Right	WM20901*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 5 Right Output Output 2 Left	WM20902*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 2 Right	WM20903*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 3 Left	WM20904*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 3 Right	WM20905*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 4 Left	WM20906*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 4 Right	WM20907*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 5 Left	WM20908*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 5 Right	WM20909*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 6 Left	WM20910*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 6 Right	WM20911*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 7 Left	WM20912*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 7 Right	WM20913*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 8 Left	WM20914*1AU\x0D
Mix-point Mute On Input Output 5 Right Output Output 8 Right	WM20915*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send A	WM20916*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send B	WM20917*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send C	WM20918*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send D	WM20919*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send E	WM20920*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send F	WM20921*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send G	WM20922*1AU\x0D
Mix-point Mute On Input Output 5 Right Output V. Send H	WM20923*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 1 Left	WM21000*1AU\x0D
Mix-point Mute On Input Output 6 Left Output	WM21001*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 1 Right	
Mix-point Mute On Input Output 6 Left Output Output 2 Left	WM21002*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 2 Right	WM21003*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 3 Left	WM21004*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 3 Right	WM21005*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 4 Left	WM21006*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 4 Right	WM21007*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 5 Left	WM21008*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 5 Right	WM21009*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 6 Left	WM21010*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 6 Right	WM21011*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 7 Left	WM21012*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 7 Right	WM21013*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 8 Left	WM21014*1AU\x0D
Mix-point Mute On Input Output 6 Left Output Output 8 Right	WM21015*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send A	WM21016*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send B	WM21017*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send C	WM21018*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send D	WM21019*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send E	WM21020*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send F	WM21021*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send G	WM21022*1AU\x0D
Mix-point Mute On Input Output 6 Left Output V. Send H	WM21023*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 1 Left	WM21100*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 6 Right Output Output 1 Right	WM21101*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 2 Left	WM21102*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 2 Right	WM21103*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 3 Left	WM21104*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 3 Right	WM21105*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 4 Left	WM21106*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 4 Right	WM21107*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 5 Left	WM21108*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 5 Right	WM21109*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 6 Left	WM21110*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 6 Right	WM21111*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 7 Left	WM21112*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 7 Right	WM21113*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 8 Left	WM21114*1AU\x0D
Mix-point Mute On Input Output 6 Right Output Output 8 Right	WM21115*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send A	WM21116*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send B	WM21117*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send C	WM21118*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send D	WM21119*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send E	WM21120*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send F	WM21121*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send G	WM21122*1AU\x0D
Mix-point Mute On Input Output 6 Right Output V. Send H	WM21123*1AU\x0D
Mix-point Mute On Input Output 7 Left Output	WM21200*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Output 1 Left	
Mix-point Mute On Input Output 7 Left Output Output 1 Right	WM21201*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 2 Left	WM21202*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 2 Right	WM21203*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 3 Left	WM21204*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 3 Right	WM21205*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 4 Left	WM21206*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 4 Right	WM21207*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 5 Left	WM21208*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 5 Right	WM21209*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 6 Left	WM21210*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 6 Right	WM21211*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 7 Left	WM21212*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 7 Right	WM21213*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 8 Left	WM21214*1AU\x0D
Mix-point Mute On Input Output 7 Left Output Output 8 Right	WM21215*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send A	WM21216*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send B	WM21217*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send C	WM21218*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send D	WM21219*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send E	WM21220*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send F	WM21221*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send G	WM21222*1AU\x0D
Mix-point Mute On Input Output 7 Left Output V. Send H	WM21223*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 7 Right Output Output 1 Left	WM21300*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 1 Right	WM21301*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 2 Left	WM21302*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 2 Right	WM21303*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 3 Left	WM21304*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 3 Right	WM21305*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 4 Left	WM21306*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 4 Right	WM21307*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 5 Left	WM21308*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 5 Right	WM21309*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 6 Left	WM21310*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 6 Right	WM21311*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 7 Left	WM21312*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 7 Right	WM21313*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 8 Left	WM21314*1AU\x0D
Mix-point Mute On Input Output 7 Right Output Output 8 Right	WM21315*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V. Send A	WM21316*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V. Send B	WM21317*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V. Send C	WM21318*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V. Send D	WM21319*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V. Send E	WM21320*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V. Send F	WM21321*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V. Send G	WM21322*1AU\x0D
Mix-point Mute On Input Output 7 Right Output V.	WM21323*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Send H	
Mix-point Mute On Input Output 8 Left Output Output 1 Left	WM21400*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 1 Right	WM21401*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 2 Left	WM21402*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 2 Right	WM21403*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 3 Left	WM21404*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 3 Right	WM21405*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 4 Left	WM21406*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 4 Right	WM21407*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 5 Left	WM21408*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 5 Right	WM21409*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 6 Left	WM21410*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 6 Right	WM21411*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 7 Left	WM21412*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 7 Right	WM21413*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 8 Left	WM21414*1AU\x0D
Mix-point Mute On Input Output 8 Left Output Output 8 Right	WM21415*1AU\x0D
Mix-point Mute On Input Output 8 Left Output V. Send A	WM21416*1AU\x0D
Mix-point Mute On Input Output 8 Left Output V. Send B	WM21417*1AU\x0D
Mix-point Mute On Input Output 8 Left Output V. Send C	WM21418*1AU\x0D
Mix-point Mute On Input Output 8 Left Output V. Send D	WM21419*1AU\x0D
Mix-point Mute On Input Output 8 Left Output V. Send E	WM21420*1AU\x0D
Mix-point Mute On Input Output 8 Left Output V. Send F	WM21421*1AU\x0D
Mix-point Mute On Input Output 8 Left Output V. Send G	WM21422*1AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input Output 8 Left Output V. Send H	WM21423*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 1 Left	WM21500*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 1 Right	WM21501*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 2 Left	WM21502*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 2 Right	WM21503*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 3 Left	WM21504*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 3 Right	WM21505*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 4 Left	WM21506*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 4 Right	WM21507*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 5 Left	WM21508*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 5 Right	WM21509*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 6 Left	WM21510*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 6 Right	WM21511*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 7 Left	WM21512*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 7 Right	WM21513*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 8 Left	WM21514*1AU\x0D
Mix-point Mute On Input Output 8 Right Output Output 8 Right	WM21515*1AU\x0D
Mix-point Mute On Input Output 8 Right Output V. Send A	WM21516*1AU\x0D
Mix-point Mute On Input Output 8 Right Output V. Send B	WM21517*1AU\x0D
Mix-point Mute On Input Output 8 Right Output V. Send C	WM21518*1AU\x0D
Mix-point Mute On Input Output 8 Right Output V. Send D	WM21519*1AU\x0D
Mix-point Mute On Input Output 8 Right Output V. Send E	WM21520*1AU\x0D
Mix-point Mute On Input Output 8 Right Output V. Send F	WM21521*1AU\x0D
Mix-point Mute On Input Output 8 Right Output V.	WM21522*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Send G	
Mix-point Mute On Input Output 8 Right Output V. Send H	WM21523*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 1 Left	WM22000*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 1 Right	WM22001*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 2 Left	WM22002*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 2 Right	WM22003*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 3 Left	WM22004*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 3 Right	WM22005*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 4 Left	WM22006*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 4 Right	WM22007*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 5 Left	WM22008*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 5 Right	WM22009*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 6 Left	WM22010*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 6 Right	WM22011*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 7 Left	WM22012*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 7 Right	WM22013*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 8 Left	WM22014*1AU\x0D
Mix-point Mute On Input V. Return A Output Output 8 Right	WM22015*1AU\x0D
Mix-point Mute On Input V. Return A Output V. Send A	WM22016*1AU\x0D
Mix-point Mute On Input V. Return A Output V. Send B	WM22017*1AU\x0D
Mix-point Mute On Input V. Return A Output V. Send C	WM22018*1AU\x0D
Mix-point Mute On Input V. Return A Output V. Send D	WM22019*1AU\x0D
Mix-point Mute On Input V. Return A Output V. Send E	WM22020*1AU\x0D
Mix-point Mute On Input V. Return A Output V. Send F	WM22021*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input V. Return A Output V. Send G	WM22022*1AU\x0D
Mix-point Mute On Input V. Return A Output V. Send H	WM22023*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 1 Left	WM22100*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 1 Right	WM22101*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 2 Left	WM22102*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 2 Right	WM22103*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 3 Left	WM22104*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 3 Right	WM22105*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 4 Left	WM22106*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 4 Right	WM22107*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 5 Left	WM22108*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 5 Right	WM22109*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 6 Left	WM22110*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 6 Right	WM22111*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 7 Left	WM22112*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 7 Right	WM22113*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 8 Left	WM22114*1AU\x0D
Mix-point Mute On Input V. Return B Output Output 8 Right	WM22115*1AU\x0D
Mix-point Mute On Input V. Return B Output V. Send A	WM22116*1AU\x0D
Mix-point Mute On Input V. Return B Output V. Send B	WM22117*1AU\x0D
Mix-point Mute On Input V. Return B Output V. Send C	WM22118*1AU\x0D
Mix-point Mute On Input V. Return B Output V. Send D	WM22119*1AU\x0D
Mix-point Mute On Input V. Return B Output V. Send E	WM22120*1AU\x0D
Mix-point Mute On Input V. Return B Output V. Send	WM22121*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

F	
Mix-point Mute On Input V. Return B Output V. Send G	WM22122*1AU\x0D
Mix-point Mute On Input V. Return B Output V. Send H	WM22123*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 1 Left	WM22200*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 1 Right	WM22201*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 2 Left	WM22202*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 2 Right	WM22203*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 3 Left	WM22204*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 3 Right	WM22205*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 4 Left	WM22206*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 4 Right	WM22207*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 5 Left	WM22208*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 5 Right	WM22209*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 6 Left	WM22210*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 6 Right	WM22211*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 7 Left	WM22212*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 7 Right	WM22213*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 8 Left	WM22214*1AU\x0D
Mix-point Mute On Input V. Return C Output Output 8 Right	WM22215*1AU\x0D
Mix-point Mute On Input V. Return C Output V. Send A	WM22216*1AU\x0D
Mix-point Mute On Input V. Return C Output V. Send B	WM22217*1AU\x0D
Mix-point Mute On Input V. Return C Output V. Send C	WM22218*1AU\x0D
Mix-point Mute On Input V. Return C Output V. Send D	WM22219*1AU\x0D
Mix-point Mute On Input V. Return C Output V. Send E	WM22220*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input V. Return C Output V. Send F	WM22221*1AU\x0D
Mix-point Mute On Input V. Return C Output V. Send G	WM22222*1AU\x0D
Mix-point Mute On Input V. Return C Output V. Send H	WM22223*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 1 Left	WM22300*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 1 Right	WM22301*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 2 Left	WM22302*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 2 Right	WM22303*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 3 Left	WM22304*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 3 Right	WM22305*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 4 Left	WM22306*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 4 Right	WM22307*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 5 Left	WM22308*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 5 Right	WM22309*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 6 Left	WM22310*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 6 Right	WM22311*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 7 Left	WM22312*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 7 Right	WM22313*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 8 Left	WM22314*1AU\x0D
Mix-point Mute On Input V. Return D Output Output 8 Right	WM22315*1AU\x0D
Mix-point Mute On Input V. Return D Output V. Send A	WM22316*1AU\x0D
Mix-point Mute On Input V. Return D Output V. Send B	WM22317*1AU\x0D
Mix-point Mute On Input V. Return D Output V. Send C	WM22318*1AU\x0D
Mix-point Mute On Input V. Return D Output V. Send D	WM22319*1AU\x0D
Mix-point Mute On Input V. Return D Output V.	WM22320*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Send E	
Mix-point Mute On Input V. Return D Output V. Send F	WM22321*1AU\x0D
Mix-point Mute On Input V. Return D Output V. Send G	WM22322*1AU\x0D
Mix-point Mute On Input V. Return D Output V. Send H	WM22323*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 1 Left	WM22400*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 1 Right	WM22401*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 2 Left	WM22402*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 2 Right	WM22403*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 3 Left	WM22404*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 3 Right	WM22405*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 4 Left	WM22406*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 4 Right	WM22407*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 5 Left	WM22408*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 5 Right	WM22409*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 6 Left	WM22410*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 6 Right	WM22411*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 7 Left	WM22412*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 7 Right	WM22413*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 8 Left	WM22414*1AU\x0D
Mix-point Mute On Input V. Return E Output Output 8 Right	WM22415*1AU\x0D
Mix-point Mute On Input V. Return E Output V. Send A	WM22416*1AU\x0D
Mix-point Mute On Input V. Return E Output V. Send B	WM22417*1AU\x0D
Mix-point Mute On Input V. Return E Output V. Send C	WM22418*1AU\x0D
Mix-point Mute On Input V. Return E Output V. Send D	WM22419*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input V. Return E Output V. Send E	WM22420*1AU\x0D
Mix-point Mute On Input V. Return E Output V. Send F	WM22421*1AU\x0D
Mix-point Mute On Input V. Return E Output V. Send G	WM22422*1AU\x0D
Mix-point Mute On Input V. Return E Output V. Send H	WM22423*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 1 Left	WM22500*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 1 Right	WM22501*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 2 Left	WM22502*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 2 Right	WM22503*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 3 Left	WM22504*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 3 Right	WM22505*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 4 Left	WM22506*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 4 Right	WM22507*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 5 Left	WM22508*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 5 Right	WM22509*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 6 Left	WM22510*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 6 Right	WM22511*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 7 Left	WM22512*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 7 Right	WM22513*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 8 Left	WM22514*1AU\x0D
Mix-point Mute On Input V. Return F Output Output 8 Right	WM22515*1AU\x0D
Mix-point Mute On Input V. Return F Output V. Send A	WM22516*1AU\x0D
Mix-point Mute On Input V. Return F Output V. Send B	WM22517*1AU\x0D
Mix-point Mute On Input V. Return F Output V. Send C	WM22518*1AU\x0D
Mix-point Mute On Input V. Return F Output V. Send	WM22519*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

D	
Mix-point Mute On Input V. Return F Output V. Send E	WM22520*1AU\x0D
Mix-point Mute On Input V. Return F Output V. Send F	WM22521*1AU\x0D
Mix-point Mute On Input V. Return F Output V. Send G	WM22522*1AU\x0D
Mix-point Mute On Input V. Return F Output V. Send H	WM22523*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 1 Left	WM22600*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 1 Right	WM22601*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 2 Left	WM22602*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 2 Right	WM22603*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 3 Left	WM22604*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 3 Right	WM22605*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 4 Left	WM22606*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 4 Right	WM22607*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 5 Left	WM22608*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 5 Right	WM22609*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 6 Left	WM22610*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 6 Right	WM22611*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 7 Left	WM22612*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 7 Right	WM22613*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 8 Left	WM22614*1AU\x0D
Mix-point Mute On Input V. Return G Output Output 8 Right	WM22615*1AU\x0D
Mix-point Mute On Input V. Return G Output V. Send A	WM22616*1AU\x0D
Mix-point Mute On Input V. Return G Output V. Send B	WM22617*1AU\x0D
Mix-point Mute On Input V. Return G Output V. Send C	WM22618*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute On Input V. Return G Output V. Send D	WM22619*1AU\x0D
Mix-point Mute On Input V. Return G Output V. Send E	WM22620*1AU\x0D
Mix-point Mute On Input V. Return G Output V. Send F	WM22621*1AU\x0D
Mix-point Mute On Input V. Return G Output V. Send G	WM22622*1AU\x0D
Mix-point Mute On Input V. Return G Output V. Send H	WM22623*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 1 Left	WM22700*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 1 Right	WM22701*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 2 Left	WM22702*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 2 Right	WM22703*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 3 Left	WM22704*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 3 Right	WM22705*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 4 Left	WM22706*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 4 Right	WM22707*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 5 Left	WM22708*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 5 Right	WM22709*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 6 Left	WM22710*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 6 Right	WM22711*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 7 Left	WM22712*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 7 Right	WM22713*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 8 Left	WM22714*1AU\x0D
Mix-point Mute On Input V. Return H Output Output 8 Right	WM22715*1AU\x0D
Mix-point Mute On Input V. Return H Output V. Send A	WM22716*1AU\x0D
Mix-point Mute On Input V. Return H Output V. Send B	WM22717*1AU\x0D
Mix-point Mute On Input V. Return H Output V.	WM22718*1AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Send C	
Mix-point Mute On Input V. Return H Output V. Send D	WM22719*1AU\x0D
Mix-point Mute On Input V. Return H Output V. Send E	WM22720*1AU\x0D
Mix-point Mute On Input V. Return H Output V. Send F	WM22721*1AU\x0D
Mix-point Mute On Input V. Return H Output V. Send G	WM22722*1AU\x0D
Mix-point Mute On Input V. Return H Output V. Send H	WM22723*1AU\x0D
Output Audio Select Embedded Audio Output 1	wO1*1AFMT\x0D\x0A
Output Audio Select Embedded Audio Output 6	wO6*1AFMT\x0D\x0A
Output Audio Select Embedded Audio Output 8	wO8*1AFMT\x0D\x0A
Output Audio Select No Audio Output 1	wO1*2AFMT\x0D\x0A
Output Audio Select No Audio Output 6	wO6*2AFMT\x0D\x0A
Output Audio Select No Audio Output 8	wO8*2AFMT\x0D\x0A
Output Audio Select Original HDMI Output 1	wO1*0AFMT\x0D\x0A
Output Audio Select Original HDMI Output 6	wO6*0AFMT\x0D\x0A
Output Audio Select Original HDMI Output 8	wO8*0AFMT\x0D\x0A
Output Post-mixer Trim 12 Output 1 L/R Left	wG60100*120AU\x0D
Output Post-mixer Trim -12 Output 1 L/R Left	wG60100*-120AU\x0D
Output Post-mixer Trim 12 Output 1 L/R Right	wG60101*120AU\x0D
Output Post-mixer Trim -12 Output 1 L/R Right	wG60101*-120AU\x0D
Output Post-mixer Trim 12 Output 6 L/R Left	wG60110*120AU\x0D
Output Post-mixer Trim -12 Output 6 L/R Left	wG60110*-120AU\x0D
Output Post-mixer Trim 12 Output 6 L/R Right	wG60111*120AU\x0D
Output Post-mixer Trim -12 Output 6 L/R Right	wG60111*-120AU\x0D
Output Post-mixer Trim 12 Output 8 L/R Left	wG60114*120AU\x0D
Output Post-mixer Trim -12 Output 8 L/R Left	wG60114*-120AU\x0D
Output Post-mixer Trim 12 Output 8 L/R Right	wG60115*120AU\x0D
Output Post-mixer Trim -12 Output 8 L/R Right	wG60115*-120AU\x0D
Output Resolution 1024x768 (60Hz) Output 3	w3*12RATE\x0D\x0A
Output Resolution 1024x768 (60Hz) Output 5	w5*12RATE\x0D\x0A
Output Resolution 1024x768 (60Hz) Output 6	w6*12RATE\x0D\x0A
Output Resolution 1024x768 (60Hz) Output 8	w8*12RATE\x0D\x0A
Output Resolution 1080i (50Hz) Output 3	w3*35RATE\x0D\x0A
Output Resolution 1080i (50Hz) Output 5	w5*35RATE\x0D\x0A
Output Resolution 1080i (50Hz) Output 6	w6*35RATE\x0D\x0A
Output Resolution 1080i (50Hz) Output 8	w8*35RATE\x0D\x0A
Output Resolution 1080i (59.94Hz) Output 3	w3*36RATE\x0D\x0A
Output Resolution 1080i (59.94Hz) Output 5	w5*36RATE\x0D\x0A
Output Resolution 1080i (59.94Hz) Output 6	w6*36RATE\x0D\x0A
Output Resolution 1080i (59.94Hz) Output 8	w8*36RATE\x0D\x0A
Output Resolution 1080i (60Hz) Output 3	w3*37RATE\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output Resolution 1080i (60Hz) Output 5	w5*37RATE\x0D\x0A
Output Resolution 1080i (60Hz) Output 6	w6*37RATE\x0D\x0A
Output Resolution 1080i (60Hz) Output 8	w8*37RATE\x0D\x0A
Output Resolution 1080p (23.98Hz) Output 3	w3*38RATE\x0D\x0A
Output Resolution 1080p (23.98Hz) Output 5	w5*38RATE\x0D\x0A
Output Resolution 1080p (23.98Hz) Output 6	w6*38RATE\x0D\x0A
Output Resolution 1080p (23.98Hz) Output 8	w8*38RATE\x0D\x0A
Output Resolution 1080p (24Hz) Output 3	w3*39RATE\x0D\x0A
Output Resolution 1080p (24Hz) Output 5	w5*39RATE\x0D\x0A
Output Resolution 1080p (24Hz) Output 6	w6*39RATE\x0D\x0A
Output Resolution 1080p (24Hz) Output 8	w8*39RATE\x0D\x0A
Output Resolution 1080p (25Hz) Output 3	w3*40RATE\x0D\x0A
Output Resolution 1080p (25Hz) Output 5	w5*40RATE\x0D\x0A
Output Resolution 1080p (25Hz) Output 6	w6*40RATE\x0D\x0A
Output Resolution 1080p (25Hz) Output 8	w8*40RATE\x0D\x0A
Output Resolution 1080p (29.97Hz) Output 3	w3*41RATE\x0D\x0A
Output Resolution 1080p (29.97Hz) Output 5	w5*41RATE\x0D\x0A
Output Resolution 1080p (29.97Hz) Output 6	w6*41RATE\x0D\x0A
Output Resolution 1080p (29.97Hz) Output 8	w8*41RATE\x0D\x0A
Output Resolution 1080p (30Hz) Output 3	w3*42RATE\x0D\x0A
Output Resolution 1080p (30Hz) Output 5	w5*42RATE\x0D\x0A
Output Resolution 1080p (30Hz) Output 6	w6*42RATE\x0D\x0A
Output Resolution 1080p (30Hz) Output 8	w8*42RATE\x0D\x0A
Output Resolution 1080p (50Hz) Output 3	w3*43RATE\x0D\x0A
Output Resolution 1080p (50Hz) Output 5	w5*43RATE\x0D\x0A
Output Resolution 1080p (50Hz) Output 6	w6*43RATE\x0D\x0A
Output Resolution 1080p (50Hz) Output 8	w8*43RATE\x0D\x0A
Output Resolution 1080p (59.94Hz) Output 3	w3*44RATE\x0D\x0A
Output Resolution 1080p (59.94Hz) Output 5	w5*44RATE\x0D\x0A
Output Resolution 1080p (59.94Hz) Output 6	w6*44RATE\x0D\x0A
Output Resolution 1080p (59.94Hz) Output 8	w8*44RATE\x0D\x0A
Output Resolution 1080p (60Hz) Output 3	w3*45RATE\x0D\x0A
Output Resolution 1080p (60Hz) Output 5	w5*45RATE\x0D\x0A
Output Resolution 1080p (60Hz) Output 6	w6*45RATE\x0D\x0A
Output Resolution 1080p (60Hz) Output 8	w8*45RATE\x0D\x0A
Output Resolution 1280x1024 (60Hz) Output 3	w3*15RATE\x0D\x0A
Output Resolution 1280x1024 (60Hz) Output 5	w5*15RATE\x0D\x0A
Output Resolution 1280x1024 (60Hz) Output 6	w6*15RATE\x0D\x0A
Output Resolution 1280x1024 (60Hz) Output 8	w8*15RATE\x0D\x0A
Output Resolution 1280x768 (60Hz) Output 3	w3*13RATE\x0D\x0A
Output Resolution 1280x768 (60Hz) Output 5	w5*13RATE\x0D\x0A
Output Resolution 1280x768 (60Hz) Output 6	w6*13RATE\x0D\x0A
Output Resolution 1280x768 (60Hz) Output 8	w8*13RATE\x0D\x0A
Output Resolution 1280x800 (60Hz) Output 3	w3*14RATE\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output Resolution 1280x800 (60Hz) Output 5	w5*14RATE\x0D\x0A
Output Resolution 1280x800 (60Hz) Output 6	w6*14RATE\x0D\x0A
Output Resolution 1280x800 (60Hz) Output 8	w8*14RATE\x0D\x0A
Output Resolution 1360x768 (60Hz) Output 3	w3*16RATE\x0D\x0A
Output Resolution 1360x768 (60Hz) Output 5	w5*16RATE\x0D\x0A
Output Resolution 1360x768 (60Hz) Output 6	w6*16RATE\x0D\x0A
Output Resolution 1360x768 (60Hz) Output 8	w8*16RATE\x0D\x0A
Output Resolution 1366x768 (60Hz) Output 3	w3*17RATE\x0D\x0A
Output Resolution 1366x768 (60Hz) Output 5	w5*17RATE\x0D\x0A
Output Resolution 1366x768 (60Hz) Output 6	w6*17RATE\x0D\x0A
Output Resolution 1366x768 (60Hz) Output 8	w8*17RATE\x0D\x0A
Output Resolution 1400x1050 (60Hz) Output 3	w3*19RATE\x0D\x0A
Output Resolution 1400x1050 (60Hz) Output 5	w5*19RATE\x0D\x0A
Output Resolution 1400x1050 (60Hz) Output 6	w6*19RATE\x0D\x0A
Output Resolution 1400x1050 (60Hz) Output 8	w8*19RATE\x0D\x0A
Output Resolution 1440x900 (60Hz) Output 3	w3*18RATE\x0D\x0A
Output Resolution 1440x900 (60Hz) Output 5	w5*18RATE\x0D\x0A
Output Resolution 1440x900 (60Hz) Output 6	w6*18RATE\x0D\x0A
Output Resolution 1440x900 (60Hz) Output 8	w8*18RATE\x0D\x0A
Output Resolution 1600x1200 (60Hz) Output 3	w3*22RATE\x0D\x0A
Output Resolution 1600x1200 (60Hz) Output 5	w5*22RATE\x0D\x0A
Output Resolution 1600x1200 (60Hz) Output 6	w6*22RATE\x0D\x0A
Output Resolution 1600x1200 (60Hz) Output 8	w8*22RATE\x0D\x0A
Output Resolution 1600x900 (60Hz) Output 3	w3*20RATE\x0D\x0A
Output Resolution 1600x900 (60Hz) Output 5	w5*20RATE\x0D\x0A
Output Resolution 1600x900 (60Hz) Output 6	w6*20RATE\x0D\x0A
Output Resolution 1600x900 (60Hz) Output 8	w8*20RATE\x0D\x0A
Output Resolution 1680x1050 (60Hz) Output 3	w3*21RATE\x0D\x0A
Output Resolution 1680x1050 (60Hz) Output 5	w5*21RATE\x0D\x0A
Output Resolution 1680x1050 (60Hz) Output 6	w6*21RATE\x0D\x0A
Output Resolution 1680x1050 (60Hz) Output 8	w8*21RATE\x0D\x0A
Output Resolution 1920x1200 (60Hz) Output 3	w3*23RATE\x0D\x0A
Output Resolution 1920x1200 (60Hz) Output 5	w5*23RATE\x0D\x0A
Output Resolution 1920x1200 (60Hz) Output 6	w6*23RATE\x0D\x0A
Output Resolution 1920x1200 (60Hz) Output 8	w8*23RATE\x0D\x0A
Output Resolution 1920x2160 (23.98Hz) Output 3	w3*54RATE\x0D\x0A
Output Resolution 1920x2160 (23.98Hz) Output 5	w5*54RATE\x0D\x0A
Output Resolution 1920x2160 (23.98Hz) Output 6	w6*54RATE\x0D\x0A
Output Resolution 1920x2160 (23.98Hz) Output 8	w8*54RATE\x0D\x0A
Output Resolution 1920x2160 (24Hz) Output 3	w3*55RATE\x0D\x0A
Output Resolution 1920x2160 (24Hz) Output 5	w5*55RATE\x0D\x0A
Output Resolution 1920x2160 (24Hz) Output 6	w6*55RATE\x0D\x0A
Output Resolution 1920x2160 (24Hz) Output 8	w8*55RATE\x0D\x0A
Output Resolution 1920x2160 (25Hz) Output 3	w3*56RATE\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output Resolution 1920x2160 (25Hz) Output 5	w5*56RATE\x0D\x0A
Output Resolution 1920x2160 (25Hz) Output 6	w6*56RATE\x0D\x0A
Output Resolution 1920x2160 (25Hz) Output 8	w8*56RATE\x0D\x0A
Output Resolution 1920x2160 (29.97Hz) Output 3	w3*57RATE\x0D\x0A
Output Resolution 1920x2160 (29.97Hz) Output 5	w5*57RATE\x0D\x0A
Output Resolution 1920x2160 (29.97Hz) Output 6	w6*57RATE\x0D\x0A
Output Resolution 1920x2160 (29.97Hz) Output 8	w8*57RATE\x0D\x0A
Output Resolution 1920x2160 (30Hz) Output 3	w3*58RATE\x0D\x0A
Output Resolution 1920x2160 (30Hz) Output 5	w5*58RATE\x0D\x0A
Output Resolution 1920x2160 (30Hz) Output 6	w6*58RATE\x0D\x0A
Output Resolution 1920x2160 (30Hz) Output 8	w8*58RATE\x0D\x0A
Output Resolution 1920x2160 (50Hz) Output 3	w3*59RATE\x0D\x0A
Output Resolution 1920x2160 (50Hz) Output 5	w5*59RATE\x0D\x0A
Output Resolution 1920x2160 (50Hz) Output 6	w6*59RATE\x0D\x0A
Output Resolution 1920x2160 (50Hz) Output 8	w8*59RATE\x0D\x0A
Output Resolution 1920x2160 (59.94Hz) Output 3	w3*60RATE\x0D\x0A
Output Resolution 1920x2160 (59.94Hz) Output 5	w5*60RATE\x0D\x0A
Output Resolution 1920x2160 (59.94Hz) Output 6	w6*60RATE\x0D\x0A
Output Resolution 1920x2160 (59.94Hz) Output 8	w8*60RATE\x0D\x0A
Output Resolution 1920x2160 (60Hz) Output 3	w3*61RATE\x0D\x0A
Output Resolution 1920x2160 (60Hz) Output 5	w5*61RATE\x0D\x0A
Output Resolution 1920x2160 (60Hz) Output 6	w6*61RATE\x0D\x0A
Output Resolution 1920x2160 (60Hz) Output 8	w8*61RATE\x0D\x0A
Output Resolution 1920x2400 (30Hz) Output 3	w3*62RATE\x0D\x0A
Output Resolution 1920x2400 (30Hz) Output 5	w5*62RATE\x0D\x0A
Output Resolution 1920x2400 (30Hz) Output 6	w6*62RATE\x0D\x0A
Output Resolution 1920x2400 (30Hz) Output 8	w8*62RATE\x0D\x0A
Output Resolution 1920x2400 (60Hz) Output 3	w3*63RATE\x0D\x0A
Output Resolution 1920x2400 (60Hz) Output 5	w5*63RATE\x0D\x0A
Output Resolution 1920x2400 (60Hz) Output 6	w6*63RATE\x0D\x0A
Output Resolution 1920x2400 (60Hz) Output 8	w8*63RATE\x0D\x0A
Output Resolution 2048x1080 2K (23.98Hz) Output 3	w3*46RATE\x0D\x0A
Output Resolution 2048x1080 2K (23.98Hz) Output 5	w5*46RATE\x0D\x0A
Output Resolution 2048x1080 2K (23.98Hz) Output 6	w6*46RATE\x0D\x0A
Output Resolution 2048x1080 2K (23.98Hz) Output 8	w8*46RATE\x0D\x0A
Output Resolution 2048x1080 2K (24Hz) Output 3	w3*47RATE\x0D\x0A
Output Resolution 2048x1080 2K (24Hz) Output 5	w5*47RATE\x0D\x0A
Output Resolution 2048x1080 2K (24Hz) Output 6	w6*47RATE\x0D\x0A
Output Resolution 2048x1080 2K (24Hz) Output 8	w8*47RATE\x0D\x0A
Output Resolution 2048x1080 2K (25Hz) Output 3	w3*48RATE\x0D\x0A
Output Resolution 2048x1080 2K (25Hz) Output 5	w5*48RATE\x0D\x0A
Output Resolution 2048x1080 2K (25Hz) Output 6	w6*48RATE\x0D\x0A
Output Resolution 2048x1080 2K (25Hz) Output 8	w8*48RATE\x0D\x0A
Output Resolution 2048x1080 2K (29.97Hz) Output 3	w3*49RATE\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output Resolution 2048x1080 2K (29.97Hz) Output 5	w5*49RATE\x0D\x0A
Output Resolution 2048x1080 2K (29.97Hz) Output 6	w6*49RATE\x0D\x0A
Output Resolution 2048x1080 2K (29.97Hz) Output 8	w8*49RATE\x0D\x0A
Output Resolution 2048x1080 2K (30Hz) Output 3	w3*50RATE\x0D\x0A
Output Resolution 2048x1080 2K (30Hz) Output 5	w5*50RATE\x0D\x0A
Output Resolution 2048x1080 2K (30Hz) Output 6	w6*50RATE\x0D\x0A
Output Resolution 2048x1080 2K (30Hz) Output 8	w8*50RATE\x0D\x0A
Output Resolution 2048x1080 2K (50Hz) Output 3	w3*51RATE\x0D\x0A
Output Resolution 2048x1080 2K (50Hz) Output 5	w5*51RATE\x0D\x0A
Output Resolution 2048x1080 2K (50Hz) Output 6	w6*51RATE\x0D\x0A
Output Resolution 2048x1080 2K (50Hz) Output 8	w8*51RATE\x0D\x0A
Output Resolution 2048x1080 2K (59.94Hz) Output 3	w3*52RATE\x0D\x0A
Output Resolution 2048x1080 2K (59.94Hz) Output 5	w5*52RATE\x0D\x0A
Output Resolution 2048x1080 2K (59.94Hz) Output 6	w6*52RATE\x0D\x0A
Output Resolution 2048x1080 2K (59.94Hz) Output 8	w8*52RATE\x0D\x0A
Output Resolution 2048x1080 2K (60Hz) Output 3	w3*53RATE\x0D\x0A
Output Resolution 2048x1080 2K (60Hz) Output 5	w5*53RATE\x0D\x0A
Output Resolution 2048x1080 2K (60Hz) Output 6	w6*53RATE\x0D\x0A
Output Resolution 2048x1080 2K (60Hz) Output 8	w8*53RATE\x0D\x0A
Output Resolution 2048x1200 (60Hz) Output 3	w3*64RATE\x0D\x0A
Output Resolution 2048x1200 (60Hz) Output 5	w5*64RATE\x0D\x0A
Output Resolution 2048x1200 (60Hz) Output 6	w6*64RATE\x0D\x0A
Output Resolution 2048x1200 (60Hz) Output 8	w8*64RATE\x0D\x0A
Output Resolution 2048x1536 (60Hz) Output 3	w3*65RATE\x0D\x0A
Output Resolution 2048x1536 (60Hz) Output 5	w5*65RATE\x0D\x0A
Output Resolution 2048x1536 (60Hz) Output 6	w6*65RATE\x0D\x0A
Output Resolution 2048x1536 (60Hz) Output 8	w8*65RATE\x0D\x0A
Output Resolution 2048x2160 (23.98Hz) Output 3	w3*66RATE\x0D\x0A
Output Resolution 2048x2160 (23.98Hz) Output 5	w5*66RATE\x0D\x0A
Output Resolution 2048x2160 (23.98Hz) Output 6	w6*66RATE\x0D\x0A
Output Resolution 2048x2160 (23.98Hz) Output 8	w8*66RATE\x0D\x0A
Output Resolution 2048x2160 (24Hz) Output 3	w3*67RATE\x0D\x0A
Output Resolution 2048x2160 (24Hz) Output 5	w5*67RATE\x0D\x0A
Output Resolution 2048x2160 (24Hz) Output 6	w6*67RATE\x0D\x0A
Output Resolution 2048x2160 (24Hz) Output 8	w8*67RATE\x0D\x0A
Output Resolution 2048x2160 (25Hz) Output 3	w3*68RATE\x0D\x0A
Output Resolution 2048x2160 (25Hz) Output 5	w5*68RATE\x0D\x0A
Output Resolution 2048x2160 (25Hz) Output 6	w6*68RATE\x0D\x0A
Output Resolution 2048x2160 (25Hz) Output 8	w8*68RATE\x0D\x0A
Output Resolution 2048x2160 (29.97Hz) Output 3	w3*69RATE\x0D\x0A
Output Resolution 2048x2160 (29.97Hz) Output 5	w5*69RATE\x0D\x0A
Output Resolution 2048x2160 (29.97Hz) Output 6	w6*69RATE\x0D\x0A
Output Resolution 2048x2160 (29.97Hz) Output 8	w8*69RATE\x0D\x0A
Output Resolution 2048x2160 (30Hz) Output 3	w3*70RATE\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output Resolution 2048x2160 (30Hz) Output 5	w5*70RATE\x0D\x0A
Output Resolution 2048x2160 (30Hz) Output 6	w6*70RATE\x0D\x0A
Output Resolution 2048x2160 (30Hz) Output 8	w8*70RATE\x0D\x0A
Output Resolution 2048x2160 (50Hz) Output 3	w3*71RATE\x0D\x0A
Output Resolution 2048x2160 (50Hz) Output 5	w5*71RATE\x0D\x0A
Output Resolution 2048x2160 (50Hz) Output 6	w6*71RATE\x0D\x0A
Output Resolution 2048x2160 (50Hz) Output 8	w8*71RATE\x0D\x0A
Output Resolution 2048x2160 (59.94Hz) Output 3	w3*72RATE\x0D\x0A
Output Resolution 2048x2160 (59.94Hz) Output 5	w5*72RATE\x0D\x0A
Output Resolution 2048x2160 (59.94Hz) Output 6	w6*72RATE\x0D\x0A
Output Resolution 2048x2160 (59.94Hz) Output 8	w8*72RATE\x0D\x0A
Output Resolution 2048x2160 (60Hz) Output 3	w3*73RATE\x0D\x0A
Output Resolution 2048x2160 (60Hz) Output 5	w5*73RATE\x0D\x0A
Output Resolution 2048x2160 (60Hz) Output 6	w6*73RATE\x0D\x0A
Output Resolution 2048x2160 (60Hz) Output 8	w8*73RATE\x0D\x0A
Output Resolution 2048x2400 (30Hz) Output 3	w3*74RATE\x0D\x0A
Output Resolution 2048x2400 (30Hz) Output 5	w5*74RATE\x0D\x0A
Output Resolution 2048x2400 (30Hz) Output 6	w6*74RATE\x0D\x0A
Output Resolution 2048x2400 (30Hz) Output 8	w8*74RATE\x0D\x0A
Output Resolution 2560x1080 (60Hz) Output 3	w3*76RATE\x0D\x0A
Output Resolution 2560x1080 (60Hz) Output 5	w5*76RATE\x0D\x0A
Output Resolution 2560x1080 (60Hz) Output 6	w6*76RATE\x0D\x0A
Output Resolution 2560x1080 (60Hz) Output 8	w8*76RATE\x0D\x0A
Output Resolution 2560x1440 (60Hz) Output 3	w3*77RATE\x0D\x0A
Output Resolution 2560x1440 (60Hz) Output 5	w5*77RATE\x0D\x0A
Output Resolution 2560x1440 (60Hz) Output 6	w6*77RATE\x0D\x0A
Output Resolution 2560x1440 (60Hz) Output 8	w8*77RATE\x0D\x0A
Output Resolution 2560x1600 (60Hz) Output 3	w3*78RATE\x0D\x0A
Output Resolution 2560x1600 (60Hz) Output 5	w5*78RATE\x0D\x0A
Output Resolution 2560x1600 (60Hz) Output 6	w6*78RATE\x0D\x0A
Output Resolution 2560x1600 (60Hz) Output 8	w8*78RATE\x0D\x0A
Output Resolution 3840x2160 (23.98Hz) Output 3	w3*79RATE\x0D\x0A
Output Resolution 3840x2160 (23.98Hz) Output 5	w5*79RATE\x0D\x0A
Output Resolution 3840x2160 (23.98Hz) Output 6	w6*79RATE\x0D\x0A
Output Resolution 3840x2160 (23.98Hz) Output 8	w8*79RATE\x0D\x0A
Output Resolution 3840x2160 (24Hz) Output 3	w3*80RATE\x0D\x0A
Output Resolution 3840x2160 (24Hz) Output 5	w5*80RATE\x0D\x0A
Output Resolution 3840x2160 (24Hz) Output 6	w6*80RATE\x0D\x0A
Output Resolution 3840x2160 (24Hz) Output 8	w8*80RATE\x0D\x0A
Output Resolution 3840x2160 (25Hz) Output 3	w3*81RATE\x0D\x0A
Output Resolution 3840x2160 (25Hz) Output 5	w5*81RATE\x0D\x0A
Output Resolution 3840x2160 (25Hz) Output 6	w6*81RATE\x0D\x0A
Output Resolution 3840x2160 (25Hz) Output 8	w8*81RATE\x0D\x0A
Output Resolution 3840x2160 (29.97Hz) Output 3	w3*82RATE\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output Resolution 3840x2160 (29.97Hz) Output 5	w5*82RATE\x0D\x0A
Output Resolution 3840x2160 (29.97Hz) Output 6	w6*82RATE\x0D\x0A
Output Resolution 3840x2160 (29.97Hz) Output 8	w8*82RATE\x0D\x0A
Output Resolution 3840x2160 (30Hz) Output 3	w3*83RATE\x0D\x0A
Output Resolution 3840x2160 (30Hz) Output 5	w5*83RATE\x0D\x0A
Output Resolution 3840x2160 (30Hz) Output 6	w6*83RATE\x0D\x0A
Output Resolution 3840x2160 (30Hz) Output 8	w8*83RATE\x0D\x0A
Output Resolution 3840x2400 (30Hz) Output 3	w3*87RATE\x0D\x0A
Output Resolution 3840x2400 (30Hz) Output 5	w5*87RATE\x0D\x0A
Output Resolution 3840x2400 (30Hz) Output 6	w6*87RATE\x0D\x0A
Output Resolution 3840x2400 (30Hz) Output 8	w8*87RATE\x0D\x0A
Output Resolution 3840x2400 (60Hz) Output 3	w3*88RATE\x0D\x0A
Output Resolution 3840x2400 (60Hz) Output 5	w5*88RATE\x0D\x0A
Output Resolution 3840x2400 (60Hz) Output 6	w6*88RATE\x0D\x0A
Output Resolution 3840x2400 (60Hz) Output 8	w8*88RATE\x0D\x0A
Output Resolution 4096x2160 (23.98Hz) Output 3	w3*89RATE\x0D\x0A
Output Resolution 4096x2160 (23.98Hz) Output 5	w5*89RATE\x0D\x0A
Output Resolution 4096x2160 (23.98Hz) Output 6	w6*89RATE\x0D\x0A
Output Resolution 4096x2160 (23.98Hz) Output 8	w8*89RATE\x0D\x0A
Output Resolution 4096x2160 (24Hz) Output 3	w3*90RATE\x0D\x0A
Output Resolution 4096x2160 (24Hz) Output 5	w5*90RATE\x0D\x0A
Output Resolution 4096x2160 (24Hz) Output 6	w6*90RATE\x0D\x0A
Output Resolution 4096x2160 (24Hz) Output 8	w8*90RATE\x0D\x0A
Output Resolution 4096x2160 (25Hz) Output 3	w3*91RATE\x0D\x0A
Output Resolution 4096x2160 (25Hz) Output 5	w5*91RATE\x0D\x0A
Output Resolution 4096x2160 (25Hz) Output 6	w6*91RATE\x0D\x0A
Output Resolution 4096x2160 (25Hz) Output 8	w8*91RATE\x0D\x0A
Output Resolution 4096x2160 (29.97Hz) Output 3	w3*92RATE\x0D\x0A
Output Resolution 4096x2160 (29.97Hz) Output 5	w5*92RATE\x0D\x0A
Output Resolution 4096x2160 (29.97Hz) Output 6	w6*92RATE\x0D\x0A
Output Resolution 4096x2160 (29.97Hz) Output 8	w8*92RATE\x0D\x0A
Output Resolution 4096x2160 (30Hz) Output 3	w3*93RATE\x0D\x0A
Output Resolution 4096x2160 (30Hz) Output 5	w5*93RATE\x0D\x0A
Output Resolution 4096x2160 (30Hz) Output 6	w6*93RATE\x0D\x0A
Output Resolution 4096x2160 (30Hz) Output 8	w8*93RATE\x0D\x0A
Output Resolution 480p (59.94Hz) Output 3	w3*24RATE\x0D\x0A
Output Resolution 480p (59.94Hz) Output 5	w5*24RATE\x0D\x0A
Output Resolution 480p (59.94Hz) Output 6	w6*24RATE\x0D\x0A
Output Resolution 480p (59.94Hz) Output 8	w8*24RATE\x0D\x0A
Output Resolution 480p (60Hz) Output 3	w3*25RATE\x0D\x0A
Output Resolution 480p (60Hz) Output 5	w5*25RATE\x0D\x0A
Output Resolution 480p (60Hz) Output 6	w6*25RATE\x0D\x0A
Output Resolution 480p (60Hz) Output 8	w8*25RATE\x0D\x0A
Output Resolution 576p (50Hz) Output 3	w3*26RATE\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Output Resolution 576p (50Hz) Output 5	w5*26RATE\x0D\x0A
Output Resolution 576p (50Hz) Output 6	w6*26RATE\x0D\x0A
Output Resolution 576p (50Hz) Output 8	w8*26RATE\x0D\x0A
Output Resolution 640x480 (60Hz) Output 3	w3*10RATE\x0D\x0A
Output Resolution 640x480 (60Hz) Output 5	w5*10RATE\x0D\x0A
Output Resolution 640x480 (60Hz) Output 6	w6*10RATE\x0D\x0A
Output Resolution 640x480 (60Hz) Output 8	w8*10RATE\x0D\x0A
Output Resolution 720p (23.98Hz) Output 3	w3*27RATE\x0D\x0A
Output Resolution 720p (23.98Hz) Output 5	w5*27RATE\x0D\x0A
Output Resolution 720p (23.98Hz) Output 6	w6*27RATE\x0D\x0A
Output Resolution 720p (23.98Hz) Output 8	w8*27RATE\x0D\x0A
Output Resolution 720p (24Hz) Output 3	w3*28RATE\x0D\x0A
Output Resolution 720p (24Hz) Output 5	w5*28RATE\x0D\x0A
Output Resolution 720p (24Hz) Output 6	w6*28RATE\x0D\x0A
Output Resolution 720p (24Hz) Output 8	w8*28RATE\x0D\x0A
Output Resolution 720p (25Hz) Output 3	w3*29RATE\x0D\x0A
Output Resolution 720p (25Hz) Output 5	w5*29RATE\x0D\x0A
Output Resolution 720p (25Hz) Output 6	w6*29RATE\x0D\x0A
Output Resolution 720p (25Hz) Output 8	w8*29RATE\x0D\x0A
Output Resolution 720p (29.97Hz) Output 3	w3*30RATE\x0D\x0A
Output Resolution 720p (29.97Hz) Output 5	w5*30RATE\x0D\x0A
Output Resolution 720p (29.97Hz) Output 6	w6*30RATE\x0D\x0A
Output Resolution 720p (29.97Hz) Output 8	w8*30RATE\x0D\x0A
Output Resolution 720p (30Hz) Output 3	w3*31RATE\x0D\x0A
Output Resolution 720p (30Hz) Output 5	w5*31RATE\x0D\x0A
Output Resolution 720p (30Hz) Output 6	w6*31RATE\x0D\x0A
Output Resolution 720p (30Hz) Output 8	w8*31RATE\x0D\x0A
Output Resolution 720p (50Hz) Output 3	w3*32RATE\x0D\x0A
Output Resolution 720p (50Hz) Output 5	w5*32RATE\x0D\x0A
Output Resolution 720p (50Hz) Output 6	w6*32RATE\x0D\x0A
Output Resolution 720p (50Hz) Output 8	w8*32RATE\x0D\x0A
Output Resolution 720p (59.94Hz) Output 3	w3*33RATE\x0D\x0A
Output Resolution 720p (59.94Hz) Output 5	w5*33RATE\x0D\x0A
Output Resolution 720p (59.94Hz) Output 6	w6*33RATE\x0D\x0A
Output Resolution 720p (59.94Hz) Output 8	w8*33RATE\x0D\x0A
Output Resolution 720p (60Hz) Output 3	w3*34RATE\x0D\x0A
Output Resolution 720p (60Hz) Output 5	w5*34RATE\x0D\x0A
Output Resolution 720p (60Hz) Output 6	w6*34RATE\x0D\x0A
Output Resolution 720p (60Hz) Output 8	w8*34RATE\x0D\x0A
Output Resolution 800x600 (60Hz) Output 3	w3*11RATE\x0D\x0A
Output Resolution 800x600 (60Hz) Output 5	w5*11RATE\x0D\x0A
Output Resolution 800x600 (60Hz) Output 6	w6*11RATE\x0D\x0A
Output Resolution 800x600 (60Hz) Output 8	w8*11RATE\x0D\x0A
Phantom Power Off Input 1	wZ40000*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Phantom Power Off Input 4	wZ40003*0AU\x0D
Phantom Power On Input 1	wZ40000*1AU\x0D
Phantom Power On Input 4	wZ40003*1AU\x0D
Post Matrix Gain -100 Output 1 L/R Left	WG50000*-1000AU\x0D
Post Matrix Gain -100 Output 1 L/R Right	WG50001*-1000AU\x0D
Post Matrix Gain -100 Output 6 L/R Left	WG50010*-1000AU\x0D
Post Matrix Gain -100 Output 6 L/R Right	WG50011*-1000AU\x0D
Post Matrix Gain -100 Output 8 L/R Left	WG50014*-1000AU\x0D
Post Matrix Gain -100 Output 8 L/R Right	WG50015*-1000AU\x0D
Post Matrix Gain 12 Output 1 L/R Left	WG50000*120AU\x0D
Post Matrix Gain 12 Output 1 L/R Right	WG50001*120AU\x0D
Post Matrix Gain 12 Output 6 L/R Left	WG50010*120AU\x0D
Post Matrix Gain 12 Output 6 L/R Right	WG50011*120AU\x0D
Post Matrix Gain 12 Output 8 L/R Left	WG50014*120AU\x0D
Post Matrix Gain 12 Output 8 L/R Right	WG50015*120AU\x0D
Post Matrix Mute Off Output 1 L/R Left	WM50000*0AU\x0D
Post Matrix Mute Off Output 1 L/R Right	WM50001*0AU\x0D
Post Matrix Mute Off Output 6 L/R Left	WM50010*0AU\x0D
Post Matrix Mute Off Output 6 L/R Right	WM50011*0AU\x0D
Post Matrix Mute Off Output 8 L/R Left	WM50014*0AU\x0D
Post Matrix Mute Off Output 8 L/R Right	WM50015*0AU\x0D
Post Matrix Mute On Output 1 L/R Left	WM50000*1AU\x0D
Post Matrix Mute On Output 1 L/R Right	WM50001*1AU\x0D
Post Matrix Mute On Output 6 L/R Left	WM50010*1AU\x0D
Post Matrix Mute On Output 6 L/R Right	WM50011*1AU\x0D
Post Matrix Mute On Output 8 L/R Left	WM50014*1AU\x0D
Post Matrix Mute On Output 8 L/R Right	WM50015*1AU\x0D
Pre-matrix Trim 12 Input 1 L/R Left	wG30100*120AU\x0D
Pre-matrix Trim -12 Input 1 L/R Left	wG30100*-120AU\x0D
Pre-matrix Trim 12 Input 1 L/R Right	wG30101*120AU\x0D
Pre-matrix Trim -12 Input 1 L/R Right	wG30101*-120AU\x0D
Pre-matrix Trim 12 Input 10 L/R Left	wG30118*120AU\x0D
Pre-matrix Trim -12 Input 10 L/R Left	wG30118*-120AU\x0D
Pre-matrix Trim 12 Input 10 L/R Right	wG30119*120AU\x0D
Pre-matrix Trim -12 Input 10 L/R Right	wG30119*-120AU\x0D
Pre-matrix Trim 12 Input 8 L/R Left	wG30114*120AU\x0D
Pre-matrix Trim -12 Input 8 L/R Left	wG30114*-120AU\x0D
Pre-matrix Trim 12 Input 8 L/R Right	wG30115*120AU\x0D
Pre-matrix Trim -12 Input 8 L/R Right	wG30115*-120AU\x0D
Pre-mixer Gain -100 Input 1	WG40100*-1000AU\x0D
Pre-mixer Gain -100 Input 4	WG40103*-1000AU\x0D
Pre-mixer Gain 12 Input 1	WG40100*120AU\x0D
Pre-mixer Gain 12 Input 4	WG40103*120AU\x0D
Pre-mixer Mute Off Input 1	WM40100*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Pre-mixer Mute Off Input 4	WM40103*0AU\x0D\x0A
Pre-mixer Mute On Input 1	WM40100*1AU\x0D\x0A
Pre-mixer Mute On Input 4	WM40103*1AU\x0D\x0A
Preset Recall 1	1.
Preset Recall 32	32.
Scaler Preset Recall 1 Output 3	2*3*1.\x0D\x0A
Scaler Preset Recall 1 Output 5	2*5*1.\x0D\x0A
Scaler Preset Recall 1 Output 6	2*6*1.\x0D\x0A
Scaler Preset Recall 1 Output 8	2*8*1.\x0D\x0A
Scaler Preset Recall 128 Output 3	2*3*128.\x0D\x0A
Scaler Preset Recall 128 Output 5	2*5*128.\x0D\x0A
Scaler Preset Recall 128 Output 6	2*6*128.\x0D\x0A
Scaler Preset Recall 128 Output 8	2*8*128.\x0D\x0A
Scaler Preset Save 1 Output 3	2*3*1,\x0D\x0A
Scaler Preset Save 1 Output 5	2*5*1,\x0D\x0A
Scaler Preset Save 1 Output 6	2*6*1,\x0D\x0A
Scaler Preset Save 1 Output 8	2*8*1,\x0D\x0A
Scaler Preset Save 128 Output 3	2*3*128,\x0D\x0A
Scaler Preset Save 128 Output 5	2*5*128,\x0D\x0A
Scaler Preset Save 128 Output 6	2*6*128,\x0D\x0A
Scaler Preset Save 128 Output 8	2*8*128,\x0D\x0A
Test Pattern Alternating Pixels Output 3	W3*2TEST\x0D
Test Pattern Alternating Pixels Output 5	W5*2TEST\x0D
Test Pattern Alternating Pixels Output 6	W6*2TEST\x0D
Test Pattern Alternating Pixels Output 8	W8*2TEST\x0D
Test Pattern Blue Mode Output 3	W3*6TEST\x0D
Test Pattern Blue Mode Output 5	W5*6TEST\x0D
Test Pattern Blue Mode Output 6	W6*6TEST\x0D
Test Pattern Blue Mode Output 8	W8*6TEST\x0D
Test Pattern Color Bars Output 3	W3*4TEST\x0D
Test Pattern Color Bars Output 5	W5*4TEST\x0D
Test Pattern Color Bars Output 6	W6*4TEST\x0D
Test Pattern Color Bars Output 8	W8*4TEST\x0D
Test Pattern Crop Output 3	W3*1TEST\x0D
Test Pattern Crop Output 5	W5*1TEST\x0D
Test Pattern Crop Output 6	W6*1TEST\x0D
Test Pattern Crop Output 8	W8*1TEST\x0D
Test Pattern Crosshatch Output 3	W3*3TEST\x0D
Test Pattern Crosshatch Output 5	W5*3TEST\x0D
Test Pattern Crosshatch Output 6	W6*3TEST\x0D
Test Pattern Crosshatch Output 8	W8*3TEST\x0D
Test Pattern Grayscale Output 3	W3*5TEST\x0D
Test Pattern Grayscale Output 5	W5*5TEST\x0D
Test Pattern Grayscale Output 6	W6*5TEST\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Test Pattern Grayscale Output 8	W8*5TEST\x0D
Test Pattern Off Output 3	W3*0TEST\x0D
Test Pattern Off Output 5	W5*0TEST\x0D
Test Pattern Off Output 6	W6*0TEST\x0D
Test Pattern Off Output 8	W8*0TEST\x0D
Video Mute Off Output 1	1*0B
Video Mute Off Output 2	2*0B
Video Mute Off Output 4	4*0B
Video Mute Off Output 5A	5A*0B
Video Mute Off Output 5B	5B*0B
Video Mute Off Output 6A	6A*0B
Video Mute Off Output 6B	6B*0B
Video Mute Off Output 7	7*0B
Video Mute Off Output 8	8*0B
Video Mute Video & Sync Output 1	1*2B
Video Mute Video & Sync Output 2	2*2B
Video Mute Video & Sync Output 4	4*2B
Video Mute Video & Sync Output 5A	5A*2B
Video Mute Video & Sync Output 5B	5B*2B
Video Mute Video & Sync Output 6A	6A*2B
Video Mute Video & Sync Output 6B	6B*2B
Video Mute Video & Sync Output 7	7*2B
Video Mute Video & Sync Output 8	8*2B
Video Mute Video Output 1	1*1B
Video Mute Video Output 2	2*1B
Video Mute Video Output 4	4*1B
Video Mute Video Output 5A	5A*1B
Video Mute Video Output 5B	5B*1B
Video Mute Video Output 6A	6A*1B
Video Mute Video Output 6B	6B*1B
Video Mute Video Output 7	7*1B
Video Mute Video Output 8	8*1B
Virtual Return Gain -100 Input A	WG50100*-1000AU\x0D\x0A
Virtual Return Gain -100 Input B	WG50101*-1000AU\x0D\x0A
Virtual Return Gain -100 Input C	WG50102*-1000AU\x0D\x0A
Virtual Return Gain -100 Input D	WG50103*-1000AU\x0D\x0A
Virtual Return Gain -100 Input E	WG50104*-1000AU\x0D\x0A
Virtual Return Gain -100 Input F	WG50105*-1000AU\x0D\x0A
Virtual Return Gain -100 Input G	WG50106*-1000AU\x0D\x0A
Virtual Return Gain -100 Input H	WG50107*-1000AU\x0D\x0A
Virtual Return Gain 12 Input A	WG50100*120AU\x0D\x0A
Virtual Return Gain 12 Input B	WG50101*120AU\x0D\x0A
Virtual Return Gain 12 Input C	WG50102*120AU\x0D\x0A
Virtual Return Gain 12 Input D	WG50103*120AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Virtual Return Gain 12 Input E	WG50104*120AU\x0D\x0A
Virtual Return Gain 12 Input F	WG50105*120AU\x0D\x0A
Virtual Return Gain 12 Input G	WG50106*120AU\x0D\x0A
Virtual Return Gain 12 Input H	WG50107*120AU\x0D\x0A
Virtual Return Mute Off Input A	WM50100*0AU\x0D\x0A
Virtual Return Mute Off Input B	WM50101*0AU\x0D\x0A
Virtual Return Mute Off Input C	WM50102*0AU\x0D\x0A
Virtual Return Mute Off Input D	WM50103*0AU\x0D\x0A
Virtual Return Mute Off Input E	WM50104*0AU\x0D\x0A
Virtual Return Mute Off Input F	WM50105*0AU\x0D\x0A
Virtual Return Mute Off Input G	WM50106*0AU\x0D\x0A
Virtual Return Mute Off Input H	WM50107*0AU\x0D\x0A
Virtual Return Mute On Input A	WM50100*1AU\x0D\x0A
Virtual Return Mute On Input B	WM50101*1AU\x0D\x0A
Virtual Return Mute On Input C	WM50102*1AU\x0D\x0A
Virtual Return Mute On Input D	WM50103*1AU\x0D\x0A
Virtual Return Mute On Input E	WM50104*1AU\x0D\x0A
Virtual Return Mute On Input F	WM50105*1AU\x0D\x0A
Virtual Return Mute On Input G	WM50106*1AU\x0D\x0A
Virtual Return Mute On Input H	WM50107*1AU\x0D\x0A

Appendix B. Update Commands

Amplifier Attenuation	WG60016AU\x0D
Amplifier Attenuation L/R Left	WG60016AU\x0D
Amplifier Attenuation L/R Right	WG60017AU\x0D
Amplifier Mute	WM60016AU\x0D
Amplifier Mute L/R Left	WM60016AU\x0D
Amplifier Mute L/R Right	WM60017AU\x0D
Amplifier Post-mixer Trim L/R Left	WG60116AU\x0D
Amplifier Post-mixer Trim L/R Right	WG60117AU\x0D
Analog Attenuation Output 1 L/R Left	WG60000AU\x0D
Analog Attenuation Output 1 L/R Right	WG60001AU\x0D
Analog Attenuation Output 4 L/R Left	WG60006AU\x0D
Analog Attenuation Output 4 L/R Right	WG60007AU\x0D
Analog Mute Output 1 L/R Left	WM60000AU\x0D
Analog Mute Output 1 L/R Right	WM60001AU\x0D
Analog Mute Output 4 L/R Left	WM60006AU\x0D
Analog Mute Output 4 L/R Right	WM60007AU\x0D
Aspect Ratio Input 1	w1ASPR\x0D\x0A
Aspect Ratio Input 10	w10ASPR\x0D\x0A
Aspect Ratio Input 8	w8ASPR\x0D\x0A
DTP Attenuation Output 5 L/R Left	WG60008AU\x0D
DTP Attenuation Output 5 L/R Right	WG60009AU\x0D
DTP Attenuation Output 6 L/R Left	WG60010AU\x0D
DTP Attenuation Output 6 L/R Right	WG60011AU\x0D
DTP Attenuation Output 8 L/R Left	WG60014AU\x0D
DTP Attenuation Output 8 L/R Right	WG60015AU\x0D
DTP Mute Output 5 L/R Left	WM60008AU\x0D
DTP Mute Output 5 L/R Right	WM60009AU\x0D
DTP Mute Output 6 L/R Left	WM60010AU\x0D
DTP Mute Output 6 L/R Right	WM60011AU\x0D
DTP Mute Output 8 L/R Left	WM60014AU\x0D
DTP Mute Output 8 L/R Right	WM60015AU\x0D
EDID Assignment Input 1	wA1EDID\x0D
EDID Assignment Input 10	wA10EDID\x0D
EDID Assignment Input 8	wA8EDID\x0D
Executive Mode	X
Expansion Pre-mixer Gain Input 1	wG50200AU\x0D
Expansion Pre-mixer Gain Input 16	wG50215AU\x0D
Expansion Pre-mixer Mute Input 1	wM50200AU\x0D
Expansion Pre-mixer Mute Input 16	wM50215AU\x0D
Freeze Output 5	5F
Freeze Output 6	6F
Freeze Output 8	8F

Global Scripiter Module Communication Sheet

Revision: 3/1/2021

Group Mic/Line Input Gain Group 1	WD1GRPM\x0D
Group Mic/Line Input Gain Group 32	WD32GRPM\x0D
Group Mix-point Group 1	WD1GRPM\x0D
Group Mix-point Group 32	WD32GRPM\x0D
Group Mute Group 1	WD1GRPM\x0D
Group Mute Group 32	WD32GRPM\x0D
Group Output Attenuation Group 1	WD1GRPM\x0D
Group Output Attenuation Group 32	WD32GRPM\x0D
Group Post-mixer Trim Group 1	WD1GRPM\x0D
Group Post-mixer Trim Group 32	WD32GRPM\x0D
Group Pre-matrix Trim Group 1	WD1GRPM\x0D
Group Pre-matrix Trim Group 32	WD32GRPM\x0D
Group Pre-mixer Gain Group 1	WD1GRPM\x0D
Group Pre-mixer Gain Group 32	WD32GRPM\x0D
HDCP Input Authorization Input 1	wE1HDCP\x0D\x0A
HDCP Input Authorization Input 10	wE10HDCP\x0D\x0A
HDCP Input Authorization Input 8	wE8HDCP\x0D\x0A
HDCP Input Status Input 1	wI1HDCP\x0D
HDCP Input Status Input 10	wI10HDCP\x0D
HDCP Input Status Input 8	wI8HDCP\x0D
HDCP Output Authorization Output 1	wS1HDCP\x0D\x0A
HDCP Output Authorization Output 2	wS2HDCP\x0D\x0A
HDCP Output Authorization Output 4	wS4HDCP\x0D\x0A
HDCP Output Authorization Output 5A	wS5AHDCP\x0D\x0A
HDCP Output Authorization Output 5B	wS5BHDCP\x0D\x0A
HDCP Output Authorization Output 6A	wS6AHDCP\x0D\x0A
HDCP Output Authorization Output 6B	wS6BHDCP\x0D\x0A
HDCP Output Authorization Output 7	wS7HDCP\x0D\x0A
HDCP Output Authorization Output 8	wS8HDCP\x0D\x0A
HDCP Output Status Output 1	wO1HDCP\x0D
HDCP Output Status Output 2	wO2HDCP\x0D
HDCP Output Status Output 4	wO4HDCP\x0D
HDCP Output Status Output 5A	wO5AHDCP\x0D
HDCP Output Status Output 5B	wO5BHDCP\x0D
HDCP Output Status Output 6A	wO6AHDCP\x0D
HDCP Output Status Output 6B	wO6BHDCP\x0D
HDCP Output Status Output 7	wO7HDCP\x0D
HDCP Output Status Output 8	wO8HDCP\x0D
HDMI Attenuation Output 1 L/R Left	WG60200AU\x0D
HDMI Attenuation Output 1 L/R Right	WG60201AU\x0D
HDMI Attenuation Output 4 L/R Left	WG60206AU\x0D
HDMI Attenuation Output 4 L/R Right	WG60207AU\x0D
HDMI Mute Output 1 L/R Left	WM60200AU\x0D
HDMI Mute Output 1 L/R Right	WM60201AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

HDMI Mute Output 4 L/R Left	WM60206AU\x0D
HDMI Mute Output 4 L/R Right	WM60207AU\x0D
Input Audio Switch Mode Input 1	wIAFMT\x0D\x0A
Input Audio Switch Mode Input 10	wIAFMT\x0D\x0A
Input Audio Switch Mode Input 8	wIAFMT\x0D\x0A
Input Format Input 1	1*\x0D
Input Format Input 10	10*\x0D
Input Format Input 8	8*\x0D
Input Gain Format Analog L/R Left Input 1	wG30000AU\x0D
Input Gain Format Analog L/R Left Input 8	wG30014AU\x0D
Input Gain Format Analog L/R Right Input 1	wG30001AU\x0D
Input Gain Format Analog L/R Right Input 8	wG30015AU\x0D
Input Gain Format Digital L/R Left Input 1	wH30000AU\x0D
Input Gain Format Digital L/R Left Input 8	wH30014AU\x0D
Input Gain Format Digital L/R Right Input 1	wH30001AU\x0D
Input Gain Format Digital L/R Right Input 8	wH30015AU\x0D
Input Gain Input 1 Format Analog L/R Left	wG30000AU\x0D
Input Gain Input 1 Format Analog L/R Right	wG30001AU\x0D
Input Gain Input 1 Format Digital L/R Left	wH30000AU\x0D
Input Gain Input 1 Format Digital L/R Right	wH30001AU\x0D
Input Gain Input 10 Format Analog L/R Left	wG30018AU\x0D
Input Gain Input 10 Format Analog L/R Right	wG30019AU\x0D
Input Gain Input 10 Format Digital L/R Left	wH30018AU\x0D
Input Gain Input 10 Format Digital L/R Right	wH30019AU\x0D
Input Mute Input 1 L/R Left	wM30000AU\x0D
Input Mute Input 1 L/R Right	wM30001AU\x0D
Input Mute Input 10 L/R Left	wM30018AU\x0D
Input Mute Input 10 L/R Right	wM30019AU\x0D
Input Mute L/R Left Input 1	wM30000AU\x0D
Input Mute L/R Left Input 8	wM30014AU\x0D
Input Mute L/R Right Input 1	wM30001AU\x0D
Input Mute L/R Right Input 8	wM30015AU\x0D
Input Signal Status Input 1	0LS
Input Signal Status Input 10	0LS
Input Signal Status Input 8	0LS
Logo Availability Logo 1	wQLOGO\x0D\x0A
Logo Availability Logo 16	wQLOGO\x0D\x0A
Logo Key Setting Output 1	w1VKEF\x0D\x0A
Logo Key Setting Output 6	w6VKEF\x0D\x0A
Logo Key Setting Output 8	w8VKEF\x0D\x0A
Logo Output 5	wE5LOGO\x0D
Logo Output 6	wE6LOGO\x0D
Logo Output 8	wE8LOGO\x0D
Mic/Line Gain Input 1	wG40000AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mic/Line Gain Input 4	wG40003AU\x0D
Mic/Line Mute Input 1	wM40000AU\x0D
Mic/Line Mute Input 4	wM40003AU\x0D
Microphone Signal Status Input 1	wv40000*1AU\x0D
Microphone Signal Status Input 4	wv40003*1AU\x0D
Mix-point Gain Input Exp. 1 Output Output 1 Left	WG22800AU\x0D
Mix-point Gain Input Exp. 1 Output Output 1 Right	WG22801AU\x0D
Mix-point Gain Input Exp. 1 Output Output 2 Left	WG22802AU\x0D
Mix-point Gain Input Exp. 1 Output Output 2 Right	WG22803AU\x0D
Mix-point Gain Input Exp. 1 Output Output 3 Left	WG22804AU\x0D
Mix-point Gain Input Exp. 1 Output Output 3 Right	WG22805AU\x0D
Mix-point Gain Input Exp. 1 Output Output 4 Left	WG22806AU\x0D
Mix-point Gain Input Exp. 1 Output Output 4 Right	WG22807AU\x0D
Mix-point Gain Input Exp. 1 Output Output 5 Left	WG22808AU\x0D
Mix-point Gain Input Exp. 1 Output Output 5 Right	WG22809AU\x0D
Mix-point Gain Input Exp. 1 Output Output 6 Left	WG22810AU\x0D
Mix-point Gain Input Exp. 1 Output Output 6 Right	WG22811AU\x0D
Mix-point Gain Input Exp. 1 Output Output 7 Left	WG22812AU\x0D
Mix-point Gain Input Exp. 1 Output Output 7 Right	WG22813AU\x0D
Mix-point Gain Input Exp. 1 Output Output 8 Left	WG22814AU\x0D
Mix-point Gain Input Exp. 1 Output Output 8 Right	WG22815AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send A	WG22816AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send B	WG22817AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send C	WG22818AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send D	WG22819AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send E	WG22820AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send F	WG22821AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send G	WG22822AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send H	WG22823AU\x0D
Mix-point Gain Input Exp. 10 Output Output 1 Left	WG23700AU\x0D
Mix-point Gain Input Exp. 10 Output Output 1 Right	WG23701AU\x0D
Mix-point Gain Input Exp. 10 Output Output 2 Left	WG23702AU\x0D
Mix-point Gain Input Exp. 10 Output Output 2 Right	WG23703AU\x0D
Mix-point Gain Input Exp. 10 Output Output 3 Left	WG23704AU\x0D
Mix-point Gain Input Exp. 10 Output Output 3 Right	WG23705AU\x0D
Mix-point Gain Input Exp. 10 Output Output 4 Left	WG23706AU\x0D
Mix-point Gain Input Exp. 10 Output Output 4 Right	WG23707AU\x0D
Mix-point Gain Input Exp. 10 Output Output 5 Left	WG23708AU\x0D
Mix-point Gain Input Exp. 10 Output Output 5 Right	WG23709AU\x0D
Mix-point Gain Input Exp. 10 Output Output 6 Left	WG23710AU\x0D
Mix-point Gain Input Exp. 10 Output Output 6 Right	WG23711AU\x0D
Mix-point Gain Input Exp. 10 Output Output 7 Left	WG23712AU\x0D
Mix-point Gain Input Exp. 10 Output Output 7 Right	WG23713AU\x0D
Mix-point Gain Input Exp. 10 Output Output 8 Left	WG23714AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 10 Output Output 8 Right	WG23715AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send A	WG23716AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send B	WG23717AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send C	WG23718AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send D	WG23719AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send E	WG23720AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send F	WG23721AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send G	WG23722AU\x0D
Mix-point Gain Input Exp. 10 Output V. Send H	WG23723AU\x0D
Mix-point Gain Input Exp. 11 Output Output 1 Left	WG23800AU\x0D
Mix-point Gain Input Exp. 11 Output Output 1 Right	WG23801AU\x0D
Mix-point Gain Input Exp. 11 Output Output 2 Left	WG23802AU\x0D
Mix-point Gain Input Exp. 11 Output Output 2 Right	WG23803AU\x0D
Mix-point Gain Input Exp. 11 Output Output 3 Left	WG23804AU\x0D
Mix-point Gain Input Exp. 11 Output Output 3 Right	WG23805AU\x0D
Mix-point Gain Input Exp. 11 Output Output 4 Left	WG23806AU\x0D
Mix-point Gain Input Exp. 11 Output Output 4 Right	WG23807AU\x0D
Mix-point Gain Input Exp. 11 Output Output 5 Left	WG23808AU\x0D
Mix-point Gain Input Exp. 11 Output Output 5 Right	WG23809AU\x0D
Mix-point Gain Input Exp. 11 Output Output 6 Left	WG23810AU\x0D
Mix-point Gain Input Exp. 11 Output Output 6 Right	WG23811AU\x0D
Mix-point Gain Input Exp. 11 Output Output 7 Left	WG23812AU\x0D
Mix-point Gain Input Exp. 11 Output Output 7 Right	WG23813AU\x0D
Mix-point Gain Input Exp. 11 Output Output 8 Left	WG23814AU\x0D
Mix-point Gain Input Exp. 11 Output Output 8 Right	WG23815AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send A	WG23816AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send B	WG23817AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send C	WG23818AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send D	WG23819AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send E	WG23820AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send F	WG23821AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send G	WG23822AU\x0D
Mix-point Gain Input Exp. 11 Output V. Send H	WG23823AU\x0D
Mix-point Gain Input Exp. 12 Output Output 1 Left	WG23900AU\x0D
Mix-point Gain Input Exp. 12 Output Output 1 Right	WG23901AU\x0D
Mix-point Gain Input Exp. 12 Output Output 2 Left	WG23902AU\x0D
Mix-point Gain Input Exp. 12 Output Output 2 Right	WG23903AU\x0D
Mix-point Gain Input Exp. 12 Output Output 3 Left	WG23904AU\x0D
Mix-point Gain Input Exp. 12 Output Output 3 Right	WG23905AU\x0D
Mix-point Gain Input Exp. 12 Output Output 4 Left	WG23906AU\x0D
Mix-point Gain Input Exp. 12 Output Output 4 Right	WG23907AU\x0D
Mix-point Gain Input Exp. 12 Output Output 5 Left	WG23908AU\x0D
Mix-point Gain Input Exp. 12 Output Output 5 Right	WG23909AU\x0D
Mix-point Gain Input Exp. 12 Output Output 6 Left	WG23910AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 12 Output Output 6 Right	WG23911AU\x0D
Mix-point Gain Input Exp. 12 Output Output 7 Left	WG23912AU\x0D
Mix-point Gain Input Exp. 12 Output Output 7 Right	WG23913AU\x0D
Mix-point Gain Input Exp. 12 Output Output 8 Left	WG23914AU\x0D
Mix-point Gain Input Exp. 12 Output Output 8 Right	WG23915AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send A	WG23916AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send B	WG23917AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send C	WG23918AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send D	WG23919AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send E	WG23920AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send F	WG23921AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send G	WG23922AU\x0D
Mix-point Gain Input Exp. 12 Output V. Send H	WG23923AU\x0D
Mix-point Gain Input Exp. 13 Output Output 1 Left	WG24000AU\x0D
Mix-point Gain Input Exp. 13 Output Output 1 Right	WG24001AU\x0D
Mix-point Gain Input Exp. 13 Output Output 2 Left	WG24002AU\x0D
Mix-point Gain Input Exp. 13 Output Output 2 Right	WG24003AU\x0D
Mix-point Gain Input Exp. 13 Output Output 3 Left	WG24004AU\x0D
Mix-point Gain Input Exp. 13 Output Output 3 Right	WG24005AU\x0D
Mix-point Gain Input Exp. 13 Output Output 4 Left	WG24006AU\x0D
Mix-point Gain Input Exp. 13 Output Output 4 Right	WG24007AU\x0D
Mix-point Gain Input Exp. 13 Output Output 5 Left	WG24008AU\x0D
Mix-point Gain Input Exp. 13 Output Output 5 Right	WG24009AU\x0D
Mix-point Gain Input Exp. 13 Output Output 6 Left	WG24010AU\x0D
Mix-point Gain Input Exp. 13 Output Output 6 Right	WG24011AU\x0D
Mix-point Gain Input Exp. 13 Output Output 7 Left	WG24012AU\x0D
Mix-point Gain Input Exp. 13 Output Output 7 Right	WG24013AU\x0D
Mix-point Gain Input Exp. 13 Output Output 8 Left	WG24014AU\x0D
Mix-point Gain Input Exp. 13 Output Output 8 Right	WG24015AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send A	WG24016AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send B	WG24017AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send C	WG24018AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send D	WG24019AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send E	WG24020AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send F	WG24021AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send G	WG24022AU\x0D
Mix-point Gain Input Exp. 13 Output V. Send H	WG24023AU\x0D
Mix-point Gain Input Exp. 14 Output Output 1 Left	WG24100AU\x0D
Mix-point Gain Input Exp. 14 Output Output 1 Right	WG24101AU\x0D
Mix-point Gain Input Exp. 14 Output Output 2 Left	WG24102AU\x0D
Mix-point Gain Input Exp. 14 Output Output 2 Right	WG24103AU\x0D
Mix-point Gain Input Exp. 14 Output Output 3 Left	WG24104AU\x0D
Mix-point Gain Input Exp. 14 Output Output 3 Right	WG24105AU\x0D
Mix-point Gain Input Exp. 14 Output Output 4 Left	WG24106AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 14 Output Output 4 Right	WG24107AU\x0D
Mix-point Gain Input Exp. 14 Output Output 5 Left	WG24108AU\x0D
Mix-point Gain Input Exp. 14 Output Output 5 Right	WG24109AU\x0D
Mix-point Gain Input Exp. 14 Output Output 6 Left	WG24110AU\x0D
Mix-point Gain Input Exp. 14 Output Output 6 Right	WG24111AU\x0D
Mix-point Gain Input Exp. 14 Output Output 7 Left	WG24112AU\x0D
Mix-point Gain Input Exp. 14 Output Output 7 Right	WG24113AU\x0D
Mix-point Gain Input Exp. 14 Output Output 8 Left	WG24114AU\x0D
Mix-point Gain Input Exp. 14 Output Output 8 Right	WG24115AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send A	WG24116AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send B	WG24117AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send C	WG24118AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send D	WG24119AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send E	WG24120AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send F	WG24121AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send G	WG24122AU\x0D
Mix-point Gain Input Exp. 14 Output V. Send H	WG24123AU\x0D
Mix-point Gain Input Exp. 15 Output Output 1 Left	WG24200AU\x0D
Mix-point Gain Input Exp. 15 Output Output 1 Right	WG24201AU\x0D
Mix-point Gain Input Exp. 15 Output Output 2 Left	WG24202AU\x0D
Mix-point Gain Input Exp. 15 Output Output 2 Right	WG24203AU\x0D
Mix-point Gain Input Exp. 15 Output Output 3 Left	WG24204AU\x0D
Mix-point Gain Input Exp. 15 Output Output 3 Right	WG24205AU\x0D
Mix-point Gain Input Exp. 15 Output Output 4 Left	WG24206AU\x0D
Mix-point Gain Input Exp. 15 Output Output 4 Right	WG24207AU\x0D
Mix-point Gain Input Exp. 15 Output Output 5 Left	WG24208AU\x0D
Mix-point Gain Input Exp. 15 Output Output 5 Right	WG24209AU\x0D
Mix-point Gain Input Exp. 15 Output Output 6 Left	WG24210AU\x0D
Mix-point Gain Input Exp. 15 Output Output 6 Right	WG24211AU\x0D
Mix-point Gain Input Exp. 15 Output Output 7 Left	WG24212AU\x0D
Mix-point Gain Input Exp. 15 Output Output 7 Right	WG24213AU\x0D
Mix-point Gain Input Exp. 15 Output Output 8 Left	WG24214AU\x0D
Mix-point Gain Input Exp. 15 Output Output 8 Right	WG24215AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send A	WG24216AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send B	WG24217AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send C	WG24218AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send D	WG24219AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send E	WG24220AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send F	WG24221AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send G	WG24222AU\x0D
Mix-point Gain Input Exp. 15 Output V. Send H	WG24223AU\x0D
Mix-point Gain Input Exp. 16 Output Output 1 Left	WG24300AU\x0D
Mix-point Gain Input Exp. 16 Output Output 1 Right	WG24301AU\x0D
Mix-point Gain Input Exp. 16 Output Output 2 Left	WG24302AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 16 Output Output 2 Right	WG24303AU\x0D
Mix-point Gain Input Exp. 16 Output Output 3 Left	WG24304AU\x0D
Mix-point Gain Input Exp. 16 Output Output 3 Right	WG24305AU\x0D
Mix-point Gain Input Exp. 16 Output Output 4 Left	WG24306AU\x0D
Mix-point Gain Input Exp. 16 Output Output 4 Right	WG24307AU\x0D
Mix-point Gain Input Exp. 16 Output Output 5 Left	WG24308AU\x0D
Mix-point Gain Input Exp. 16 Output Output 5 Right	WG24309AU\x0D
Mix-point Gain Input Exp. 16 Output Output 6 Left	WG24310AU\x0D
Mix-point Gain Input Exp. 16 Output Output 6 Right	WG24311AU\x0D
Mix-point Gain Input Exp. 16 Output Output 7 Left	WG24312AU\x0D
Mix-point Gain Input Exp. 16 Output Output 7 Right	WG24313AU\x0D
Mix-point Gain Input Exp. 16 Output Output 8 Left	WG24314AU\x0D
Mix-point Gain Input Exp. 16 Output Output 8 Right	WG24315AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send A	WG24316AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send B	WG24317AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send C	WG24318AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send D	WG24319AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send E	WG24320AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send F	WG24321AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send G	WG24322AU\x0D
Mix-point Gain Input Exp. 16 Output V. Send H	WG24323AU\x0D
Mix-point Gain Input Exp. 2 Output Output 1 Left	WG22900AU\x0D
Mix-point Gain Input Exp. 2 Output Output 1 Right	WG22901AU\x0D
Mix-point Gain Input Exp. 2 Output Output 2 Left	WG22902AU\x0D
Mix-point Gain Input Exp. 2 Output Output 2 Right	WG22903AU\x0D
Mix-point Gain Input Exp. 2 Output Output 3 Left	WG22904AU\x0D
Mix-point Gain Input Exp. 2 Output Output 3 Right	WG22905AU\x0D
Mix-point Gain Input Exp. 2 Output Output 4 Left	WG22906AU\x0D
Mix-point Gain Input Exp. 2 Output Output 4 Right	WG22907AU\x0D
Mix-point Gain Input Exp. 2 Output Output 5 Left	WG22908AU\x0D
Mix-point Gain Input Exp. 2 Output Output 5 Right	WG22909AU\x0D
Mix-point Gain Input Exp. 2 Output Output 6 Left	WG22910AU\x0D
Mix-point Gain Input Exp. 2 Output Output 6 Right	WG22911AU\x0D
Mix-point Gain Input Exp. 2 Output Output 7 Left	WG22912AU\x0D
Mix-point Gain Input Exp. 2 Output Output 7 Right	WG22913AU\x0D
Mix-point Gain Input Exp. 2 Output Output 8 Left	WG22914AU\x0D
Mix-point Gain Input Exp. 2 Output Output 8 Right	WG22915AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send A	WG22916AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send B	WG22917AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send C	WG22918AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send D	WG22919AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send E	WG22920AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send F	WG22921AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send G	WG22922AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 2 Output V. Send H	WG22923AU\x0D
Mix-point Gain Input Exp. 3 Output Output 1 Left	WG23000AU\x0D
Mix-point Gain Input Exp. 3 Output Output 1 Right	WG23001AU\x0D
Mix-point Gain Input Exp. 3 Output Output 2 Left	WG23002AU\x0D
Mix-point Gain Input Exp. 3 Output Output 2 Right	WG23003AU\x0D
Mix-point Gain Input Exp. 3 Output Output 3 Left	WG23004AU\x0D
Mix-point Gain Input Exp. 3 Output Output 3 Right	WG23005AU\x0D
Mix-point Gain Input Exp. 3 Output Output 4 Left	WG23006AU\x0D
Mix-point Gain Input Exp. 3 Output Output 4 Right	WG23007AU\x0D
Mix-point Gain Input Exp. 3 Output Output 5 Left	WG23008AU\x0D
Mix-point Gain Input Exp. 3 Output Output 5 Right	WG23009AU\x0D
Mix-point Gain Input Exp. 3 Output Output 6 Left	WG23010AU\x0D
Mix-point Gain Input Exp. 3 Output Output 6 Right	WG23011AU\x0D
Mix-point Gain Input Exp. 3 Output Output 7 Left	WG23012AU\x0D
Mix-point Gain Input Exp. 3 Output Output 7 Right	WG23013AU\x0D
Mix-point Gain Input Exp. 3 Output Output 8 Left	WG23014AU\x0D
Mix-point Gain Input Exp. 3 Output Output 8 Right	WG23015AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send A	WG23016AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send B	WG23017AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send C	WG23018AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send D	WG23019AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send E	WG23020AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send F	WG23021AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send G	WG23022AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send H	WG23023AU\x0D
Mix-point Gain Input Exp. 4 Output Output 1 Left	WG23100AU\x0D
Mix-point Gain Input Exp. 4 Output Output 1 Right	WG23101AU\x0D
Mix-point Gain Input Exp. 4 Output Output 2 Left	WG23102AU\x0D
Mix-point Gain Input Exp. 4 Output Output 2 Right	WG23103AU\x0D
Mix-point Gain Input Exp. 4 Output Output 3 Left	WG23104AU\x0D
Mix-point Gain Input Exp. 4 Output Output 3 Right	WG23105AU\x0D
Mix-point Gain Input Exp. 4 Output Output 4 Left	WG23106AU\x0D
Mix-point Gain Input Exp. 4 Output Output 4 Right	WG23107AU\x0D
Mix-point Gain Input Exp. 4 Output Output 5 Left	WG23108AU\x0D
Mix-point Gain Input Exp. 4 Output Output 5 Right	WG23109AU\x0D
Mix-point Gain Input Exp. 4 Output Output 6 Left	WG23110AU\x0D
Mix-point Gain Input Exp. 4 Output Output 6 Right	WG23111AU\x0D
Mix-point Gain Input Exp. 4 Output Output 7 Left	WG23112AU\x0D
Mix-point Gain Input Exp. 4 Output Output 7 Right	WG23113AU\x0D
Mix-point Gain Input Exp. 4 Output Output 8 Left	WG23114AU\x0D
Mix-point Gain Input Exp. 4 Output Output 8 Right	WG23115AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send A	WG23116AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send B	WG23117AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send C	WG23118AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 4 Output V. Send D	WG23119AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send E	WG23120AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send F	WG23121AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send G	WG23122AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send H	WG23123AU\x0D
Mix-point Gain Input Exp. 5 Output Output 1 Left	WG23200AU\x0D
Mix-point Gain Input Exp. 5 Output Output 1 Right	WG23201AU\x0D
Mix-point Gain Input Exp. 5 Output Output 2 Left	WG23202AU\x0D
Mix-point Gain Input Exp. 5 Output Output 2 Right	WG23203AU\x0D
Mix-point Gain Input Exp. 5 Output Output 3 Left	WG23204AU\x0D
Mix-point Gain Input Exp. 5 Output Output 3 Right	WG23205AU\x0D
Mix-point Gain Input Exp. 5 Output Output 4 Left	WG23206AU\x0D
Mix-point Gain Input Exp. 5 Output Output 4 Right	WG23207AU\x0D
Mix-point Gain Input Exp. 5 Output Output 5 Left	WG23208AU\x0D
Mix-point Gain Input Exp. 5 Output Output 5 Right	WG23209AU\x0D
Mix-point Gain Input Exp. 5 Output Output 6 Left	WG23210AU\x0D
Mix-point Gain Input Exp. 5 Output Output 6 Right	WG23211AU\x0D
Mix-point Gain Input Exp. 5 Output Output 7 Left	WG23212AU\x0D
Mix-point Gain Input Exp. 5 Output Output 7 Right	WG23213AU\x0D
Mix-point Gain Input Exp. 5 Output Output 8 Left	WG23214AU\x0D
Mix-point Gain Input Exp. 5 Output Output 8 Right	WG23215AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send A	WG23216AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send B	WG23217AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send C	WG23218AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send D	WG23219AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send E	WG23220AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send F	WG23221AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send G	WG23222AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send H	WG23223AU\x0D
Mix-point Gain Input Exp. 6 Output Output 1 Left	WG23300AU\x0D
Mix-point Gain Input Exp. 6 Output Output 1 Right	WG23301AU\x0D
Mix-point Gain Input Exp. 6 Output Output 2 Left	WG23302AU\x0D
Mix-point Gain Input Exp. 6 Output Output 2 Right	WG23303AU\x0D
Mix-point Gain Input Exp. 6 Output Output 3 Left	WG23304AU\x0D
Mix-point Gain Input Exp. 6 Output Output 3 Right	WG23305AU\x0D
Mix-point Gain Input Exp. 6 Output Output 4 Left	WG23306AU\x0D
Mix-point Gain Input Exp. 6 Output Output 4 Right	WG23307AU\x0D
Mix-point Gain Input Exp. 6 Output Output 5 Left	WG23308AU\x0D
Mix-point Gain Input Exp. 6 Output Output 5 Right	WG23309AU\x0D
Mix-point Gain Input Exp. 6 Output Output 6 Left	WG23310AU\x0D
Mix-point Gain Input Exp. 6 Output Output 6 Right	WG23311AU\x0D
Mix-point Gain Input Exp. 6 Output Output 7 Left	WG23312AU\x0D
Mix-point Gain Input Exp. 6 Output Output 7 Right	WG23313AU\x0D
Mix-point Gain Input Exp. 6 Output Output 8 Left	WG23314AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 6 Output Output 8 Right	WG23315AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send A	WG23316AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send B	WG23317AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send C	WG23318AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send D	WG23319AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send E	WG23320AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send F	WG23321AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send G	WG23322AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send H	WG23323AU\x0D
Mix-point Gain Input Exp. 7 Output Output 1 Left	WG23400AU\x0D
Mix-point Gain Input Exp. 7 Output Output 1 Right	WG23401AU\x0D
Mix-point Gain Input Exp. 7 Output Output 2 Left	WG23402AU\x0D
Mix-point Gain Input Exp. 7 Output Output 2 Right	WG23403AU\x0D
Mix-point Gain Input Exp. 7 Output Output 3 Left	WG23404AU\x0D
Mix-point Gain Input Exp. 7 Output Output 3 Right	WG23405AU\x0D
Mix-point Gain Input Exp. 7 Output Output 4 Left	WG23406AU\x0D
Mix-point Gain Input Exp. 7 Output Output 4 Right	WG23407AU\x0D
Mix-point Gain Input Exp. 7 Output Output 5 Left	WG23408AU\x0D
Mix-point Gain Input Exp. 7 Output Output 5 Right	WG23409AU\x0D
Mix-point Gain Input Exp. 7 Output Output 6 Left	WG23410AU\x0D
Mix-point Gain Input Exp. 7 Output Output 6 Right	WG23411AU\x0D
Mix-point Gain Input Exp. 7 Output Output 7 Left	WG23412AU\x0D
Mix-point Gain Input Exp. 7 Output Output 7 Right	WG23413AU\x0D
Mix-point Gain Input Exp. 7 Output Output 8 Left	WG23414AU\x0D
Mix-point Gain Input Exp. 7 Output Output 8 Right	WG23415AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send A	WG23416AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send B	WG23417AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send C	WG23418AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send D	WG23419AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send E	WG23420AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send F	WG23421AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send G	WG23422AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send H	WG23423AU\x0D
Mix-point Gain Input Exp. 8 Output Output 1 Left	WG23500AU\x0D
Mix-point Gain Input Exp. 8 Output Output 1 Right	WG23501AU\x0D
Mix-point Gain Input Exp. 8 Output Output 2 Left	WG23502AU\x0D
Mix-point Gain Input Exp. 8 Output Output 2 Right	WG23503AU\x0D
Mix-point Gain Input Exp. 8 Output Output 3 Left	WG23504AU\x0D
Mix-point Gain Input Exp. 8 Output Output 3 Right	WG23505AU\x0D
Mix-point Gain Input Exp. 8 Output Output 4 Left	WG23506AU\x0D
Mix-point Gain Input Exp. 8 Output Output 4 Right	WG23507AU\x0D
Mix-point Gain Input Exp. 8 Output Output 5 Left	WG23508AU\x0D
Mix-point Gain Input Exp. 8 Output Output 5 Right	WG23509AU\x0D
Mix-point Gain Input Exp. 8 Output Output 6 Left	WG23510AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Exp. 8 Output Output 6 Right	WG23511AU\x0D
Mix-point Gain Input Exp. 8 Output Output 7 Left	WG23512AU\x0D
Mix-point Gain Input Exp. 8 Output Output 7 Right	WG23513AU\x0D
Mix-point Gain Input Exp. 8 Output Output 8 Left	WG23514AU\x0D
Mix-point Gain Input Exp. 8 Output Output 8 Right	WG23515AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send A	WG23516AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send B	WG23517AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send C	WG23518AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send D	WG23519AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send E	WG23520AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send F	WG23521AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send G	WG23522AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send H	WG23523AU\x0D
Mix-point Gain Input Exp. 9 Output Output 1 Left	WG23600AU\x0D
Mix-point Gain Input Exp. 9 Output Output 1 Right	WG23601AU\x0D
Mix-point Gain Input Exp. 9 Output Output 2 Left	WG23602AU\x0D
Mix-point Gain Input Exp. 9 Output Output 2 Right	WG23603AU\x0D
Mix-point Gain Input Exp. 9 Output Output 3 Left	WG23604AU\x0D
Mix-point Gain Input Exp. 9 Output Output 3 Right	WG23605AU\x0D
Mix-point Gain Input Exp. 9 Output Output 4 Left	WG23606AU\x0D
Mix-point Gain Input Exp. 9 Output Output 4 Right	WG23607AU\x0D
Mix-point Gain Input Exp. 9 Output Output 5 Left	WG23608AU\x0D
Mix-point Gain Input Exp. 9 Output Output 5 Right	WG23609AU\x0D
Mix-point Gain Input Exp. 9 Output Output 6 Left	WG23610AU\x0D
Mix-point Gain Input Exp. 9 Output Output 6 Right	WG23611AU\x0D
Mix-point Gain Input Exp. 9 Output Output 7 Left	WG23612AU\x0D
Mix-point Gain Input Exp. 9 Output Output 7 Right	WG23613AU\x0D
Mix-point Gain Input Exp. 9 Output Output 8 Left	WG23614AU\x0D
Mix-point Gain Input Exp. 9 Output Output 8 Right	WG23615AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send A	WG23616AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send B	WG23617AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send C	WG23618AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send D	WG23619AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send E	WG23620AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send F	WG23621AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send G	WG23622AU\x0D
Mix-point Gain Input Exp. 9 Output V. Send H	WG23623AU\x0D
Mix-point Gain Input Mic 1 Output Output 1 Left	WG21600AU\x0D
Mix-point Gain Input Mic 1 Output Output 1 Right	WG21601AU\x0D
Mix-point Gain Input Mic 1 Output Output 2 Left	WG21602AU\x0D
Mix-point Gain Input Mic 1 Output Output 2 Right	WG21603AU\x0D
Mix-point Gain Input Mic 1 Output Output 3 Left	WG21604AU\x0D
Mix-point Gain Input Mic 1 Output Output 3 Right	WG21605AU\x0D
Mix-point Gain Input Mic 1 Output Output 4 Left	WG21606AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Mic 1 Output Output 4 Right	WG21607AU\x0D
Mix-point Gain Input Mic 1 Output Output 5 Left	WG21608AU\x0D
Mix-point Gain Input Mic 1 Output Output 5 Right	WG21609AU\x0D
Mix-point Gain Input Mic 1 Output Output 6 Left	WG21610AU\x0D
Mix-point Gain Input Mic 1 Output Output 6 Right	WG21611AU\x0D
Mix-point Gain Input Mic 1 Output Output 7 Left	WG21612AU\x0D
Mix-point Gain Input Mic 1 Output Output 7 Right	WG21613AU\x0D
Mix-point Gain Input Mic 1 Output Output 8 Left	WG21614AU\x0D
Mix-point Gain Input Mic 1 Output Output 8 Right	WG21615AU\x0D
Mix-point Gain Input Mic 1 Output V. Send A	WG21616AU\x0D
Mix-point Gain Input Mic 1 Output V. Send B	WG21617AU\x0D
Mix-point Gain Input Mic 1 Output V. Send C	WG21618AU\x0D
Mix-point Gain Input Mic 1 Output V. Send D	WG21619AU\x0D
Mix-point Gain Input Mic 1 Output V. Send E	WG21620AU\x0D
Mix-point Gain Input Mic 1 Output V. Send F	WG21621AU\x0D
Mix-point Gain Input Mic 1 Output V. Send G	WG21622AU\x0D
Mix-point Gain Input Mic 1 Output V. Send H	WG21623AU\x0D
Mix-point Gain Input Mic 2 Output Output 1 Left	WG21700AU\x0D
Mix-point Gain Input Mic 2 Output Output 1 Right	WG21701AU\x0D
Mix-point Gain Input Mic 2 Output Output 2 Left	WG21702AU\x0D
Mix-point Gain Input Mic 2 Output Output 2 Right	WG21703AU\x0D
Mix-point Gain Input Mic 2 Output Output 3 Left	WG21704AU\x0D
Mix-point Gain Input Mic 2 Output Output 3 Right	WG21705AU\x0D
Mix-point Gain Input Mic 2 Output Output 4 Left	WG21706AU\x0D
Mix-point Gain Input Mic 2 Output Output 4 Right	WG21707AU\x0D
Mix-point Gain Input Mic 2 Output Output 5 Left	WG21708AU\x0D
Mix-point Gain Input Mic 2 Output Output 5 Right	WG21709AU\x0D
Mix-point Gain Input Mic 2 Output Output 6 Left	WG21710AU\x0D
Mix-point Gain Input Mic 2 Output Output 6 Right	WG21711AU\x0D
Mix-point Gain Input Mic 2 Output Output 7 Left	WG21712AU\x0D
Mix-point Gain Input Mic 2 Output Output 7 Right	WG21713AU\x0D
Mix-point Gain Input Mic 2 Output Output 8 Left	WG21714AU\x0D
Mix-point Gain Input Mic 2 Output Output 8 Right	WG21715AU\x0D
Mix-point Gain Input Mic 2 Output V. Send A	WG21716AU\x0D
Mix-point Gain Input Mic 2 Output V. Send B	WG21717AU\x0D
Mix-point Gain Input Mic 2 Output V. Send C	WG21718AU\x0D
Mix-point Gain Input Mic 2 Output V. Send D	WG21719AU\x0D
Mix-point Gain Input Mic 2 Output V. Send E	WG21720AU\x0D
Mix-point Gain Input Mic 2 Output V. Send F	WG21721AU\x0D
Mix-point Gain Input Mic 2 Output V. Send G	WG21722AU\x0D
Mix-point Gain Input Mic 2 Output V. Send H	WG21723AU\x0D
Mix-point Gain Input Mic 3 Output Output 1 Left	WG21800AU\x0D
Mix-point Gain Input Mic 3 Output Output 1 Right	WG21801AU\x0D
Mix-point Gain Input Mic 3 Output Output 2 Left	WG21802AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Mic 3 Output Output 2 Right	WG21803AU\x0D
Mix-point Gain Input Mic 3 Output Output 3 Left	WG21804AU\x0D
Mix-point Gain Input Mic 3 Output Output 3 Right	WG21805AU\x0D
Mix-point Gain Input Mic 3 Output Output 4 Left	WG21806AU\x0D
Mix-point Gain Input Mic 3 Output Output 4 Right	WG21807AU\x0D
Mix-point Gain Input Mic 3 Output Output 5 Left	WG21808AU\x0D
Mix-point Gain Input Mic 3 Output Output 5 Right	WG21809AU\x0D
Mix-point Gain Input Mic 3 Output Output 6 Left	WG21810AU\x0D
Mix-point Gain Input Mic 3 Output Output 6 Right	WG21811AU\x0D
Mix-point Gain Input Mic 3 Output Output 7 Left	WG21812AU\x0D
Mix-point Gain Input Mic 3 Output Output 7 Right	WG21813AU\x0D
Mix-point Gain Input Mic 3 Output Output 8 Left	WG21814AU\x0D
Mix-point Gain Input Mic 3 Output Output 8 Right	WG21815AU\x0D
Mix-point Gain Input Mic 3 Output V. Send A	WG21816AU\x0D
Mix-point Gain Input Mic 3 Output V. Send B	WG21817AU\x0D
Mix-point Gain Input Mic 3 Output V. Send C	WG21818AU\x0D
Mix-point Gain Input Mic 3 Output V. Send D	WG21819AU\x0D
Mix-point Gain Input Mic 3 Output V. Send E	WG21820AU\x0D
Mix-point Gain Input Mic 3 Output V. Send F	WG21821AU\x0D
Mix-point Gain Input Mic 3 Output V. Send G	WG21822AU\x0D
Mix-point Gain Input Mic 3 Output V. Send H	WG21823AU\x0D
Mix-point Gain Input Mic 4 Output Output 1 Left	WG21900AU\x0D
Mix-point Gain Input Mic 4 Output Output 1 Right	WG21901AU\x0D
Mix-point Gain Input Mic 4 Output Output 2 Left	WG21902AU\x0D
Mix-point Gain Input Mic 4 Output Output 2 Right	WG21903AU\x0D
Mix-point Gain Input Mic 4 Output Output 3 Left	WG21904AU\x0D
Mix-point Gain Input Mic 4 Output Output 3 Right	WG21905AU\x0D
Mix-point Gain Input Mic 4 Output Output 4 Left	WG21906AU\x0D
Mix-point Gain Input Mic 4 Output Output 4 Right	WG21907AU\x0D
Mix-point Gain Input Mic 4 Output Output 5 Left	WG21908AU\x0D
Mix-point Gain Input Mic 4 Output Output 5 Right	WG21909AU\x0D
Mix-point Gain Input Mic 4 Output Output 6 Left	WG21910AU\x0D
Mix-point Gain Input Mic 4 Output Output 6 Right	WG21911AU\x0D
Mix-point Gain Input Mic 4 Output Output 7 Left	WG21912AU\x0D
Mix-point Gain Input Mic 4 Output Output 7 Right	WG21913AU\x0D
Mix-point Gain Input Mic 4 Output Output 8 Left	WG21914AU\x0D
Mix-point Gain Input Mic 4 Output Output 8 Right	WG21915AU\x0D
Mix-point Gain Input Mic 4 Output V. Send A	WG21916AU\x0D
Mix-point Gain Input Mic 4 Output V. Send B	WG21917AU\x0D
Mix-point Gain Input Mic 4 Output V. Send C	WG21918AU\x0D
Mix-point Gain Input Mic 4 Output V. Send D	WG21919AU\x0D
Mix-point Gain Input Mic 4 Output V. Send E	WG21920AU\x0D
Mix-point Gain Input Mic 4 Output V. Send F	WG21921AU\x0D
Mix-point Gain Input Mic 4 Output V. Send G	WG21922AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Mic 4 Output V. Send H	WG21923AU\x0D
Mix-point Gain Input Output 1 Left Output Output 1 Left	WG20000AU\x0D
Mix-point Gain Input Output 1 Left Output Output 1 Right	WG20001AU\x0D
Mix-point Gain Input Output 1 Left Output Output 2 Left	WG20002AU\x0D
Mix-point Gain Input Output 1 Left Output Output 2 Right	WG20003AU\x0D
Mix-point Gain Input Output 1 Left Output Output 3 Left	WG20004AU\x0D
Mix-point Gain Input Output 1 Left Output Output 3 Right	WG20005AU\x0D
Mix-point Gain Input Output 1 Left Output Output 4 Left	WG20006AU\x0D
Mix-point Gain Input Output 1 Left Output Output 4 Right	WG20007AU\x0D
Mix-point Gain Input Output 1 Left Output Output 5 Left	WG20008AU\x0D
Mix-point Gain Input Output 1 Left Output Output 5 Right	WG20009AU\x0D
Mix-point Gain Input Output 1 Left Output Output 6 Left	WG20010AU\x0D
Mix-point Gain Input Output 1 Left Output Output 6 Right	WG20011AU\x0D
Mix-point Gain Input Output 1 Left Output Output 7 Left	WG20012AU\x0D
Mix-point Gain Input Output 1 Left Output Output 7 Right	WG20013AU\x0D
Mix-point Gain Input Output 1 Left Output Output 8 Left	WG20014AU\x0D
Mix-point Gain Input Output 1 Left Output Output 8 Right	WG20015AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send A	WG20016AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send B	WG20017AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send C	WG20018AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send D	WG20019AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send E	WG20020AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send F	WG20021AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send G	WG20022AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send H	WG20023AU\x0D
Mix-point Gain Input Output 1 Right Output Output 1 Left	WG20100AU\x0D
Mix-point Gain Input Output 1 Right Output Output 1 Right	WG20101AU\x0D
Mix-point Gain Input Output 1 Right Output Output	WG20102AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

2 Left	
Mix-point Gain Input Output 1 Right Output Output 2 Right	WG20103AU\x0D
Mix-point Gain Input Output 1 Right Output Output 3 Left	WG20104AU\x0D
Mix-point Gain Input Output 1 Right Output Output 3 Right	WG20105AU\x0D
Mix-point Gain Input Output 1 Right Output Output 4 Left	WG20106AU\x0D
Mix-point Gain Input Output 1 Right Output Output 4 Right	WG20107AU\x0D
Mix-point Gain Input Output 1 Right Output Output 5 Left	WG20108AU\x0D
Mix-point Gain Input Output 1 Right Output Output 5 Right	WG20109AU\x0D
Mix-point Gain Input Output 1 Right Output Output 6 Left	WG20110AU\x0D
Mix-point Gain Input Output 1 Right Output Output 6 Right	WG20111AU\x0D
Mix-point Gain Input Output 1 Right Output Output 7 Left	WG20112AU\x0D
Mix-point Gain Input Output 1 Right Output Output 7 Right	WG20113AU\x0D
Mix-point Gain Input Output 1 Right Output Output 8 Left	WG20114AU\x0D
Mix-point Gain Input Output 1 Right Output Output 8 Right	WG20115AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send A	WG20116AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send B	WG20117AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send C	WG20118AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send D	WG20119AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send E	WG20120AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send F	WG20121AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send G	WG20122AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send H	WG20123AU\x0D
Mix-point Gain Input Output 2 Left Output Output 1 Left	WG20200AU\x0D
Mix-point Gain Input Output 2 Left Output Output 1 Right	WG20201AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 2 Left Output Output 2 Left	WG20202AU\x0D
Mix-point Gain Input Output 2 Left Output Output 2 Right	WG20203AU\x0D
Mix-point Gain Input Output 2 Left Output Output 3 Left	WG20204AU\x0D
Mix-point Gain Input Output 2 Left Output Output 3 Right	WG20205AU\x0D
Mix-point Gain Input Output 2 Left Output Output 4 Left	WG20206AU\x0D
Mix-point Gain Input Output 2 Left Output Output 4 Right	WG20207AU\x0D
Mix-point Gain Input Output 2 Left Output Output 5 Left	WG20208AU\x0D
Mix-point Gain Input Output 2 Left Output Output 5 Right	WG20209AU\x0D
Mix-point Gain Input Output 2 Left Output Output 6 Left	WG20210AU\x0D
Mix-point Gain Input Output 2 Left Output Output 6 Right	WG20211AU\x0D
Mix-point Gain Input Output 2 Left Output Output 7 Left	WG20212AU\x0D
Mix-point Gain Input Output 2 Left Output Output 7 Right	WG20213AU\x0D
Mix-point Gain Input Output 2 Left Output Output 8 Left	WG20214AU\x0D
Mix-point Gain Input Output 2 Left Output Output 8 Right	WG20215AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send A	WG20216AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send B	WG20217AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send C	WG20218AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send D	WG20219AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send E	WG20220AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send F	WG20221AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send G	WG20222AU\x0D
Mix-point Gain Input Output 2 Left Output V. Send H	WG20223AU\x0D
Mix-point Gain Input Output 2 Right Output Output 1 Left	WG20300AU\x0D
Mix-point Gain Input Output 2 Right Output Output 1 Right	WG20301AU\x0D
Mix-point Gain Input Output 2 Right Output Output 2 Left	WG20302AU\x0D
Mix-point Gain Input Output 2 Right Output Output 2 Right	WG20303AU\x0D
Mix-point Gain Input Output 2 Right Output Output 3 Left	WG20304AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 2 Right Output Output 3 Right	WG20305AU\x0D
Mix-point Gain Input Output 2 Right Output Output 4 Left	WG20306AU\x0D
Mix-point Gain Input Output 2 Right Output Output 4 Right	WG20307AU\x0D
Mix-point Gain Input Output 2 Right Output Output 5 Left	WG20308AU\x0D
Mix-point Gain Input Output 2 Right Output Output 5 Right	WG20309AU\x0D
Mix-point Gain Input Output 2 Right Output Output 6 Left	WG20310AU\x0D
Mix-point Gain Input Output 2 Right Output Output 6 Right	WG20311AU\x0D
Mix-point Gain Input Output 2 Right Output Output 7 Left	WG20312AU\x0D
Mix-point Gain Input Output 2 Right Output Output 7 Right	WG20313AU\x0D
Mix-point Gain Input Output 2 Right Output Output 8 Left	WG20314AU\x0D
Mix-point Gain Input Output 2 Right Output Output 8 Right	WG20315AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send A	WG20316AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send B	WG20317AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send C	WG20318AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send D	WG20319AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send E	WG20320AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send F	WG20321AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send G	WG20322AU\x0D
Mix-point Gain Input Output 2 Right Output V. Send H	WG20323AU\x0D
Mix-point Gain Input Output 3 Left Output Output 1 Left	WG20400AU\x0D
Mix-point Gain Input Output 3 Left Output Output 1 Right	WG20401AU\x0D
Mix-point Gain Input Output 3 Left Output Output 2 Left	WG20402AU\x0D
Mix-point Gain Input Output 3 Left Output Output 2 Right	WG20403AU\x0D
Mix-point Gain Input Output 3 Left Output Output 3	WG20404AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Left	
Mix-point Gain Input Output 3 Left Output Output 3 Right	WG20405AU\x0D
Mix-point Gain Input Output 3 Left Output Output 4 Left	WG20406AU\x0D
Mix-point Gain Input Output 3 Left Output Output 4 Right	WG20407AU\x0D
Mix-point Gain Input Output 3 Left Output Output 5 Left	WG20408AU\x0D
Mix-point Gain Input Output 3 Left Output Output 5 Right	WG20409AU\x0D
Mix-point Gain Input Output 3 Left Output Output 6 Left	WG20410AU\x0D
Mix-point Gain Input Output 3 Left Output Output 6 Right	WG20411AU\x0D
Mix-point Gain Input Output 3 Left Output Output 7 Left	WG20412AU\x0D
Mix-point Gain Input Output 3 Left Output Output 7 Right	WG20413AU\x0D
Mix-point Gain Input Output 3 Left Output Output 8 Left	WG20414AU\x0D
Mix-point Gain Input Output 3 Left Output Output 8 Right	WG20415AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send A	WG20416AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send B	WG20417AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send C	WG20418AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send D	WG20419AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send E	WG20420AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send F	WG20421AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send G	WG20422AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send H	WG20423AU\x0D
Mix-point Gain Input Output 3 Right Output Output 1 Left	WG20500AU\x0D
Mix-point Gain Input Output 3 Right Output Output 1 Right	WG20501AU\x0D
Mix-point Gain Input Output 3 Right Output Output 2 Left	WG20502AU\x0D
Mix-point Gain Input Output 3 Right Output Output 2 Right	WG20503AU\x0D
Mix-point Gain Input Output 3 Right Output Output 3 Left	WG20504AU\x0D
Mix-point Gain Input Output 3 Right Output Output 3 Right	WG20505AU\x0D
Mix-point Gain Input Output 3 Right Output Output 4 Left	WG20506AU\x0D
Mix-point Gain Input Output 3 Right Output Output	WG20507AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

4 Right	
Mix-point Gain Input Output 3 Right Output Output 5 Left	WG20508AU\x0D
Mix-point Gain Input Output 3 Right Output Output 5 Right	WG20509AU\x0D
Mix-point Gain Input Output 3 Right Output Output 6 Left	WG20510AU\x0D
Mix-point Gain Input Output 3 Right Output Output 6 Right	WG20511AU\x0D
Mix-point Gain Input Output 3 Right Output Output 7 Left	WG20512AU\x0D
Mix-point Gain Input Output 3 Right Output Output 7 Right	WG20513AU\x0D
Mix-point Gain Input Output 3 Right Output Output 8 Left	WG20514AU\x0D
Mix-point Gain Input Output 3 Right Output Output 8 Right	WG20515AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send A	WG20516AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send B	WG20517AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send C	WG20518AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send D	WG20519AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send E	WG20520AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send F	WG20521AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send G	WG20522AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send H	WG20523AU\x0D
Mix-point Gain Input Output 4 Left Output Output 1 Left	WG20600AU\x0D
Mix-point Gain Input Output 4 Left Output Output 1 Right	WG20601AU\x0D
Mix-point Gain Input Output 4 Left Output Output 2 Left	WG20602AU\x0D
Mix-point Gain Input Output 4 Left Output Output 2 Right	WG20603AU\x0D
Mix-point Gain Input Output 4 Left Output Output 3 Left	WG20604AU\x0D
Mix-point Gain Input Output 4 Left Output Output 3 Right	WG20605AU\x0D
Mix-point Gain Input Output 4 Left Output Output 4 Left	WG20606AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 4 Left Output Output 4 Right	WG20607AU\x0D
Mix-point Gain Input Output 4 Left Output Output 5 Left	WG20608AU\x0D
Mix-point Gain Input Output 4 Left Output Output 5 Right	WG20609AU\x0D
Mix-point Gain Input Output 4 Left Output Output 6 Left	WG20610AU\x0D
Mix-point Gain Input Output 4 Left Output Output 6 Right	WG20611AU\x0D
Mix-point Gain Input Output 4 Left Output Output 7 Left	WG20612AU\x0D
Mix-point Gain Input Output 4 Left Output Output 7 Right	WG20613AU\x0D
Mix-point Gain Input Output 4 Left Output Output 8 Left	WG20614AU\x0D
Mix-point Gain Input Output 4 Left Output Output 8 Right	WG20615AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send A	WG20616AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send B	WG20617AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send C	WG20618AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send D	WG20619AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send E	WG20620AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send F	WG20621AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send G	WG20622AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send H	WG20623AU\x0D
Mix-point Gain Input Output 4 Right Output Output 1 Left	WG20700AU\x0D
Mix-point Gain Input Output 4 Right Output Output 1 Right	WG20701AU\x0D
Mix-point Gain Input Output 4 Right Output Output 2 Left	WG20702AU\x0D
Mix-point Gain Input Output 4 Right Output Output 2 Right	WG20703AU\x0D
Mix-point Gain Input Output 4 Right Output Output 3 Left	WG20704AU\x0D
Mix-point Gain Input Output 4 Right Output Output 3 Right	WG20705AU\x0D
Mix-point Gain Input Output 4 Right Output Output 4 Left	WG20706AU\x0D
Mix-point Gain Input Output 4 Right Output Output 4 Right	WG20707AU\x0D
Mix-point Gain Input Output 4 Right Output Output 5 Left	WG20708AU\x0D
Mix-point Gain Input Output 4 Right Output Output 5 Right	WG20709AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 4 Right Output Output 6 Left	WG20710AU\x0D
Mix-point Gain Input Output 4 Right Output Output 6 Right	WG20711AU\x0D
Mix-point Gain Input Output 4 Right Output Output 7 Left	WG20712AU\x0D
Mix-point Gain Input Output 4 Right Output Output 7 Right	WG20713AU\x0D
Mix-point Gain Input Output 4 Right Output Output 8 Left	WG20714AU\x0D
Mix-point Gain Input Output 4 Right Output Output 8 Right	WG20715AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send A	WG20716AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send B	WG20717AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send C	WG20718AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send D	WG20719AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send E	WG20720AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send F	WG20721AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send G	WG20722AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send H	WG20723AU\x0D
Mix-point Gain Input Output 5 Left Output Output 1 Left	WG20800AU\x0D
Mix-point Gain Input Output 5 Left Output Output 1 Right	WG20801AU\x0D
Mix-point Gain Input Output 5 Left Output Output 2 Left	WG20802AU\x0D
Mix-point Gain Input Output 5 Left Output Output 2 Right	WG20803AU\x0D
Mix-point Gain Input Output 5 Left Output Output 3 Left	WG20804AU\x0D
Mix-point Gain Input Output 5 Left Output Output 3 Right	WG20805AU\x0D
Mix-point Gain Input Output 5 Left Output Output 4 Left	WG20806AU\x0D
Mix-point Gain Input Output 5 Left Output Output 4 Right	WG20807AU\x0D
Mix-point Gain Input Output 5 Left Output Output 5 Left	WG20808AU\x0D
Mix-point Gain Input Output 5 Left Output Output 5	WG20809AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Right	
Mix-point Gain Input Output 5 Left Output Output 6 Left	WG20810AU\x0D
Mix-point Gain Input Output 5 Left Output Output 6 Right	WG20811AU\x0D
Mix-point Gain Input Output 5 Left Output Output 7 Left	WG20812AU\x0D
Mix-point Gain Input Output 5 Left Output Output 7 Right	WG20813AU\x0D
Mix-point Gain Input Output 5 Left Output Output 8 Left	WG20814AU\x0D
Mix-point Gain Input Output 5 Left Output Output 8 Right	WG20815AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send A	WG20816AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send B	WG20817AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send C	WG20818AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send D	WG20819AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send E	WG20820AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send F	WG20821AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send G	WG20822AU\x0D
Mix-point Gain Input Output 5 Left Output V. Send H	WG20823AU\x0D
Mix-point Gain Input Output 5 Right Output Output 1 Left	WG20900AU\x0D
Mix-point Gain Input Output 5 Right Output Output 1 Right	WG20901AU\x0D
Mix-point Gain Input Output 5 Right Output Output 2 Left	WG20902AU\x0D
Mix-point Gain Input Output 5 Right Output Output 2 Right	WG20903AU\x0D
Mix-point Gain Input Output 5 Right Output Output 3 Left	WG20904AU\x0D
Mix-point Gain Input Output 5 Right Output Output 3 Right	WG20905AU\x0D
Mix-point Gain Input Output 5 Right Output Output 4 Left	WG20906AU\x0D
Mix-point Gain Input Output 5 Right Output Output 4 Right	WG20907AU\x0D
Mix-point Gain Input Output 5 Right Output Output 5 Left	WG20908AU\x0D
Mix-point Gain Input Output 5 Right Output Output 5 Right	WG20909AU\x0D
Mix-point Gain Input Output 5 Right Output Output 6 Left	WG20910AU\x0D
Mix-point Gain Input Output 5 Right Output Output 6 Right	WG20911AU\x0D
Mix-point Gain Input Output 5 Right Output Output	WG20912AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

7 Left	
Mix-point Gain Input Output 5 Right Output Output 7 Right	WG20913AU\x0D
Mix-point Gain Input Output 5 Right Output Output 8 Left	WG20914AU\x0D
Mix-point Gain Input Output 5 Right Output Output 8 Right	WG20915AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send A	WG20916AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send B	WG20917AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send C	WG20918AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send D	WG20919AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send E	WG20920AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send F	WG20921AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send G	WG20922AU\x0D
Mix-point Gain Input Output 5 Right Output V. Send H	WG20923AU\x0D
Mix-point Gain Input Output 6 Left Output Output 1 Left	WG21000AU\x0D
Mix-point Gain Input Output 6 Left Output Output 1 Right	WG21001AU\x0D
Mix-point Gain Input Output 6 Left Output Output 2 Left	WG21002AU\x0D
Mix-point Gain Input Output 6 Left Output Output 2 Right	WG21003AU\x0D
Mix-point Gain Input Output 6 Left Output Output 3 Left	WG21004AU\x0D
Mix-point Gain Input Output 6 Left Output Output 3 Right	WG21005AU\x0D
Mix-point Gain Input Output 6 Left Output Output 4 Left	WG21006AU\x0D
Mix-point Gain Input Output 6 Left Output Output 4 Right	WG21007AU\x0D
Mix-point Gain Input Output 6 Left Output Output 5 Left	WG21008AU\x0D
Mix-point Gain Input Output 6 Left Output Output 5 Right	WG21009AU\x0D
Mix-point Gain Input Output 6 Left Output Output 6 Left	WG21010AU\x0D
Mix-point Gain Input Output 6 Left Output Output 6 Right	WG21011AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 6 Left Output Output 7 Left	WG21012AU\x0D
Mix-point Gain Input Output 6 Left Output Output 7 Right	WG21013AU\x0D
Mix-point Gain Input Output 6 Left Output Output 8 Left	WG21014AU\x0D
Mix-point Gain Input Output 6 Left Output Output 8 Right	WG21015AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send A	WG21016AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send B	WG21017AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send C	WG21018AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send D	WG21019AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send E	WG21020AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send F	WG21021AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send G	WG21022AU\x0D
Mix-point Gain Input Output 6 Left Output V. Send H	WG21023AU\x0D
Mix-point Gain Input Output 6 Right Output Output 1 Left	WG21100AU\x0D
Mix-point Gain Input Output 6 Right Output Output 1 Right	WG21101AU\x0D
Mix-point Gain Input Output 6 Right Output Output 2 Left	WG21102AU\x0D
Mix-point Gain Input Output 6 Right Output Output 2 Right	WG21103AU\x0D
Mix-point Gain Input Output 6 Right Output Output 3 Left	WG21104AU\x0D
Mix-point Gain Input Output 6 Right Output Output 3 Right	WG21105AU\x0D
Mix-point Gain Input Output 6 Right Output Output 4 Left	WG21106AU\x0D
Mix-point Gain Input Output 6 Right Output Output 4 Right	WG21107AU\x0D
Mix-point Gain Input Output 6 Right Output Output 5 Left	WG21108AU\x0D
Mix-point Gain Input Output 6 Right Output Output 5 Right	WG21109AU\x0D
Mix-point Gain Input Output 6 Right Output Output 6 Left	WG21110AU\x0D
Mix-point Gain Input Output 6 Right Output Output 6 Right	WG21111AU\x0D
Mix-point Gain Input Output 6 Right Output Output 7 Left	WG21112AU\x0D
Mix-point Gain Input Output 6 Right Output Output 7 Right	WG21113AU\x0D
Mix-point Gain Input Output 6 Right Output Output 8 Left	WG21114AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 6 Right Output Output 8 Right	WG21115AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send A	WG21116AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send B	WG21117AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send C	WG21118AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send D	WG21119AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send E	WG21120AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send F	WG21121AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send G	WG21122AU\x0D
Mix-point Gain Input Output 6 Right Output V. Send H	WG21123AU\x0D
Mix-point Gain Input Output 7 Left Output Output 1 Left	WG21200AU\x0D
Mix-point Gain Input Output 7 Left Output Output 1 Right	WG21201AU\x0D
Mix-point Gain Input Output 7 Left Output Output 2 Left	WG21202AU\x0D
Mix-point Gain Input Output 7 Left Output Output 2 Right	WG21203AU\x0D
Mix-point Gain Input Output 7 Left Output Output 3 Left	WG21204AU\x0D
Mix-point Gain Input Output 7 Left Output Output 3 Right	WG21205AU\x0D
Mix-point Gain Input Output 7 Left Output Output 4 Left	WG21206AU\x0D
Mix-point Gain Input Output 7 Left Output Output 4 Right	WG21207AU\x0D
Mix-point Gain Input Output 7 Left Output Output 5 Left	WG21208AU\x0D
Mix-point Gain Input Output 7 Left Output Output 5 Right	WG21209AU\x0D
Mix-point Gain Input Output 7 Left Output Output 6 Left	WG21210AU\x0D
Mix-point Gain Input Output 7 Left Output Output 6 Right	WG21211AU\x0D
Mix-point Gain Input Output 7 Left Output Output 7 Left	WG21212AU\x0D
Mix-point Gain Input Output 7 Left Output Output 7 Right	WG21213AU\x0D
Mix-point Gain Input Output 7 Left Output Output 8	WG21214AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Left	
Mix-point Gain Input Output 7 Left Output Output 8 Right	WG21215AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send A	WG21216AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send B	WG21217AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send C	WG21218AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send D	WG21219AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send E	WG21220AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send F	WG21221AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send G	WG21222AU\x0D
Mix-point Gain Input Output 7 Left Output V. Send H	WG21223AU\x0D
Mix-point Gain Input Output 7 Right Output Output 1 Left	WG21300AU\x0D
Mix-point Gain Input Output 7 Right Output Output 1 Right	WG21301AU\x0D
Mix-point Gain Input Output 7 Right Output Output 2 Left	WG21302AU\x0D
Mix-point Gain Input Output 7 Right Output Output 2 Right	WG21303AU\x0D
Mix-point Gain Input Output 7 Right Output Output 3 Left	WG21304AU\x0D
Mix-point Gain Input Output 7 Right Output Output 3 Right	WG21305AU\x0D
Mix-point Gain Input Output 7 Right Output Output 4 Left	WG21306AU\x0D
Mix-point Gain Input Output 7 Right Output Output 4 Right	WG21307AU\x0D
Mix-point Gain Input Output 7 Right Output Output 5 Left	WG21308AU\x0D
Mix-point Gain Input Output 7 Right Output Output 5 Right	WG21309AU\x0D
Mix-point Gain Input Output 7 Right Output Output 6 Left	WG21310AU\x0D
Mix-point Gain Input Output 7 Right Output Output 6 Right	WG21311AU\x0D
Mix-point Gain Input Output 7 Right Output Output 7 Left	WG21312AU\x0D
Mix-point Gain Input Output 7 Right Output Output 7 Right	WG21313AU\x0D
Mix-point Gain Input Output 7 Right Output Output 8 Left	WG21314AU\x0D
Mix-point Gain Input Output 7 Right Output Output 8 Right	WG21315AU\x0D
Mix-point Gain Input Output 7 Right Output V. Send A	WG21316AU\x0D
Mix-point Gain Input Output 7 Right Output V. Send	WG21317AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

B	
Mix-point Gain Input Output 7 Right Output V. Send C	WG21318AU\x0D
Mix-point Gain Input Output 7 Right Output V. Send D	WG21319AU\x0D
Mix-point Gain Input Output 7 Right Output V. Send E	WG21320AU\x0D
Mix-point Gain Input Output 7 Right Output V. Send F	WG21321AU\x0D
Mix-point Gain Input Output 7 Right Output V. Send G	WG21322AU\x0D
Mix-point Gain Input Output 7 Right Output V. Send H	WG21323AU\x0D
Mix-point Gain Input Output 8 Left Output Output 1 Left	WG21400AU\x0D
Mix-point Gain Input Output 8 Left Output Output 1 Right	WG21401AU\x0D
Mix-point Gain Input Output 8 Left Output Output 2 Left	WG21402AU\x0D
Mix-point Gain Input Output 8 Left Output Output 2 Right	WG21403AU\x0D
Mix-point Gain Input Output 8 Left Output Output 3 Left	WG21404AU\x0D
Mix-point Gain Input Output 8 Left Output Output 3 Right	WG21405AU\x0D
Mix-point Gain Input Output 8 Left Output Output 4 Left	WG21406AU\x0D
Mix-point Gain Input Output 8 Left Output Output 4 Right	WG21407AU\x0D
Mix-point Gain Input Output 8 Left Output Output 5 Left	WG21408AU\x0D
Mix-point Gain Input Output 8 Left Output Output 5 Right	WG21409AU\x0D
Mix-point Gain Input Output 8 Left Output Output 6 Left	WG21410AU\x0D
Mix-point Gain Input Output 8 Left Output Output 6 Right	WG21411AU\x0D
Mix-point Gain Input Output 8 Left Output Output 7 Left	WG21412AU\x0D
Mix-point Gain Input Output 8 Left Output Output 7 Right	WG21413AU\x0D
Mix-point Gain Input Output 8 Left Output Output 8 Left	WG21414AU\x0D
Mix-point Gain Input Output 8 Left Output Output 8 Right	WG21415AU\x0D
Mix-point Gain Input Output 8 Left Output V. Send A	WG21416AU\x0D
Mix-point Gain Input Output 8 Left Output V. Send B	WG21417AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 8 Left Output V. Send C	WG21418AU\x0D
Mix-point Gain Input Output 8 Left Output V. Send D	WG21419AU\x0D
Mix-point Gain Input Output 8 Left Output V. Send E	WG21420AU\x0D
Mix-point Gain Input Output 8 Left Output V. Send F	WG21421AU\x0D
Mix-point Gain Input Output 8 Left Output V. Send G	WG21422AU\x0D
Mix-point Gain Input Output 8 Left Output V. Send H	WG21423AU\x0D
Mix-point Gain Input Output 8 Right Output Output 1 Left	WG21500AU\x0D
Mix-point Gain Input Output 8 Right Output Output 1 Right	WG21501AU\x0D
Mix-point Gain Input Output 8 Right Output Output 2 Left	WG21502AU\x0D
Mix-point Gain Input Output 8 Right Output Output 2 Right	WG21503AU\x0D
Mix-point Gain Input Output 8 Right Output Output 3 Left	WG21504AU\x0D
Mix-point Gain Input Output 8 Right Output Output 3 Right	WG21505AU\x0D
Mix-point Gain Input Output 8 Right Output Output 4 Left	WG21506AU\x0D
Mix-point Gain Input Output 8 Right Output Output 4 Right	WG21507AU\x0D
Mix-point Gain Input Output 8 Right Output Output 5 Left	WG21508AU\x0D
Mix-point Gain Input Output 8 Right Output Output 5 Right	WG21509AU\x0D
Mix-point Gain Input Output 8 Right Output Output 6 Left	WG21510AU\x0D
Mix-point Gain Input Output 8 Right Output Output 6 Right	WG21511AU\x0D
Mix-point Gain Input Output 8 Right Output Output 7 Left	WG21512AU\x0D
Mix-point Gain Input Output 8 Right Output Output 7 Right	WG21513AU\x0D
Mix-point Gain Input Output 8 Right Output Output 8 Left	WG21514AU\x0D
Mix-point Gain Input Output 8 Right Output Output 8 Right	WG21515AU\x0D
Mix-point Gain Input Output 8 Right Output V. Send A	WG21516AU\x0D
Mix-point Gain Input Output 8 Right Output V. Send B	WG21517AU\x0D
Mix-point Gain Input Output 8 Right Output V. Send C	WG21518AU\x0D
Mix-point Gain Input Output 8 Right Output V. Send D	WG21519AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input Output 8 Right Output V. Send E	WG21520AU\x0D
Mix-point Gain Input Output 8 Right Output V. Send F	WG21521AU\x0D
Mix-point Gain Input Output 8 Right Output V. Send G	WG21522AU\x0D
Mix-point Gain Input Output 8 Right Output V. Send H	WG21523AU\x0D
Mix-point Gain Input V. Return A Output Output 1 Left	WG22000AU\x0D
Mix-point Gain Input V. Return A Output Output 1 Right	WG22001AU\x0D
Mix-point Gain Input V. Return A Output Output 2 Left	WG22002AU\x0D
Mix-point Gain Input V. Return A Output Output 2 Right	WG22003AU\x0D
Mix-point Gain Input V. Return A Output Output 3 Left	WG22004AU\x0D
Mix-point Gain Input V. Return A Output Output 3 Right	WG22005AU\x0D
Mix-point Gain Input V. Return A Output Output 4 Left	WG22006AU\x0D
Mix-point Gain Input V. Return A Output Output 4 Right	WG22007AU\x0D
Mix-point Gain Input V. Return A Output Output 5 Left	WG22008AU\x0D
Mix-point Gain Input V. Return A Output Output 5 Right	WG22009AU\x0D
Mix-point Gain Input V. Return A Output Output 6 Left	WG22010AU\x0D
Mix-point Gain Input V. Return A Output Output 6 Right	WG22011AU\x0D
Mix-point Gain Input V. Return A Output Output 7 Left	WG22012AU\x0D
Mix-point Gain Input V. Return A Output Output 7 Right	WG22013AU\x0D
Mix-point Gain Input V. Return A Output Output 8 Left	WG22014AU\x0D
Mix-point Gain Input V. Return A Output Output 8 Right	WG22015AU\x0D
Mix-point Gain Input V. Return A Output V. Send B	WG22017AU\x0D
Mix-point Gain Input V. Return A Output V. Send C	WG22018AU\x0D
Mix-point Gain Input V. Return A Output V. Send D	WG22019AU\x0D
Mix-point Gain Input V. Return A Output V. Send E	WG22020AU\x0D
Mix-point Gain Input V. Return A Output V. Send F	WG22021AU\x0D
Mix-point Gain Input V. Return A Output V. Send G	WG22022AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input V. Return A Output V. Send H	WG22023AU\x0D
Mix-point Gain Input V. Return B Output Output 1 Left	WG22100AU\x0D
Mix-point Gain Input V. Return B Output Output 1 Right	WG22101AU\x0D
Mix-point Gain Input V. Return B Output Output 2 Left	WG22102AU\x0D
Mix-point Gain Input V. Return B Output Output 2 Right	WG22103AU\x0D
Mix-point Gain Input V. Return B Output Output 3 Left	WG22104AU\x0D
Mix-point Gain Input V. Return B Output Output 3 Right	WG22105AU\x0D
Mix-point Gain Input V. Return B Output Output 4 Left	WG22106AU\x0D
Mix-point Gain Input V. Return B Output Output 4 Right	WG22107AU\x0D
Mix-point Gain Input V. Return B Output Output 5 Left	WG22108AU\x0D
Mix-point Gain Input V. Return B Output Output 5 Right	WG22109AU\x0D
Mix-point Gain Input V. Return B Output Output 6 Left	WG22110AU\x0D
Mix-point Gain Input V. Return B Output Output 6 Right	WG22111AU\x0D
Mix-point Gain Input V. Return B Output Output 7 Left	WG22112AU\x0D
Mix-point Gain Input V. Return B Output Output 7 Right	WG22113AU\x0D
Mix-point Gain Input V. Return B Output Output 8 Left	WG22114AU\x0D
Mix-point Gain Input V. Return B Output Output 8 Right	WG22115AU\x0D
Mix-point Gain Input V. Return B Output V. Send A	WG22116AU\x0D
Mix-point Gain Input V. Return B Output V. Send C	WG22118AU\x0D
Mix-point Gain Input V. Return B Output V. Send D	WG22119AU\x0D
Mix-point Gain Input V. Return B Output V. Send E	WG22120AU\x0D
Mix-point Gain Input V. Return B Output V. Send F	WG22121AU\x0D
Mix-point Gain Input V. Return B Output V. Send G	WG22122AU\x0D
Mix-point Gain Input V. Return B Output V. Send H	WG22123AU\x0D
Mix-point Gain Input V. Return C Output Output 1 Left	WG22200AU\x0D
Mix-point Gain Input V. Return C Output Output 1 Right	WG22201AU\x0D
Mix-point Gain Input V. Return C Output Output 2 Left	WG22202AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input V. Return C Output Output 2 Right	WG22203AU\x0D
Mix-point Gain Input V. Return C Output Output 3 Left	WG22204AU\x0D
Mix-point Gain Input V. Return C Output Output 3 Right	WG22205AU\x0D
Mix-point Gain Input V. Return C Output Output 4 Left	WG22206AU\x0D
Mix-point Gain Input V. Return C Output Output 4 Right	WG22207AU\x0D
Mix-point Gain Input V. Return C Output Output 5 Left	WG22208AU\x0D
Mix-point Gain Input V. Return C Output Output 5 Right	WG22209AU\x0D
Mix-point Gain Input V. Return C Output Output 6 Left	WG22210AU\x0D
Mix-point Gain Input V. Return C Output Output 6 Right	WG22211AU\x0D
Mix-point Gain Input V. Return C Output Output 7 Left	WG22212AU\x0D
Mix-point Gain Input V. Return C Output Output 7 Right	WG22213AU\x0D
Mix-point Gain Input V. Return C Output Output 8 Left	WG22214AU\x0D
Mix-point Gain Input V. Return C Output Output 8 Right	WG22215AU\x0D
Mix-point Gain Input V. Return C Output V. Send A	WG22216AU\x0D
Mix-point Gain Input V. Return C Output V. Send B	WG22217AU\x0D
Mix-point Gain Input V. Return C Output V. Send D	WG22219AU\x0D
Mix-point Gain Input V. Return C Output V. Send E	WG22220AU\x0D
Mix-point Gain Input V. Return C Output V. Send F	WG22221AU\x0D
Mix-point Gain Input V. Return C Output V. Send G	WG22222AU\x0D
Mix-point Gain Input V. Return C Output V. Send H	WG22223AU\x0D
Mix-point Gain Input V. Return D Output Output 1 Left	WG22300AU\x0D
Mix-point Gain Input V. Return D Output Output 1 Right	WG22301AU\x0D
Mix-point Gain Input V. Return D Output Output 2 Left	WG22302AU\x0D
Mix-point Gain Input V. Return D Output Output 2 Right	WG22303AU\x0D
Mix-point Gain Input V. Return D Output Output 3 Left	WG22304AU\x0D
Mix-point Gain Input V. Return D Output Output 3 Right	WG22305AU\x0D
Mix-point Gain Input V. Return D Output Output 4	WG22306AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Left	
Mix-point Gain Input V. Return D Output Output 4 Right	WG22307AU\x0D
Mix-point Gain Input V. Return D Output Output 5 Left	WG22308AU\x0D
Mix-point Gain Input V. Return D Output Output 5 Right	WG22309AU\x0D
Mix-point Gain Input V. Return D Output Output 6 Left	WG22310AU\x0D
Mix-point Gain Input V. Return D Output Output 6 Right	WG22311AU\x0D
Mix-point Gain Input V. Return D Output Output 7 Left	WG22312AU\x0D
Mix-point Gain Input V. Return D Output Output 7 Right	WG22313AU\x0D
Mix-point Gain Input V. Return D Output Output 8 Left	WG22314AU\x0D
Mix-point Gain Input V. Return D Output Output 8 Right	WG22315AU\x0D
Mix-point Gain Input V. Return D Output V. Send A	WG22316AU\x0D
Mix-point Gain Input V. Return D Output V. Send B	WG22317AU\x0D
Mix-point Gain Input V. Return D Output V. Send C	WG22318AU\x0D
Mix-point Gain Input V. Return D Output V. Send E	WG22320AU\x0D
Mix-point Gain Input V. Return D Output V. Send F	WG22321AU\x0D
Mix-point Gain Input V. Return D Output V. Send G	WG22322AU\x0D
Mix-point Gain Input V. Return D Output V. Send H	WG22323AU\x0D
Mix-point Gain Input V. Return E Output Output 1 Left	WG22400AU\x0D
Mix-point Gain Input V. Return E Output Output 1 Right	WG22401AU\x0D
Mix-point Gain Input V. Return E Output Output 2 Left	WG22402AU\x0D
Mix-point Gain Input V. Return E Output Output 2 Right	WG22403AU\x0D
Mix-point Gain Input V. Return E Output Output 3 Left	WG22404AU\x0D
Mix-point Gain Input V. Return E Output Output 3 Right	WG22405AU\x0D
Mix-point Gain Input V. Return E Output Output 4 Left	WG22406AU\x0D
Mix-point Gain Input V. Return E Output Output 4 Right	WG22407AU\x0D
Mix-point Gain Input V. Return E Output Output 5 Left	WG22408AU\x0D
Mix-point Gain Input V. Return E Output Output 5 Right	WG22409AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input V. Return E Output Output 6 Left	WG22410AU\x0D
Mix-point Gain Input V. Return E Output Output 6 Right	WG22411AU\x0D
Mix-point Gain Input V. Return E Output Output 7 Left	WG22412AU\x0D
Mix-point Gain Input V. Return E Output Output 7 Right	WG22413AU\x0D
Mix-point Gain Input V. Return E Output Output 8 Left	WG22414AU\x0D
Mix-point Gain Input V. Return E Output Output 8 Right	WG22415AU\x0D
Mix-point Gain Input V. Return E Output V. Send A	WG22416AU\x0D
Mix-point Gain Input V. Return E Output V. Send B	WG22417AU\x0D
Mix-point Gain Input V. Return E Output V. Send C	WG22418AU\x0D
Mix-point Gain Input V. Return E Output V. Send D	WG22419AU\x0D
Mix-point Gain Input V. Return E Output V. Send F	WG22421AU\x0D
Mix-point Gain Input V. Return E Output V. Send G	WG22422AU\x0D
Mix-point Gain Input V. Return E Output V. Send H	WG22423AU\x0D
Mix-point Gain Input V. Return F Output Output 1 Left	WG22500AU\x0D
Mix-point Gain Input V. Return F Output Output 1 Right	WG22501AU\x0D
Mix-point Gain Input V. Return F Output Output 2 Left	WG22502AU\x0D
Mix-point Gain Input V. Return F Output Output 2 Right	WG22503AU\x0D
Mix-point Gain Input V. Return F Output Output 3 Left	WG22504AU\x0D
Mix-point Gain Input V. Return F Output Output 3 Right	WG22505AU\x0D
Mix-point Gain Input V. Return F Output Output 4 Left	WG22506AU\x0D
Mix-point Gain Input V. Return F Output Output 4 Right	WG22507AU\x0D
Mix-point Gain Input V. Return F Output Output 5 Left	WG22508AU\x0D
Mix-point Gain Input V. Return F Output Output 5 Right	WG22509AU\x0D
Mix-point Gain Input V. Return F Output Output 6 Left	WG22510AU\x0D
Mix-point Gain Input V. Return F Output Output 6 Right	WG22511AU\x0D
Mix-point Gain Input V. Return F Output Output 7 Left	WG22512AU\x0D
Mix-point Gain Input V. Return F Output Output 7 Right	WG22513AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Right	
Mix-point Gain Input V. Return F Output Output 8 Left	WG22514AU\x0D
Mix-point Gain Input V. Return F Output Output 8 Right	WG22515AU\x0D
Mix-point Gain Input V. Return F Output V. Send A	WG22516AU\x0D
Mix-point Gain Input V. Return F Output V. Send B	WG22517AU\x0D
Mix-point Gain Input V. Return F Output V. Send C	WG22518AU\x0D
Mix-point Gain Input V. Return F Output V. Send D	WG22519AU\x0D
Mix-point Gain Input V. Return F Output V. Send E	WG22520AU\x0D
Mix-point Gain Input V. Return F Output V. Send G	WG22522AU\x0D
Mix-point Gain Input V. Return F Output V. Send H	WG22523AU\x0D
Mix-point Gain Input V. Return G Output Output 1 Left	WG22600AU\x0D
Mix-point Gain Input V. Return G Output Output 1 Right	WG22601AU\x0D
Mix-point Gain Input V. Return G Output Output 2 Left	WG22602AU\x0D
Mix-point Gain Input V. Return G Output Output 2 Right	WG22603AU\x0D
Mix-point Gain Input V. Return G Output Output 3 Left	WG22604AU\x0D
Mix-point Gain Input V. Return G Output Output 3 Right	WG22605AU\x0D
Mix-point Gain Input V. Return G Output Output 4 Left	WG22606AU\x0D
Mix-point Gain Input V. Return G Output Output 4 Right	WG22607AU\x0D
Mix-point Gain Input V. Return G Output Output 5 Left	WG22608AU\x0D
Mix-point Gain Input V. Return G Output Output 5 Right	WG22609AU\x0D
Mix-point Gain Input V. Return G Output Output 6 Left	WG22610AU\x0D
Mix-point Gain Input V. Return G Output Output 6 Right	WG22611AU\x0D
Mix-point Gain Input V. Return G Output Output 7 Left	WG22612AU\x0D
Mix-point Gain Input V. Return G Output Output 7 Right	WG22613AU\x0D
Mix-point Gain Input V. Return G Output Output 8 Left	WG22614AU\x0D
Mix-point Gain Input V. Return G Output Output 8 Right	WG22615AU\x0D
Mix-point Gain Input V. Return G Output V. Send A	WG22616AU\x0D
Mix-point Gain Input V. Return G Output V. Send B	WG22617AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Gain Input V. Return G Output V. Send C	WG22618AU\x0D
Mix-point Gain Input V. Return G Output V. Send D	WG22619AU\x0D
Mix-point Gain Input V. Return G Output V. Send E	WG22620AU\x0D
Mix-point Gain Input V. Return G Output V. Send F	WG22621AU\x0D
Mix-point Gain Input V. Return G Output V. Send H	WG22623AU\x0D
Mix-point Gain Input V. Return H Output Output 1 Left	WG22700AU\x0D
Mix-point Gain Input V. Return H Output Output 1 Right	WG22701AU\x0D
Mix-point Gain Input V. Return H Output Output 2 Left	WG22702AU\x0D
Mix-point Gain Input V. Return H Output Output 2 Right	WG22703AU\x0D
Mix-point Gain Input V. Return H Output Output 3 Left	WG22704AU\x0D
Mix-point Gain Input V. Return H Output Output 3 Right	WG22705AU\x0D
Mix-point Gain Input V. Return H Output Output 4 Left	WG22706AU\x0D
Mix-point Gain Input V. Return H Output Output 4 Right	WG22707AU\x0D
Mix-point Gain Input V. Return H Output Output 5 Left	WG22708AU\x0D
Mix-point Gain Input V. Return H Output Output 5 Right	WG22709AU\x0D
Mix-point Gain Input V. Return H Output Output 6 Left	WG22710AU\x0D
Mix-point Gain Input V. Return H Output Output 6 Right	WG22711AU\x0D
Mix-point Gain Input V. Return H Output Output 7 Left	WG22712AU\x0D
Mix-point Gain Input V. Return H Output Output 7 Right	WG22713AU\x0D
Mix-point Gain Input V. Return H Output Output 8 Left	WG22714AU\x0D
Mix-point Gain Input V. Return H Output Output 8 Right	WG22715AU\x0D
Mix-point Gain Input V. Return H Output V. Send A	WG22716AU\x0D
Mix-point Gain Input V. Return H Output V. Send B	WG22717AU\x0D
Mix-point Gain Input V. Return H Output V. Send C	WG22718AU\x0D
Mix-point Gain Input V. Return H Output V. Send D	WG22719AU\x0D
Mix-point Gain Input V. Return H Output V. Send E	WG22720AU\x0D
Mix-point Gain Input V. Return H Output V. Send F	WG22721AU\x0D
Mix-point Gain Input V. Return H Output V. Send G	WG22722AU\x0D
Mix-point Mute Input Exp. 1 Output Output 1 Left	WM22800AU\x0D
Mix-point Mute Input Exp. 1 Output Output 1 Right	WM22801AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 1 Output Output 2 Left	WM22802AU\x0D
Mix-point Mute Input Exp. 1 Output Output 2 Right	WM22803AU\x0D
Mix-point Mute Input Exp. 1 Output Output 3 Left	WM22804AU\x0D
Mix-point Mute Input Exp. 1 Output Output 3 Right	WM22805AU\x0D
Mix-point Mute Input Exp. 1 Output Output 4 Left	WM22806AU\x0D
Mix-point Mute Input Exp. 1 Output Output 4 Right	WM22807AU\x0D
Mix-point Mute Input Exp. 1 Output Output 5 Left	WM22808AU\x0D
Mix-point Mute Input Exp. 1 Output Output 5 Right	WM22809AU\x0D
Mix-point Mute Input Exp. 1 Output Output 6 Left	WM22810AU\x0D
Mix-point Mute Input Exp. 1 Output Output 6 Right	WM22811AU\x0D
Mix-point Mute Input Exp. 1 Output Output 7 Left	WM22812AU\x0D
Mix-point Mute Input Exp. 1 Output Output 7 Right	WM22813AU\x0D
Mix-point Mute Input Exp. 1 Output Output 8 Left	WM22814AU\x0D
Mix-point Mute Input Exp. 1 Output Output 8 Right	WM22815AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send A	WM22816AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send B	WM22817AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send C	WM22818AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send D	WM22819AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send E	WM22820AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send F	WM22821AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send G	WM22822AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send H	WM22823AU\x0D
Mix-point Mute Input Exp. 10 Output Output 1 Left	WM23700AU\x0D
Mix-point Mute Input Exp. 10 Output Output 1 Right	WM23701AU\x0D
Mix-point Mute Input Exp. 10 Output Output 2 Left	WM23702AU\x0D
Mix-point Mute Input Exp. 10 Output Output 2 Right	WM23703AU\x0D
Mix-point Mute Input Exp. 10 Output Output 3 Left	WM23704AU\x0D
Mix-point Mute Input Exp. 10 Output Output 3 Right	WM23705AU\x0D
Mix-point Mute Input Exp. 10 Output Output 4 Left	WM23706AU\x0D
Mix-point Mute Input Exp. 10 Output Output 4 Right	WM23707AU\x0D
Mix-point Mute Input Exp. 10 Output Output 5 Left	WM23708AU\x0D
Mix-point Mute Input Exp. 10 Output Output 5 Right	WM23709AU\x0D
Mix-point Mute Input Exp. 10 Output Output 6 Left	WM23710AU\x0D
Mix-point Mute Input Exp. 10 Output Output 6 Right	WM23711AU\x0D
Mix-point Mute Input Exp. 10 Output Output 7 Left	WM23712AU\x0D
Mix-point Mute Input Exp. 10 Output Output 7 Right	WM23713AU\x0D
Mix-point Mute Input Exp. 10 Output Output 8 Left	WM23714AU\x0D
Mix-point Mute Input Exp. 10 Output Output 8 Right	WM23715AU\x0D
Mix-point Mute Input Exp. 10 Output V. Send A	WM23716AU\x0D
Mix-point Mute Input Exp. 10 Output V. Send B	WM23717AU\x0D
Mix-point Mute Input Exp. 10 Output V. Send C	WM23718AU\x0D
Mix-point Mute Input Exp. 10 Output V. Send D	WM23719AU\x0D
Mix-point Mute Input Exp. 10 Output V. Send E	WM23720AU\x0D
Mix-point Mute Input Exp. 10 Output V. Send F	WM23721AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 10 Output V. Send G	WM23722AU\x0D
Mix-point Mute Input Exp. 10 Output V. Send H	WM23723AU\x0D
Mix-point Mute Input Exp. 11 Output Output 1 Left	WM23800AU\x0D
Mix-point Mute Input Exp. 11 Output Output 1 Right	WM23801AU\x0D
Mix-point Mute Input Exp. 11 Output Output 2 Left	WM23802AU\x0D
Mix-point Mute Input Exp. 11 Output Output 2 Right	WM23803AU\x0D
Mix-point Mute Input Exp. 11 Output Output 3 Left	WM23804AU\x0D
Mix-point Mute Input Exp. 11 Output Output 3 Right	WM23805AU\x0D
Mix-point Mute Input Exp. 11 Output Output 4 Left	WM23806AU\x0D
Mix-point Mute Input Exp. 11 Output Output 4 Right	WM23807AU\x0D
Mix-point Mute Input Exp. 11 Output Output 5 Left	WM23808AU\x0D
Mix-point Mute Input Exp. 11 Output Output 5 Right	WM23809AU\x0D
Mix-point Mute Input Exp. 11 Output Output 6 Left	WM23810AU\x0D
Mix-point Mute Input Exp. 11 Output Output 6 Right	WM23811AU\x0D
Mix-point Mute Input Exp. 11 Output Output 7 Left	WM23812AU\x0D
Mix-point Mute Input Exp. 11 Output Output 7 Right	WM23813AU\x0D
Mix-point Mute Input Exp. 11 Output Output 8 Left	WM23814AU\x0D
Mix-point Mute Input Exp. 11 Output Output 8 Right	WM23815AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send A	WM23816AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send B	WM23817AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send C	WM23818AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send D	WM23819AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send E	WM23820AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send F	WM23821AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send G	WM23822AU\x0D
Mix-point Mute Input Exp. 11 Output V. Send H	WM23823AU\x0D
Mix-point Mute Input Exp. 12 Output Output 1 Left	WM23900AU\x0D
Mix-point Mute Input Exp. 12 Output Output 1 Right	WM23901AU\x0D
Mix-point Mute Input Exp. 12 Output Output 2 Left	WM23902AU\x0D
Mix-point Mute Input Exp. 12 Output Output 2 Right	WM23903AU\x0D
Mix-point Mute Input Exp. 12 Output Output 3 Left	WM23904AU\x0D
Mix-point Mute Input Exp. 12 Output Output 3 Right	WM23905AU\x0D
Mix-point Mute Input Exp. 12 Output Output 4 Left	WM23906AU\x0D
Mix-point Mute Input Exp. 12 Output Output 4 Right	WM23907AU\x0D
Mix-point Mute Input Exp. 12 Output Output 5 Left	WM23908AU\x0D
Mix-point Mute Input Exp. 12 Output Output 5 Right	WM23909AU\x0D
Mix-point Mute Input Exp. 12 Output Output 6 Left	WM23910AU\x0D
Mix-point Mute Input Exp. 12 Output Output 6 Right	WM23911AU\x0D
Mix-point Mute Input Exp. 12 Output Output 7 Left	WM23912AU\x0D
Mix-point Mute Input Exp. 12 Output Output 7 Right	WM23913AU\x0D
Mix-point Mute Input Exp. 12 Output Output 8 Left	WM23914AU\x0D
Mix-point Mute Input Exp. 12 Output Output 8 Right	WM23915AU\x0D
Mix-point Mute Input Exp. 12 Output V. Send A	WM23916AU\x0D
Mix-point Mute Input Exp. 12 Output V. Send B	WM23917AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 12 Output V. Send C	WM23918AU\x0D
Mix-point Mute Input Exp. 12 Output V. Send D	WM23919AU\x0D
Mix-point Mute Input Exp. 12 Output V. Send E	WM23920AU\x0D
Mix-point Mute Input Exp. 12 Output V. Send F	WM23921AU\x0D
Mix-point Mute Input Exp. 12 Output V. Send G	WM23922AU\x0D
Mix-point Mute Input Exp. 12 Output V. Send H	WM23923AU\x0D
Mix-point Mute Input Exp. 13 Output Output 1 Left	WM24000AU\x0D
Mix-point Mute Input Exp. 13 Output Output 1 Right	WM24001AU\x0D
Mix-point Mute Input Exp. 13 Output Output 2 Left	WM24002AU\x0D
Mix-point Mute Input Exp. 13 Output Output 2 Right	WM24003AU\x0D
Mix-point Mute Input Exp. 13 Output Output 3 Left	WM24004AU\x0D
Mix-point Mute Input Exp. 13 Output Output 3 Right	WM24005AU\x0D
Mix-point Mute Input Exp. 13 Output Output 4 Left	WM24006AU\x0D
Mix-point Mute Input Exp. 13 Output Output 4 Right	WM24007AU\x0D
Mix-point Mute Input Exp. 13 Output Output 5 Left	WM24008AU\x0D
Mix-point Mute Input Exp. 13 Output Output 5 Right	WM24009AU\x0D
Mix-point Mute Input Exp. 13 Output Output 6 Left	WM24010AU\x0D
Mix-point Mute Input Exp. 13 Output Output 6 Right	WM24011AU\x0D
Mix-point Mute Input Exp. 13 Output Output 7 Left	WM24012AU\x0D
Mix-point Mute Input Exp. 13 Output Output 7 Right	WM24013AU\x0D
Mix-point Mute Input Exp. 13 Output Output 8 Left	WM24014AU\x0D
Mix-point Mute Input Exp. 13 Output Output 8 Right	WM24015AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send A	WM24016AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send B	WM24017AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send C	WM24018AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send D	WM24019AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send E	WM24020AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send F	WM24021AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send G	WM24022AU\x0D
Mix-point Mute Input Exp. 13 Output V. Send H	WM24023AU\x0D
Mix-point Mute Input Exp. 14 Output Output 1 Left	WM24100AU\x0D
Mix-point Mute Input Exp. 14 Output Output 1 Right	WM24101AU\x0D
Mix-point Mute Input Exp. 14 Output Output 2 Left	WM24102AU\x0D
Mix-point Mute Input Exp. 14 Output Output 2 Right	WM24103AU\x0D
Mix-point Mute Input Exp. 14 Output Output 3 Left	WM24104AU\x0D
Mix-point Mute Input Exp. 14 Output Output 3 Right	WM24105AU\x0D
Mix-point Mute Input Exp. 14 Output Output 4 Left	WM24106AU\x0D
Mix-point Mute Input Exp. 14 Output Output 4 Right	WM24107AU\x0D
Mix-point Mute Input Exp. 14 Output Output 5 Left	WM24108AU\x0D
Mix-point Mute Input Exp. 14 Output Output 5 Right	WM24109AU\x0D
Mix-point Mute Input Exp. 14 Output Output 6 Left	WM24110AU\x0D
Mix-point Mute Input Exp. 14 Output Output 6 Right	WM24111AU\x0D
Mix-point Mute Input Exp. 14 Output Output 7 Left	WM24112AU\x0D
Mix-point Mute Input Exp. 14 Output Output 7 Right	WM24113AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 14 Output Output 8 Left	WM24114AU\x0D
Mix-point Mute Input Exp. 14 Output Output 8 Right	WM24115AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send A	WM24116AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send B	WM24117AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send C	WM24118AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send D	WM24119AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send E	WM24120AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send F	WM24121AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send G	WM24122AU\x0D
Mix-point Mute Input Exp. 14 Output V. Send H	WM24123AU\x0D
Mix-point Mute Input Exp. 15 Output Output 1 Left	WM24200AU\x0D
Mix-point Mute Input Exp. 15 Output Output 1 Right	WM24201AU\x0D
Mix-point Mute Input Exp. 15 Output Output 2 Left	WM24202AU\x0D
Mix-point Mute Input Exp. 15 Output Output 2 Right	WM24203AU\x0D
Mix-point Mute Input Exp. 15 Output Output 3 Left	WM24204AU\x0D
Mix-point Mute Input Exp. 15 Output Output 3 Right	WM24205AU\x0D
Mix-point Mute Input Exp. 15 Output Output 4 Left	WM24206AU\x0D
Mix-point Mute Input Exp. 15 Output Output 4 Right	WM24207AU\x0D
Mix-point Mute Input Exp. 15 Output Output 5 Left	WM24208AU\x0D
Mix-point Mute Input Exp. 15 Output Output 5 Right	WM24209AU\x0D
Mix-point Mute Input Exp. 15 Output Output 6 Left	WM24210AU\x0D
Mix-point Mute Input Exp. 15 Output Output 6 Right	WM24211AU\x0D
Mix-point Mute Input Exp. 15 Output Output 7 Left	WM24212AU\x0D
Mix-point Mute Input Exp. 15 Output Output 7 Right	WM24213AU\x0D
Mix-point Mute Input Exp. 15 Output Output 8 Left	WM24214AU\x0D
Mix-point Mute Input Exp. 15 Output Output 8 Right	WM24215AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send A	WM24216AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send B	WM24217AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send C	WM24218AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send D	WM24219AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send E	WM24220AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send F	WM24221AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send G	WM24222AU\x0D
Mix-point Mute Input Exp. 15 Output V. Send H	WM24223AU\x0D
Mix-point Mute Input Exp. 16 Output Output 1 Left	WM24300AU\x0D
Mix-point Mute Input Exp. 16 Output Output 1 Right	WM24301AU\x0D
Mix-point Mute Input Exp. 16 Output Output 2 Left	WM24302AU\x0D
Mix-point Mute Input Exp. 16 Output Output 2 Right	WM24303AU\x0D
Mix-point Mute Input Exp. 16 Output Output 3 Left	WM24304AU\x0D
Mix-point Mute Input Exp. 16 Output Output 3 Right	WM24305AU\x0D
Mix-point Mute Input Exp. 16 Output Output 4 Left	WM24306AU\x0D
Mix-point Mute Input Exp. 16 Output Output 4 Right	WM24307AU\x0D
Mix-point Mute Input Exp. 16 Output Output 5 Left	WM24308AU\x0D
Mix-point Mute Input Exp. 16 Output Output 5 Right	WM24309AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 16 Output Output 6 Left	WM24310AU\x0D
Mix-point Mute Input Exp. 16 Output Output 6 Right	WM24311AU\x0D
Mix-point Mute Input Exp. 16 Output Output 7 Left	WM24312AU\x0D
Mix-point Mute Input Exp. 16 Output Output 7 Right	WM24313AU\x0D
Mix-point Mute Input Exp. 16 Output Output 8 Left	WM24314AU\x0D
Mix-point Mute Input Exp. 16 Output Output 8 Right	WM24315AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send A	WM24316AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send B	WM24317AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send C	WM24318AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send D	WM24319AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send E	WM24320AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send F	WM24321AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send G	WM24322AU\x0D
Mix-point Mute Input Exp. 16 Output V. Send H	WM24323AU\x0D
Mix-point Mute Input Exp. 2 Output Output 1 Left	WM22900AU\x0D
Mix-point Mute Input Exp. 2 Output Output 1 Right	WM22901AU\x0D
Mix-point Mute Input Exp. 2 Output Output 2 Left	WM22902AU\x0D
Mix-point Mute Input Exp. 2 Output Output 2 Right	WM22903AU\x0D
Mix-point Mute Input Exp. 2 Output Output 3 Left	WM22904AU\x0D
Mix-point Mute Input Exp. 2 Output Output 3 Right	WM22905AU\x0D
Mix-point Mute Input Exp. 2 Output Output 4 Left	WM22906AU\x0D
Mix-point Mute Input Exp. 2 Output Output 4 Right	WM22907AU\x0D
Mix-point Mute Input Exp. 2 Output Output 5 Left	WM22908AU\x0D
Mix-point Mute Input Exp. 2 Output Output 5 Right	WM22909AU\x0D
Mix-point Mute Input Exp. 2 Output Output 6 Left	WM22910AU\x0D
Mix-point Mute Input Exp. 2 Output Output 6 Right	WM22911AU\x0D
Mix-point Mute Input Exp. 2 Output Output 7 Left	WM22912AU\x0D
Mix-point Mute Input Exp. 2 Output Output 7 Right	WM22913AU\x0D
Mix-point Mute Input Exp. 2 Output Output 8 Left	WM22914AU\x0D
Mix-point Mute Input Exp. 2 Output Output 8 Right	WM22915AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send A	WM22916AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send B	WM22917AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send C	WM22918AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send D	WM22919AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send E	WM22920AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send F	WM22921AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send G	WM22922AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send H	WM22923AU\x0D
Mix-point Mute Input Exp. 3 Output Output 1 Left	WM23000AU\x0D
Mix-point Mute Input Exp. 3 Output Output 1 Right	WM23001AU\x0D
Mix-point Mute Input Exp. 3 Output Output 2 Left	WM23002AU\x0D
Mix-point Mute Input Exp. 3 Output Output 2 Right	WM23003AU\x0D
Mix-point Mute Input Exp. 3 Output Output 3 Left	WM23004AU\x0D
Mix-point Mute Input Exp. 3 Output Output 3 Right	WM23005AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 3 Output Output 4 Left	WM23006AU\x0D
Mix-point Mute Input Exp. 3 Output Output 4 Right	WM23007AU\x0D
Mix-point Mute Input Exp. 3 Output Output 5 Left	WM23008AU\x0D
Mix-point Mute Input Exp. 3 Output Output 5 Right	WM23009AU\x0D
Mix-point Mute Input Exp. 3 Output Output 6 Left	WM23010AU\x0D
Mix-point Mute Input Exp. 3 Output Output 6 Right	WM23011AU\x0D
Mix-point Mute Input Exp. 3 Output Output 7 Left	WM23012AU\x0D
Mix-point Mute Input Exp. 3 Output Output 7 Right	WM23013AU\x0D
Mix-point Mute Input Exp. 3 Output Output 8 Left	WM23014AU\x0D
Mix-point Mute Input Exp. 3 Output Output 8 Right	WM23015AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send A	WM23016AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send B	WM23017AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send C	WM23018AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send D	WM23019AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send E	WM23020AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send F	WM23021AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send G	WM23022AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send H	WM23023AU\x0D
Mix-point Mute Input Exp. 4 Output Output 1 Left	WM23100AU\x0D
Mix-point Mute Input Exp. 4 Output Output 1 Right	WM23101AU\x0D
Mix-point Mute Input Exp. 4 Output Output 2 Left	WM23102AU\x0D
Mix-point Mute Input Exp. 4 Output Output 2 Right	WM23103AU\x0D
Mix-point Mute Input Exp. 4 Output Output 3 Left	WM23104AU\x0D
Mix-point Mute Input Exp. 4 Output Output 3 Right	WM23105AU\x0D
Mix-point Mute Input Exp. 4 Output Output 4 Left	WM23106AU\x0D
Mix-point Mute Input Exp. 4 Output Output 4 Right	WM23107AU\x0D
Mix-point Mute Input Exp. 4 Output Output 5 Left	WM23108AU\x0D
Mix-point Mute Input Exp. 4 Output Output 5 Right	WM23109AU\x0D
Mix-point Mute Input Exp. 4 Output Output 6 Left	WM23110AU\x0D
Mix-point Mute Input Exp. 4 Output Output 6 Right	WM23111AU\x0D
Mix-point Mute Input Exp. 4 Output Output 7 Left	WM23112AU\x0D
Mix-point Mute Input Exp. 4 Output Output 7 Right	WM23113AU\x0D
Mix-point Mute Input Exp. 4 Output Output 8 Left	WM23114AU\x0D
Mix-point Mute Input Exp. 4 Output Output 8 Right	WM23115AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send A	WM23116AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send B	WM23117AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send C	WM23118AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send D	WM23119AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send E	WM23120AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send F	WM23121AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send G	WM23122AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send H	WM23123AU\x0D
Mix-point Mute Input Exp. 5 Output Output 1 Left	WM23200AU\x0D
Mix-point Mute Input Exp. 5 Output Output 1 Right	WM23201AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 5 Output Output 2 Left	WM23202AU\x0D
Mix-point Mute Input Exp. 5 Output Output 2 Right	WM23203AU\x0D
Mix-point Mute Input Exp. 5 Output Output 3 Left	WM23204AU\x0D
Mix-point Mute Input Exp. 5 Output Output 3 Right	WM23205AU\x0D
Mix-point Mute Input Exp. 5 Output Output 4 Left	WM23206AU\x0D
Mix-point Mute Input Exp. 5 Output Output 4 Right	WM23207AU\x0D
Mix-point Mute Input Exp. 5 Output Output 5 Left	WM23208AU\x0D
Mix-point Mute Input Exp. 5 Output Output 5 Right	WM23209AU\x0D
Mix-point Mute Input Exp. 5 Output Output 6 Left	WM23210AU\x0D
Mix-point Mute Input Exp. 5 Output Output 6 Right	WM23211AU\x0D
Mix-point Mute Input Exp. 5 Output Output 7 Left	WM23212AU\x0D
Mix-point Mute Input Exp. 5 Output Output 7 Right	WM23213AU\x0D
Mix-point Mute Input Exp. 5 Output Output 8 Left	WM23214AU\x0D
Mix-point Mute Input Exp. 5 Output Output 8 Right	WM23215AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send A	WM23216AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send B	WM23217AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send C	WM23218AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send D	WM23219AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send E	WM23220AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send F	WM23221AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send G	WM23222AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send H	WM23223AU\x0D
Mix-point Mute Input Exp. 6 Output Output 1 Left	WM23300AU\x0D
Mix-point Mute Input Exp. 6 Output Output 1 Right	WM23301AU\x0D
Mix-point Mute Input Exp. 6 Output Output 2 Left	WM23302AU\x0D
Mix-point Mute Input Exp. 6 Output Output 2 Right	WM23303AU\x0D
Mix-point Mute Input Exp. 6 Output Output 3 Left	WM23304AU\x0D
Mix-point Mute Input Exp. 6 Output Output 3 Right	WM23305AU\x0D
Mix-point Mute Input Exp. 6 Output Output 4 Left	WM23306AU\x0D
Mix-point Mute Input Exp. 6 Output Output 4 Right	WM23307AU\x0D
Mix-point Mute Input Exp. 6 Output Output 5 Left	WM23308AU\x0D
Mix-point Mute Input Exp. 6 Output Output 5 Right	WM23309AU\x0D
Mix-point Mute Input Exp. 6 Output Output 6 Left	WM23310AU\x0D
Mix-point Mute Input Exp. 6 Output Output 6 Right	WM23311AU\x0D
Mix-point Mute Input Exp. 6 Output Output 7 Left	WM23312AU\x0D
Mix-point Mute Input Exp. 6 Output Output 7 Right	WM23313AU\x0D
Mix-point Mute Input Exp. 6 Output Output 8 Left	WM23314AU\x0D
Mix-point Mute Input Exp. 6 Output Output 8 Right	WM23315AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send A	WM23316AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send B	WM23317AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send C	WM23318AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send D	WM23319AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send E	WM23320AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send F	WM23321AU\x0D

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 6 Output V. Send G	WM23322AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send H	WM23323AU\x0D
Mix-point Mute Input Exp. 7 Output Output 1 Left	WM23400AU\x0D
Mix-point Mute Input Exp. 7 Output Output 1 Right	WM23401AU\x0D
Mix-point Mute Input Exp. 7 Output Output 2 Left	WM23402AU\x0D
Mix-point Mute Input Exp. 7 Output Output 2 Right	WM23403AU\x0D
Mix-point Mute Input Exp. 7 Output Output 3 Left	WM23404AU\x0D
Mix-point Mute Input Exp. 7 Output Output 3 Right	WM23405AU\x0D
Mix-point Mute Input Exp. 7 Output Output 4 Left	WM23406AU\x0D
Mix-point Mute Input Exp. 7 Output Output 4 Right	WM23407AU\x0D
Mix-point Mute Input Exp. 7 Output Output 5 Left	WM23408AU\x0D
Mix-point Mute Input Exp. 7 Output Output 5 Right	WM23409AU\x0D
Mix-point Mute Input Exp. 7 Output Output 6 Left	WM23410AU\x0D
Mix-point Mute Input Exp. 7 Output Output 6 Right	WM23411AU\x0D
Mix-point Mute Input Exp. 7 Output Output 7 Left	WM23412AU\x0D
Mix-point Mute Input Exp. 7 Output Output 7 Right	WM23413AU\x0D
Mix-point Mute Input Exp. 7 Output Output 8 Left	WM23414AU\x0D
Mix-point Mute Input Exp. 7 Output Output 8 Right	WM23415AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send A	WM23416AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send B	WM23417AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send C	WM23418AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send D	WM23419AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send E	WM23420AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send F	WM23421AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send G	WM23422AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send H	WM23423AU\x0D
Mix-point Mute Input Exp. 8 Output Output 1 Left	WM23500AU\x0D
Mix-point Mute Input Exp. 8 Output Output 1 Right	WM23501AU\x0D
Mix-point Mute Input Exp. 8 Output Output 2 Left	WM23502AU\x0D
Mix-point Mute Input Exp. 8 Output Output 2 Right	WM23503AU\x0D
Mix-point Mute Input Exp. 8 Output Output 3 Left	WM23504AU\x0D
Mix-point Mute Input Exp. 8 Output Output 3 Right	WM23505AU\x0D
Mix-point Mute Input Exp. 8 Output Output 4 Left	WM23506AU\x0D
Mix-point Mute Input Exp. 8 Output Output 4 Right	WM23507AU\x0D
Mix-point Mute Input Exp. 8 Output Output 5 Left	WM23508AU\x0D
Mix-point Mute Input Exp. 8 Output Output 5 Right	WM23509AU\x0D
Mix-point Mute Input Exp. 8 Output Output 6 Left	WM23510AU\x0D
Mix-point Mute Input Exp. 8 Output Output 6 Right	WM23511AU\x0D
Mix-point Mute Input Exp. 8 Output Output 7 Left	WM23512AU\x0D
Mix-point Mute Input Exp. 8 Output Output 7 Right	WM23513AU\x0D
Mix-point Mute Input Exp. 8 Output Output 8 Left	WM23514AU\x0D
Mix-point Mute Input Exp. 8 Output Output 8 Right	WM23515AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send A	WM23516AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send B	WM23517AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Exp. 8 Output V. Send C	WM23518AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send D	WM23519AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send E	WM23520AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send F	WM23521AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send G	WM23522AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send H	WM23523AU\x0D
Mix-point Mute Input Exp. 9 Output Output 1 Left	WM23600AU\x0D
Mix-point Mute Input Exp. 9 Output Output 1 Right	WM23601AU\x0D
Mix-point Mute Input Exp. 9 Output Output 2 Left	WM23602AU\x0D
Mix-point Mute Input Exp. 9 Output Output 2 Right	WM23603AU\x0D
Mix-point Mute Input Exp. 9 Output Output 3 Left	WM23604AU\x0D
Mix-point Mute Input Exp. 9 Output Output 3 Right	WM23605AU\x0D
Mix-point Mute Input Exp. 9 Output Output 4 Left	WM23606AU\x0D
Mix-point Mute Input Exp. 9 Output Output 4 Right	WM23607AU\x0D
Mix-point Mute Input Exp. 9 Output Output 5 Left	WM23608AU\x0D
Mix-point Mute Input Exp. 9 Output Output 5 Right	WM23609AU\x0D
Mix-point Mute Input Exp. 9 Output Output 6 Left	WM23610AU\x0D
Mix-point Mute Input Exp. 9 Output Output 6 Right	WM23611AU\x0D
Mix-point Mute Input Exp. 9 Output Output 7 Left	WM23612AU\x0D
Mix-point Mute Input Exp. 9 Output Output 7 Right	WM23613AU\x0D
Mix-point Mute Input Exp. 9 Output Output 8 Left	WM23614AU\x0D
Mix-point Mute Input Exp. 9 Output Output 8 Right	WM23615AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send A	WM23616AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send B	WM23617AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send C	WM23618AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send D	WM23619AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send E	WM23620AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send F	WM23621AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send G	WM23622AU\x0D
Mix-point Mute Input Exp. 9 Output V. Send H	WM23623AU\x0D
Mix-point Mute Input Mic 1 Output Output 1 Left	WM21600AU\x0D
Mix-point Mute Input Mic 1 Output Output 1 Right	WM21601AU\x0D
Mix-point Mute Input Mic 1 Output Output 2 Left	WM21602AU\x0D
Mix-point Mute Input Mic 1 Output Output 2 Right	WM21603AU\x0D
Mix-point Mute Input Mic 1 Output Output 3 Left	WM21604AU\x0D
Mix-point Mute Input Mic 1 Output Output 3 Right	WM21605AU\x0D
Mix-point Mute Input Mic 1 Output Output 4 Left	WM21606AU\x0D
Mix-point Mute Input Mic 1 Output Output 4 Right	WM21607AU\x0D
Mix-point Mute Input Mic 1 Output Output 5 Left	WM21608AU\x0D
Mix-point Mute Input Mic 1 Output Output 5 Right	WM21609AU\x0D
Mix-point Mute Input Mic 1 Output Output 6 Left	WM21610AU\x0D
Mix-point Mute Input Mic 1 Output Output 6 Right	WM21611AU\x0D
Mix-point Mute Input Mic 1 Output Output 7 Left	WM21612AU\x0D
Mix-point Mute Input Mic 1 Output Output 7 Right	WM21613AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Mic 1 Output Output 8 Left	WM21614AU\x0D
Mix-point Mute Input Mic 1 Output Output 8 Right	WM21615AU\x0D
Mix-point Mute Input Mic 1 Output V. Send A	WM21616AU\x0D
Mix-point Mute Input Mic 1 Output V. Send B	WM21617AU\x0D
Mix-point Mute Input Mic 1 Output V. Send C	WM21618AU\x0D
Mix-point Mute Input Mic 1 Output V. Send D	WM21619AU\x0D
Mix-point Mute Input Mic 1 Output V. Send E	WM21620AU\x0D
Mix-point Mute Input Mic 1 Output V. Send F	WM21621AU\x0D
Mix-point Mute Input Mic 1 Output V. Send G	WM21622AU\x0D
Mix-point Mute Input Mic 1 Output V. Send H	WM21623AU\x0D
Mix-point Mute Input Mic 2 Output Output 1 Left	WM21700AU\x0D
Mix-point Mute Input Mic 2 Output Output 1 Right	WM21701AU\x0D
Mix-point Mute Input Mic 2 Output Output 2 Left	WM21702AU\x0D
Mix-point Mute Input Mic 2 Output Output 2 Right	WM21703AU\x0D
Mix-point Mute Input Mic 2 Output Output 3 Left	WM21704AU\x0D
Mix-point Mute Input Mic 2 Output Output 3 Right	WM21705AU\x0D
Mix-point Mute Input Mic 2 Output Output 4 Left	WM21706AU\x0D
Mix-point Mute Input Mic 2 Output Output 4 Right	WM21707AU\x0D
Mix-point Mute Input Mic 2 Output Output 5 Left	WM21708AU\x0D
Mix-point Mute Input Mic 2 Output Output 5 Right	WM21709AU\x0D
Mix-point Mute Input Mic 2 Output Output 6 Left	WM21710AU\x0D
Mix-point Mute Input Mic 2 Output Output 6 Right	WM21711AU\x0D
Mix-point Mute Input Mic 2 Output Output 7 Left	WM21712AU\x0D
Mix-point Mute Input Mic 2 Output Output 7 Right	WM21713AU\x0D
Mix-point Mute Input Mic 2 Output Output 8 Left	WM21714AU\x0D
Mix-point Mute Input Mic 2 Output Output 8 Right	WM21715AU\x0D
Mix-point Mute Input Mic 2 Output V. Send A	WM21716AU\x0D
Mix-point Mute Input Mic 2 Output V. Send B	WM21717AU\x0D
Mix-point Mute Input Mic 2 Output V. Send C	WM21718AU\x0D
Mix-point Mute Input Mic 2 Output V. Send D	WM21719AU\x0D
Mix-point Mute Input Mic 2 Output V. Send E	WM21720AU\x0D
Mix-point Mute Input Mic 2 Output V. Send F	WM21721AU\x0D
Mix-point Mute Input Mic 2 Output V. Send G	WM21722AU\x0D
Mix-point Mute Input Mic 2 Output V. Send H	WM21723AU\x0D
Mix-point Mute Input Mic 3 Output Output 1 Left	WM21800AU\x0D
Mix-point Mute Input Mic 3 Output Output 1 Right	WM21801AU\x0D
Mix-point Mute Input Mic 3 Output Output 2 Left	WM21802AU\x0D
Mix-point Mute Input Mic 3 Output Output 2 Right	WM21803AU\x0D
Mix-point Mute Input Mic 3 Output Output 3 Left	WM21804AU\x0D
Mix-point Mute Input Mic 3 Output Output 3 Right	WM21805AU\x0D
Mix-point Mute Input Mic 3 Output Output 4 Left	WM21806AU\x0D
Mix-point Mute Input Mic 3 Output Output 4 Right	WM21807AU\x0D
Mix-point Mute Input Mic 3 Output Output 5 Left	WM21808AU\x0D
Mix-point Mute Input Mic 3 Output Output 5 Right	WM21809AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Mic 3 Output Output 6 Left	WM21810AU\x0D
Mix-point Mute Input Mic 3 Output Output 6 Right	WM21811AU\x0D
Mix-point Mute Input Mic 3 Output Output 7 Left	WM21812AU\x0D
Mix-point Mute Input Mic 3 Output Output 7 Right	WM21813AU\x0D
Mix-point Mute Input Mic 3 Output Output 8 Left	WM21814AU\x0D
Mix-point Mute Input Mic 3 Output Output 8 Right	WM21815AU\x0D
Mix-point Mute Input Mic 3 Output V. Send A	WM21816AU\x0D
Mix-point Mute Input Mic 3 Output V. Send B	WM21817AU\x0D
Mix-point Mute Input Mic 3 Output V. Send C	WM21818AU\x0D
Mix-point Mute Input Mic 3 Output V. Send D	WM21819AU\x0D
Mix-point Mute Input Mic 3 Output V. Send E	WM21820AU\x0D
Mix-point Mute Input Mic 3 Output V. Send F	WM21821AU\x0D
Mix-point Mute Input Mic 3 Output V. Send G	WM21822AU\x0D
Mix-point Mute Input Mic 3 Output V. Send H	WM21823AU\x0D
Mix-point Mute Input Mic 4 Output Output 1 Left	WM21900AU\x0D
Mix-point Mute Input Mic 4 Output Output 1 Right	WM21901AU\x0D
Mix-point Mute Input Mic 4 Output Output 2 Left	WM21902AU\x0D
Mix-point Mute Input Mic 4 Output Output 2 Right	WM21903AU\x0D
Mix-point Mute Input Mic 4 Output Output 3 Left	WM21904AU\x0D
Mix-point Mute Input Mic 4 Output Output 3 Right	WM21905AU\x0D
Mix-point Mute Input Mic 4 Output Output 4 Left	WM21906AU\x0D
Mix-point Mute Input Mic 4 Output Output 4 Right	WM21907AU\x0D
Mix-point Mute Input Mic 4 Output Output 5 Left	WM21908AU\x0D
Mix-point Mute Input Mic 4 Output Output 5 Right	WM21909AU\x0D
Mix-point Mute Input Mic 4 Output Output 6 Left	WM21910AU\x0D
Mix-point Mute Input Mic 4 Output Output 6 Right	WM21911AU\x0D
Mix-point Mute Input Mic 4 Output Output 7 Left	WM21912AU\x0D
Mix-point Mute Input Mic 4 Output Output 7 Right	WM21913AU\x0D
Mix-point Mute Input Mic 4 Output Output 8 Left	WM21914AU\x0D
Mix-point Mute Input Mic 4 Output Output 8 Right	WM21915AU\x0D
Mix-point Mute Input Mic 4 Output V. Send A	WM21916AU\x0D
Mix-point Mute Input Mic 4 Output V. Send B	WM21917AU\x0D
Mix-point Mute Input Mic 4 Output V. Send C	WM21918AU\x0D
Mix-point Mute Input Mic 4 Output V. Send D	WM21919AU\x0D
Mix-point Mute Input Mic 4 Output V. Send E	WM21920AU\x0D
Mix-point Mute Input Mic 4 Output V. Send F	WM21921AU\x0D
Mix-point Mute Input Mic 4 Output V. Send G	WM21922AU\x0D
Mix-point Mute Input Mic 4 Output V. Send H	WM21923AU\x0D
Mix-point Mute Input Output 1 Left Output Output 1 Left	WM20000AU\x0D
Mix-point Mute Input Output 1 Left Output Output 1 Right	WM20001AU\x0D
Mix-point Mute Input Output 1 Left Output Output 2 Left	WM20002AU\x0D
Mix-point Mute Input Output 1 Left Output Output 2 Right	WM20003AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Right	
Mix-point Mute Input Output 1 Left Output Output 3 Left	WM20004AU\x0D
Mix-point Mute Input Output 1 Left Output Output 3 Right	WM20005AU\x0D
Mix-point Mute Input Output 1 Left Output Output 4 Left	WM20006AU\x0D
Mix-point Mute Input Output 1 Left Output Output 4 Right	WM20007AU\x0D
Mix-point Mute Input Output 1 Left Output Output 5 Left	WM20008AU\x0D
Mix-point Mute Input Output 1 Left Output Output 5 Right	WM20009AU\x0D
Mix-point Mute Input Output 1 Left Output Output 6 Left	WM20010AU\x0D
Mix-point Mute Input Output 1 Left Output Output 6 Right	WM20011AU\x0D
Mix-point Mute Input Output 1 Left Output Output 7 Left	WM20012AU\x0D
Mix-point Mute Input Output 1 Left Output Output 7 Right	WM20013AU\x0D
Mix-point Mute Input Output 1 Left Output Output 8 Left	WM20014AU\x0D
Mix-point Mute Input Output 1 Left Output Output 8 Right	WM20015AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send A	WM20016AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send B	WM20017AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send C	WM20018AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send D	WM20019AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send E	WM20020AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send F	WM20021AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send G	WM20022AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send H	WM20023AU\x0D
Mix-point Mute Input Output 1 Right Output Output 1 Left	WM20100AU\x0D
Mix-point Mute Input Output 1 Right Output Output 1 Right	WM20101AU\x0D
Mix-point Mute Input Output 1 Right Output Output 2 Left	WM20102AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 1 Right Output Output 2 Right	WM20103AU\x0D
Mix-point Mute Input Output 1 Right Output Output 3 Left	WM20104AU\x0D
Mix-point Mute Input Output 1 Right Output Output 3 Right	WM20105AU\x0D
Mix-point Mute Input Output 1 Right Output Output 4 Left	WM20106AU\x0D
Mix-point Mute Input Output 1 Right Output Output 4 Right	WM20107AU\x0D
Mix-point Mute Input Output 1 Right Output Output 5 Left	WM20108AU\x0D
Mix-point Mute Input Output 1 Right Output Output 5 Right	WM20109AU\x0D
Mix-point Mute Input Output 1 Right Output Output 6 Left	WM20110AU\x0D
Mix-point Mute Input Output 1 Right Output Output 6 Right	WM20111AU\x0D
Mix-point Mute Input Output 1 Right Output Output 7 Left	WM20112AU\x0D
Mix-point Mute Input Output 1 Right Output Output 7 Right	WM20113AU\x0D
Mix-point Mute Input Output 1 Right Output Output 8 Left	WM20114AU\x0D
Mix-point Mute Input Output 1 Right Output Output 8 Right	WM20115AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send A	WM20116AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send B	WM20117AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send C	WM20118AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send D	WM20119AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send E	WM20120AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send F	WM20121AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send G	WM20122AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send H	WM20123AU\x0D
Mix-point Mute Input Output 2 Left Output Output 1 Left	WM20200AU\x0D
Mix-point Mute Input Output 2 Left Output Output 1 Right	WM20201AU\x0D
Mix-point Mute Input Output 2 Left Output Output 2	WM20202AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Left	
Mix-point Mute Input Output 2 Left Output Output 2 Right	WM20203AU\x0D
Mix-point Mute Input Output 2 Left Output Output 3 Left	WM20204AU\x0D
Mix-point Mute Input Output 2 Left Output Output 3 Right	WM20205AU\x0D
Mix-point Mute Input Output 2 Left Output Output 4 Left	WM20206AU\x0D
Mix-point Mute Input Output 2 Left Output Output 4 Right	WM20207AU\x0D
Mix-point Mute Input Output 2 Left Output Output 5 Left	WM20208AU\x0D
Mix-point Mute Input Output 2 Left Output Output 5 Right	WM20209AU\x0D
Mix-point Mute Input Output 2 Left Output Output 6 Left	WM20210AU\x0D
Mix-point Mute Input Output 2 Left Output Output 6 Right	WM20211AU\x0D
Mix-point Mute Input Output 2 Left Output Output 7 Left	WM20212AU\x0D
Mix-point Mute Input Output 2 Left Output Output 7 Right	WM20213AU\x0D
Mix-point Mute Input Output 2 Left Output Output 8 Left	WM20214AU\x0D
Mix-point Mute Input Output 2 Left Output Output 8 Right	WM20215AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send A	WM20216AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send B	WM20217AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send C	WM20218AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send D	WM20219AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send E	WM20220AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send F	WM20221AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send G	WM20222AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send H	WM20223AU\x0D
Mix-point Mute Input Output 2 Right Output Output 1 Left	WM20300AU\x0D
Mix-point Mute Input Output 2 Right Output Output 1 Right	WM20301AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 2 Right Output Output 2 Left	WM20302AU\x0D
Mix-point Mute Input Output 2 Right Output Output 2 Right	WM20303AU\x0D
Mix-point Mute Input Output 2 Right Output Output 3 Left	WM20304AU\x0D
Mix-point Mute Input Output 2 Right Output Output 3 Right	WM20305AU\x0D
Mix-point Mute Input Output 2 Right Output Output 4 Left	WM20306AU\x0D
Mix-point Mute Input Output 2 Right Output Output 4 Right	WM20307AU\x0D
Mix-point Mute Input Output 2 Right Output Output 5 Left	WM20308AU\x0D
Mix-point Mute Input Output 2 Right Output Output 5 Right	WM20309AU\x0D
Mix-point Mute Input Output 2 Right Output Output 6 Left	WM20310AU\x0D
Mix-point Mute Input Output 2 Right Output Output 6 Right	WM20311AU\x0D
Mix-point Mute Input Output 2 Right Output Output 7 Left	WM20312AU\x0D
Mix-point Mute Input Output 2 Right Output Output 7 Right	WM20313AU\x0D
Mix-point Mute Input Output 2 Right Output Output 8 Left	WM20314AU\x0D
Mix-point Mute Input Output 2 Right Output Output 8 Right	WM20315AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send A	WM20316AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send B	WM20317AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send C	WM20318AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send D	WM20319AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send E	WM20320AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send F	WM20321AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send G	WM20322AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send H	WM20323AU\x0D
Mix-point Mute Input Output 3 Left Output Output 1 Left	WM20400AU\x0D
Mix-point Mute Input Output 3 Left Output Output 1	WM20401AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Right	
Mix-point Mute Input Output 3 Left Output Output 2 Left	WM20402AU\x0D
Mix-point Mute Input Output 3 Left Output Output 2 Right	WM20403AU\x0D
Mix-point Mute Input Output 3 Left Output Output 3 Left	WM20404AU\x0D
Mix-point Mute Input Output 3 Left Output Output 3 Right	WM20405AU\x0D
Mix-point Mute Input Output 3 Left Output Output 4 Left	WM20406AU\x0D
Mix-point Mute Input Output 3 Left Output Output 4 Right	WM20407AU\x0D
Mix-point Mute Input Output 3 Left Output Output 5 Left	WM20408AU\x0D
Mix-point Mute Input Output 3 Left Output Output 5 Right	WM20409AU\x0D
Mix-point Mute Input Output 3 Left Output Output 6 Left	WM20410AU\x0D
Mix-point Mute Input Output 3 Left Output Output 6 Right	WM20411AU\x0D
Mix-point Mute Input Output 3 Left Output Output 7 Left	WM20412AU\x0D
Mix-point Mute Input Output 3 Left Output Output 7 Right	WM20413AU\x0D
Mix-point Mute Input Output 3 Left Output Output 8 Left	WM20414AU\x0D
Mix-point Mute Input Output 3 Left Output Output 8 Right	WM20415AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send A	WM20416AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send B	WM20417AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send C	WM20418AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send D	WM20419AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send E	WM20420AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send F	WM20421AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send G	WM20422AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send H	WM20423AU\x0D
Mix-point Mute Input Output 3 Right Output Output 1 Left	WM20500AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 3 Right Output Output 1 Right	WM20501AU\x0D
Mix-point Mute Input Output 3 Right Output Output 2 Left	WM20502AU\x0D
Mix-point Mute Input Output 3 Right Output Output 2 Right	WM20503AU\x0D
Mix-point Mute Input Output 3 Right Output Output 3 Left	WM20504AU\x0D
Mix-point Mute Input Output 3 Right Output Output 3 Right	WM20505AU\x0D
Mix-point Mute Input Output 3 Right Output Output 4 Left	WM20506AU\x0D
Mix-point Mute Input Output 3 Right Output Output 4 Right	WM20507AU\x0D
Mix-point Mute Input Output 3 Right Output Output 5 Left	WM20508AU\x0D
Mix-point Mute Input Output 3 Right Output Output 5 Right	WM20509AU\x0D
Mix-point Mute Input Output 3 Right Output Output 6 Left	WM20510AU\x0D
Mix-point Mute Input Output 3 Right Output Output 6 Right	WM20511AU\x0D
Mix-point Mute Input Output 3 Right Output Output 7 Left	WM20512AU\x0D
Mix-point Mute Input Output 3 Right Output Output 7 Right	WM20513AU\x0D
Mix-point Mute Input Output 3 Right Output Output 8 Left	WM20514AU\x0D
Mix-point Mute Input Output 3 Right Output Output 8 Right	WM20515AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send A	WM20516AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send B	WM20517AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send C	WM20518AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send D	WM20519AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send E	WM20520AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send F	WM20521AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send G	WM20522AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send H	WM20523AU\x0D
Mix-point Mute Input Output 4 Left Output Output 1	WM20600AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Left	
Mix-point Mute Input Output 4 Left Output Output 1 Right	WM20601AU\x0D
Mix-point Mute Input Output 4 Left Output Output 2 Left	WM20602AU\x0D
Mix-point Mute Input Output 4 Left Output Output 2 Right	WM20603AU\x0D
Mix-point Mute Input Output 4 Left Output Output 3 Left	WM20604AU\x0D
Mix-point Mute Input Output 4 Left Output Output 3 Right	WM20605AU\x0D
Mix-point Mute Input Output 4 Left Output Output 4 Left	WM20606AU\x0D
Mix-point Mute Input Output 4 Left Output Output 4 Right	WM20607AU\x0D
Mix-point Mute Input Output 4 Left Output Output 5 Left	WM20608AU\x0D
Mix-point Mute Input Output 4 Left Output Output 5 Right	WM20609AU\x0D
Mix-point Mute Input Output 4 Left Output Output 6 Left	WM20610AU\x0D
Mix-point Mute Input Output 4 Left Output Output 6 Right	WM20611AU\x0D
Mix-point Mute Input Output 4 Left Output Output 7 Left	WM20612AU\x0D
Mix-point Mute Input Output 4 Left Output Output 7 Right	WM20613AU\x0D
Mix-point Mute Input Output 4 Left Output Output 8 Left	WM20614AU\x0D
Mix-point Mute Input Output 4 Left Output Output 8 Right	WM20615AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send A	WM20616AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send B	WM20617AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send C	WM20618AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send D	WM20619AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send E	WM20620AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send F	WM20621AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send G	WM20622AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send H	WM20623AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 4 Right Output Output 1 Left	WM20700AU\x0D
Mix-point Mute Input Output 4 Right Output Output 1 Right	WM20701AU\x0D
Mix-point Mute Input Output 4 Right Output Output 2 Left	WM20702AU\x0D
Mix-point Mute Input Output 4 Right Output Output 2 Right	WM20703AU\x0D
Mix-point Mute Input Output 4 Right Output Output 3 Left	WM20704AU\x0D
Mix-point Mute Input Output 4 Right Output Output 3 Right	WM20705AU\x0D
Mix-point Mute Input Output 4 Right Output Output 4 Left	WM20706AU\x0D
Mix-point Mute Input Output 4 Right Output Output 4 Right	WM20707AU\x0D
Mix-point Mute Input Output 4 Right Output Output 5 Left	WM20708AU\x0D
Mix-point Mute Input Output 4 Right Output Output 5 Right	WM20709AU\x0D
Mix-point Mute Input Output 4 Right Output Output 6 Left	WM20710AU\x0D
Mix-point Mute Input Output 4 Right Output Output 6 Right	WM20711AU\x0D
Mix-point Mute Input Output 4 Right Output Output 7 Left	WM20712AU\x0D
Mix-point Mute Input Output 4 Right Output Output 7 Right	WM20713AU\x0D
Mix-point Mute Input Output 4 Right Output Output 8 Left	WM20714AU\x0D
Mix-point Mute Input Output 4 Right Output Output 8 Right	WM20715AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send A	WM20716AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send B	WM20717AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send C	WM20718AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send D	WM20719AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send E	WM20720AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send F	WM20721AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send G	WM20722AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send	WM20723AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

H	
Mix-point Mute Input Output 5 Left Output Output 1 Left	WM20800AU\x0D
Mix-point Mute Input Output 5 Left Output Output 1 Right	WM20801AU\x0D
Mix-point Mute Input Output 5 Left Output Output 2 Left	WM20802AU\x0D
Mix-point Mute Input Output 5 Left Output Output 2 Right	WM20803AU\x0D
Mix-point Mute Input Output 5 Left Output Output 3 Left	WM20804AU\x0D
Mix-point Mute Input Output 5 Left Output Output 3 Right	WM20805AU\x0D
Mix-point Mute Input Output 5 Left Output Output 4 Left	WM20806AU\x0D
Mix-point Mute Input Output 5 Left Output Output 4 Right	WM20807AU\x0D
Mix-point Mute Input Output 5 Left Output Output 5 Left	WM20808AU\x0D
Mix-point Mute Input Output 5 Left Output Output 5 Right	WM20809AU\x0D
Mix-point Mute Input Output 5 Left Output Output 6 Left	WM20810AU\x0D
Mix-point Mute Input Output 5 Left Output Output 6 Right	WM20811AU\x0D
Mix-point Mute Input Output 5 Left Output Output 7 Left	WM20812AU\x0D
Mix-point Mute Input Output 5 Left Output Output 7 Right	WM20813AU\x0D
Mix-point Mute Input Output 5 Left Output Output 8 Left	WM20814AU\x0D
Mix-point Mute Input Output 5 Left Output Output 8 Right	WM20815AU\x0D
Mix-point Mute Input Output 5 Left Output V. Send A	WM20816AU\x0D
Mix-point Mute Input Output 5 Left Output V. Send B	WM20817AU\x0D
Mix-point Mute Input Output 5 Left Output V. Send C	WM20818AU\x0D
Mix-point Mute Input Output 5 Left Output V. Send D	WM20819AU\x0D
Mix-point Mute Input Output 5 Left Output V. Send E	WM20820AU\x0D
Mix-point Mute Input Output 5 Left Output V. Send F	WM20821AU\x0D
Mix-point Mute Input Output 5 Left Output V. Send G	WM20822AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 5 Left Output V. Send H	WM20823AU\x0D
Mix-point Mute Input Output 5 Right Output Output 1 Left	WM20900AU\x0D
Mix-point Mute Input Output 5 Right Output Output 1 Right	WM20901AU\x0D
Mix-point Mute Input Output 5 Right Output Output 2 Left	WM20902AU\x0D
Mix-point Mute Input Output 5 Right Output Output 2 Right	WM20903AU\x0D
Mix-point Mute Input Output 5 Right Output Output 3 Left	WM20904AU\x0D
Mix-point Mute Input Output 5 Right Output Output 3 Right	WM20905AU\x0D
Mix-point Mute Input Output 5 Right Output Output 4 Left	WM20906AU\x0D
Mix-point Mute Input Output 5 Right Output Output 4 Right	WM20907AU\x0D
Mix-point Mute Input Output 5 Right Output Output 5 Left	WM20908AU\x0D
Mix-point Mute Input Output 5 Right Output Output 5 Right	WM20909AU\x0D
Mix-point Mute Input Output 5 Right Output Output 6 Left	WM20910AU\x0D
Mix-point Mute Input Output 5 Right Output Output 6 Right	WM20911AU\x0D
Mix-point Mute Input Output 5 Right Output Output 7 Left	WM20912AU\x0D
Mix-point Mute Input Output 5 Right Output Output 7 Right	WM20913AU\x0D
Mix-point Mute Input Output 5 Right Output Output 8 Left	WM20914AU\x0D
Mix-point Mute Input Output 5 Right Output Output 8 Right	WM20915AU\x0D
Mix-point Mute Input Output 5 Right Output V. Send A	WM20916AU\x0D
Mix-point Mute Input Output 5 Right Output V. Send B	WM20917AU\x0D
Mix-point Mute Input Output 5 Right Output V. Send C	WM20918AU\x0D
Mix-point Mute Input Output 5 Right Output V. Send D	WM20919AU\x0D
Mix-point Mute Input Output 5 Right Output V. Send E	WM20920AU\x0D
Mix-point Mute Input Output 5 Right Output V. Send F	WM20921AU\x0D
Mix-point Mute Input Output 5 Right Output V. Send	WM20922AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

G	
Mix-point Mute Input Output 5 Right Output V. Send H	WM20923AU\x0D
Mix-point Mute Input Output 6 Left Output Output 1 Left	WM21000AU\x0D
Mix-point Mute Input Output 6 Left Output Output 1 Right	WM21001AU\x0D
Mix-point Mute Input Output 6 Left Output Output 2 Left	WM21002AU\x0D
Mix-point Mute Input Output 6 Left Output Output 2 Right	WM21003AU\x0D
Mix-point Mute Input Output 6 Left Output Output 3 Left	WM21004AU\x0D
Mix-point Mute Input Output 6 Left Output Output 3 Right	WM21005AU\x0D
Mix-point Mute Input Output 6 Left Output Output 4 Left	WM21006AU\x0D
Mix-point Mute Input Output 6 Left Output Output 4 Right	WM21007AU\x0D
Mix-point Mute Input Output 6 Left Output Output 5 Left	WM21008AU\x0D
Mix-point Mute Input Output 6 Left Output Output 5 Right	WM21009AU\x0D
Mix-point Mute Input Output 6 Left Output Output 6 Left	WM21010AU\x0D
Mix-point Mute Input Output 6 Left Output Output 6 Right	WM21011AU\x0D
Mix-point Mute Input Output 6 Left Output Output 7 Left	WM21012AU\x0D
Mix-point Mute Input Output 6 Left Output Output 7 Right	WM21013AU\x0D
Mix-point Mute Input Output 6 Left Output Output 8 Left	WM21014AU\x0D
Mix-point Mute Input Output 6 Left Output Output 8 Right	WM21015AU\x0D
Mix-point Mute Input Output 6 Left Output V. Send A	WM21016AU\x0D
Mix-point Mute Input Output 6 Left Output V. Send B	WM21017AU\x0D
Mix-point Mute Input Output 6 Left Output V. Send C	WM21018AU\x0D
Mix-point Mute Input Output 6 Left Output V. Send D	WM21019AU\x0D
Mix-point Mute Input Output 6 Left Output V. Send E	WM21020AU\x0D
Mix-point Mute Input Output 6 Left Output V. Send F	WM21021AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 6 Left Output V. Send G	WM21022AU\x0D
Mix-point Mute Input Output 6 Left Output V. Send H	WM21023AU\x0D
Mix-point Mute Input Output 6 Right Output Output 1 Left	WM21100AU\x0D
Mix-point Mute Input Output 6 Right Output Output 1 Right	WM21101AU\x0D
Mix-point Mute Input Output 6 Right Output Output 2 Left	WM21102AU\x0D
Mix-point Mute Input Output 6 Right Output Output 2 Right	WM21103AU\x0D
Mix-point Mute Input Output 6 Right Output Output 3 Left	WM21104AU\x0D
Mix-point Mute Input Output 6 Right Output Output 3 Right	WM21105AU\x0D
Mix-point Mute Input Output 6 Right Output Output 4 Left	WM21106AU\x0D
Mix-point Mute Input Output 6 Right Output Output 4 Right	WM21107AU\x0D
Mix-point Mute Input Output 6 Right Output Output 5 Left	WM21108AU\x0D
Mix-point Mute Input Output 6 Right Output Output 5 Right	WM21109AU\x0D
Mix-point Mute Input Output 6 Right Output Output 6 Left	WM21110AU\x0D
Mix-point Mute Input Output 6 Right Output Output 6 Right	WM21111AU\x0D
Mix-point Mute Input Output 6 Right Output Output 7 Left	WM21112AU\x0D
Mix-point Mute Input Output 6 Right Output Output 7 Right	WM21113AU\x0D
Mix-point Mute Input Output 6 Right Output Output 8 Left	WM21114AU\x0D
Mix-point Mute Input Output 6 Right Output Output 8 Right	WM21115AU\x0D
Mix-point Mute Input Output 6 Right Output V. Send A	WM21116AU\x0D
Mix-point Mute Input Output 6 Right Output V. Send B	WM21117AU\x0D
Mix-point Mute Input Output 6 Right Output V. Send C	WM21118AU\x0D
Mix-point Mute Input Output 6 Right Output V. Send D	WM21119AU\x0D
Mix-point Mute Input Output 6 Right Output V. Send E	WM21120AU\x0D
Mix-point Mute Input Output 6 Right Output V. Send	WM21121AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

F	
Mix-point Mute Input Output 6 Right Output V. Send G	WM21122AU\x0D
Mix-point Mute Input Output 6 Right Output V. Send H	WM21123AU\x0D
Mix-point Mute Input Output 7 Left Output Output 1 Left	WM21200AU\x0D
Mix-point Mute Input Output 7 Left Output Output 1 Right	WM21201AU\x0D
Mix-point Mute Input Output 7 Left Output Output 2 Left	WM21202AU\x0D
Mix-point Mute Input Output 7 Left Output Output 2 Right	WM21203AU\x0D
Mix-point Mute Input Output 7 Left Output Output 3 Left	WM21204AU\x0D
Mix-point Mute Input Output 7 Left Output Output 3 Right	WM21205AU\x0D
Mix-point Mute Input Output 7 Left Output Output 4 Left	WM21206AU\x0D
Mix-point Mute Input Output 7 Left Output Output 4 Right	WM21207AU\x0D
Mix-point Mute Input Output 7 Left Output Output 5 Left	WM21208AU\x0D
Mix-point Mute Input Output 7 Left Output Output 5 Right	WM21209AU\x0D
Mix-point Mute Input Output 7 Left Output Output 6 Left	WM21210AU\x0D
Mix-point Mute Input Output 7 Left Output Output 6 Right	WM21211AU\x0D
Mix-point Mute Input Output 7 Left Output Output 7 Left	WM21212AU\x0D
Mix-point Mute Input Output 7 Left Output Output 7 Right	WM21213AU\x0D
Mix-point Mute Input Output 7 Left Output Output 8 Left	WM21214AU\x0D
Mix-point Mute Input Output 7 Left Output Output 8 Right	WM21215AU\x0D
Mix-point Mute Input Output 7 Left Output V. Send A	WM21216AU\x0D
Mix-point Mute Input Output 7 Left Output V. Send B	WM21217AU\x0D
Mix-point Mute Input Output 7 Left Output V. Send C	WM21218AU\x0D
Mix-point Mute Input Output 7 Left Output V. Send D	WM21219AU\x0D
Mix-point Mute Input Output 7 Left Output V. Send E	WM21220AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 7 Left Output V. Send F	WM21221AU\x0D
Mix-point Mute Input Output 7 Left Output V. Send G	WM21222AU\x0D
Mix-point Mute Input Output 7 Left Output V. Send H	WM21223AU\x0D
Mix-point Mute Input Output 7 Right Output Output 1 Left	WM21300AU\x0D
Mix-point Mute Input Output 7 Right Output Output 1 Right	WM21301AU\x0D
Mix-point Mute Input Output 7 Right Output Output 2 Left	WM21302AU\x0D
Mix-point Mute Input Output 7 Right Output Output 2 Right	WM21303AU\x0D
Mix-point Mute Input Output 7 Right Output Output 3 Left	WM21304AU\x0D
Mix-point Mute Input Output 7 Right Output Output 3 Right	WM21305AU\x0D
Mix-point Mute Input Output 7 Right Output Output 4 Left	WM21306AU\x0D
Mix-point Mute Input Output 7 Right Output Output 4 Right	WM21307AU\x0D
Mix-point Mute Input Output 7 Right Output Output 5 Left	WM21308AU\x0D
Mix-point Mute Input Output 7 Right Output Output 5 Right	WM21309AU\x0D
Mix-point Mute Input Output 7 Right Output Output 6 Left	WM21310AU\x0D
Mix-point Mute Input Output 7 Right Output Output 6 Right	WM21311AU\x0D
Mix-point Mute Input Output 7 Right Output Output 7 Left	WM21312AU\x0D
Mix-point Mute Input Output 7 Right Output Output 7 Right	WM21313AU\x0D
Mix-point Mute Input Output 7 Right Output Output 8 Left	WM21314AU\x0D
Mix-point Mute Input Output 7 Right Output Output 8 Right	WM21315AU\x0D
Mix-point Mute Input Output 7 Right Output V. Send A	WM21316AU\x0D
Mix-point Mute Input Output 7 Right Output V. Send B	WM21317AU\x0D
Mix-point Mute Input Output 7 Right Output V. Send C	WM21318AU\x0D
Mix-point Mute Input Output 7 Right Output V. Send D	WM21319AU\x0D
Mix-point Mute Input Output 7 Right Output V. Send	WM21320AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

E	
Mix-point Mute Input Output 7 Right Output V. Send F	WM21321AU\x0D
Mix-point Mute Input Output 7 Right Output V. Send G	WM21322AU\x0D
Mix-point Mute Input Output 7 Right Output V. Send H	WM21323AU\x0D
Mix-point Mute Input Output 8 Left Output Output 1 Left	WM21400AU\x0D
Mix-point Mute Input Output 8 Left Output Output 1 Right	WM21401AU\x0D
Mix-point Mute Input Output 8 Left Output Output 2 Left	WM21402AU\x0D
Mix-point Mute Input Output 8 Left Output Output 2 Right	WM21403AU\x0D
Mix-point Mute Input Output 8 Left Output Output 3 Left	WM21404AU\x0D
Mix-point Mute Input Output 8 Left Output Output 3 Right	WM21405AU\x0D
Mix-point Mute Input Output 8 Left Output Output 4 Left	WM21406AU\x0D
Mix-point Mute Input Output 8 Left Output Output 4 Right	WM21407AU\x0D
Mix-point Mute Input Output 8 Left Output Output 5 Left	WM21408AU\x0D
Mix-point Mute Input Output 8 Left Output Output 5 Right	WM21409AU\x0D
Mix-point Mute Input Output 8 Left Output Output 6 Left	WM21410AU\x0D
Mix-point Mute Input Output 8 Left Output Output 6 Right	WM21411AU\x0D
Mix-point Mute Input Output 8 Left Output Output 7 Left	WM21412AU\x0D
Mix-point Mute Input Output 8 Left Output Output 7 Right	WM21413AU\x0D
Mix-point Mute Input Output 8 Left Output Output 8 Left	WM21414AU\x0D
Mix-point Mute Input Output 8 Left Output Output 8 Right	WM21415AU\x0D
Mix-point Mute Input Output 8 Left Output V. Send A	WM21416AU\x0D
Mix-point Mute Input Output 8 Left Output V. Send B	WM21417AU\x0D
Mix-point Mute Input Output 8 Left Output V. Send C	WM21418AU\x0D
Mix-point Mute Input Output 8 Left Output V. Send D	WM21419AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input Output 8 Left Output V. Send E	WM21420AU\x0D
Mix-point Mute Input Output 8 Left Output V. Send F	WM21421AU\x0D
Mix-point Mute Input Output 8 Left Output V. Send G	WM21422AU\x0D
Mix-point Mute Input Output 8 Left Output V. Send H	WM21423AU\x0D
Mix-point Mute Input Output 8 Right Output Output 1 Left	WM21500AU\x0D
Mix-point Mute Input Output 8 Right Output Output 1 Right	WM21501AU\x0D
Mix-point Mute Input Output 8 Right Output Output 2 Left	WM21502AU\x0D
Mix-point Mute Input Output 8 Right Output Output 2 Right	WM21503AU\x0D
Mix-point Mute Input Output 8 Right Output Output 3 Left	WM21504AU\x0D
Mix-point Mute Input Output 8 Right Output Output 3 Right	WM21505AU\x0D
Mix-point Mute Input Output 8 Right Output Output 4 Left	WM21506AU\x0D
Mix-point Mute Input Output 8 Right Output Output 4 Right	WM21507AU\x0D
Mix-point Mute Input Output 8 Right Output Output 5 Left	WM21508AU\x0D
Mix-point Mute Input Output 8 Right Output Output 5 Right	WM21509AU\x0D
Mix-point Mute Input Output 8 Right Output Output 6 Left	WM21510AU\x0D
Mix-point Mute Input Output 8 Right Output Output 6 Right	WM21511AU\x0D
Mix-point Mute Input Output 8 Right Output Output 7 Left	WM21512AU\x0D
Mix-point Mute Input Output 8 Right Output Output 7 Right	WM21513AU\x0D
Mix-point Mute Input Output 8 Right Output Output 8 Left	WM21514AU\x0D
Mix-point Mute Input Output 8 Right Output Output 8 Right	WM21515AU\x0D
Mix-point Mute Input Output 8 Right Output V. Send A	WM21516AU\x0D
Mix-point Mute Input Output 8 Right Output V. Send B	WM21517AU\x0D
Mix-point Mute Input Output 8 Right Output V. Send C	WM21518AU\x0D
Mix-point Mute Input Output 8 Right Output V. Send	WM21519AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

D	
Mix-point Mute Input Output 8 Right Output V. Send E	WM21520AU\x0D
Mix-point Mute Input Output 8 Right Output V. Send F	WM21521AU\x0D
Mix-point Mute Input Output 8 Right Output V. Send G	WM21522AU\x0D
Mix-point Mute Input Output 8 Right Output V. Send H	WM21523AU\x0D
Mix-point Mute Input V. Return A Output Output 1 Left	WM22000AU\x0D
Mix-point Mute Input V. Return A Output Output 1 Right	WM22001AU\x0D
Mix-point Mute Input V. Return A Output Output 2 Left	WM22002AU\x0D
Mix-point Mute Input V. Return A Output Output 2 Right	WM22003AU\x0D
Mix-point Mute Input V. Return A Output Output 3 Left	WM22004AU\x0D
Mix-point Mute Input V. Return A Output Output 3 Right	WM22005AU\x0D
Mix-point Mute Input V. Return A Output Output 4 Left	WM22006AU\x0D
Mix-point Mute Input V. Return A Output Output 4 Right	WM22007AU\x0D
Mix-point Mute Input V. Return A Output Output 5 Left	WM22008AU\x0D
Mix-point Mute Input V. Return A Output Output 5 Right	WM22009AU\x0D
Mix-point Mute Input V. Return A Output Output 6 Left	WM22010AU\x0D
Mix-point Mute Input V. Return A Output Output 6 Right	WM22011AU\x0D
Mix-point Mute Input V. Return A Output Output 7 Left	WM22012AU\x0D
Mix-point Mute Input V. Return A Output Output 7 Right	WM22013AU\x0D
Mix-point Mute Input V. Return A Output Output 8 Left	WM22014AU\x0D
Mix-point Mute Input V. Return A Output Output 8 Right	WM22015AU\x0D
Mix-point Mute Input V. Return A Output V. Send A	WM22016AU\x0D
Mix-point Mute Input V. Return A Output V. Send B	WM22017AU\x0D
Mix-point Mute Input V. Return A Output V. Send C	WM22018AU\x0D
Mix-point Mute Input V. Return A Output V. Send D	WM22019AU\x0D
Mix-point Mute Input V. Return A Output V. Send E	WM22020AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input V. Return A Output V. Send F	WM22021AU\x0D
Mix-point Mute Input V. Return A Output V. Send G	WM22022AU\x0D
Mix-point Mute Input V. Return A Output V. Send H	WM22023AU\x0D
Mix-point Mute Input V. Return B Output Output 1 Left	WM22100AU\x0D
Mix-point Mute Input V. Return B Output Output 1 Right	WM22101AU\x0D
Mix-point Mute Input V. Return B Output Output 2 Left	WM22102AU\x0D
Mix-point Mute Input V. Return B Output Output 2 Right	WM22103AU\x0D
Mix-point Mute Input V. Return B Output Output 3 Left	WM22104AU\x0D
Mix-point Mute Input V. Return B Output Output 3 Right	WM22105AU\x0D
Mix-point Mute Input V. Return B Output Output 4 Left	WM22106AU\x0D
Mix-point Mute Input V. Return B Output Output 4 Right	WM22107AU\x0D
Mix-point Mute Input V. Return B Output Output 5 Left	WM22108AU\x0D
Mix-point Mute Input V. Return B Output Output 5 Right	WM22109AU\x0D
Mix-point Mute Input V. Return B Output Output 6 Left	WM22110AU\x0D
Mix-point Mute Input V. Return B Output Output 6 Right	WM22111AU\x0D
Mix-point Mute Input V. Return B Output Output 7 Left	WM22112AU\x0D
Mix-point Mute Input V. Return B Output Output 7 Right	WM22113AU\x0D
Mix-point Mute Input V. Return B Output Output 8 Left	WM22114AU\x0D
Mix-point Mute Input V. Return B Output Output 8 Right	WM22115AU\x0D
Mix-point Mute Input V. Return B Output V. Send A	WM22116AU\x0D
Mix-point Mute Input V. Return B Output V. Send B	WM22117AU\x0D
Mix-point Mute Input V. Return B Output V. Send C	WM22118AU\x0D
Mix-point Mute Input V. Return B Output V. Send D	WM22119AU\x0D
Mix-point Mute Input V. Return B Output V. Send E	WM22120AU\x0D
Mix-point Mute Input V. Return B Output V. Send F	WM22121AU\x0D
Mix-point Mute Input V. Return B Output V. Send G	WM22122AU\x0D
Mix-point Mute Input V. Return B Output V. Send H	WM22123AU\x0D
Mix-point Mute Input V. Return C Output Output 1 Left	WM22200AU\x0D
Mix-point Mute Input V. Return C Output Output 1	WM22201AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Right	
Mix-point Mute Input V. Return C Output Output 2 Left	WM22202AU\x0D
Mix-point Mute Input V. Return C Output Output 2 Right	WM22203AU\x0D
Mix-point Mute Input V. Return C Output Output 3 Left	WM22204AU\x0D
Mix-point Mute Input V. Return C Output Output 3 Right	WM22205AU\x0D
Mix-point Mute Input V. Return C Output Output 4 Left	WM22206AU\x0D
Mix-point Mute Input V. Return C Output Output 4 Right	WM22207AU\x0D
Mix-point Mute Input V. Return C Output Output 5 Left	WM22208AU\x0D
Mix-point Mute Input V. Return C Output Output 5 Right	WM22209AU\x0D
Mix-point Mute Input V. Return C Output Output 6 Left	WM22210AU\x0D
Mix-point Mute Input V. Return C Output Output 6 Right	WM22211AU\x0D
Mix-point Mute Input V. Return C Output Output 7 Left	WM22212AU\x0D
Mix-point Mute Input V. Return C Output Output 7 Right	WM22213AU\x0D
Mix-point Mute Input V. Return C Output Output 8 Left	WM22214AU\x0D
Mix-point Mute Input V. Return C Output Output 8 Right	WM22215AU\x0D
Mix-point Mute Input V. Return C Output V. Send A	WM22216AU\x0D
Mix-point Mute Input V. Return C Output V. Send B	WM22217AU\x0D
Mix-point Mute Input V. Return C Output V. Send C	WM22218AU\x0D
Mix-point Mute Input V. Return C Output V. Send D	WM22219AU\x0D
Mix-point Mute Input V. Return C Output V. Send E	WM22220AU\x0D
Mix-point Mute Input V. Return C Output V. Send F	WM22221AU\x0D
Mix-point Mute Input V. Return C Output V. Send G	WM22222AU\x0D
Mix-point Mute Input V. Return C Output V. Send H	WM22223AU\x0D
Mix-point Mute Input V. Return D Output Output 1 Left	WM22300AU\x0D
Mix-point Mute Input V. Return D Output Output 1 Right	WM22301AU\x0D
Mix-point Mute Input V. Return D Output Output 2 Left	WM22302AU\x0D
Mix-point Mute Input V. Return D Output Output 2 Right	WM22303AU\x0D
Mix-point Mute Input V. Return D Output Output 3	WM22304AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Left	
Mix-point Mute Input V. Return D Output Output 3 Right	WM22305AU\x0D
Mix-point Mute Input V. Return D Output Output 4 Left	WM22306AU\x0D
Mix-point Mute Input V. Return D Output Output 4 Right	WM22307AU\x0D
Mix-point Mute Input V. Return D Output Output 5 Left	WM22308AU\x0D
Mix-point Mute Input V. Return D Output Output 5 Right	WM22309AU\x0D
Mix-point Mute Input V. Return D Output Output 6 Left	WM22310AU\x0D
Mix-point Mute Input V. Return D Output Output 6 Right	WM22311AU\x0D
Mix-point Mute Input V. Return D Output Output 7 Left	WM22312AU\x0D
Mix-point Mute Input V. Return D Output Output 7 Right	WM22313AU\x0D
Mix-point Mute Input V. Return D Output Output 8 Left	WM22314AU\x0D
Mix-point Mute Input V. Return D Output Output 8 Right	WM22315AU\x0D
Mix-point Mute Input V. Return D Output V. Send A	WM22316AU\x0D
Mix-point Mute Input V. Return D Output V. Send B	WM22317AU\x0D
Mix-point Mute Input V. Return D Output V. Send C	WM22318AU\x0D
Mix-point Mute Input V. Return D Output V. Send D	WM22319AU\x0D
Mix-point Mute Input V. Return D Output V. Send E	WM22320AU\x0D
Mix-point Mute Input V. Return D Output V. Send F	WM22321AU\x0D
Mix-point Mute Input V. Return D Output V. Send G	WM22322AU\x0D
Mix-point Mute Input V. Return D Output V. Send H	WM22323AU\x0D
Mix-point Mute Input V. Return E Output Output 1 Left	WM22400AU\x0D
Mix-point Mute Input V. Return E Output Output 1 Right	WM22401AU\x0D
Mix-point Mute Input V. Return E Output Output 2 Left	WM22402AU\x0D
Mix-point Mute Input V. Return E Output Output 2 Right	WM22403AU\x0D
Mix-point Mute Input V. Return E Output Output 3 Left	WM22404AU\x0D
Mix-point Mute Input V. Return E Output Output 3 Right	WM22405AU\x0D
Mix-point Mute Input V. Return E Output Output 4 Left	WM22406AU\x0D
Mix-point Mute Input V. Return E Output Output 4 Right	WM22407AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Right	
Mix-point Mute Input V. Return E Output Output 5 Left	WM22408AU\x0D
Mix-point Mute Input V. Return E Output Output 5 Right	WM22409AU\x0D
Mix-point Mute Input V. Return E Output Output 6 Left	WM22410AU\x0D
Mix-point Mute Input V. Return E Output Output 6 Right	WM22411AU\x0D
Mix-point Mute Input V. Return E Output Output 7 Left	WM22412AU\x0D
Mix-point Mute Input V. Return E Output Output 7 Right	WM22413AU\x0D
Mix-point Mute Input V. Return E Output Output 8 Left	WM22414AU\x0D
Mix-point Mute Input V. Return E Output Output 8 Right	WM22415AU\x0D
Mix-point Mute Input V. Return E Output V. Send A	WM22416AU\x0D
Mix-point Mute Input V. Return E Output V. Send B	WM22417AU\x0D
Mix-point Mute Input V. Return E Output V. Send C	WM22418AU\x0D
Mix-point Mute Input V. Return E Output V. Send D	WM22419AU\x0D
Mix-point Mute Input V. Return E Output V. Send E	WM22420AU\x0D
Mix-point Mute Input V. Return E Output V. Send F	WM22421AU\x0D
Mix-point Mute Input V. Return E Output V. Send G	WM22422AU\x0D
Mix-point Mute Input V. Return E Output V. Send H	WM22423AU\x0D
Mix-point Mute Input V. Return F Output Output 1 Left	WM22500AU\x0D
Mix-point Mute Input V. Return F Output Output 1 Right	WM22501AU\x0D
Mix-point Mute Input V. Return F Output Output 2 Left	WM22502AU\x0D
Mix-point Mute Input V. Return F Output Output 2 Right	WM22503AU\x0D
Mix-point Mute Input V. Return F Output Output 3 Left	WM22504AU\x0D
Mix-point Mute Input V. Return F Output Output 3 Right	WM22505AU\x0D
Mix-point Mute Input V. Return F Output Output 4 Left	WM22506AU\x0D
Mix-point Mute Input V. Return F Output Output 4 Right	WM22507AU\x0D
Mix-point Mute Input V. Return F Output Output 5 Left	WM22508AU\x0D
Mix-point Mute Input V. Return F Output Output 5 Right	WM22509AU\x0D
Mix-point Mute Input V. Return F Output Output 6	WM22510AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Left	
Mix-point Mute Input V. Return F Output Output 6 Right	WM22511AU\x0D
Mix-point Mute Input V. Return F Output Output 7 Left	WM22512AU\x0D
Mix-point Mute Input V. Return F Output Output 7 Right	WM22513AU\x0D
Mix-point Mute Input V. Return F Output Output 8 Left	WM22514AU\x0D
Mix-point Mute Input V. Return F Output Output 8 Right	WM22515AU\x0D
Mix-point Mute Input V. Return F Output V. Send A	WM22516AU\x0D
Mix-point Mute Input V. Return F Output V. Send B	WM22517AU\x0D
Mix-point Mute Input V. Return F Output V. Send C	WM22518AU\x0D
Mix-point Mute Input V. Return F Output V. Send D	WM22519AU\x0D
Mix-point Mute Input V. Return F Output V. Send E	WM22520AU\x0D
Mix-point Mute Input V. Return F Output V. Send F	WM22521AU\x0D
Mix-point Mute Input V. Return F Output V. Send G	WM22522AU\x0D
Mix-point Mute Input V. Return F Output V. Send H	WM22523AU\x0D
Mix-point Mute Input V. Return G Output Output 1 Left	WM22600AU\x0D
Mix-point Mute Input V. Return G Output Output 1 Right	WM22601AU\x0D
Mix-point Mute Input V. Return G Output Output 2 Left	WM22602AU\x0D
Mix-point Mute Input V. Return G Output Output 2 Right	WM22603AU\x0D
Mix-point Mute Input V. Return G Output Output 3 Left	WM22604AU\x0D
Mix-point Mute Input V. Return G Output Output 3 Right	WM22605AU\x0D
Mix-point Mute Input V. Return G Output Output 4 Left	WM22606AU\x0D
Mix-point Mute Input V. Return G Output Output 4 Right	WM22607AU\x0D
Mix-point Mute Input V. Return G Output Output 5 Left	WM22608AU\x0D
Mix-point Mute Input V. Return G Output Output 5 Right	WM22609AU\x0D
Mix-point Mute Input V. Return G Output Output 6 Left	WM22610AU\x0D
Mix-point Mute Input V. Return G Output Output 6 Right	WM22611AU\x0D
Mix-point Mute Input V. Return G Output Output 7 Left	WM22612AU\x0D
Mix-point Mute Input V. Return G Output Output 7 Right	WM22613AU\x0D

Global Scripter Module Communication Sheet

Right	
Mix-point Mute Input V. Return G Output Output 8 Left	WM22614AU\x0D
Mix-point Mute Input V. Return G Output Output 8 Right	WM22615AU\x0D
Mix-point Mute Input V. Return G Output V. Send A	WM22616AU\x0D
Mix-point Mute Input V. Return G Output V. Send B	WM22617AU\x0D
Mix-point Mute Input V. Return G Output V. Send C	WM22618AU\x0D
Mix-point Mute Input V. Return G Output V. Send D	WM22619AU\x0D
Mix-point Mute Input V. Return G Output V. Send E	WM22620AU\x0D
Mix-point Mute Input V. Return G Output V. Send F	WM22621AU\x0D
Mix-point Mute Input V. Return G Output V. Send G	WM22622AU\x0D
Mix-point Mute Input V. Return G Output V. Send H	WM22623AU\x0D
Mix-point Mute Input V. Return H Output Output 1 Left	WM22700AU\x0D
Mix-point Mute Input V. Return H Output Output 1 Right	WM22701AU\x0D
Mix-point Mute Input V. Return H Output Output 2 Left	WM22702AU\x0D
Mix-point Mute Input V. Return H Output Output 2 Right	WM22703AU\x0D
Mix-point Mute Input V. Return H Output Output 3 Left	WM22704AU\x0D
Mix-point Mute Input V. Return H Output Output 3 Right	WM22705AU\x0D
Mix-point Mute Input V. Return H Output Output 4 Left	WM22706AU\x0D
Mix-point Mute Input V. Return H Output Output 4 Right	WM22707AU\x0D
Mix-point Mute Input V. Return H Output Output 5 Left	WM22708AU\x0D
Mix-point Mute Input V. Return H Output Output 5 Right	WM22709AU\x0D
Mix-point Mute Input V. Return H Output Output 6 Left	WM22710AU\x0D
Mix-point Mute Input V. Return H Output Output 6 Right	WM22711AU\x0D
Mix-point Mute Input V. Return H Output Output 7 Left	WM22712AU\x0D
Mix-point Mute Input V. Return H Output Output 7 Right	WM22713AU\x0D
Mix-point Mute Input V. Return H Output Output 8 Left	WM22714AU\x0D
Mix-point Mute Input V. Return H Output Output 8 Right	WM22715AU\x0D
Mix-point Mute Input V. Return H Output V. Send A	WM22716AU\x0D

Global Scripter Module Communication Sheet

Revision: 3/1/2021

Mix-point Mute Input V. Return H Output V. Send B	WM22717AU\x0D
Mix-point Mute Input V. Return H Output V. Send C	WM22718AU\x0D
Mix-point Mute Input V. Return H Output V. Send D	WM22719AU\x0D
Mix-point Mute Input V. Return H Output V. Send E	WM22720AU\x0D
Mix-point Mute Input V. Return H Output V. Send F	WM22721AU\x0D
Mix-point Mute Input V. Return H Output V. Send G	WM22722AU\x0D
Mix-point Mute Input V. Return H Output V. Send H	WM22723AU\x0D
Output Audio Select Output 1	wOAFMT\x0D\x0A
Output Audio Select Output 6	wOAFMT\x0D\x0A
Output Audio Select Output 8	wOAFMT\x0D\x0A
Output Post-mixer Trim Output 1 L/R Left	wG60100AU\x0D
Output Post-mixer Trim Output 1 L/R Right	wG60101AU\x0D
Output Post-mixer Trim Output 6 L/R Left	wG60110AU\x0D
Output Post-mixer Trim Output 6 L/R Right	wG60111AU\x0D
Output Post-mixer Trim Output 8 L/R Left	wG60114AU\x0D
Output Post-mixer Trim Output 8 L/R Right	wG60115AU\x0D
Output Resolution Output 5	w5RATE\x0D\x0A
Output Resolution Output 6	w6RATE\x0D\x0A
Output Resolution Output 8	w8RATE\x0D\x0A
Phantom Power Input 1	wZ40000AU\x0D
Phantom Power Input 4	wZ40003AU\x0D
Post Matrix Gain Output 1 L/R Left	WG50000AU\x0D
Post Matrix Gain Output 1 L/R Right	WG50001AU\x0D
Post Matrix Gain Output 6 L/R Left	WG50010AU\x0D
Post Matrix Gain Output 6 L/R Right	WG50011AU\x0D
Post Matrix Gain Output 8 L/R Left	WG50014AU\x0D
Post Matrix Gain Output 8 L/R Right	WG50015AU\x0D
Post Matrix Mute Output 1 L/R Left	WM50000AU\x0D
Post Matrix Mute Output 1 L/R Right	WM50001AU\x0D
Post Matrix Mute Output 6 L/R Left	WM50010AU\x0D
Post Matrix Mute Output 6 L/R Right	WM50011AU\x0D
Post Matrix Mute Output 8 L/R Left	WM50014AU\x0D
Post Matrix Mute Output 8 L/R Right	WM50015AU\x0D
Pre-matrix Trim Input 1 L/R Left	wG30100AU\x0D
Pre-matrix Trim Input 1 L/R Right	wG30101AU\x0D
Pre-matrix Trim Input 10 L/R Left	wG30118AU\x0D
Pre-matrix Trim Input 10 L/R Right	wG30119AU\x0D
Pre-matrix Trim Input 8 L/R Left	wG30114AU\x0D
Pre-matrix Trim Input 8 L/R Right	wG30115AU\x0D
Pre-mixer Gain Input 1	WG40100AU\x0D
Pre-mixer Gain Input 4	WG40103AU\x0D
Pre-mixer Mute Input 1	WM40100AU\x0D
Pre-mixer Mute Input 4	WM40103AU\x0D
Temperature	S

Global Scriptor Module Communication Sheet

Revision: 3/1/2021

Test Pattern Output 5	W5TEST\x0D
Test Pattern Output 6	W6TEST\x0D
Test Pattern Output 8	W8TEST\x0D
Video Mute Output 1	1B
Video Mute Output 2	2B
Video Mute Output 4	4B
Video Mute Output 5A	5AB
Video Mute Output 5B	5BB
Video Mute Output 6A	6AB
Video Mute Output 6B	6BB
Video Mute Output 7	7B
Video Mute Output 8	8B
Virtual Return Gain Input A	WG50100AU\x0D\x0A
Virtual Return Gain Input B	WG50101AU\x0D\x0A
Virtual Return Gain Input C	WG50102AU\x0D\x0A
Virtual Return Gain Input D	WG50103AU\x0D\x0A
Virtual Return Gain Input E	WG50104AU\x0D\x0A
Virtual Return Gain Input F	WG50105AU\x0D\x0A
Virtual Return Gain Input G	WG50106AU\x0D\x0A
Virtual Return Gain Input H	WG50107AU\x0D\x0A
Virtual Return Mute Input A	WM50100AU\x0D\x0A
Virtual Return Mute Input B	WM50101AU\x0D\x0A
Virtual Return Mute Input C	WM50102AU\x0D\x0A
Virtual Return Mute Input D	WM50103AU\x0D\x0A
Virtual Return Mute Input E	WM50104AU\x0D\x0A
Virtual Return Mute Input F	WM50105AU\x0D\x0A
Virtual Return Mute Input G	WM50106AU\x0D\x0A
Virtual Return Mute Input H	WM50107AU\x0D\x0A

